


# SN54ALS11A, SN54AS11, SN74ALS11A, SN74AS11 TRIPLE 3-INPUT POSITIVE-AND GATES


SDAS009D – MARCH 1984 – REVISED NOVEMBER 2002

- 4.5-V to 5.5-V  $V_{CC}$  Operation
- Max  $t_{pd}$  of 5.5 ns at 5 V

SN54ALS11A, . . . J OR W PACKAGE  
SN54AS11 . . . J PACKAGE  
SN74ALS11A, SN74AS11 . . . D, N, OR NS PACKAGE  
(TOP VIEW)



SN54ALS11A, SN54AS11 . . . FK PACKAGE  
(TOP VIEW)



NC – No internal connection

## description/ordering information

These devices contain three independent 3-input positive-AND gates. They perform the Boolean functions  $Y = A \cdot B \cdot C$  or  $Y = \overline{A} + \overline{B} + \overline{C}$  in positive logic.

## ORDERING INFORMATION

| $T_A$          | PACKAGE <sup>†</sup> |               | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|----------------------|---------------|-----------------------|------------------|
| 0°C to 70°C    | PDIP – N             | Tube          | SN74ALS11AN           | SN74ALS11AN      |
|                |                      |               | SN74AS11N             | SN74AS11N        |
|                | SOIC – D             | Tube          | SN74ALS11AD           | ALS11A           |
|                |                      | Tape and reel | SN74ALS11ADR          |                  |
|                |                      | Tube          | SN74AS11D             | AS11             |
|                |                      | Tape and reel | SN74AS11DR            |                  |
| –55°C to 125°C | SOP – NS             | Tape and reel | SN74ALS11ANSR         | ALS11A           |
|                |                      |               | SN74AS11NSR           | 74AS11           |
|                | CDIP – J             | Tube          | SNJ54ALS11AJ          | SNJ54ALS11AJ     |
|                |                      |               | SNJ54AS11J            | SNJ54AS11J       |
|                | CFP – W              | Tube          | SNJ54ALS11AW          | SNJ54ALS11AW     |
|                |                      |               | SNJ54AS11AFK          | SNJ54ALS11AFK    |
|                | LCCC – FK            | Tube          | SNJ54ALS11AFK         | SNJ54ALS11AFK    |
|                |                      |               | SNJ54AS11FK           | SNJ54AS11FK      |

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2002, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.


SN54ALS11A, SN54AS11, SN74ALS11A, SN74AS11  
TRIPLE 3-INPUT POSITIVE-AND GATES

SDAS009D – MARCH 1984 – REVISED NOVEMBER 2002

FUNCTION TABLE  
(each gate)

| INPUTS |   |   | OUTPUT<br>Y |
|--------|---|---|-------------|
| A      | B | C |             |
| H      | H | H | H           |
| L      | X | X | L           |
| X      | L | X | L           |
| X      | X | L | L           |

logic diagram, each gate (positive logic)

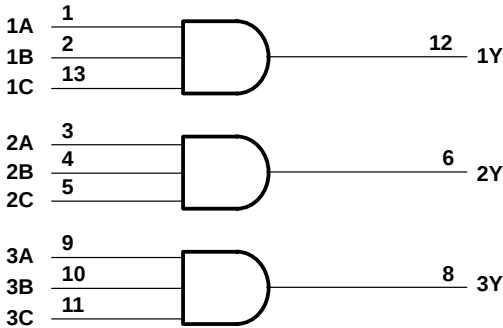

Pin numbers shown are for the D, J, N, NS, and W packages.

absolute maximum ratings over operating free-air temperature range (SN54ALS11A, SN74ALS11A) (unless otherwise noted)<sup>†</sup>

|                                                                  |                |
|------------------------------------------------------------------|----------------|
| Supply voltage, $V_{CC}$                                         | 7 V            |
| Input voltage, $V_I$                                             | 7 V            |
| Package thermal impedance, $\theta_{JA}$ (see Note 1): D package | 86°C/W         |
| N package                                                        | 80°C/W         |
| NS package                                                       | 76°C/W         |
| Storage temperature range                                        | –65°C to 150°C |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions (see Note 2)

|          |                                | SN54ALS11A |     |                  | SN74ALS11A |     |      | UNIT |
|----------|--------------------------------|------------|-----|------------------|------------|-----|------|------|
|          |                                | MIN        | NOM | MAX              | MIN        | NOM | MAX  |      |
| $V_{CC}$ | Supply voltage                 | 4.5        | 5   | 5.5              | 4.5        | 5   | 5.5  | V    |
| $V_{IH}$ | High-level input voltage       | 2          |     |                  | 2          |     |      | V    |
| $V_{IL}$ | Low-level input voltage        |            |     | 0.8 <sup>‡</sup> |            |     | 0.8  | V    |
|          |                                |            |     | 0.7 <sup>§</sup> |            |     |      |      |
| $I_{OH}$ | High-level output current      |            |     | –0.4             |            |     | –0.4 | mA   |
| $I_{OL}$ | Low-level output current       |            |     | 4                |            |     | 8    | mA   |
| $T_A$    | Operating free-air temperature | –55        |     | 125              | 0          |     | 70   | °C   |

<sup>‡</sup> Applies over temperature range –55°C to 70°C

<sup>§</sup> Applies over temperature range 70°C to 125°C

NOTE 2: All unused inputs of the device must be held at  $V_{CC}$  or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.



# SN54ALS11A, SN54AS11, SN74ALS11A, SN74AS11 TRIPLE 3-INPUT POSITIVE-AND GATES

SDAS009D – MARCH 1984 – REVISED NOVEMBER 2002

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

| PARAMETER        | TEST CONDITIONS                                             |                         | SN54ALS11A          |      | SN74ALS11A          |      | UNIT |
|------------------|-------------------------------------------------------------|-------------------------|---------------------|------|---------------------|------|------|
|                  |                                                             |                         | MIN                 | TYP† | MAX                 | MIN  |      |
| V <sub>IK</sub>  | V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = −18 mA            |                         | −1.5                |      | −1.5                |      | V    |
| V <sub>OH</sub>  | V <sub>CC</sub> = 4.5 V to 5.5 V, I <sub>OH</sub> = −0.4 mA |                         | V <sub>CC</sub> − 2 |      | V <sub>CC</sub> − 2 |      | V    |
| V <sub>OL</sub>  | V <sub>CC</sub> = 4.5 V                                     | I <sub>OL</sub> = 4 mA  | 0.25                | 0.4  | 0.25                | 0.4  | V    |
|                  |                                                             | I <sub>OL</sub> = 8 mA  |                     |      | 0.35                | 0.5  |      |
| I <sub>I</sub>   | V <sub>CC</sub> = 5.5 V,                                    | V <sub>I</sub> = 7 V    | 0.1                 |      | 0.1                 |      | mA   |
| I <sub>IH</sub>  | V <sub>CC</sub> = 5.5 V,                                    | V <sub>I</sub> = 2.7 V  | 20                  |      | 20                  |      | μA   |
| I <sub>IL</sub>  | V <sub>CC</sub> = 5.5 V,                                    | V <sub>I</sub> = 0.4 V  | −0.1                |      | −0.1                |      | mA   |
| I <sub>O</sub> ‡ | V <sub>CC</sub> = 5.5 V,                                    | V <sub>O</sub> = 2.25 V | −20                 | −112 | −30                 | −112 | mA   |
| I <sub>CCH</sub> | V <sub>CC</sub> = 5.5 V,                                    | V <sub>I</sub> = 4.5 V  | 1                   | 1.8  | 1                   | 1.8  | mA   |
| I <sub>CCL</sub> | V <sub>CC</sub> = 5.5 V,                                    | V <sub>I</sub> = 0      | 1.6                 | 3    | 1.6                 | 3    | mA   |

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current,  $I_{OS}$ .

**switching characteristics (see Figure 1)**

| PARAMETER        | FROM<br>(INPUT) | TO<br>(OUTPUT) | V <sub>CC</sub> = 4.5 V TO 5.5 V,<br>C <sub>L</sub> = 50 PF,<br>R <sub>L</sub> = 500 Ω,<br>T <sub>A</sub> = MIN TO MAX§ |      |            |     | UNIT |
|------------------|-----------------|----------------|-------------------------------------------------------------------------------------------------------------------------|------|------------|-----|------|
|                  |                 |                | SN54ALS11A                                                                                                              |      | SN74ALS11A |     |      |
|                  |                 |                | MIN                                                                                                                     | MAX  | MIN        | MAX |      |
| t <sub>PLH</sub> | A, B, or C      | Y              | 2                                                                                                                       | 14   | 2          | 13  | ns   |
| t <sub>PHL</sub> |                 |                | 2                                                                                                                       | 12.5 | 2          | 10  |      |

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

**absolute maximum ratings over operating free-air temperature range (SN54AS11, SN74AS11) (unless otherwise noted)<sup>¶</sup>**

Supply voltage,  $V_{CC}$  ..... 7 V

Input voltage,  $V_I$  ..... 7 V

Package thermal impedance,  $\theta_{JA}$  (see Note 1): D package ..... 86°C/W

N package ..... 80°C/W

NS package ..... 76°C/W

Storage temperature range ..... -65°C to 150°C

¶ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The package thermal impedance is calculated in accordance with JESD 51-7.



# SN54ALS11A, SN54AS11, SN74ALS11A, SN74AS11

## TRIPLE 3-INPUT POSITIVE-AND GATES

SDAS009D – MARCH 1984 – REVISED NOVEMBER 2002

### recommended operating conditions (see Note 2)

|                 |                                | SN54AS11 |     |     | SN74AS11 |     |     | UNIT |
|-----------------|--------------------------------|----------|-----|-----|----------|-----|-----|------|
|                 |                                | MIN      | NOM | MAX | MIN      | NOM | MAX |      |
| V <sub>CC</sub> | Supply voltage                 | 4.5      | 5   | 5.5 | 4.5      | 5   | 5.5 | V    |
| V <sub>IH</sub> | High-level input voltage       | 2        |     |     | 2        |     |     | V    |
| V <sub>IL</sub> | Low-level input voltage        |          |     | 0.8 |          |     | 0.8 | V    |
| I <sub>OH</sub> | High-level output current      |          |     | –2  |          |     | –2  | mA   |
| I <sub>OL</sub> | Low-level output current       |          |     | 20  |          |     | 20  | mA   |
| T <sub>A</sub>  | Operating free-air temperature | –55      |     | 125 | 0        |     | 70  | °C   |

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER        | TEST CONDITIONS                                           | SN54AS11           |      |      | SN74AS11           |      |      | UNIT |
|------------------|-----------------------------------------------------------|--------------------|------|------|--------------------|------|------|------|
|                  |                                                           | MIN                | TYP† | MAX  | MIN                | TYP† | MAX  |      |
| V <sub>IK</sub>  | V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = –18 mA          |                    |      | –1.2 |                    |      | –1.2 | V    |
| V <sub>OH</sub>  | V <sub>CC</sub> = 4.5 V to 5.5 V, I <sub>OH</sub> = –2 mA | V <sub>CC</sub> –2 |      |      | V <sub>CC</sub> –2 |      |      | V    |
| V <sub>OL</sub>  | V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 20 mA          | 0.35               | 0.5  |      | 0.35               | 0.5  |      | V    |
| I <sub>I</sub>   | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 7 V             |                    | 0.1  |      |                    | 0.1  |      | mA   |
| I <sub>IH</sub>  | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 2.7 V           |                    | 20   |      |                    | 20   |      | μA   |
| I <sub>IL</sub>  | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0.4 V           |                    | –0.5 |      |                    | –0.5 |      | mA   |
| I <sub>O</sub> ‡ | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.25 V          | –30                |      | –112 | –30                |      | –112 | mA   |
| I <sub>CCH</sub> | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 4.5 V           | 4.3                | 7    |      | 4.3                | 7    |      | mA   |
| I <sub>CCL</sub> | V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0               | 11.2               | 18   |      | 11.2               | 18   |      | mA   |

† All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

‡ The output conditions have been chosen to produce a current that closely approximates one-half of the true short-circuit output current, I<sub>OS</sub>.


### switching characteristics (see Figure 1)

| PARAMETER        | FROM<br>(INPUT) | TO<br>(OUTPUT) | V <sub>CC</sub> = 4.5 V TO 5.5 V,<br>C <sub>L</sub> = 50 pF,<br>R <sub>L</sub> = 500 Ω,<br>T <sub>A</sub> = MIN TO MAX§ |     |          |     | UNIT |
|------------------|-----------------|----------------|-------------------------------------------------------------------------------------------------------------------------|-----|----------|-----|------|
|                  |                 |                | SN54AS11                                                                                                                |     | SN74AS11 |     |      |
|                  |                 |                | MIN                                                                                                                     | MAX | MIN      | MAX |      |
| t <sub>PLH</sub> | A, B, or C      | Y              | 1                                                                                                                       | 6.5 | 1        | 6   | ns   |
| t <sub>PHL</sub> |                 |                | 1                                                                                                                       | 6.5 | 1        | 5.5 |      |

§ For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.



PARAMETER MEASUREMENT INFORMATION  
SERIES 54ALS/74ALS AND 54AS/74AS DEVICES

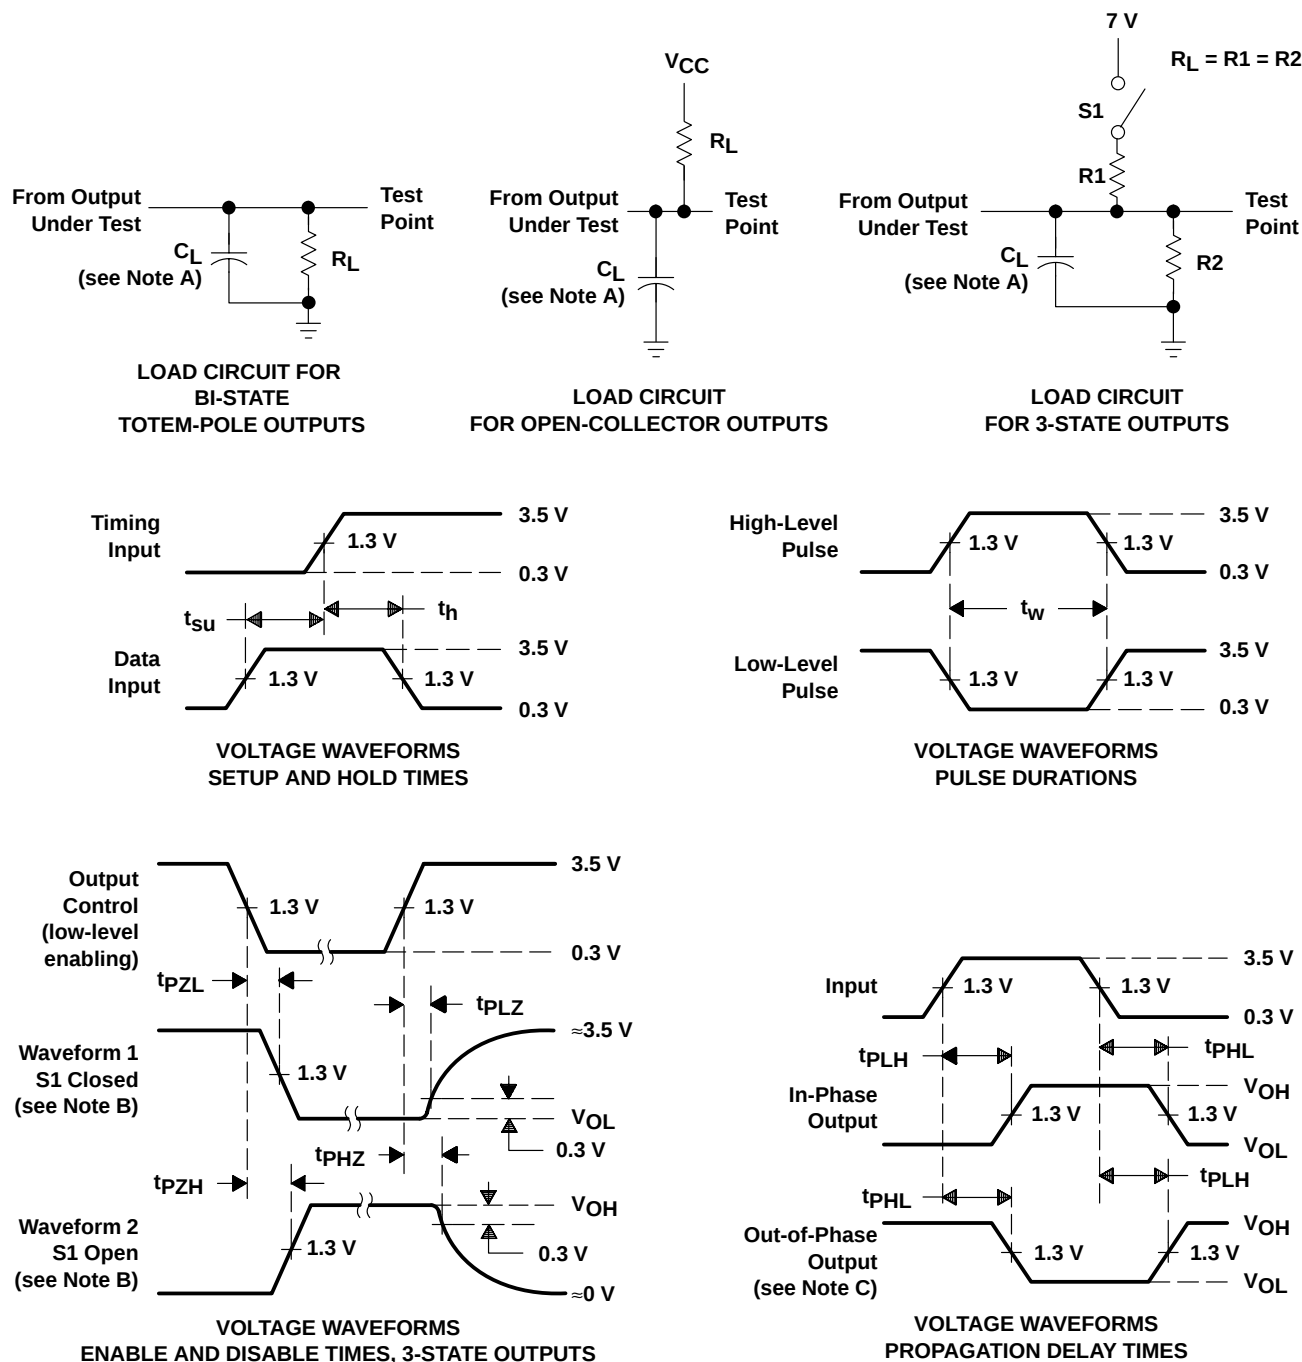

- NOTES:
- $C_L$  includes probe and jig capacitance.
  - Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
  - When measuring propagation delay items of 3-state outputs, switch S1 is open.
  - All input pulses have the following characteristics:  $PRR \leq 1$  MHz,  $t_r = t_f = 2$  ns, duty cycle = 50%.
  - The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuits and Voltage Waveforms

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)                 | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|-----------------------------------------|-------------------------|
| 5962-86841012A   | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-<br>86841012A<br>SNJ54ALS<br>11AFK | <a href="#">Samples</a> |
| 5962-8684101CA   | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-8684101CA<br>SNJ54ALS11AJ          | <a href="#">Samples</a> |
| 5962-8684101DA   | ACTIVE        | CFP          | W                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-8684101DA<br>SNJ54ALS11AW          | <a href="#">Samples</a> |
| 5962-9756101QCA  | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-9756101QC<br>A<br>SNJ54AS11J       | <a href="#">Samples</a> |
| JM38510/37402BCA | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>37402BCA                    | <a href="#">Samples</a> |
| M38510/37402BCA  | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>37402BCA                    | <a href="#">Samples</a> |
| SN54ALS11AJ      | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | SN54ALS11AJ                             | <a href="#">Samples</a> |
| SN54AS11J        | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | SN54AS11J                               | <a href="#">Samples</a> |
| SN74ALS11AD      | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ALS11A                                  | <a href="#">Samples</a> |
| SN74ALS11ADR     | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ALS11A                                  | <a href="#">Samples</a> |
| SN74ALS11ADRG4   | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ALS11A                                  | <a href="#">Samples</a> |
| SN74ALS11AN      | ACTIVE        | PDIP         | N                  | 14   | 25             | RoHS & Green        | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | SN74ALS11AN                             | <a href="#">Samples</a> |
| SN74ALS11ANSR    | ACTIVE        | SO           | NS                 | 14   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ALS11A                                  | <a href="#">Samples</a> |
| SN74AS11D        | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | AS11                                    | <a href="#">Samples</a> |
| SN74AS11N        | ACTIVE        | PDIP         | N                  | 14   | 25             | RoHS & Green        | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | SN74AS11N                               | <a href="#">Samples</a> |
| SNJ54ALS11AFK    | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-<br>86841012A<br>SNJ54ALS<br>11AFK | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)           | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|-----------------------------------|-------------------------|
| SNJ54ALS11AJ     | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-8684101CA<br>SNJ54ALS11AJ    | <a href="#">Samples</a> |
| SNJ54ALS11AW     | ACTIVE        | CFP          | W                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-8684101DA<br>SNJ54ALS11AW    | <a href="#">Samples</a> |
| SNJ54AS11J       | ACTIVE        | CDIP         | J                  | 14   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-9756101QC<br>A<br>SNJ54AS11J | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN54ALS11A, SN54AS11, SN74ALS11A, SN74AS11 :**

- Catalog : [SN74ALS11A](#), [SN74AS11](#)
- Military : [SN54ALS11A](#), [SN54AS11](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74ALS11ADR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| SN74ALS11ANSR | SO           | NS              | 14   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74ALS11ADR  | SOIC         | D               | 14   | 2500 | 853.0       | 449.0      | 35.0        |
| SN74ALS11ANSR | SO           | NS              | 14   | 2000 | 853.0       | 449.0      | 35.0        |

## TUBE



\*All dimensions are nominal

| Device         | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-86841012A | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| SN74ALS11AD    | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74ALS11AN    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74ALS11AN    | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74AS11D      | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |
| SN74AS11N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SN74AS11N      | N            | PDIP         | 14   | 25  | 506    | 13.97  | 11230  | 4.32   |
| SNJ54ALS11AFK  | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |

W (R-GDFP-F14)

CERAMIC DUAL FLATPACK



## NOTES:

- All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- This package can be hermetically sealed with a ceramic lid using glass frit.
- Index point is provided on cap for terminal identification only.
- Falls within MIL STD 1835 GDFP1-F14

**J 14**

## GENERIC PACKAGE VIEW

**CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4040083-5/G




**J0014A**

## PACKAGE OUTLINE

**CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

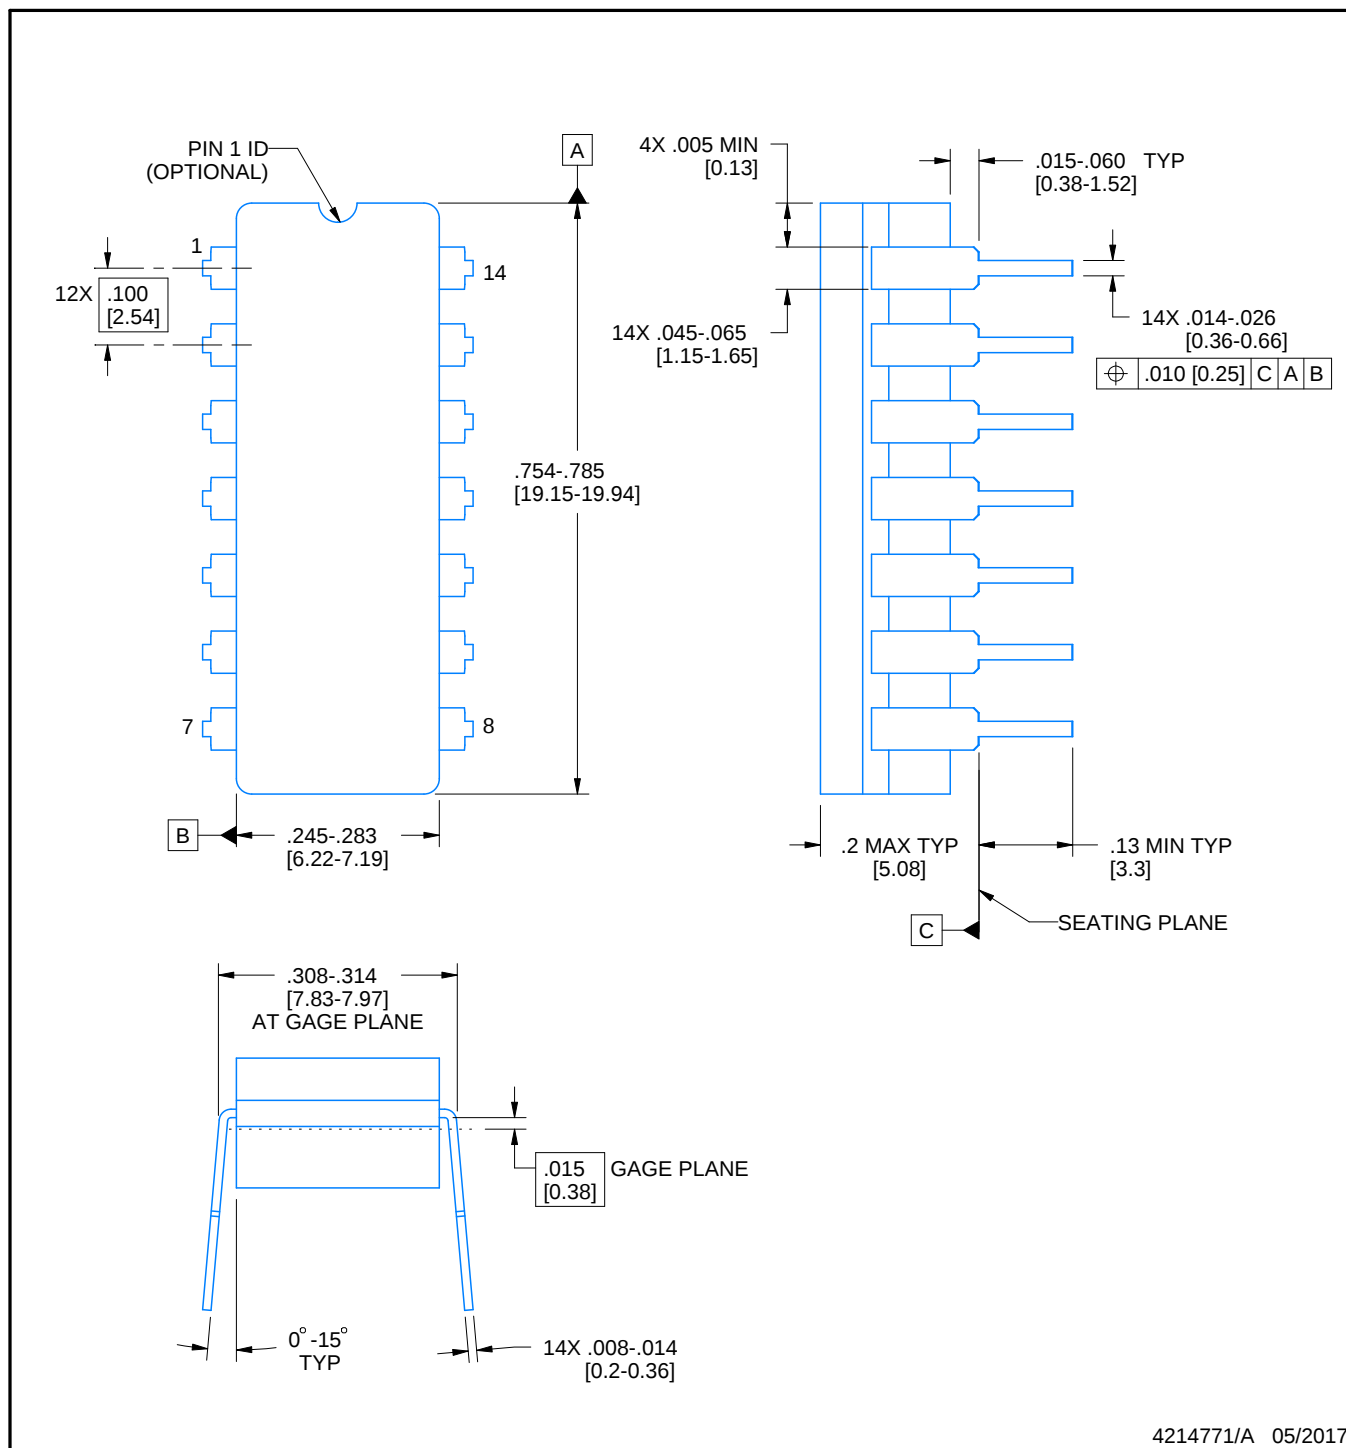


### NOTES:

1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This package is hermetically sealed with a ceramic lid using glass frit.
4. Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
5. Falls within MIL-STD-1835 and GDIP1-T14.



**J0014A**

**CDIP - 5.08 mm max height**

CERAMIC DUAL IN LINE PACKAGE

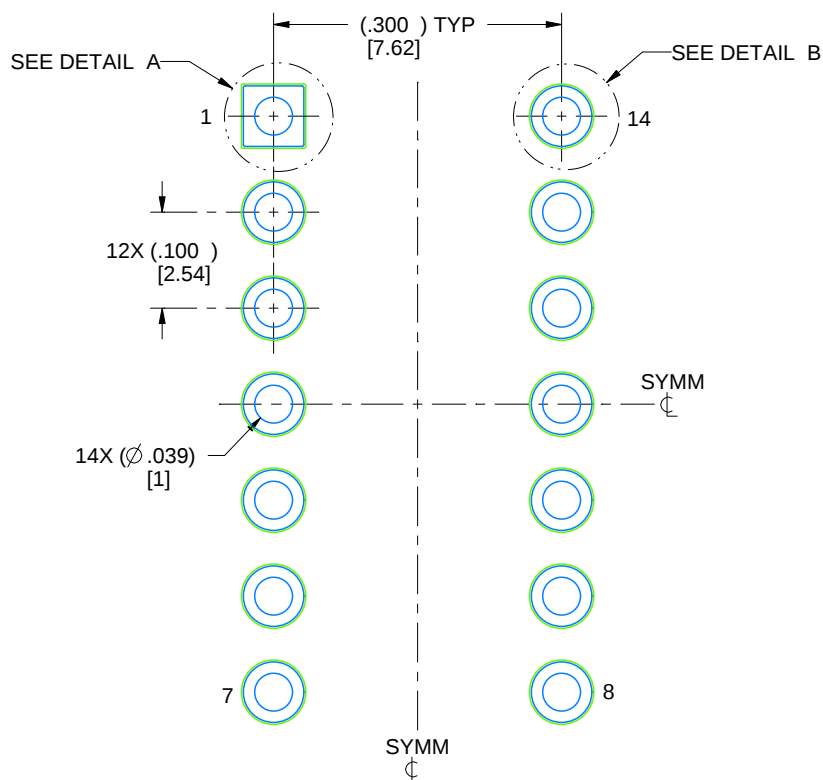

LAND PATTERN EXAMPLE  
NON-SOLDER MASK DEFINED  
SCALE: 5X

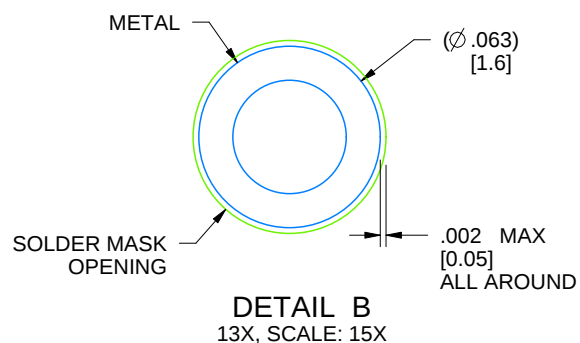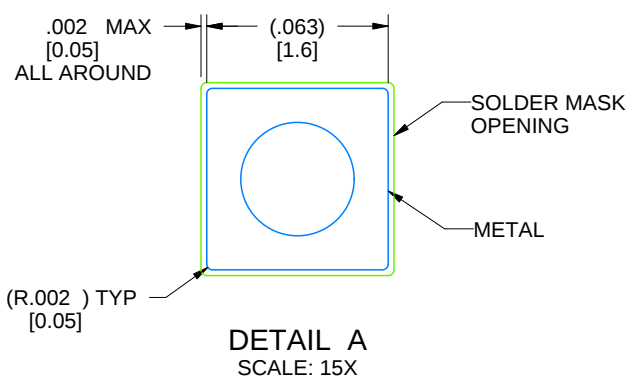

4214771/A 05/2017

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |



4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE



| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |



4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4040047-5/M 06/11

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN



| DIM \ PINS ** | 14    | 16    | 20    | 24    |
|---------------|-------|-------|-------|-------|
| A MAX         | 10,50 | 10,50 | 12,90 | 15,30 |
| A MIN         | 9,90  | 9,90  | 12,30 | 14,70 |

4040062/C 03/03

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated