

# TUSB1046A-DCI USB Type-C™ DisplayPort™ 交替模式 10Gbps 线性转接驱动器交叉点开关

## 1 特性

- USB Type-C™交叉点开关支持
  - USB 3.1 SSP + 2 条 DisplayPort 信道
  - 4 条 DisplayPort™信道
- USB 3.1 Gen 1/Gen 2 高达 10Gbps
- DisplayPort 1.4 高达 8.1Gbps (HBR3)
- VESA®支持 c、d、e 和 f 配置的 DisplayPort 交替模式 DFP 转接驱动交叉点开关
- 超低功耗架构
- 具有高达 14dB 均衡功能的线性转接驱动器
- 透明呈现 DisplayPort 链路训练
- 自动 LFPS 去加重控制, 满足 USB 3.1 认证要求
- 可通过 GPIO 或 I<sup>2</sup>C 进行配置
- 基于 USB Type-C 的 Intel 专有 DCI 功能, 可实现不开箱调试
- 支持热插拔
- 工业级温度范围: -40°C 至 85°C (TUSB1046AI-DCI)
- 商业级温度范围: 0°C 至 70°C (TUSB1046-DCI)
- 4mm x 6mm、0.4mm 间距 WQFN 封装

## 2 应用

- 平板电脑
- 笔记本电脑
- 台式机
- 扩展坞

## 3 说明

TUSB1046A-DCI 是一种 VESA USB Type-C™ 交替模式转接驱动开关, 对于下行端口 (主机), 支持高达 10Gbps 的 USB 3.1 数据速率以及高达 8.1Gbps 的 DisplayPort 1.4 数据速率。这款 VESA DisplayPort Alt 模式器件支持基于 USB Type-C 标准 1.1 版本的配置 C、D、E 和 F。此线性转接驱动器与协议无关, 并且还支持其他 USB Type-C Alt 模式接口。


TUSB1046A-DCI 提供多个接收线性均衡级别, 用于补偿由于线缆或电路板走线损耗而产生的码间串扰 (ISI)。该器件由 3.3V 单电源供电运行, 支持商业级温度范围和工业级温度范围。

器件信息<sup>(1)</sup>

| 器件型号           | 封装        | 封装尺寸 (标称值)      |
|----------------|-----------|-----------------|
| TUSB1046A-DCI  | WQFN (40) | 4.00mm x 6.00mm |
| TUSB1046AI-DCI |           |                 |


(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

简化电路原理图

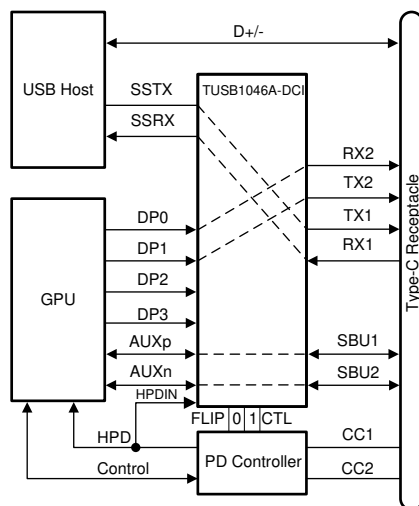

Copyright © 2017, Texas Instruments Incorporated

TUSB1046A-DCI 眼图

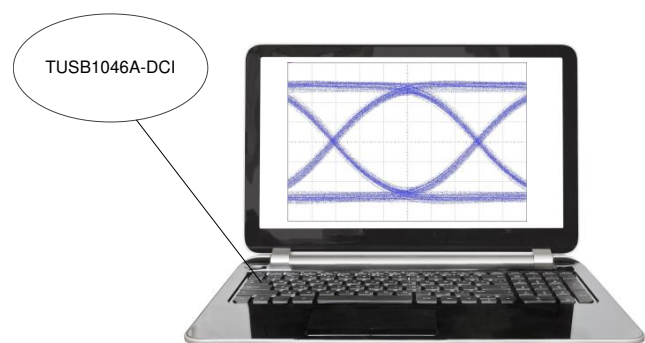

## 目录


|          |                                          |           |           |                                       |           |
|----------|------------------------------------------|-----------|-----------|---------------------------------------|-----------|
| <b>1</b> | <b>特性</b>                                | <b>1</b>  | 8.3       | Feature Description                   | 16        |
| <b>2</b> | <b>应用</b>                                | <b>1</b>  | 8.4       | Device Functional Modes               | 17        |
| <b>3</b> | <b>说明</b>                                | <b>1</b>  | 8.5       | Programming                           | 22        |
| <b>4</b> | <b>修订历史记录</b>                            | <b>2</b>  | 8.6       | Register Maps                         | 24        |
| <b>5</b> | <b>Pin Configuration and Functions</b>   | <b>3</b>  | <b>9</b>  | <b>Application and Implementation</b> | <b>29</b> |
| <b>6</b> | <b>Specifications</b>                    | <b>5</b>  | 9.1       | Application Information               | 29        |
| 6.1      | Absolute Maximum Ratings                 | 5         | 9.2       | Typical Application                   | 29        |
| 6.2      | ESD Ratings                              | 5         | 9.3       | System Examples                       | 33        |
| 6.3      | Recommended Operating Conditions         | 5         | <b>10</b> | <b>Power Supply Recommendations</b>   | <b>38</b> |
| 6.4      | Thermal Information                      | 5         | <b>11</b> | <b>Layout</b>                         | <b>39</b> |
| 6.5      | Power Supply Characteristics             | 6         | 11.1      | Layout Guidelines                     | 39        |
| 6.6      | DC Electrical Characteristics            | 6         | 11.2      | Layout Example                        | 39        |
| 6.7      | AC Electrical Characteristics            | 7         | <b>12</b> | <b>器件和文档支持</b>                        | <b>40</b> |
| 6.8      | DCI Specific Electrical Characteristics  | 8         | 12.1      | 相关链接                                  | 40        |
| 6.9      | Timing Requirements                      | 9         | 12.2      | 接收文档更新通知                              | 40        |
| 6.10     | Switching Characteristics                | 9         | 12.3      | 社区资源                                  | 40        |
| 6.11     | Typical Characteristics                  | 10        | 12.4      | 商标                                    | 40        |
| <b>7</b> | <b>Parameter Measurement Information</b> | <b>12</b> | 12.5      | 静电放电警告                                | 40        |
| <b>8</b> | <b>Detailed Description</b>              | <b>14</b> | 12.6      | 术语表                                   | 40        |
| 8.1      | Overview                                 | 14        | <b>13</b> | <b>机械、封装和可订购信息</b>                    | <b>40</b> |
| 8.2      | Functional Block Diagram                 | 15        |           |                                       |           |

## 4 修订历史记录

| Changes from Revision A (April 2018) to Revision B                                                 | Page |
|----------------------------------------------------------------------------------------------------|------|
| • Added following to pin 11 description: If I2C_EN = "F", then this pin must be set to "F" or "0". | 4    |

| Changes from Original (June 2017) to Revision A                                                   | Page |
|---------------------------------------------------------------------------------------------------|------|
| • Changed the appearance of the pinout image in the <i>Pin Configuration and Function</i> section | 3    |
| • Added Note 1 to the <i>Pin Functions</i> table                                                  | 3    |
| • Changed the USB3.1 Control/Status Registers reset value From: 00000000 To: 00000100             | 28   |
| • Changed the Reset value of bit 3:2 From: 00 To: 01 in <a href="#">Table 18</a>                  | 28   |

## 5 Pin Configuration and Functions

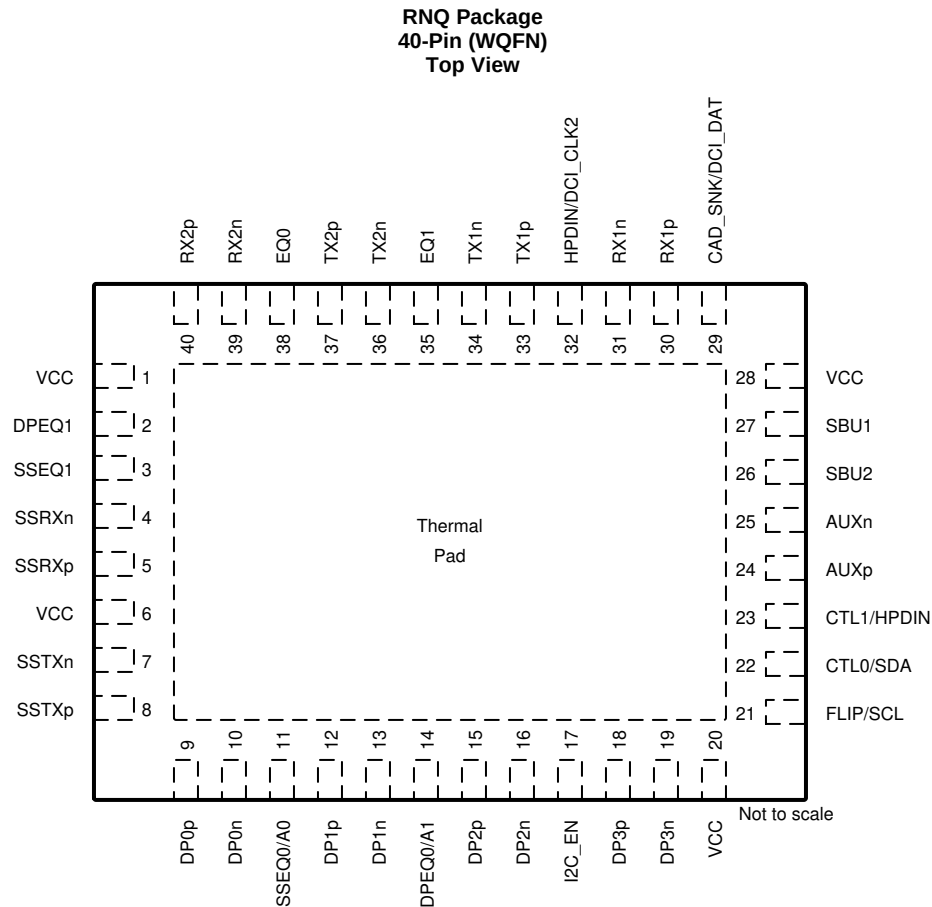

**Pin Functions**

| PIN  |     | I/O      | DESCRIPTION                                                                                                    |
|------|-----|----------|----------------------------------------------------------------------------------------------------------------|
| NAME | NO. |          |                                                                                                                |
| DP0p | 9   | Diff I   | DP Differential positive input for DisplayPort Lane 0.                                                         |
| DP0n | 10  | Diff I   | DP Differential negative input for DisplayPort Lane 0.                                                         |
| DP1p | 12  | Diff I   | DP Differential positive input for DisplayPort Lane 1.                                                         |
| DP1n | 13  | Diff I   | DP Differential negative input for DisplayPort Lane 1.                                                         |
| DP2p | 15  | Diff I   | DP Differential positive input for DisplayPort Lane 2.                                                         |
| DP2n | 16  | Diff I   | DP Differential negative input for DisplayPort Lane 2.                                                         |
| DP3p | 18  | Diff I   | DP Differential positive input for DisplayPort Lane 3.                                                         |
| DP3n | 19  | Diff I   | DP Differential negative input for DisplayPort Lane 3.                                                         |
| RX1n | 31  | Diff I/O | Differential negative output for DisplayPort or differential negative input for USB3.1 Downstream Facing port. |
| RX1p | 30  | Diff I/O | Differential positive output for DisplayPort or differential positive input for USB3.1 Downstream Facing port. |
| TX1n | 34  | Diff O   | Differential negative output for DisplayPort or USB3.1 downstream facing port.                                 |
| TX1p | 33  | Diff O   | Differential positive output for DisplayPort or USB 3.1 downstream facing port.                                |
| TX2p | 37  | Diff O   | Differential positive output for DisplayPort or USB 3.1 downstream facing port.                                |
| TX2n | 36  | Diff O   | Differential negative output for DisplayPort or USB 3.1 downstream facing port.                                |
| RX2p | 40  | Diff I/O | Differential positive output for DisplayPort or differential positive input for USB3.1 Downstream Facing port. |
| RX2n | 39  | Diff I/O | Differential negative output for DisplayPort or differential negative input for USB3.1 Downstream Facing port. |

### Pin Functions (continued)

| PIN                            |              | I/O                             | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------|--------------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                           | NO.          |                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| SSTXp                          | 8            | Diff I                          | Differential positive input for USB3.1 upstream facing port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| SSTXn                          | 7            | Diff I                          | Differential negative input for USB3.1 upstream facing port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| SSRXp                          | 5            | Diff O                          | Differential positive output for USB3.1 upstream facing port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SSRXn                          | 4            | Diff O                          | Differential negative output for USB3.1 upstream facing port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| EQ1                            | 35           | 4 Level I                       | This pin along with EQ0 sets the USB receiver equalizer gain for downstream facing RX1 and RX2 when USB used.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| EQ0                            | 38           | 4 Level I                       | This pin along with EQ1 sets the USB receiver equalizer gain for downstream facing RX1 and RX2 when USB used.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CAD_SNK/DCI_DAT <sup>(1)</sup> | 29           | I/O<br>(PD)                     | When I2C_EN ! = 0, this pin functions as DCI data output Leave open if not used. When I2C_EN = 0, this pin is CAD_SNK (L = AUX snoop enabled and H = AUX snoop disabled with all lanes active).                                                                                                                                                                                                                                                                                                                               |
| HPDIN/DCI_CLK <sup>(1)</sup>   | 32           | I/O<br>(PD)                     | When I2C_EN ! = 0, this pin functions as DCI clock output Leave open if not used. When I2C_EN = 0, this pin is an input for Hot Plug Detect received from DisplayPort sink. When HPDIN is Low for greater than 2ms, all DisplayPort lanes are disabled while the AUX to SBU switch will remain closed.                                                                                                                                                                                                                        |
| I2C_EN                         | 17           | 4 Level I                       | I <sup>2</sup> C Programming Mode or GPIO Programming Select. I2C is only disabled when this pin is '0'.<br>0 = GPIO mode (I <sup>2</sup> C disabled)<br>R = TI Test Mode (I <sup>2</sup> C enabled at 3.3 V)<br>F = I <sup>2</sup> C enabled at 1.8 V<br>1 = I <sup>2</sup> C enabled at 3.3 V.                                                                                                                                                                                                                              |
| SBU1                           | 27           | I/O, CMOS                       | SBU1. This pin should be DC coupled to the SBU1 pin on the Type-C receptacle. A 2-M ohm resistor to GND is also recommended.                                                                                                                                                                                                                                                                                                                                                                                                  |
| SBU2                           | 26           | I/O, CMOS                       | SBU2. This pin should be DC coupled to the SBU2 pin on the Type-C receptacle. A 2-M ohm resistor to GND is also recommended.                                                                                                                                                                                                                                                                                                                                                                                                  |
| AUXp                           | 24           | I/O, CMOS                       | AUXp. DisplayPort AUX positive I/O connected to the DisplayPort source through a AC coupling capacitor. In addition to AC coupling capacitor, this pin also requires a 100K resistor to GND. This pin along with AUXN is used by the TUSB1046A-DCI for AUX snooping and is routed to SBU1/2 based on the orientation of the Type-C.                                                                                                                                                                                           |
| AUXn                           | 25           | I/O, CMOS                       | AUXn. DisplayPort AUX negative I/O connected to the DisplayPort source through a AC coupling capacitor. In addition to AC coupling capacitor, this pin also requires a 100K resistor to DP_PWR (3.3V). This pin along with AUXP is used by the TUSB1046A-DCI for AUX snooping and is routed to SBU1/2 based on the orientation of the Type-C.                                                                                                                                                                                 |
| DPEQ1                          | 2            | 4 Level I                       | DisplayPort Receiver EQ. This along with DPEQ0 will select the DisplayPort receiver equalization gain.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| DPEQ0/A1                       | 14           | 4 Level I                       | DisplayPort Receiver EQ. This along with DPEQ1 will select the DisplayPort receiver equalization gain. When I2C_EN is not '0', this pin will also set the TUSB1046A-DCI I <sup>2</sup> C address.                                                                                                                                                                                                                                                                                                                             |
| SSEQ1                          | 3            | 4 Level I                       | Along with SSEQ0, sets the USB receiver equalizer gain for upstream facing SSTXP/N.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SSEQ0/A0                       | 11           | 4 Level I                       | Along with SSEQ1, sets the USB receiver equalizer gain for upstream facing SSTXP/N. When I2C_EN is not '0', this pin will also set the TUSB1046A-DCI I <sup>2</sup> C address. If I2C_EN = "F", then this pin must be set to "F" or "0".                                                                                                                                                                                                                                                                                      |
| FLIP/SCL                       | 21           | 2 Level I                       | When I2C_EN='0' this is Flip control pin, otherwise this pin is I <sup>2</sup> C clock. . When used for I <sup>2</sup> C clock pullup to I <sup>2</sup> C master's VCC I2C supply.                                                                                                                                                                                                                                                                                                                                            |
| CTL0/SDA                       | 22           | 2 Level I                       | When I2C_EN='0' this is a USB3.1 Switch control pin, otherwise this pin is I <sup>2</sup> C data. When used for I <sup>2</sup> C data pullup to I <sup>2</sup> C master's VCC I2C supply.                                                                                                                                                                                                                                                                                                                                     |
| CTL1/HPDIN                     | 23           | 2 Level I<br>(Failsafe)<br>(PD) | DP Alt mode Switch Control Pin. When I2C_EN = '0', this pin will enable or disable DisplayPort functionality. Otherwise, when I2C_EN is not "0", DisplayPort functionality is enabled and disabled through I <sup>2</sup> C registers.<br>L = DisplayPort Disabled.<br>H = DisplayPort Enabled.<br>When I2C_EN is not "0" this pin is an input for Hot Plug Detect received from DisplayPort sink. When this HPDIN is Low for greater than 2 ms, all DisplayPort lanes are disabled and AUX to SBU switch will remain closed. |
| VCC                            | 1, 6, 20, 28 | P                               | 3.3-V Power Supply                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Thermal Pad                    |              | G                               | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

(1) Not a fail-safe I/O. Actively driving pin high while VCC is removed results in leakage voltage on VCC pins.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                |                                                           | MIN  | MAX            | UNIT |
|------------------------------------------------|-----------------------------------------------------------|------|----------------|------|
| Supply Voltage Range <sup>(2)</sup> , $V_{CC}$ |                                                           | −0.3 | 4              | V    |
| Voltage Range at any input or output pin       | Differential voltage between positive and negative inputs |      | ±2.5           | V    |
|                                                | Voltage at differential inputs                            | −0.5 | $V_{CC} + 0.5$ | V    |
|                                                | CMOS Inputs                                               | −0.5 | $V_{CC} + 0.5$ | V    |
| Maximum junction temperature, $T_J$            |                                                           |      | 125            | °C   |
| Storage temperature, $T_{stg}$                 |                                                           | −65  | 150            | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the GND terminals.

### 6.2 ESD Ratings

|                                     |                                                                                | VALUE | UNIT |
|-------------------------------------|--------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±5000 | V    |
|                                     | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|             |                                                                | MIN            | NOM | MAX | UNIT |
|-------------|----------------------------------------------------------------|----------------|-----|-----|------|
| $V_{CC}$    | Main power supply                                              | 3              | 3.3 | 3.6 | V    |
|             | Supply Ramp Requirement                                        |                |     | 100 | ms   |
| $V_{(12C)}$ | Supply that external resistors are pulled up to on SDA and SCL | 1.7            |     | 3.6 | V    |
| $V_{(PSN)}$ | Supply Noise on $V_{CC}$ pins                                  |                |     | 100 | mV   |
| $T_A$       | Operating free-air temperature                                 | TUSB1046A-DCI  |     | 0   | °C   |
|             |                                                                | TUSB1046AI-DCI |     | −40 | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TUSB1046A-DCI | UNIT |
|-------------------------------|----------------------------------------------|---------------|------|
|                               |                                              | RNQ (WQFN)    |      |
|                               |                                              | 40 PINS       |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 37.6          | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 20.7          | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 9.5           | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 0.2           | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 9.4           | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | 2.3           | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Power Supply Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                |                                      | TEST CONDITIONS                                                                                                                               | MIN | TYP  | MAX | UNIT |
|--------------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| $P_{CC(Active-USB)}$     | Average active power USB Only        | Link in U0 with GEN2 data transmission. EN, EQ cntrl pins = NC, k28.5 pattern at 10 Gbps, $V_{ID} = 1000\text{ mV}_{PP}$ ; CTL1 = L; CTL0 = H |     | 335  |     | mW   |
| $P_{CC(Active-USB-DP1)}$ | Average active power USB + 2 Lane DP | Link in U0 with GEN2 data transmission. EN, EQ cntrl pins = NC, k28.5 pattern at 10 Gbps, $V_{ID} = 1000\text{ mV}_{PP}$ ; CTL1 = H; CTL0 = H |     | 634  |     | mW   |
| $P_{CC(Active-DP)}$      | Average active power 4 Lane DP Only  | Four active DP lanes operating at 8.1Gbps; CTL1 = H; CTL0 = L;                                                                                |     | 660  |     | mW   |
| $P_{CC(NC-USB)}$         | Average power with no connection     | No GEN1 device is connected to TXP/TXN; CTL1 = L; CTL0 = H;                                                                                   |     | 2.4  |     | mW   |
| $P_{CC(U2U3)}$           | Average power in U2/U3               | Link in U2 or U3 USB Mode Only; CTL1 = L; CTL0 = H;                                                                                           |     | 3    |     | mW   |
| $P_{CC(Shutdown)}$       | Device Shutdown                      | CTL1 = L; CTL0 = L; I2C_EN = 0;                                                                                                               |     | 0.85 |     | mW   |

## 6.6 DC Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                                                                      |                                                                        | TEST CONDITIONS                                              | MIN                    | TYP                    | MAX  | UNIT          |
|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------|------------------------|------------------------|------|---------------|
| <b>4-State CMOS Inputs(EQ[1:0], SSEQ[1:0], DPEQ[1:0], I2C_EN)</b>                              |                                                                        |                                                              |                        |                        |      |               |
| $I_{IH}$                                                                                       | High level input current                                               | $V_{CC} = 3.6\text{ V}$ ; $V_{IN} = 3.6\text{ V}$            | 20                     |                        | 80   | $\mu\text{A}$ |
| $I_{IL}$                                                                                       | Low level input current                                                | $V_{CC} = 3.6\text{ V}$ ; $V_{IN} = 0\text{ V}$              | -160                   |                        | -40  | $\mu\text{A}$ |
| 4-Level $V_{TH}$                                                                               | Threshold 0 / R                                                        | $V_{CC} = 3.3\text{ V}$                                      |                        | 0.55                   |      | V             |
|                                                                                                | Threshold R/ Float                                                     | $V_{CC} = 3.3\text{ V}$                                      |                        | 1.65                   |      | V             |
|                                                                                                | Threshold Float / 1                                                    | $V_{CC} = 3.3\text{ V}$                                      |                        | 2.7                    |      | V             |
| $R_{PU}$                                                                                       | Internal pull-up resistance                                            |                                                              |                        | 35                     |      | k $\Omega$    |
| $R_{PD}$                                                                                       | Internal pull-down resistance                                          |                                                              |                        | 95                     |      | k $\Omega$    |
| <b>2-State CMOS Input (CTL0, CTL1, FLIP, CAD_SNK, HPDIN) CTL1, CTL0 and FLIP are Failsafe.</b> |                                                                        |                                                              |                        |                        |      |               |
| $V_{IH}$                                                                                       | High-level input voltage                                               |                                                              | 2                      |                        | 3.6  | V             |
| $V_{IL}$                                                                                       | Low-level input voltage                                                |                                                              | 0                      |                        | 0.8  | V             |
| $R_{PD}$                                                                                       | Internal pull-down resistance for CTL1                                 |                                                              |                        | 500                    |      | k $\Omega$    |
| $R_{(ENPD)}$                                                                                   | Internal pull-down resistance for CAD_SNK (pin 29), and HPDIN (pin 32) |                                                              |                        | 150                    |      | k $\Omega$    |
| $I_{IH}$                                                                                       | High-level input current                                               | $V_{IN} = 3.6\text{ V}$                                      | -25                    |                        | 25   | $\mu\text{A}$ |
| $I_{IL}$                                                                                       | Low-level input current                                                | $V_{IN} = \text{GND}$ , $V_{CC} = 3.6\text{ V}$              | -25                    |                        | 25   | $\mu\text{A}$ |
| <b>I<sup>2</sup>C Control Pins SCL, SDA</b>                                                    |                                                                        |                                                              |                        |                        |      |               |
| $V_{IH}$                                                                                       | High-level input voltage                                               | I2C_EN = 0                                                   | $0.7 \times V_{(I2C)}$ |                        | 3.6  | V             |
| $V_{IL}$                                                                                       | Low-level input voltage                                                | I2C_EN = 0                                                   | 0                      | $0.3 \times V_{(I2C)}$ |      | V             |
| $V_{OL}$                                                                                       | Low-level output voltage                                               | I2C_EN = 0; $I_{OL} = 3\text{ mA}$                           | 0                      |                        | 0.4  | V             |
| $I_{OL}$                                                                                       | Low-level output current                                               | I2C_EN = 0; $V_{OL} = 0.4\text{ V}$                          | 20                     |                        |      | mA            |
| $I_{I(I2C)}$                                                                                   | Input current on SDA pin                                               | $0.1 \times V_{(I2C)} < \text{Input voltage} < 3.3\text{ V}$ | -10                    |                        | 10   | $\mu\text{A}$ |
| $C_{I(I2C)}$                                                                                   | Input capacitance                                                      |                                                              |                        |                        | 10   | pF            |
| $C_{(I2C\_FM+\_BUS)}$                                                                          | I2C bus capacitance for FM+ (1MHz)                                     |                                                              |                        |                        | 150  | pF            |
| $C_{(I2C\_FM\_BUS)}$                                                                           | I2C bus capacitance for FM (400kHz)                                    |                                                              |                        |                        | 150  | pF            |
| $R_{(EXT\_I2C\_FM+)}$                                                                          | External resistors on both SDA and SCL when operating at FM+ (1MHz)    | $C_{(I2C\_FM+\_BUS)} = 150\text{ pF}$                        | 620                    | 820                    | 910  | $\Omega$      |
| $R_{(EXT\_I2C\_FM)}$                                                                           | External resistors on both SDA and SCL when operating at FM (400kHz)   | $C_{(I2C\_FM\_BUS)} = 150\text{ pF}$                         | 620                    | 1500                   | 2200 | $\Omega$      |

## 6.7 AC Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                                           | TEST CONDITIONS                                                                               | MIN                                         | TYP  | MAX  | UNIT       |
|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------------------------------------|------|------|------------|
| <b>USB Gen 2 Differential Receiver (RX1P/N, RX2P/N, SSTXP/N)</b>    |                                                                                               |                                             |      |      |            |
| $V_{(RX-DIFF-PP)}$                                                  | Input differential peak-peak voltage swing linear dynamic range                               |                                             | 2000 |      | mVpp       |
| $V_{(RX-DC-CM)}$                                                    | Common-mode voltage bias in the receiver (DC)                                                 |                                             | 0    |      | V          |
| $R_{(RX-DIFF-DC)}$                                                  | Differential input impedance (DC)                                                             | 72                                          |      | 120  | $\Omega$   |
| $R_{(RX-CM-DC)}$                                                    | Receiver DC common mode impedance                                                             | 18                                          |      | 30   | $\Omega$   |
| $Z_{(RX-HIGH-IMP-DC-POS)}$                                          | Common-mode input impedance with termination disabled (DC)                                    | 25                                          |      |      | k $\Omega$ |
| $V_{(SIGNAL-DET-DIFF-PP)}$                                          | Input differential peak-to-peak signal detect assert level                                    |                                             | 80   |      | mV         |
| $V_{(RX-IDLE-DET-DIFF-PP)}$                                         | Input differential peak-to-peak signal detect de-assert Level                                 |                                             | 60   |      | mV         |
| $V_{(RX-LFPS-DET-DIFF-PP)}$                                         | Low frequency periodic signaling (LFPS) detect threshold                                      | 100                                         |      | 300  | mV         |
| $V_{(RX-CM-AC-P)}$                                                  | Peak RX AC common-mode voltage                                                                |                                             |      | 150  | mV         |
| $C_{(RX)}$                                                          | RX input capacitance to GND                                                                   |                                             | 0.5  | 1    | pF         |
| $R_{L(RX-DIFF)}$                                                    | Differential return Loss                                                                      | 50 MHz – 1.25 GHz at 90 $\Omega$            | -19  |      | dB         |
|                                                                     |                                                                                               | 5 GHz at 90 $\Omega$                        | -10  |      | dB         |
| $R_{L(RX-CM)}$                                                      | Common-mode return loss                                                                       | 50 MHz – 5 GHz at 90 $\Omega$               | -10  |      | dB         |
| $E_{Q(SS\_TX)}$                                                     | Receiver equalization for upstream facing port                                                | SSEQ[1:0] at 5 GHz                          | 11   |      | dB         |
| $E_{Q(SS\_RX)}$                                                     | Receiver equalization for downstream facing ports                                             | EQ[1:0] at 5 GHz                            | 9    |      | dB         |
| <b>USB Gen 2 Differential Transmitter (TX1P/N, TX2P/N, SSRXP/N)</b> |                                                                                               |                                             |      |      |            |
| $V_{TX(DIFF-PP)}$                                                   | Transmitter dynamic differential voltage swing range.                                         |                                             | 1600 |      | mVpp       |
| $V_{TX(RCV-DETECT)}$                                                | Amount of voltage change allowed during receiver detection                                    |                                             |      | 600  | mV         |
| $V_{TX(CM-IDLE-DELTA)}$                                             | Transmitter idle common-mode voltage change while in U2/U3 and not actively transmitting LFPS | -600                                        |      | 600  | mV         |
| $V_{TX(DC-CM)}$                                                     | Common-mode voltage bias in the transmitter (DC)                                              |                                             | 1.75 |      | V          |
| $V_{TX(CM-AC-PP-ACTIVE)}$                                           | Tx AC common-mode voltage active                                                              |                                             |      | 100  | mVpp       |
|                                                                     | Max mismatch from Txp + Txn for both time and amplitude                                       |                                             |      |      |            |
| $V_{TX(IDLE-DIFF-AC-PP)}$                                           | AC electrical idle differential peak-to-peak output voltage                                   | 0                                           |      | 10   | mV         |
| $V_{TX(IDLE-DIFF-DC)}$                                              | DC electrical idle differential output voltage                                                | 0                                           |      | 14   | mV         |
| $V_{TX(CM-DC-ACTIVE-IDLE-DELTA)}$                                   | Absolute DC common-mode voltage between U1 and U0                                             |                                             |      | 200  | mV         |
| $R_{TX(DIFF)}$                                                      | Differential impedance of the driver                                                          | 75                                          |      | 120  | $\Omega$   |
| $C_{AC(COUPLING)}$                                                  | AC coupling capacitor                                                                         | 75                                          |      | 265  | nF         |
| $R_{TX(CM)}$                                                        | Common-mode impedance of the driver                                                           | 18                                          |      | 30   | $\Omega$   |
|                                                                     | Measured with respect to AC ground over 0–500 mV                                              |                                             |      |      |            |
| $I_{TX(SHORT)}$                                                     | TX short circuit current                                                                      |                                             |      | 67   | mA         |
| $C_{TX(PARASITIC)}$                                                 | TX input capacitance for return loss                                                          |                                             |      | 1.25 | pF         |
|                                                                     | At package pins, at 5 GHz                                                                     |                                             |      |      |            |
| $R_{LTX(DIFF)}$                                                     | Differential return loss                                                                      | 50 MHz – 1.25 GHz at 90 $\Omega$            | -15  |      | dB         |
|                                                                     |                                                                                               | 5 GHz at 90 $\Omega$                        | -13  |      | dB         |
| $R_{LTX(CM)}$                                                       | Common-mode return loss                                                                       | 50 MHz – 5 GHz at 90 $\Omega$               | -13  |      | dB         |
| <b>AC Characteristics</b>                                           |                                                                                               |                                             |      |      |            |
| Crosstalk                                                           | Differential crosstalk between TX and RX signal pairs                                         | at 5 GHz                                    | -30  |      | dB         |
| $C_{(P1dB-LF)}$                                                     | Low frequency 1-dB compression point                                                          | at 100 MHz, 200 mVpp < $V_{ID}$ < 2000 mVpp | 1300 |      | mVpp       |

## AC Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                                                        |                                                                                      | TEST CONDITIONS                                                                                         | MIN | TYP   | MAX | UNIT             |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----|-------|-----|------------------|
| C <sub>(P1dB-HF)</sub>                                                           | High frequency 1-dB compression point                                                | at 5 GHz, 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub>                                |     | 1000  |     | mV <sub>PP</sub> |
| f <sub>LF</sub>                                                                  | Low frequency cutoff                                                                 | 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub>                                          |     | 20    | 50  | kHz              |
|                                                                                  | TX output deterministic jitter                                                       | 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub> , PRBS7, 10 Gbps                         |     | 0.11  |     | UIpp             |
|                                                                                  |                                                                                      | 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub> , PRBS7, 8.1 Gbps                        |     | 0.08  |     | UIpp             |
|                                                                                  | TX output total jitter                                                               | 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub> , PRBS7, 10 Gbps                         |     | 0.15  |     | UIpp             |
|                                                                                  |                                                                                      | 200 mV <sub>PP</sub> < V <sub>ID</sub> < 2000 mV <sub>PP</sub> , PRBS7, 8.1 Gbps                        |     | 0.135 |     | UIpp             |
| DisplayPort Receiver (DP[3:0]p or DP[3:0]n)                                      |                                                                                      |                                                                                                         |     |       |     |                  |
| V <sub>ID(PP)</sub>                                                              | Peak-to-peak input differential dynamic voltage range                                |                                                                                                         |     | 2000  |     | V                |
| V <sub>IC</sub>                                                                  | Input common mode voltage                                                            |                                                                                                         |     | 0     |     | V                |
| C <sub>(AC)</sub>                                                                | AC coupling capacitance                                                              |                                                                                                         | 75  |       | 200 | nF               |
| E <sub>Q(DP)</sub>                                                               | Receiver equalization                                                                | DPEQ[1:0] at 4.05 GHz                                                                                   |     |       | 14  | dB               |
| d <sub>R</sub>                                                                   | Data rate                                                                            | HBR3                                                                                                    |     |       | 8.1 | Gbps             |
| R <sub>(ti)</sub>                                                                | Input termination resistance                                                         |                                                                                                         | 80  | 100   | 120 | Ω                |
| DisplayPort Transmitter (TX1p or TX1n, TX2p or TX2n, RX1p or RX1n, RX2p or RX2n) |                                                                                      |                                                                                                         |     |       |     |                  |
| I <sub>TX(SHORT)</sub>                                                           | TX short circuit current                                                             | TX± shorted to GND                                                                                      |     |       | 67  | mA               |
| V <sub>TX(DC-CM)</sub>                                                           | Common-mode voltage bias in the transmitter (DC)                                     |                                                                                                         |     | 1.75  |     | V                |
| AUXp or AUXn and SBU1 or SBU2                                                    |                                                                                      |                                                                                                         |     |       |     |                  |
| R <sub>ON</sub>                                                                  | Output ON resistance                                                                 | V <sub>CC</sub> = 3.3V; V <sub>I</sub> = 0 to 0.4 V for AUXp; V <sub>I</sub> = 2.7 V to 3.6 V for AUXn  |     | 5     | 10  | Ω                |
| ΔR <sub>ON</sub>                                                                 | ON resistance mismatch within pair                                                   | V <sub>CC</sub> = 3.3 V; V <sub>I</sub> = 0 to 0.4 V for AUXP; V <sub>I</sub> = 2.7 V to 3.6 V for AUXN |     |       | 2.5 | Ω                |
| R <sub>ON(FLAT)</sub>                                                            | ON resistance flatness (RON max – RON min) measured at identical VCC and temperature | V <sub>CC</sub> = 3.3 V; V <sub>I</sub> = 0 to 0.4 V for AUXp; V <sub>I</sub> = 2.7 V to 3.6 V for AUXn |     |       | 2   | Ω                |
| V <sub>(AUXP_DC_CM)</sub>                                                        | AUX Channel DC common mode voltage for AUXp and SBU1.                                | V <sub>CC</sub> = 3.3 V                                                                                 | 0   |       | 0.4 | V                |
| V <sub>(AUXN_DC_CM)</sub>                                                        | AUX Channel DC common mode voltage for AUXn and SBU2                                 | V <sub>CC</sub> = 3.3 V                                                                                 | 2.7 |       | 3.6 | V                |
| C <sub>(AUX_ON)</sub>                                                            | ON-state capacitance                                                                 | V <sub>CC</sub> = 3.3 V; CTL1 = 1; V <sub>I</sub> = 0 V or 3.3 V                                        |     | 4     | 7   | pF               |
| C <sub>(AUX_OFF)</sub>                                                           | OFF-state capacitance                                                                | V <sub>CC</sub> = 3.3 V; CTL1 = 0; V <sub>I</sub> = 0 V or 3.3 V                                        |     | 3     | 6   | pF               |

## 6.8 DCI Specific Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                 |                                            | TEST CONDITIONS                                                       | MIN  | TYP | MAX  | UNIT |
|-------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------|------|-----|------|------|
| <b>DCI_CLK and DCI_DAT LVCMOS Outputs</b> |                                            |                                                                       |      |     |      |      |
| $V_{OL}$                                  | Low-Level output voltage                   | $V_{CC} = 3\text{ V}$ ; $I_{OL} = 2\text{ mA}$ ; $C_L = 10\text{ pF}$ |      |     | 0.45 | V    |
| $V_{OH}$                                  | High-Level output voltage                  | $V_{CC} = 3\text{ V}$ ; $I_{OL} = -2\text{ mA}$ ;                     | 2.4  |     |      | V    |
| $R_{DCI}$                                 | Output characteristic impedance            |                                                                       | 21   | 25  | 33   | Ω    |
| $t_{PERIOD}$                              | DCI Clock period                           | Measured at 50%                                                       | 6.67 |     |      | ns   |
| $t_{VALID}$                               | Rising edge of DCI clock to DCI data valid |                                                                       |      |     | 1    | ns   |
| $t_{DCI\_RISE}$                           | DCI output rise time                       | Measured at 20% to 80%.                                               | 350  |     |      | ps   |
| $t_{DCI\_FALL}$                           | DCI output fall time                       | Measured at 80% to 20%                                                | 350  |     |      | ps   |



## 6.9 Timing Requirements

|                      |                                                                     |                                                                       | MIN | NOM | MAX | UNIT |
|----------------------|---------------------------------------------------------------------|-----------------------------------------------------------------------|-----|-----|-----|------|
| <b>USB Gen 1</b>     |                                                                     |                                                                       |     |     |     |      |
| $t_{IDLEEntry}$      | Delay from U0 to electrical idle                                    | See Figure 14                                                         |     | 10  |     | ns   |
| $t_{IDLEExit\_U1}$   | U1 exist time: break in electrical idle to the transmission of LFPS | See Figure 14                                                         |     | 6   |     | ns   |
| $t_{IDLEExit\_U2U3}$ | U2/U3 exit time: break in electrical idle to transmission of LFPS   |                                                                       |     | 10  |     | μs   |
| $t_{RXDET\_INTVL}$   | RX detect interval while in Disconnect                              |                                                                       |     |     | 12  | ms   |
| $t_{IDLEExit\_DISC}$ | Disconnect Exit Time                                                |                                                                       |     | 10  |     | μs   |
| $t_{Exit\_SHTDN}$    | Shutdown Exit Time                                                  |                                                                       |     | 1   |     | ms   |
| $t_{DIFF\_DLY}$      | Differential Propagation Delay                                      | See Figure 13                                                         |     |     | 300 | ps   |
| $t_R, t_F$           | Output Rise/Fall time (see Figure 15)                               | 20%-80% of differential voltage measured 1.7 inch from the output pin |     | 35  |     | ps   |
| $t_{RF\_MM}$         | Output Rise/Fall time mismatch                                      | 20%-80% of differential voltage measured 1.7 inch from the output pin |     |     | 2.6 | ps   |

## 6.10 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                                           |                                                                                                                  | TEST CONDITIONS              | MIN  | TYP | MAX | UNIT |
|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|------------------------------|------|-----|-----|------|
| <b>AUXp or AUXn and SBU1 or SBU2</b>                                |                                                                                                                  |                              |      |     |     |      |
| $t_{AUX\_PD}$                                                       | Switch propagation delay                                                                                         |                              |      |     | 400 | ps   |
| $t_{AUX\_SW\_OFF}$                                                  | Switching time CTL1 to switch OFF. Not including TCTL1_DEBOUNCE.                                                 |                              |      |     | 500 | ns   |
| $t_{AUX\_SW\_ON}$                                                   | Switching time CTL1 to switch ON                                                                                 |                              |      |     | 500 | ns   |
| $t_{AUX\_INTRA}$                                                    | Intra-pair output skew                                                                                           |                              |      |     | 100 | ps   |
| <b>USB3.1 and DisplayPort mode transition requirement GPIO mode</b> |                                                                                                                  |                              |      |     |     |      |
| $t_{GP\_USB\_4DP}$                                                  | Min overlap of CTL0 and CTL1 when transitioning from USB 3.1 only mode to 4-Lane DisplayPort mode or vice versa. |                              | 4    |     |     | μs   |
| <b>CTL1 and HPDIN</b>                                               |                                                                                                                  |                              |      |     |     |      |
| $t_{CTL1\_DEBOUNCE}$                                                | CTL1 and HPDIN debounce time when transitioning from H to L.                                                     |                              | 2    |     | 10  | ms   |
| <b>I<sup>2</sup>C (Refer to Figure 11)</b>                          |                                                                                                                  |                              |      |     |     |      |
| $f_{SCL}$                                                           | I <sup>2</sup> C clock frequency                                                                                 |                              |      |     | 1   | MHz  |
| $t_{BUF}$                                                           | Bus free time between START and STOP conditions                                                                  |                              | 0.5  |     |     | μs   |
| $t_{HDSTA}$                                                         | Hold time after repeated START condition. After this period, the first clock pulse is generated                  |                              | 0.26 |     |     | μs   |
| $t_{LOW}$                                                           | Low period of the I <sup>2</sup> C clock                                                                         |                              | 0.5  |     |     | μs   |
| $t_{HIGH}$                                                          | High period of the I <sup>2</sup> C clock                                                                        |                              | 0.26 |     |     | μs   |
| $t_{SUSTA}$                                                         | Setup time for a repeated START condition                                                                        |                              | 0.26 |     |     | μs   |
| $t_{HDDAT}$                                                         | Data hold time                                                                                                   |                              | 0    |     |     | μs   |
| $t_{SUDAT}$                                                         | Data setup time                                                                                                  |                              | 50   |     |     | ns   |
| $t_R$                                                               | Rise time of both SDA and SCL signals                                                                            |                              |      |     | 120 | ns   |
| $t_F$                                                               | Fall time of both SDA and SCL signals                                                                            | $20 \times (V_{(I2C)}/5.5V)$ |      |     | 120 | ns   |
| $t_{SUSTO}$                                                         | Setup time for STOP condition                                                                                    |                              | 0.26 |     |     | μs   |
| $C_b$                                                               | Capacitive load for each bus line                                                                                |                              |      |     | 150 | pF   |

## 6.11 Typical Characteristics

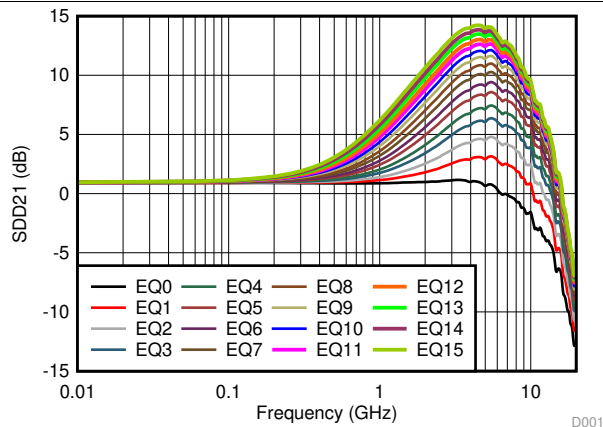


Figure 1. DisplayPort EQ Settings Curves

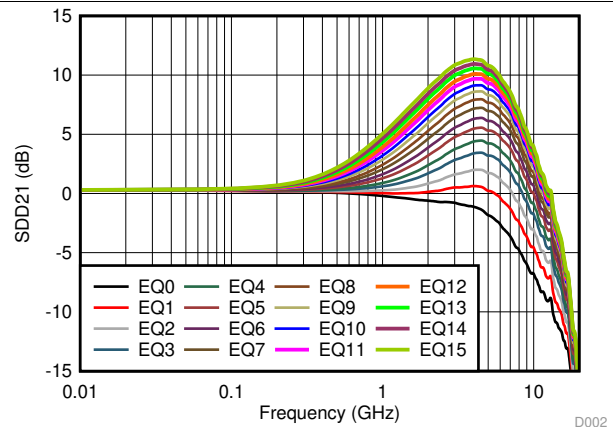


Figure 2. USB RX EQ Settings Curves

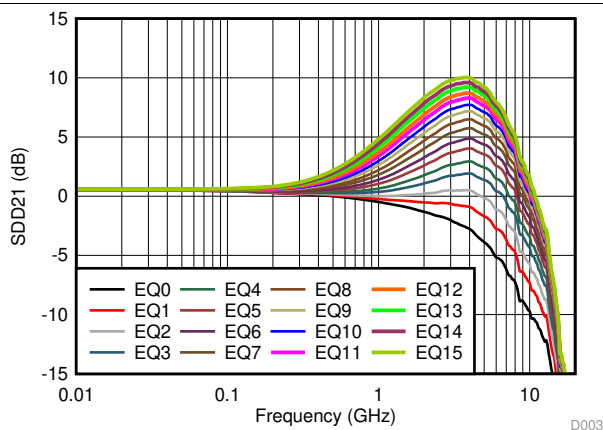


Figure 3. USB TX EQ Settings Curves

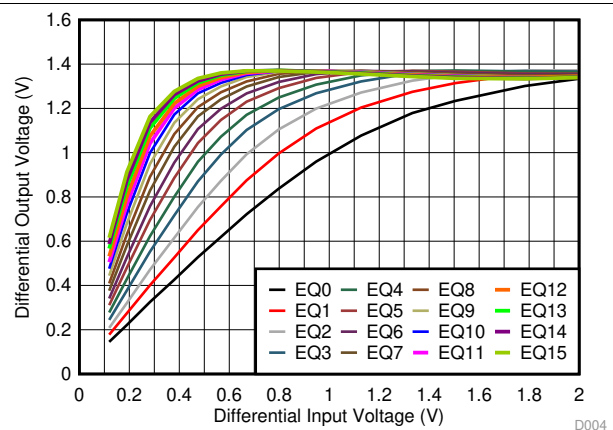


Figure 4. DisplayPort Linearity Curves at 4.05 GHz

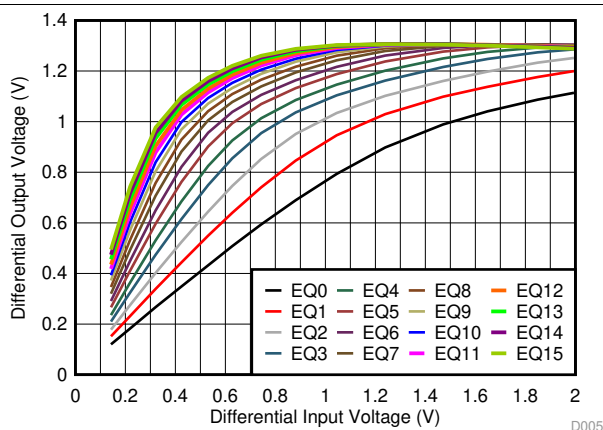


Figure 5. USB TX Linearity Curves at 5 GHz



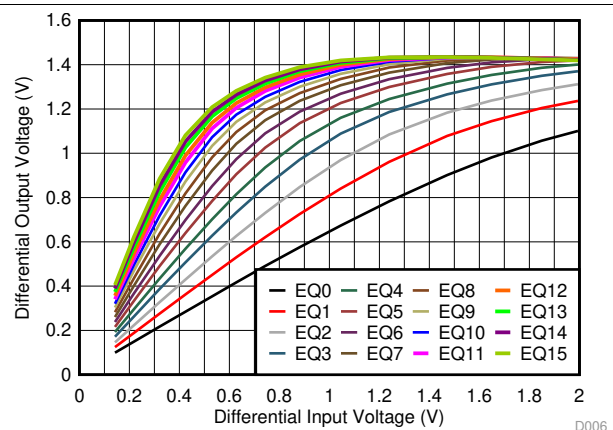


Figure 6. USB RX Linearity Curves at 5 GHz


## Typical Characteristics (continued)

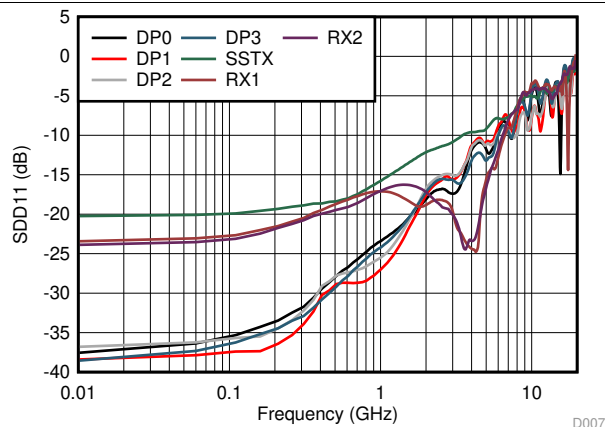


**Figure 7. Input Return Loss Performance**

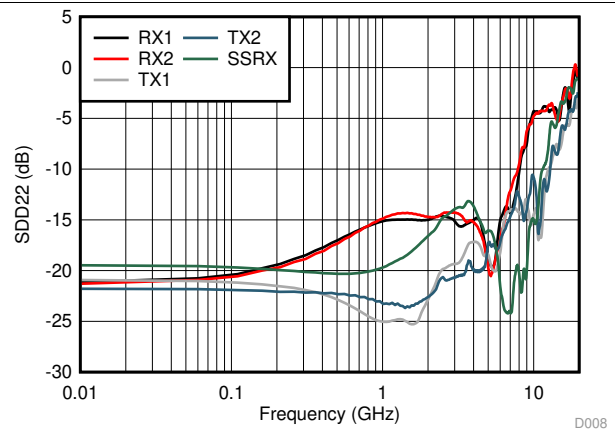

**Figure 8. Output Return Loss Performance**

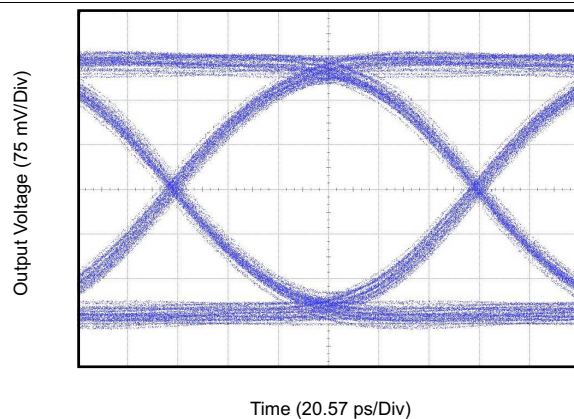


**Figure 9. DisplayPort HBR3 Eye-Pattern Performance with 12-inch Input PCB Trace at 8.1 Gbps**

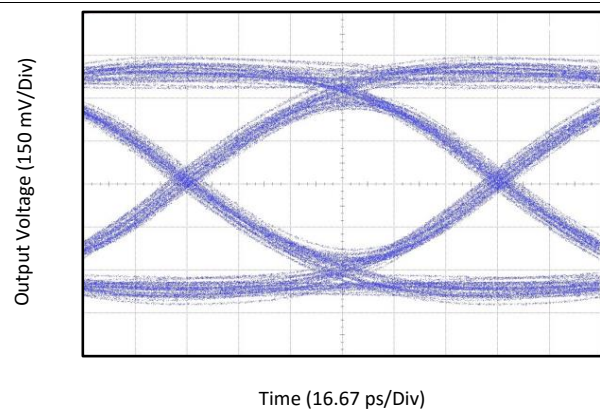


**Figure 10. USB 3.1 Gen2 Eye-Pattern Performance with 12-inch Input PCB Trace at 10 Gbps**


## 7 Parameter Measurement Information

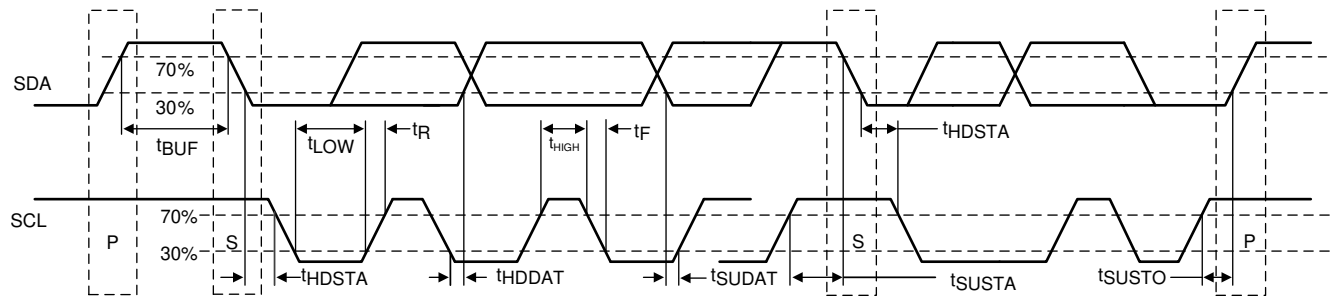

**Figure 11. I²C Timing Diagram Definitions**

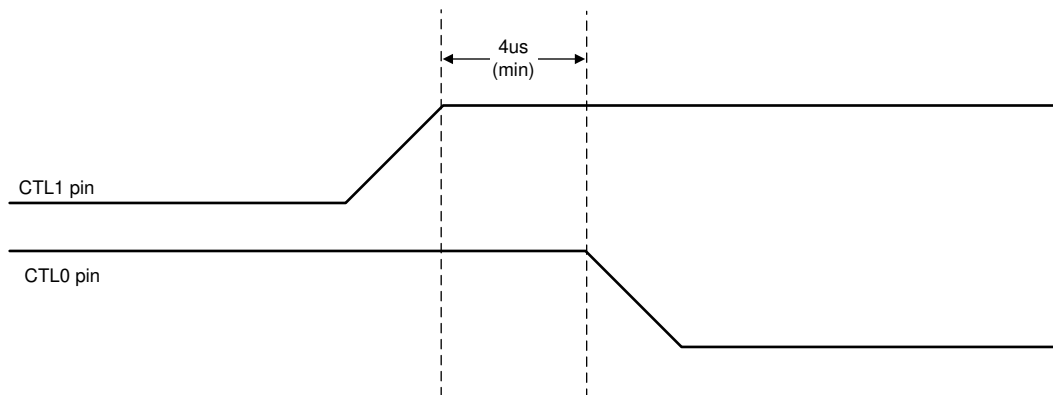


**Figure 12. USB3.1 to 4-Lane DisplayPort in GPIO Mode**

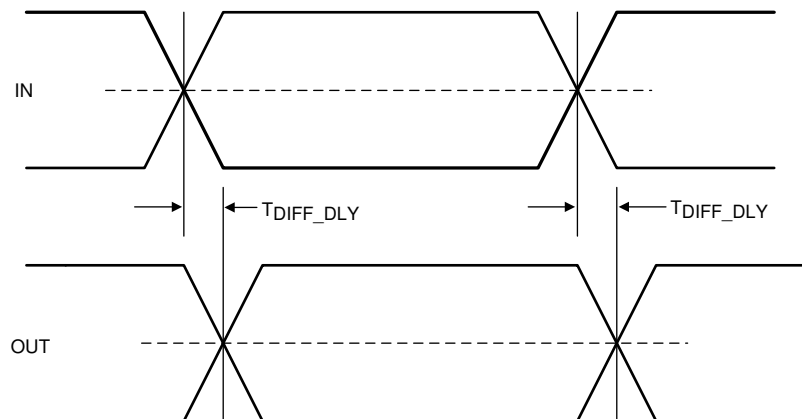


**Figure 13. Propagation Delay**


### Parameter Measurement Information (continued)

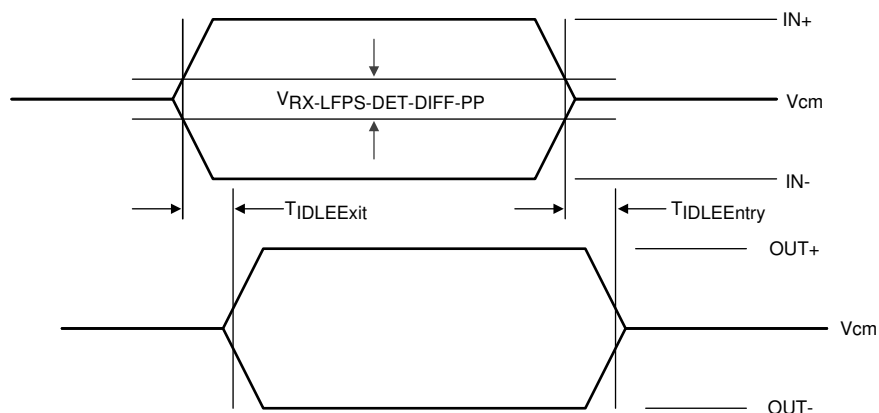


**Figure 14. Electrical Idle Mode Exit and Entry Delay**

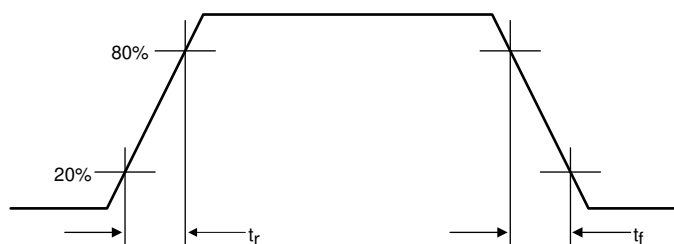

**Figure 15. Output Rise and Fall Times**

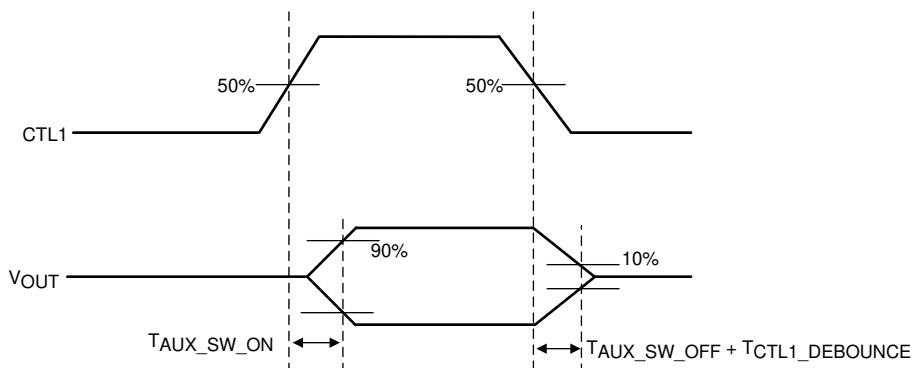

**Figure 16. AUX and SBU Switch ON and OFF Timing Diagram**

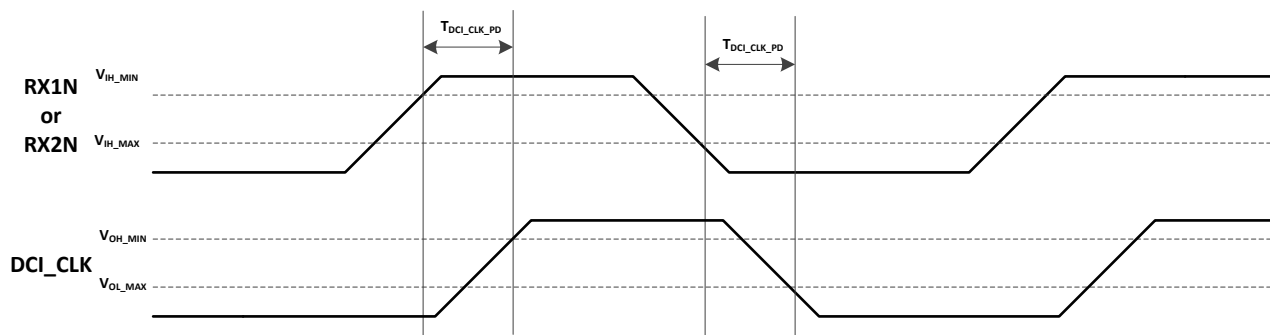

**Figure 17. DCI Clock Propagation Delay**

## 8 Detailed Description

### 8.1 Overview

The TUSB1046A-DCI is a VESA USB Type-C Alt Mode redriving switch supporting data rates up to 8.1 Gbps for downstream facing port. These devices utilize 5<sup>th</sup> generation USB redriver technology. The devices are utilized for DFP configurations C, D, E, and F from the VESA DisplayPort Alt Mode on USB Type-C.


The TUSB1046A-DCI provides several levels of receive equalization to compensate for cable and board trace loss due to inter-symbol interference (ISI) when USB 3.1 Gen1/Gen2 or DisplayPort 1.4 signals travel across a PCB or cable. This device requires a 3.3-V power supply. It comes in a commercial temperature range and industrial temperature range.

For a host application the TUSB1046A-DCI enables the system to pass both transmitter compliance and receiver jitter tolerance tests for USB 3.1 Gen1/Gen2 and DisplayPort version 1.4 HBR3. The re-driver recovers incoming data by applying equalization that compensates for channel loss, and drives out signals with a high differential voltage. Each channel has a receiver equalizer with selectable gain settings. The equalization should be set based on the amount of insertion loss before the TUSB1046A-DCI receivers. Independent equalization control for each channel can be set using EQ[1:0], SSEQ[1:0], and DPEQ[1:0] pins.

The TUSB1046A-DCI advanced state machine makes it transparent to hosts and devices. After power up, the TUSB1046A-DCI periodically performs receiver detection on the TX pairs. If it detects a USB 3.1 Gen1/Gen2 receiver, the RX termination is enabled, and the TUSB1046A-DCI is ready to re-drive.

The device ultra-low-power architecture operates at a 3.3-V power supply and achieves enhanced performance. The automatic LFPS de-emphasis control further enables the system to be USB3.1 compliant.

## 8.2 Functional Block Diagram

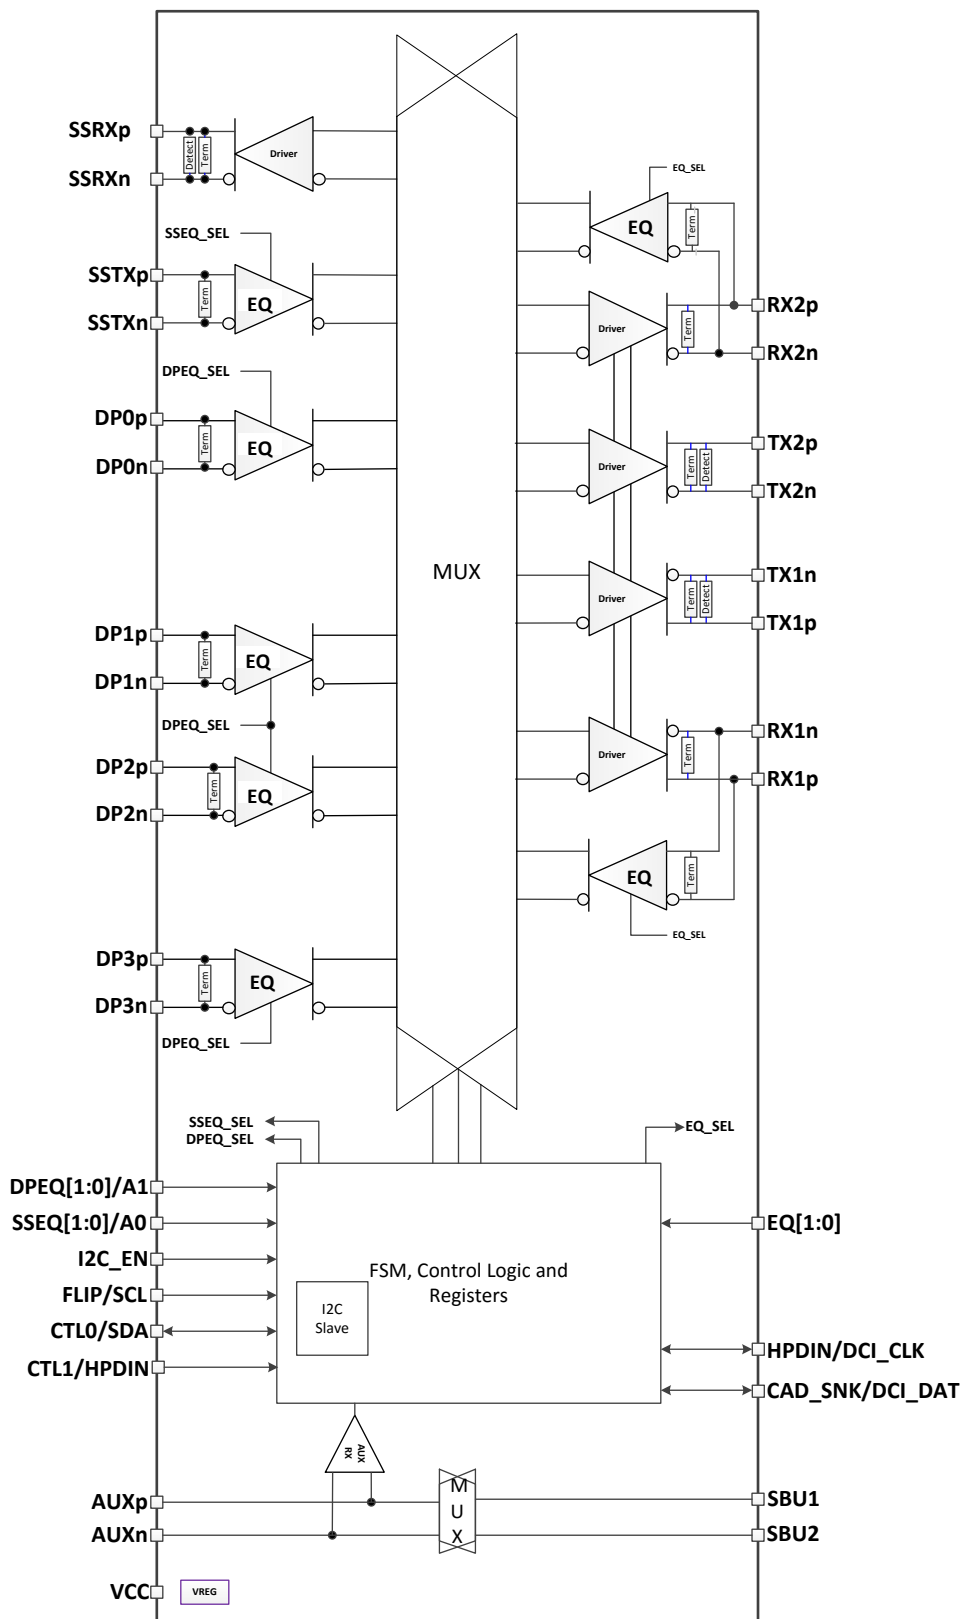

Copyright © 2017, Texas Instruments Incorporated

## 8.3 Feature Description

### 8.3.1 USB 3.1

The TUSB1046A-DCI supports USB 3.1 Gen1/Gen2 datarates up to 10 Gbps. The TUSB1046A-DCI supports all the USB defined power states (U0, U1, U2, and U3). Because the TUSB1046A-DCI is a linear redriver, it can't decode USB3.1 physical layer traffic. The TUSB1046A-DCI monitors the actual physical layer conditions like receiver termination, electrical idle, LFPS, and SuperSpeed signaling rate to determine the USB power state of the USB 3.1 interface.

The TUSB1046A-DCI features an intelligent low frequency periodic signaling (LFPS) detector. The LFPS detector automatically senses the low frequency signals and disables receiver equalization functionality. When not receiving LFPS, the TUSB1046A-DCI will enable receiver equalization based on the EQ[1:0] and SSEQ[1:0] pins or values programmed into EQ1\_SEL, EQ2\_SEL, and SSEQ\_SEL registers.

### 8.3.2 DisplayPort

The TUSB1046A-DCI supports up to 4 DisplayPort lanes at datarates up to 8.1Gbps (HBR3). The TUSB1046A-DCI, when configured in DisplayPort mode, monitors the native AUX traffic as it traverses between DisplayPort source and DisplayPort sink. For the purposes of reducing power, the TUSB1046A-DCI manages the number of active DisplayPort lanes based on the content of the AUX transactions. The TUSB1046A-DCI snoops native AUX writes to DisplayPort sink's DPCD registers 0x00101 (LANE\_COUNT\_SET) and 0x00600 (SET\_POWER\_STATE). TUSB1046A-DCI disables/enables lanes based on value written to LANE\_COUNT\_SET. The TUSB1046A-DCI disables all lanes when SET\_POWER\_STATE is in the D3. Otherwise active lanes will be based on value of LANE\_COUNT\_SET.

DisplayPort AUX snooping is enabled by default but can be disabled by changing the AUX\_SNOOP\_DISABLE register. Once AUX snoop is disabled, management of TUSB1046A-DCI DisplayPort lanes are controlled through various configuration registers. When TUSB1046A-DCI is enabled for GPIO mode (I2C\_EN = "0"), the CAD\_SNK pin can be used to disable AUX snooping. When CAD\_SNK pin is high, the AUX snooping functionality is disabled and all four DisplayPort lanes will be active.

### 8.3.3 4-level Inputs

The TUSB1046A-DCI has (I2C\_EN, EQ[1:0], DPEQ[1:0], and SSEQ[1:0]) 4-level inputs pins that are used to control the equalization gain and place TUSB1046A-DCI into different modes of operation. These 4-level inputs utilize a resistor divider to help set the 4 valid levels and provide a wider range of control settings. There is an internal 30 k $\Omega$  pull-up and a 94 k $\Omega$  pull-down. These resistors, together with the external resistor connection combine to achieve the desired voltage level.

**Table 1. 4-Level Control Pin Settings**

| LEVEL | SETTINGS                                                                                         |
|-------|--------------------------------------------------------------------------------------------------|
| 0     | Option 1: Tie 1 K $\Omega$ 5% to GND.<br>Option 2: Tie directly to GND.                          |
| R     | Tie 20 K $\Omega$ 5% to GND.                                                                     |
| F     | Float (leave pin open)                                                                           |
| 1     | Option 1: Tie 1 K $\Omega$ 5%to V <sub>CC</sub> .<br>Option 2: Tie directly to V <sub>CC</sub> . |



#### NOTE

All four-level inputs are latched on rising edge of internal reset. After  $t_{\text{cfg\_hd}}$ , the internal pull-up and pull-down resistors will be isolated in order to save power.

### 8.3.4 Receiver Linear Equalization

The purpose of receiver equalization is to compensate for channel insertion loss and inter-symbol interference in the system before the input of the TUSB1046A-DCI. The receiver overcomes these losses by attenuating the low frequency components of the signals with respect to the high frequency components. The proper gain setting should be selected to match the channel insertion loss before the input of the TUSB1046A-DCI receivers. Two 4-level inputs pins enable up to 16 possible equalization settings. USB3.1 upstream path, USB3.1 downstream path, and DisplayPort each have their own two 4-level inputs. The TUSB1046A-DCI also provides the flexibility of adjusting settings through I<sup>2</sup>C registers.

## 8.4 Device Functional Modes

### 8.4.1 Device Configuration in GPIO Mode

The TUSB1046A-DCI is in GPIO configuration when I2C\_EN = “0”. The TUSB1046A-DCI supports the following configurations: USB 3.1 only, 2 DisplayPort lanes + USB 3.1, or 4 DisplayPort lanes (no USB 3.1). The CTL1 pin controls whether DisplayPort is enabled. The combination of CTL1 and CTL0 selects between USB 3.1 only, 2 lanes of DisplayPort, or 4-lanes of DisplayPort as detailed in [Table 2](#). The AUXp or AUXn to SBU1 or SBU2 mapping is controlled based on [Table 3](#).

After power-up ( $V_{\text{CC}}$  from 0 V to 3.3 V), the TUSB1046A-DCI defaults to USB3.1 mode. The USB PD controller upon detecting no device attached to Type-C port or USB3.1 operation not required by attached device must take TUSB1046A-DCI out of USB3.1 mode by transitioning the CTL0 pin from L to H and back to L.

**Table 2. GPIO Configuration Control**

| CTL1 PIN | CTL0 PIN | FLIP PIN | TUSB1046A-DCI CONFIGURATION             | VESA DisplayPort ALT MODE DFP_D CONFIGURATION |
|----------|----------|----------|-----------------------------------------|-----------------------------------------------|
| L        | L        | L        | Power Down                              | —                                             |
| L        | L        | H        | Power Down                              | —                                             |
| L        | H        | L        | One Port USB 3.1 - No Flip              | —                                             |
| L        | H        | H        | One Port USB 3.1 – With Flip            | —                                             |
| H        | L        | L        | 4 Lane DP - No Flip                     | C and E                                       |
| H        | L        | H        | 4 Lane DP – With Flip                   | C and E                                       |
| H        | H        | L        | One Port USB 3.1 + 2 Lane DP- No Flip   | D and F                                       |
| H        | H        | H        | One Port USB 3.1 + 2 Lane DP– With Flip | D and F                                       |

**Table 3. GPIO AUXp or AUXn to SBU1 or SBU2 Mapping**

| CTL1 PIN | FLIP PIN | MAPPING                    |
|----------|----------|----------------------------|
| H        | L        | AUXp → SBU1<br>AUXn → SBU2 |
| H        | H        | AUXp → SBU2<br>AUXn → SBU1 |
| L > 2 ms | X        | Open                       |

Table 4 Details the TUSB1046A-DCI's mux routing. This table is valid for both I<sup>2</sup>C and GPIO configuration modes.

**Table 4. INPUT to OUTPUT Mapping**

| CTL1 PIN | CTL0 PIN | FLIP PIN | FROM      | TO         |
|----------|----------|----------|-----------|------------|
|          |          |          | INPUT PIN | OUTPUT PIN |
| L        | L        | L        | NA        | NA         |
| L        | L        | H        | NA        | NA         |
| L        | H        | L        | RX1P      | SSRXP      |
|          |          |          | RX1N      | SSRXN      |
|          |          |          | SSTXP     | TX1P       |
|          |          |          | SSTXN     | TX1N       |
| L        | H        | H        | RX2P      | SSRXP      |
|          |          |          | RX2N      | SSRXN      |
|          |          |          | SSTXP     | TX2P       |
|          |          |          | SSTXN     | TX2P       |
| H        | L        | L        | DP0P      | RX2P       |
|          |          |          | DP0N      | RX2N       |
|          |          |          | DP1P      | TX2P       |
|          |          |          | DP1N      | TX2N       |
|          |          |          | DP2P      | TX1P       |
|          |          |          | DP2N      | TX1N       |
|          |          |          | DP3P      | RX1P       |
|          |          |          | DP3N      | RX1N       |
| H        | L        | H        | DP0P      | RX1P       |
|          |          |          | DP0N      | RX1N       |
|          |          |          | DP1P      | TX1P       |
|          |          |          | DP1N      | TX1N       |
|          |          |          | DP2P      | TX2P       |
|          |          |          | DP2N      | TX2N       |
|          |          |          | DP3P      | RX2P       |
|          |          |          | DP3N      | RX2N       |
| H        | H        | L        | RX1P      | SSRXP      |
|          |          |          | RX1N      | SSRXN      |
|          |          |          | SSTXP     | TX1P       |
|          |          |          | SSTXN     | TX1N       |
|          |          |          | DP0P      | RX2P       |
|          |          |          | DP0N      | RX2N       |
|          |          |          | DP1P      | TX2P       |
|          |          |          | DP1N      | TX2N       |
| H        | H        | H        | RX2P      | SSRXP      |
|          |          |          | RX2N      | SSRXN      |
|          |          |          | SSTXP     | TX2P       |
|          |          |          | SSTXN     | TX2N       |
|          |          |          | DP0P      | RX1P       |
|          |          |          | DP0N      | RX1N       |
|          |          |          | DP1P      | TX1P       |
|          |          |          | DP1N      | TX1N       |

### 8.4.2 Device Configuration In I<sup>2</sup>C Mode

The TUSB1046A-DCI is in I<sup>2</sup>C mode when I2C\_EN is not equal to “0”. The same configurations defined in GPIO mode are also available in I<sup>2</sup>C mode. The TUSB1046A-DCI USB3.1 and DisplayPort configuration is controlled based on [Table 5](#). The AUXp or AUXn to SBU1 or SBU2 mapping control is based on [Table 6](#).

**Table 5. I<sup>2</sup>C Configuration Control**

| REGISTERS |         |         | TUSB1046A-DCI CONFIGURATION             | VESA DisplayPort ALT MODE DFP_D CONFIGURATION |
|-----------|---------|---------|-----------------------------------------|-----------------------------------------------|
| CTLSEL1   | CTLSEL0 | FLIPSEL |                                         |                                               |
| 0         | 0       | 0       | Power Down                              | —                                             |
| 0         | 0       | 1       | Power Down                              | —                                             |
| 0         | 1       | 0       | One Port USB 3.1 - No Flip              | —                                             |
| 0         | 1       | 1       | One Port USB 3.1 – With Flip            | —                                             |
| 1         | 0       | 0       | 4 Lane DP - No Flip                     | C and E                                       |
| 1         | 0       | 1       | 4 Lane DP – With Flip                   | C and E                                       |
| 1         | 1       | 0       | One Port USB 3.1 + 2 Lane DP- No Flip   | D and F                                       |
| 1         | 1       | 1       | One Port USB 3.1 + 2 Lane DP– With Flip | D and F                                       |

**Table 6. I<sup>2</sup>C AUXp or AUXn to SBU1 or SBU2 Mapping**

| REGISTERS    |              |         |         | MAPPING                    |
|--------------|--------------|---------|---------|----------------------------|
| AUX_SBU_OVR1 | AUX_SBU_OVR0 | CTLSEL1 | FLIPSEL |                            |
| 0            | 0            | 1       | 0       | AUXp → SBU1<br>AUXn → SBU2 |
| 0            | 0            | 1       | 1       | AUXp → SBU2<br>AUXn → SBU1 |
| 0            | 0            | 0       | X       | Open                       |
| 0            | 1            | X       | X       | AUXp → SBU1<br>AUXn → SBU2 |
| 1            | 0            | X       | X       | AUXp → SBU2<br>AUXn → SBU1 |
| 1            | 1            | X       | X       | Open                       |

### 8.4.3 DisplayPort Mode

The TUSB1046A-DCI supports up to four DisplayPort lanes at data rates up to 8.1 Gbps. TUSB1046A-DCI can be enabled for DisplayPort through GPIO control or through I<sup>2</sup>C register control. When I2C\_EN is ‘0’, DisplayPort is controlled based on [Table 2](#). When not in GPIO mode, enable of DisplayPort functionality is controlled through I<sup>2</sup>C registers.

## 8.4.4 Linear EQ Configuration

Each of the TUSB1046A-DCI receiver lanes has individual controls for receiver equalization. The receiver equalization gain value can be controlled either through I<sup>2</sup>C registers or through GPIOs. Table 7 details the gain value for each available combination when TUSB1046A-DCI is in GPIO mode. These same options are also available in I<sup>2</sup>C mode by updating registers DP0EQ\_SEL, DP1EQ\_SEL, DP2EQ\_SEL, DP3EQ\_SEL, EQ1\_SEL, EQ2\_SEL, and SSEQ\_SEL.

**Table 7. TUSB1046A-DCI Receiver Equalization GPIO Control**

| Equalization Setting # | USB3.1 DOWNSTREAM FACING PORTS |               |                       | USB 3.1 UPSTREAM FACING PORT |                 |                       | ALL DISPLAYPORT LANES |                 |                          |
|------------------------|--------------------------------|---------------|-----------------------|------------------------------|-----------------|-----------------------|-----------------------|-----------------|--------------------------|
|                        | EQ1 PIN LEVEL                  | EQ0 PIN LEVEL | EQ GAIN at 5 GHz (dB) | SSEQ1 PIN LEVEL              | SSEQ0 PIN LEVEL | EQ GAIN at 5 GHz (dB) | DPEQ1 PIN LEVEL       | DPEQ0 PIN LEVEL | EQ GAIN at 4.05 GHz (dB) |
| 0                      | 0                              | 0             | -3.9                  | 0                            | 0               | -1.8                  | 0                     | 0               | 1.0                      |
| 1                      | 0                              | R             | -1.7                  | 0                            | R               | 0.2                   | 0                     | R               | 3.3                      |
| 2                      | 0                              | F             | -0.1                  | 0                            | F               | 1.7                   | 0                     | F               | 4.9                      |
| 3                      | 0                              | 1             | 1.4                   | 0                            | 1               | 3.2                   | 0                     | 1               | 6.5                      |
| 4                      | R                              | 0             | 2.4                   | R                            | 0               | 4.2                   | R                     | 0               | 7.5                      |
| 5                      | R                              | R             | 3.5                   | R                            | R               | 5.3                   | R                     | R               | 8.6                      |
| 6                      | R                              | F             | 4.4                   | R                            | F               | 6.1                   | R                     | F               | 9.5                      |
| 7                      | R                              | 1             | 5.2                   | R                            | 1               | 7.0                   | R                     | 1               | 10.4                     |
| 8                      | F                              | 0             | 5.9                   | F                            | 0               | 7.7                   | F                     | 0               | 11.1                     |
| 9                      | F                              | R             | 6.6                   | F                            | R               | 8.3                   | F                     | R               | 11.7                     |
| 10                     | F                              | F             | 7.1                   | F                            | F               | 8.8                   | F                     | F               | 12.3                     |
| 11                     | F                              | 1             | 7.6                   | F                            | 1               | 9.3                   | F                     | 1               | 12.8                     |
| 12                     | 1                              | 0             | 8.0                   | 1                            | 0               | 9.7                   | 1                     | 0               | 13.2                     |
| 13                     | 1                              | R             | 8.5                   | 1                            | R               | 10.1                  | 1                     | R               | 13.6                     |
| 14                     | 1                              | F             | 8.8                   | 1                            | F               | 10.4                  | 1                     | F               | 14.0                     |
| 15                     | 1                              | 1             | 9.2                   | 1                            | 1               | 10.8                  | 1                     | 1               | 14.4                     |

## 8.4.5 USB3.1 Modes

The TUSB1046A-DCI monitors the physical layer conditions like receiver termination, electrical idle, LFPS, and SuperSpeed signaling rate to determine the state of the USB3.1 interface. Depending on the state of the USB 3.1 interface, the TUSB1046A-DCI can be in one of four primary modes of operation when USB 3.1 is enabled (CTL0 = H or CTLSEL0 = 1b1): Disconnect, U2/U3, U1, and U0.

The Disconnect mode is the state in which TUSB1046A-DCI has not detected far-end termination on both upstream facing port (UFP) or downstream facing port (DFP). The disconnect mode is the lowest power mode of each of the four modes. The TUSB1046A-DCI remains in this mode until far-end receiver termination has been detected on both UFP and DFP. The TUSB1046A-DCI immediately exits this mode and enter U0 once far-end termination is detected.

Once in U0 mode, the TUSB1046A-DCI will redrive all traffic received on UFP and DFP. U0 is the highest power mode of all USB3.1 modes. The TUSB1046A-DCI remains in U0 mode until electrical idle occurs on both UFP and DFP. Upon detecting electrical idle, the TUSB1046A-DCI immediately transitions to U1.

The U1 mode is the intermediate mode between U0 mode and U2/U3 mode. In U1 mode, the TUSB1046A-DCI UFP and DFP receiver termination remains enabled. The UFP and DFP transmitter DC common mode is maintained. The power consumption in U1 is similar to power consumption of U0.

Next to the disconnect mode, the U2/U3 mode is next lowest power state. While in this mode, the TUSB1046A-DCI periodically performs far-end receiver detection. Anytime the far-end receiver termination is not detected on either UFP or DFP, the TUSB1046A-DCI leaves the U2/U3 mode and transitions to the Disconnect mode. It also monitors for a valid LFPS. Upon detection of a valid LFPS, the TUSB1046A-DCI immediately transitions to the U0 mode. In U2/U3 mode, the TUSB1046A-DCI receiver terminations remain enabled but the TX DC common mode voltage is not maintained.

## 8.4.6 Operation Timing – Power Up

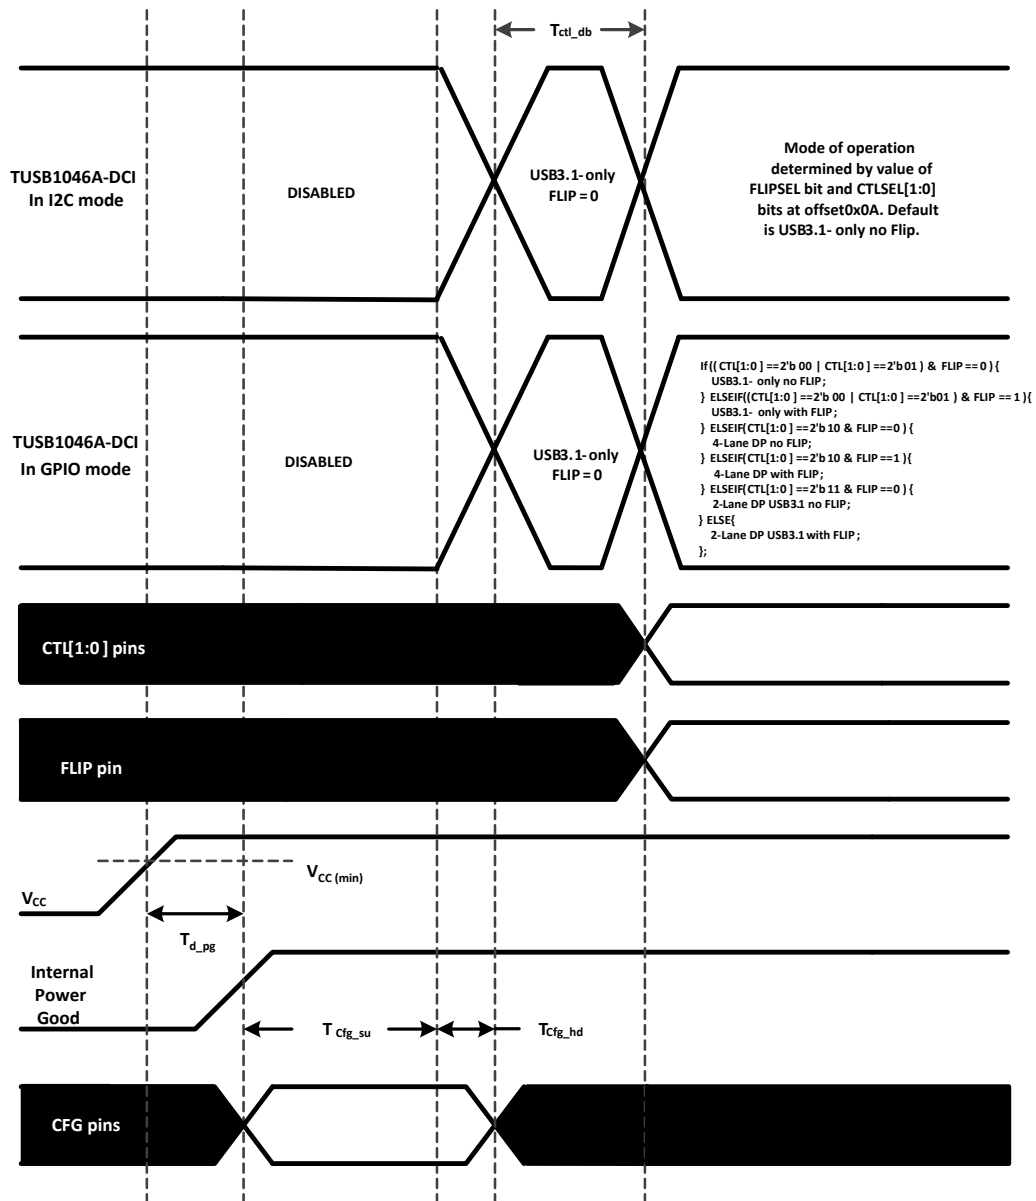


Figure 18. Power-Up Timing

Table 8. Power-Up Timing<sup>(1)(2)</sup>

| PARAMETER       |                                                                | MIN | MAX | UNIT |
|-----------------|----------------------------------------------------------------|-----|-----|------|
| $t_{d\_pg}$     | V <sub>CC</sub> (minimum) to Internal Power Good asserted high |     | 500 | μs   |
| $t_{cfg\_su}$   | CFG(1) pins setup <sup>(2)</sup>                               | 250 |     | μs   |
| $t_{cfg\_hd}$   | CFG(1) pins hold                                               | 10  |     | μs   |
| $t_{CTL\_DB}$   | CTL[1:0] and FLIP pin debounce                                 |     | 16  | ms   |
| $t_{VCC\_RAMP}$ | V <sub>CC</sub> supply ramp requirement                        |     | 100 | ms   |

(1) Following pins comprise CFG pins: I2C\_EN, EQ[1:0], SSEQ[1:0], and DPEQ[1:0].

(2) Recommend CFG pins are stable when V<sub>CC</sub> is at min.

## 8.5 Programming

For further programmability, the TUSB1046A-DCI can be controlled using I<sup>2</sup>C. The SCL and SDA pins are used for I<sup>2</sup>C clock and I<sup>2</sup>C data respectively.

**Table 9. TUSB1046A-DCI I<sup>2</sup>C Target Address**

| DPEQ0/A1<br>PIN LEVEL | SSEQ0/A0<br>PIN LEVEL | Bit 7 (MSB) | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 (W/R) |
|-----------------------|-----------------------|-------------|-------|-------|-------|-------|-------|-------|-------------|
| 0                     | 0                     | 1           | 0     | 0     | 0     | 1     | 0     | 0     | 0/1         |
| 0                     | R                     | 1           | 0     | 0     | 0     | 1     | 0     | 1     | 0/1         |
| 0                     | F                     | 1           | 0     | 0     | 0     | 1     | 1     | 0     | 0/1         |
| 0                     | 1                     | 1           | 0     | 0     | 0     | 1     | 1     | 1     | 0/1         |
| R                     | 0                     | 0           | 1     | 0     | 0     | 0     | 0     | 0     | 0/1         |
| R                     | R                     | 0           | 1     | 0     | 0     | 0     | 0     | 1     | 0/1         |
| R                     | F                     | 0           | 1     | 0     | 0     | 0     | 1     | 0     | 0/1         |
| R                     | 1                     | 0           | 1     | 0     | 0     | 0     | 1     | 1     | 0/1         |
| F                     | 0                     | 0           | 0     | 1     | 0     | 0     | 0     | 0     | 0/1         |
| F                     | R                     | 0           | 0     | 1     | 0     | 0     | 0     | 1     | 0/1         |
| F                     | F                     | 0           | 0     | 1     | 0     | 0     | 1     | 0     | 0/1         |
| F                     | 1                     | 0           | 0     | 1     | 0     | 0     | 1     | 1     | 0/1         |
| 1                     | 0                     | 0           | 0     | 0     | 1     | 1     | 0     | 0     | 0/1         |
| 1                     | R                     | 0           | 0     | 0     | 1     | 1     | 0     | 1     | 0/1         |
| 1                     | F                     | 0           | 0     | 0     | 1     | 1     | 1     | 0     | 0/1         |
| 1                     | 1                     | 0           | 0     | 0     | 1     | 1     | 1     | 1     | 0/1         |

The following procedure should be followed to write to TUSB1046A-DCI I<sup>2</sup>C registers:

1. The master initiates a write operation by generating a start condition (S), followed by the TUSB1046A-DCI 7-bit address and a zero-value "W/R" bit to indicate a write cycle.
2. The TUSB1046A-DCI acknowledges the address cycle.
3. The master presents the sub-address (I<sup>2</sup>C register within TUSB1046A-DCI) to be written, consisting of one byte of data, MSB-first.
4. The TUSB1046A-DCI acknowledges the sub-address cycle.
5. The master presents the first byte of data to be written to the I<sup>2</sup>C register.
6. The TUSB1046A-DCI acknowledges the byte transfer.
7. The master may continue presenting additional bytes of data to be written, with each byte transfer completing with an acknowledge from the TUSB1046A-DCI.
8. The master terminates the write operation by generating a stop condition (P).

The following procedure should be followed to read the TUSB1046A-DCI I<sup>2</sup>C registers:

1. The master initiates a read operation by generating a start condition (S), followed by the TUSB1046A-DCI 7-bit address and a one-value "W/R" bit to indicate a read cycle.
2. The TUSB1046A-DCI acknowledges the address cycle.
3. The TUSB1046A-DCI transmit the contents of the memory registers MSB-first starting at register 00h or last read sub-address+1. If a write to the T I<sup>2</sup>C register occurred prior to the read, then the TUSB1046A-DCI shall start at the sub-address specified in the write.
4. The TUSB1046A-DCI shall wait for either an acknowledge (ACK) or a not-acknowledge (NACK) from the master after each byte transfer; the I<sup>2</sup>C master acknowledges reception of each data byte transfer.
5. If an ACK is received, the TUSB1046A-DCI transmits the next byte of data.
6. The master terminates the read operation by generating a stop condition (P).

The following procedure should be followed for setting a starting sub-address for I<sup>2</sup>C reads:

1. The master initiates a write operation by generating a start condition (S), followed by the TUSB1046A-DCI 7-bit address and a zero-value "W/R" bit to indicate a write cycle.
2. The TUSB1046A-DCI acknowledges the address cycle.
3. The master presents the sub-address (I<sup>2</sup>C register within TUSB1046A-DCI) to be written, consisting of one byte of data, MSB-first.

4. The TUSB1046A-DCI acknowledges the sub-address cycle.
5. The master terminates the write operation by generating a stop condition (P).

#### NOTE

If no sub-addressing is included for the read procedure, and reads start at register offset 00h and continue byte by byte through the registers until the I<sup>2</sup>C master terminates the read operation. If a I<sup>2</sup>C address write occurred prior to the read, then the reads start at the sub-address specified by the address write.

**Table 10. Register Legend**

| ACCESS TAG | NAME      | MEANING                                                                                |
|------------|-----------|----------------------------------------------------------------------------------------|
| R          | Read      | The field may be read by software                                                      |
| W          | Write     | The field may be written by software                                                   |
| S          | Set       | The field may be set by a write of one. Writes of zeros to the field have no effect.   |
| C          | Clear     | The field may be cleared by a write of one. Write of zero to the field have no effect. |
| U          | Update    | Hardware may autonomously update this field.                                           |
| NA         | No Access | Not accessible or not applicable                                                       |

## 8.6 Register Maps

### 8.6.1 General Register (address = 0x0A) [reset = 00000001]

**Figure 19. General Registers**

| 7        | 6 | 5         | 4               | 3                | 2       | 1            | 0 |
|----------|---|-----------|-----------------|------------------|---------|--------------|---|
| Reserved |   | SWAP_HPDI | EQ_OVERRID<br>E | HPDI_OVRRI<br>DE | FLIPSEL | CTLSEL[1:0]. |   |
| R        |   | R/W       | R/W             | R/W              | R/W     | R/W          |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 11. General Registers**

| Bit | Field        | Type | Reset | Description                                                                                                                                                                                                                                                                           |
|-----|--------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:6 | Reserved.    | R    | 00    | Reserved.                                                                                                                                                                                                                                                                             |
| 5   | SWAP_HPDI    | R/W  | 0     | 0 – HPDI is in default location (Default)<br>1 – HPDI location is swapped (PIN 23 to PIN 32, or PIN 32 to PIN23).                                                                                                                                                                     |
| 4   | EQ_OVERRIDE  | R/W  | 0     | Setting of this field will allow software to use EQ settings from registers instead of value sample from pins.<br>0 – EQ settings based on sampled state of the EQ pins (SSEQ[1:0], EQ[1:0], and DPEQ[1:0]).<br>1 – EQ settings based on programmed value of each of the EQ registers |
| 3   | HPDI_OVRRI   | R/W  | 0     | 0 – HPDI based on state of HPDI_IN pin (Default)<br>1 – HPDI_IN high.                                                                                                                                                                                                                 |
| 2   | FLIPSEL      | R/W  | 0     | FLIPSEL. Refer to <a href="#">Table 5</a> and <a href="#">Table 6</a> for this field functionality.                                                                                                                                                                                   |
| 1:0 | CTLSEL[1:0]. | R/W  | 01    | 00 – Disabled. All RX and TX for USB3 and DisplayPort are disabled.<br>01 – USB3.1 only enabled. (Default)<br>10 – Four DisplayPort lanes enabled.<br>11 – Two DisplayPort lanes and one USB3.1                                                                                       |

### 8.6.2 DisplayPort Control/Status Registers (address = 0x10) [reset = 00000000]

**Figure 20. DisplayPort Control/Status Registers (0x10)**

| 7         | 6 | 5 | 4 | 3         | 2 | 1 | 0 |
|-----------|---|---|---|-----------|---|---|---|
| DP1EQ_SEL |   |   |   | DP0EQ_SEL |   |   |   |
| R/W/U     |   |   |   | R/W/U     |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 12. DisplayPort Control/Status Registers (0x10)**

| Bit | Field     | Type  | Reset | Description                                                                                                                                                                                                                                            |
|-----|-----------|-------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | DP1EQ_SEL | R/W/U | 0000  | Field selects between 0 to 14dB of EQ for DP lane 1. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of DPEQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for DP lane 1 based on value written to this field. |
| 3:0 | DP0EQ_SEL | R/W/U | 0000  | Field selects between 0 to 14dB of EQ for DP lane 0. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of DPEQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for DP lane 0 based on value written to this field. |



### 8.6.3 DisplayPort Control/Status Registers (address = 0x11) [reset = 00000000]

**Figure 21. DisplayPort Control/Status Registers (0x11)**

| 7         | 6 | 5 | 4 | 3         | 2 | 1 | 0 |
|-----------|---|---|---|-----------|---|---|---|
| DP3EQ_SEL |   |   |   | DP2EQ_SEL |   |   |   |
| R/W/U     |   |   |   | R/W/U     |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 13. DisplayPort Control/Status Registers (0x11)**

| Bit | Field     | Type  | Reset | Description                                                                                                                                                                                                                                            |
|-----|-----------|-------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | DP3EQ_SEL | R/W/U | 0000  | Field selects between 0 to 14dB of EQ for DP lane 3. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of DPEQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for DP lane 3 based on value written to this field. |
| 3:0 | DP2EQ_SEL | R/W/U | 0000  | Field selects between 0 to 14dB of EQ for DP lane 2. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of DPEQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for DP lane 2 based on value written to this field. |

### 8.6.4 DisplayPort Control/Status Registers (address = 0x12) [reset = 00000000]

**Figure 22. DisplayPort Control/Status Registers (0x12)**

| 7        | 6               | 5 | 4              | 3 | 2 | 1 | 0 |
|----------|-----------------|---|----------------|---|---|---|---|
| Reserved | SET_POWER_STATE |   | LANE_COUNT_SET |   |   |   |   |
| R        | RU              |   | RU             |   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 14. DisplayPort Control/Status Registers (0x12)**

| Bit | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|-----------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | Reserved        | R    | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 6:5 | SET_POWER_STATE | R/U  | 00    | This field represents the snooped value of the AUX write to DPCD address 0x00600. When AUX_SNOOP_DISABLE = 1'b0, the TUSB1046A-DCI will enable/disable DP lanes based on the snooped value. When AUX_SNOOP_DISABLE = 1'b1, then DP lane enable/disable are determined by state of DPx_DISABLE registers, where x = 0, 1, 2, or 3. This field is reset to 2'b00 by hardware when CTLSEL1 changes from a 1'b1 to a 1'b0.                                 |
| 4:0 | LANE_COUNT_SET  | R/U  | 00000 | This field represents the snooped value of AUX write to DPCD address 0x00101 register. When AUX_SNOOP_DISABLE = 1'b0, TUSB1046-DCI will enable DP lanes specified by the snoop value. Unused DP lanes will be disabled to save power. When AUX_SNOOP_DISABLE = 1'b1, then DP lanes enable/disable are determined by DPx_DISABLE registers, where x = 0, 1, 2, or 3. This field is reset to 0x0 by hardware when CTLSEL1 changes from a 1'b1 to a 1'b0. |

## 8.6.5 DisplayPort Control/Status Registers (address = 0x13) [reset = 00000000]

**Figure 23. DisplayPort Control/Status Registers (0x13)**

| 7                 | 6        | 5           | 4           | 3           | 2           | 1           | 0   |
|-------------------|----------|-------------|-------------|-------------|-------------|-------------|-----|
| AUX_SNOOP_DISABLE | Reserved | AUX_SBU_OVR | DP3_DISABLE | DP2_DISABLE | DP1_DISABLE | DP0_DISABLE |     |
| R/W               | R        | R/W         | R/W         | R/W         | R/W         | R/W         | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 15. DisplayPort Control/Status Registers (0x13)**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | AUX_SNOOP_DISABLE | R/W  | 0     | 0 – AUX snoop enabled. (Default)<br>1 – AUX snoop disabled.                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 6   | Reserved          | R    | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 5:4 | AUX_SBU_OVR       | R/W  | 00    | This field overrides the AUXp or AUXn to SBU1 or SBU2 connect and disconnect based on CTL1 and FLIP. Changing this field to 1'b1 will allow traffic to pass through AUX to SBU regardless of the state of CTLSEL1 and FLIPSEL register<br>00 – AUX to SBU connect/disconnect determined by CTLSEL1 and FLIPSEL (Default)<br>01 – AUXp -> SBU1 and AUXn -> SBU2 connection always enabled.<br>10 – AUXp -> SBU2 and AUXn -> SBU1 connection always enabled.<br>11 = AUX to SBU open. |
| 3   | DP3_DISABLE       | R/W  | 0     | When AUX_SNOOP_DISABLE = 1'b1, this field can be used to enable or disable DP lane 3. When AUX_SNOOP_DISABLE = 1'b0, changes to this field will have no effect on lane 3 functionality.<br>0 – DP Lane 3 Enabled (default)<br>1 – DP Lane 3 Disabled.                                                                                                                                                                                                                               |
| 2   | DP2_DISABLE       | R/W  | 0     | When AUX_SNOOP_DISABLE = 1'b1, this field can be used to enable or disable DP lane 2. When AUX_SNOOP_DISABLE = 1'b0, changes to this field will have no effect on lane 2 functionality.<br>0 – DP Lane 2 Enabled (default)<br>1 – DP Lane 2 Disabled.                                                                                                                                                                                                                               |
| 1   | DP1_DISABLE       | R/W  | 0     | When AUX_SNOOP_DISABLE = 1'b1, this field can be used to enable or disable DP lane 1. When AUX_SNOOP_DISABLE = 1'b0, changes to this field will have no effect on lane 1 functionality.<br>0 – DP Lane 1 Enabled (default)<br>1 – DP Lane 1 Disabled.                                                                                                                                                                                                                               |
| 0   | DP0_DISABLE       | R/W  | 0     | DISABLE. When AUX_SNOOP_DISABLE = 1'b1, this field can be used to enable or disable DP lane 0. When AUX_SNOOP_DISABLE = 1'b0, changes to this field will have no effect on lane 0 functionality.<br>0 – DP Lane 0 Enabled (default)<br>1 – DP Lane 0 Disabled.                                                                                                                                                                                                                      |

## 8.6.6 USB3.1 Control/Status Registers (address = 0x20) [reset = 00000000]

**Figure 24. USB3.1 Control/Status Registers (0x20)**

| 7       | 6 | 5 | 4 | 3       | 2 | 1 | 0 |
|---------|---|---|---|---------|---|---|---|
| EQ2_SEL |   |   |   | EQ1_SEL |   |   |   |
| R/W/U   |   |   |   | R/W/U   |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 16. USB3.1 Control/Status Registers (0x20)**

| Bit | Field   | Type  | Reset | Description                                                                                                                                                                                                                                                              |
|-----|---------|-------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | EQ2_SEL | R/W/U | 0000  | Field selects between 0 to 9 dB of EQ for USB3.1 RX2 receiver. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of EQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for USB3.1 RX2 receiver based on value written to this field. |
| 3:0 | EQ1_SEL | R/W/U | 0000  | Field selects between 0 to 9 dB of EQ for USB3.1 RX1 receiver. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of EQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for USB3.1 RX1 receiver based on value written to this field. |

## 8.6.7 USB3.1 Control/Status Registers (address = 0x21) [reset = 00000000]

**Figure 25. USB3.1 Control/Status Registers (0x21)**

| 7        | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
|----------|---|---|---|----------|---|---|---|
| Reserved |   |   |   | SSEQ_SEL |   |   |   |
| R        |   |   |   | R/W/U    |   |   |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 17. USB3.1 Control/Status Registers (0x21)**

| Bit | Field    | Type  | Reset | Description                                                                                                                                                                                                                                                                         |
|-----|----------|-------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7:4 | Reserved | R     | 0000  | Reserved                                                                                                                                                                                                                                                                            |
| 3:0 | SSEQ_SEL | R/W/U | 0000  | Field selects between 0 to 11 dB of EQ for USB3.1 SSTXP/N receiver. When EQ_OVERRIDE = 1'b0, this field reflects the sampled state of SSEQ[1:0] pins. When EQ_OVERRIDE = 1'b1, software can change the EQ setting for USB3.1 SSTXP/N receiver based on value written to this field. |

## 8.6.8 USB3.1 Control/Status Registers (address = 0x22) [reset = 00000100]

**Figure 26. USB3.1 Control/Status Registers (0x22)**

| 7         | 6       | 5                  | 4                  | 3                  | 2 | 1                    | 0 |
|-----------|---------|--------------------|--------------------|--------------------|---|----------------------|---|
| CM_ACTIVE | LFPS_EQ | U2U3_LFPS_DEBOUNCE | DISABLE_U2U3_RXDET | DFP_RXDET_INTERVAL |   | USB3_COMPLIANCE_CTRL |   |
| R/U       | R/W     | R/W                | R/W                | R/W                |   | R/W                  |   |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 18. USB3.1 Control/Status Registers (0x22)**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                      |
|-----|----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CM_ACTIVE            | R/U  | 0     | 0 – device not in USB 3.1 compliance mode. (Default)<br>1 – device in USB 3.1 compliance mode                                                                                                                                    |
| 6   | LFPS_EQ              | R/W  | 0     | Controls whether settings of EQ based on EQ1_SEL, EQ2_SEL and SSEQ_SEL applies to received LFPS signal.<br>0 – EQ set to zero when receiving LFPS (default)<br>1 – EQ set to EQ1_SEL, EQ2_SEL, and SSEQ_SEL when receiving LFPS. |
| 5   | U2U3_LFPS_DEBOUNCE   | R/W  | 0     | 0 – No debounce of LFPS before U2/U3 exit. (Default)<br>1 – 200us debounce of LFPS before U2/U3 exit.                                                                                                                            |
| 4   | DISABLE_U2U3_RXDET   | R/W  | 0     | 0 – Rx.Detect in U2/U3 enabled. (Default)<br>1 – Rx.Detect in U2/U3 disabled.                                                                                                                                                    |
| 3:2 | DFP_RXDET_INTERVAL   | R/W  | 01    | This field controls the Rx.Detect interval for the Downstream facing port (TX1P/N and TX2P/N).<br>00 – 8 ms<br>01 – 12 ms (default)<br>10 – 48 ms<br>11 – 96 ms                                                                  |
| 1:0 | USB3_COMPLIANCE_CTRL | R/W  | 00    | 00 – FSM determined compliance mode. (Default)<br>01 – Compliance Mode enabled in DFP direction (SSTX -> TX1/TX2)<br>10 – Compliance Mode enabled in UFP direction (RX1/RX2 -> SSRX)<br>11 – Compliance Mode Disabled.           |

## 9 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TUSB1046-DCI is a linear redriver designed specifically to compensation for intersymbol interference (ISI) jitter caused by signal attenuation through a passive medium like PCB traces and cables. Because the TUSB1046-DCI has four independent DisplayPort 1.4 inputs, one upstream facing USB 3.1 Gen1/Gen2 input, and two downstream facing USB 3.1 Gen1/Gen2 inputs, it can be optimized to correct ISI on all those seven inputs through 16 different equalization choices. Placing the TUSB1046-DCI between a USB3.1 Host/DisplayPort 1.4 GPU and a USB3.1 Type-C receptacle can correct signal integrity issues resulting in a more robust system.

### 9.2 Typical Application

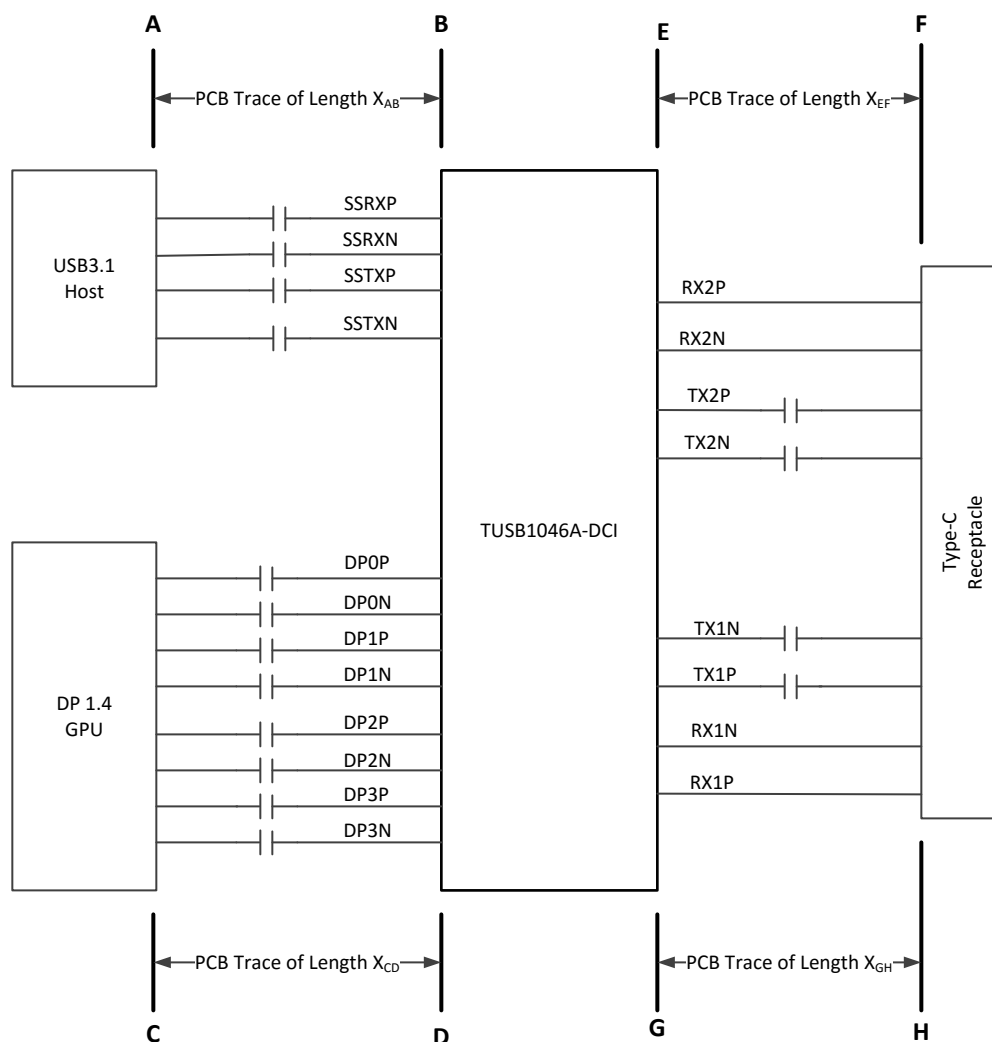

Copyright © 2017, Texas Instruments Incorporated

**Figure 27. TUSB1046-DCI in a Host Application**

## Typical Application (continued)

### 9.2.1 Design Requirements


For this design example, use the parameters shown in [Table 19](#).

**Table 19. Design Parameters**

| PARAMETER                               | VALUE                                                            |
|-----------------------------------------|------------------------------------------------------------------|
| A to B PCB trace length, $X_{AB}$       | 12 inches                                                        |
| C to D PCB trace length, $X_{CD}$       | 12 inches                                                        |
| E to F PCB trace length, $X_{EF}$       | 2 inches                                                         |
| G to H PCB trace length, $X_{GH}$       | 2 inches                                                         |
| PCB trace width                         | 4 mils                                                           |
| AC-coupling capacitor (75 nF to 265 nF) | 100 nF                                                           |
| VCC supply (3 V to 3.6 V)               | 3.3 V                                                            |
| I2C Mode or GPIO Mode                   | I2C Mode. (I2C_EN pin != "0")                                    |
| 1.8V or 3.3V I2C Interface              | 3.3V I2C. Pull-up the I2C_EN pin to 3.3V with a 1K ohm resistor. |

### 9.2.2 Detailed Design Procedure


A typical usage of the TUSB1046-DCI device is shown in [Figure 28](#). The device can be controlled either through its GPIO pins or through its I<sup>2</sup>C interface. In the example shown below, a Type-C PD controller is used to configure the device through the I<sup>2</sup>C interface. When configured for I2C mode, pins 29 (RSVD1) and 32 (RSVD2) can be left unconnected. In I2C mode, the equalization settings for each receiver can be independently controlled through I2C registers. For this reason, all of the equalization pins (EQ[1:0], SSEQ[1:0], and DPEQ[1:0]) can be left unconnected. If these pins are left unconnected, the TUSB1046-DCI 7-bit I2C slave address will be 0x12 because both DPEQ/A1 and SSEQ0/A0 will be at pin level "F". If a different I2C slave address is desired, DPEQ/A1 and SSEQ0/A0 pins should be set to a level which produces the desired I2C slave address.

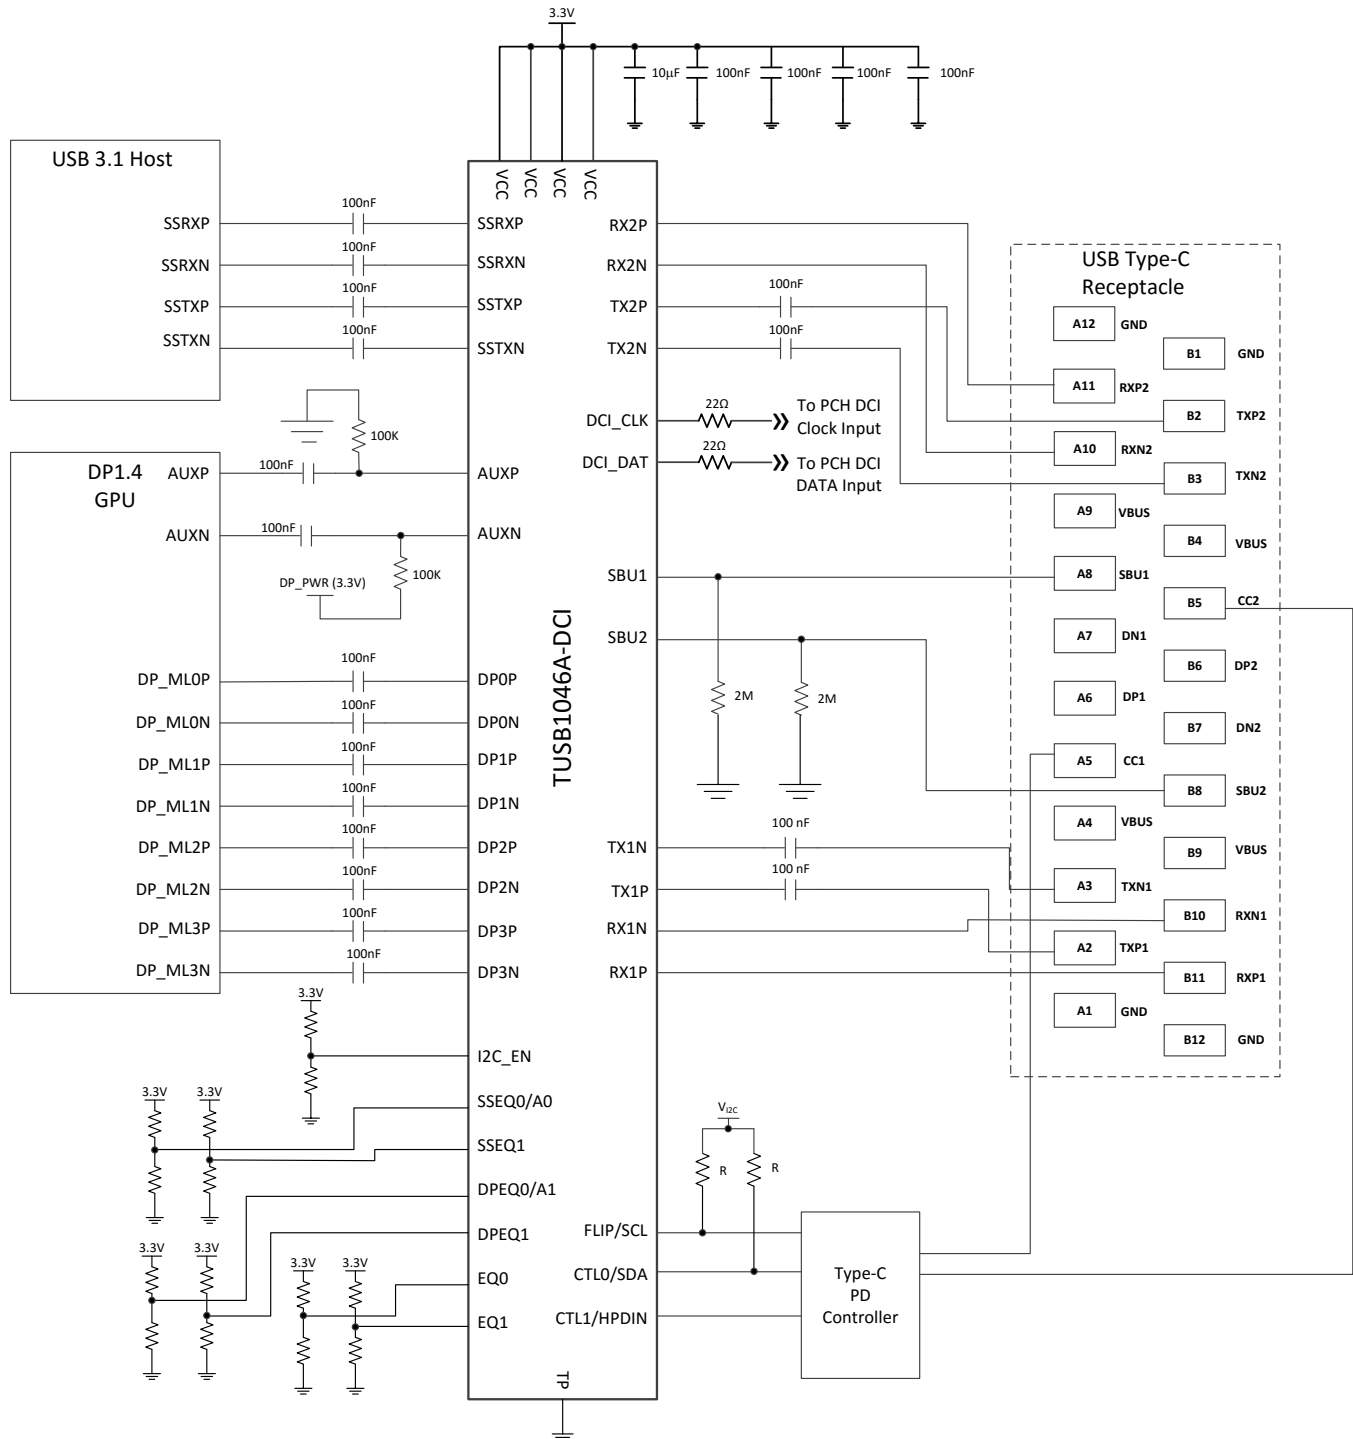

Copyright © 2016, Texas Instruments Incorporated

Figure 28. Application Circuit

### 9.2.3 Application Curve

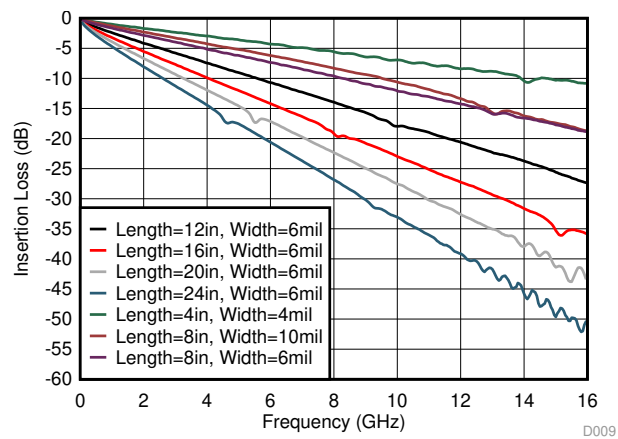


**Figure 29. Insertion Loss of FR4 PCB Traces**



## 9.3 System Examples


### 9.3.1 USB 3.1 Only

The TUSB1046-DCI is in USB3.1 only when the CTL1 pin is low and CTL0 pin is high.

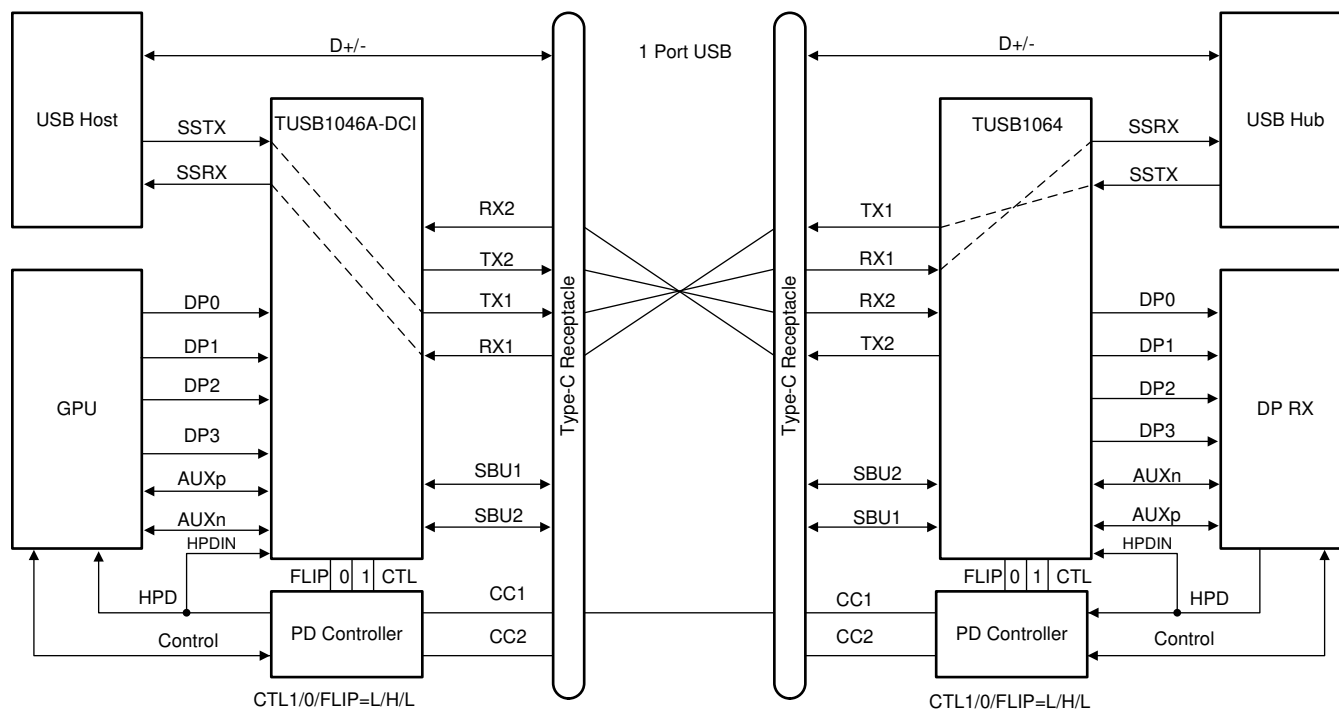

Copyright © 2017, Texas Instruments Incorporated

**Figure 30. USB3.1 Only – No Flip (CTL1 = L, CTL0 = H, FLIP = L)**

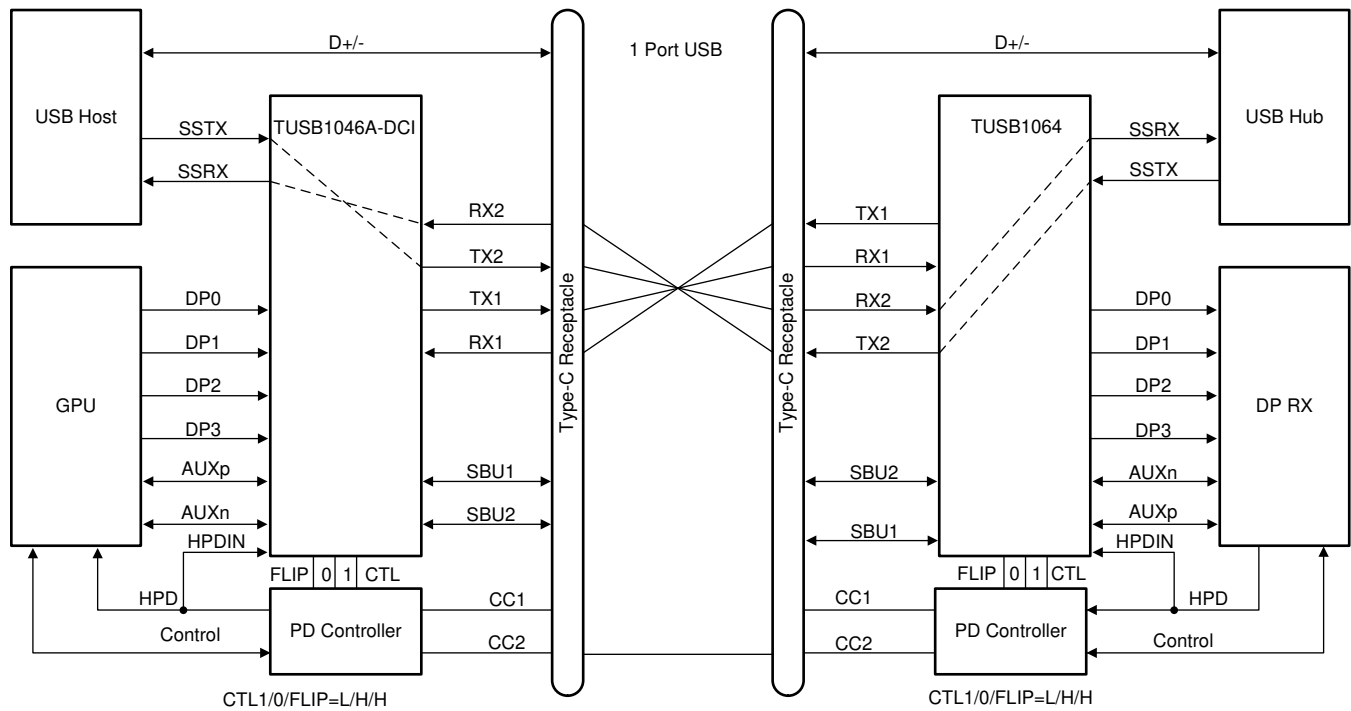**System Examples (continued)**


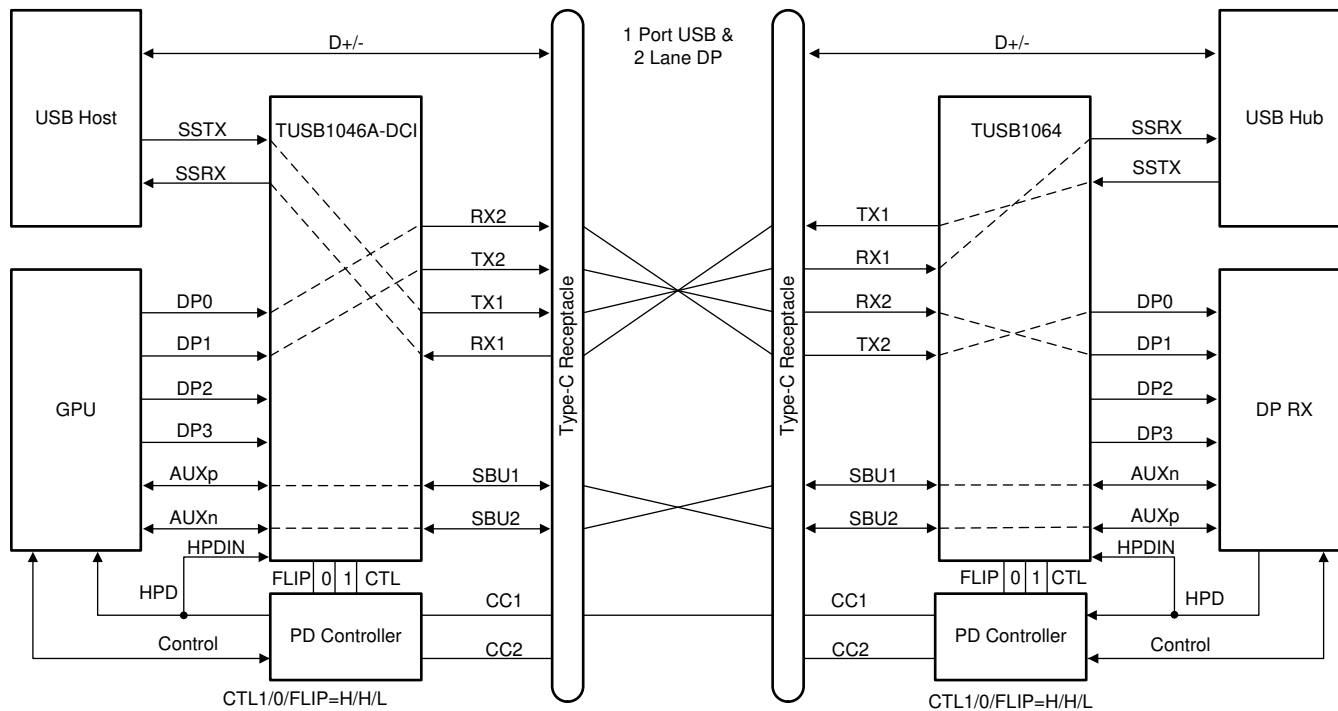
Copyright © 2017, Texas Instruments Incorporated

**Figure 31. USB3.1 Only – With Flip (CTL1 = L, CTL0 = H, FLIP = H)**

## System Examples (continued)

### 9.3.2 USB 3.1 and 2 Lanes of DisplayPort


The TUSB1046-DCI operates in USB3.1 and 2 Lanes of DisplayPort mode when the CTL1 pin is high and CTL0 pin is high.



Copyright © 2016, Texas Instruments Incorporated

**Figure 32. USB3.1 + 2 Lane DP – No Flip (CTL1 = H, CTL0 = H, FLIP = L)**

## System Examples (continued)

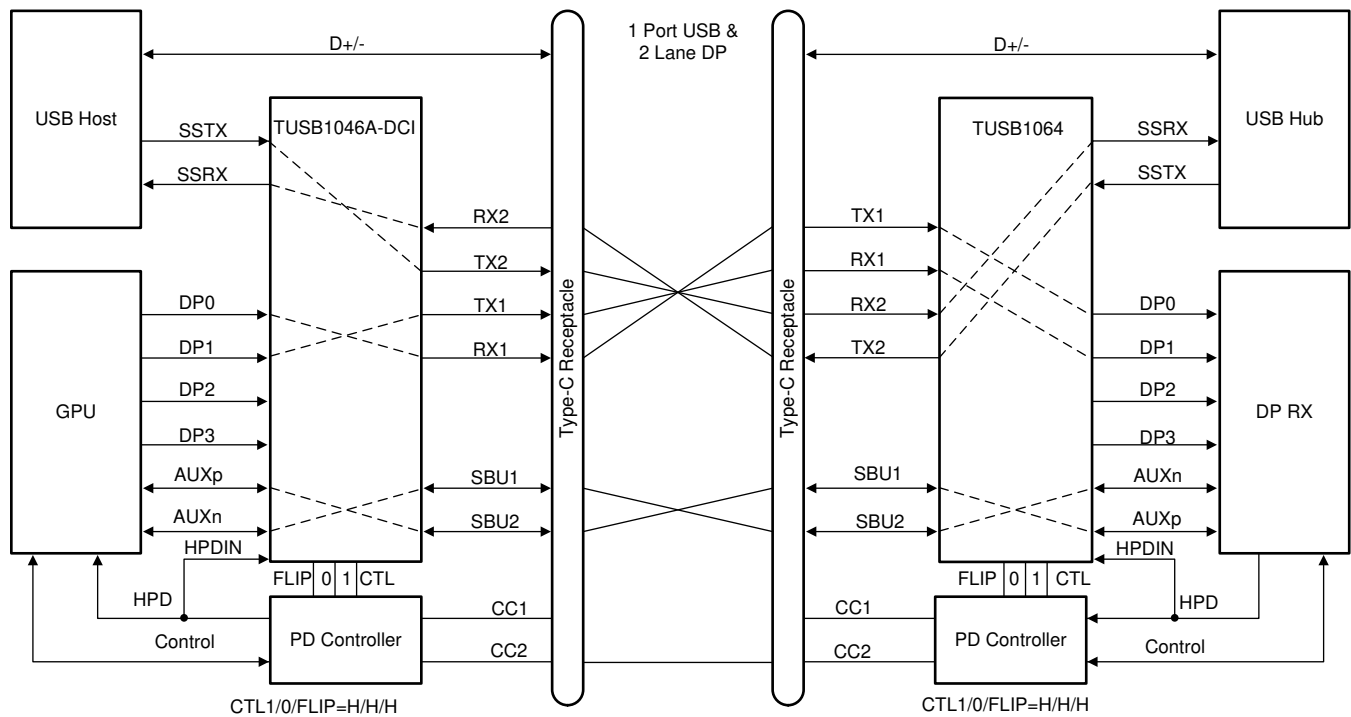


Copyright © 2016, Texas Instruments Incorporated

**Figure 33. USB 3.1 + 2 Lane DP – Flip (CTL1 = H, CTL0 = H, FLIP = H)**

## System Examples (continued)

### 9.3.3 DisplayPort Only

The TUSB1046-DCI operates in 4 Lanes of DisplayPort only mode when the CTL1 pin is high and CTL0 pin is low.

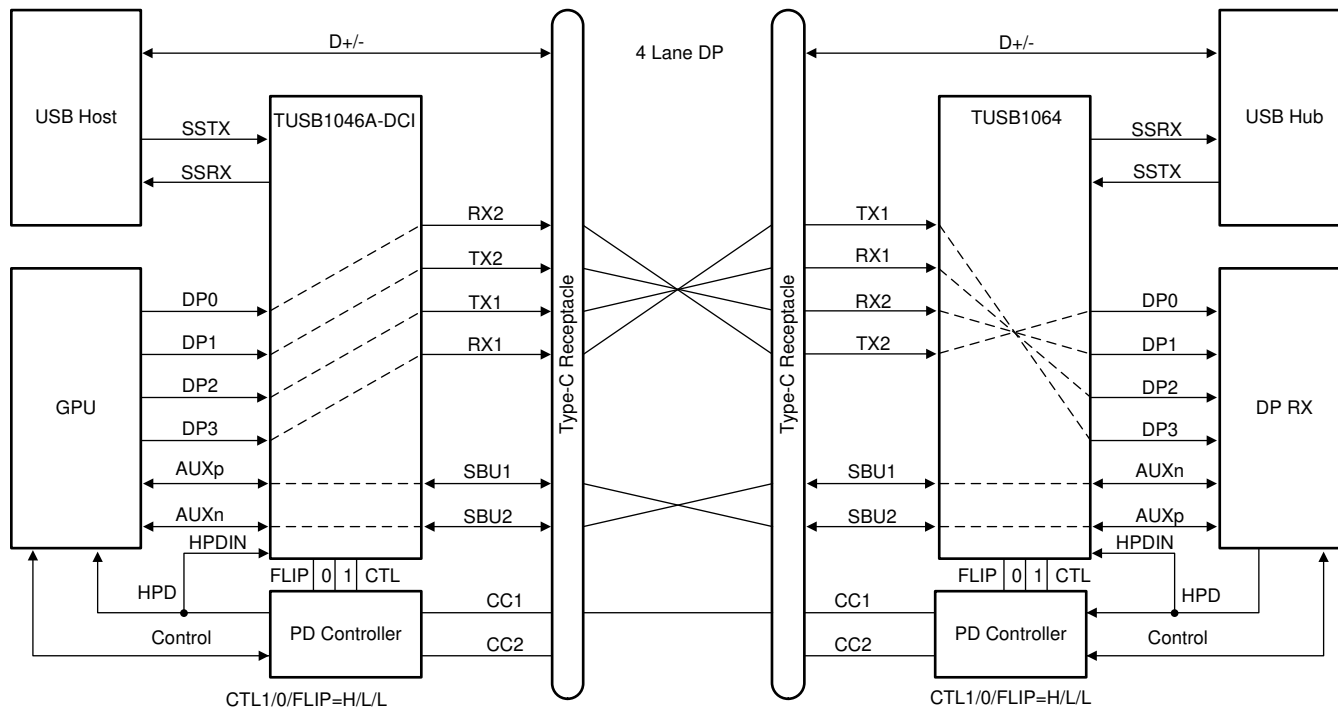

Copyright © 2017, Texas Instruments Incorporated

**Figure 34. Four Lane DP – No Flip (CTL1 = H, CTL0 = L, FLIP = L)**




## 11 Layout

### 11.1 Layout Guidelines

1. RXP/N and TXP/N pairs should be routed with controlled 90-Ω differential impedance ( $\pm 15\%$ ).
2. Keep away from other high speed signals.
3. Intra-pair routing should be kept to within 2 mils.
4. Length matching should be near the location of mismatch.
5. Each pair should be separated at least by 3 times the signal trace width.
6. The use of bends in differential traces should be kept to a minimum. When bends are used, the number of left and right bends should be as equal as possible and the angle of the bend should be  $\geq 135$  degrees. This will minimize any length mismatch causes by the bends and therefore minimize the impact bends have on EMI.
7. Route all differential pairs on the same of layer.
8. The number of vias should be kept to a minimum. It is recommended to keep the vias count to 2 or less.
9. Keep traces on layers adjacent to ground plane.
10. Do not route differential pairs over any plane split.
11. Adding Test points will cause impedance discontinuity, and therefore, negatively impact signal performance. If test points are used, they should be placed in series and symmetrically. They must not be placed in a manner that causes a stub on the differential pair.

### 11.2 Layout Example

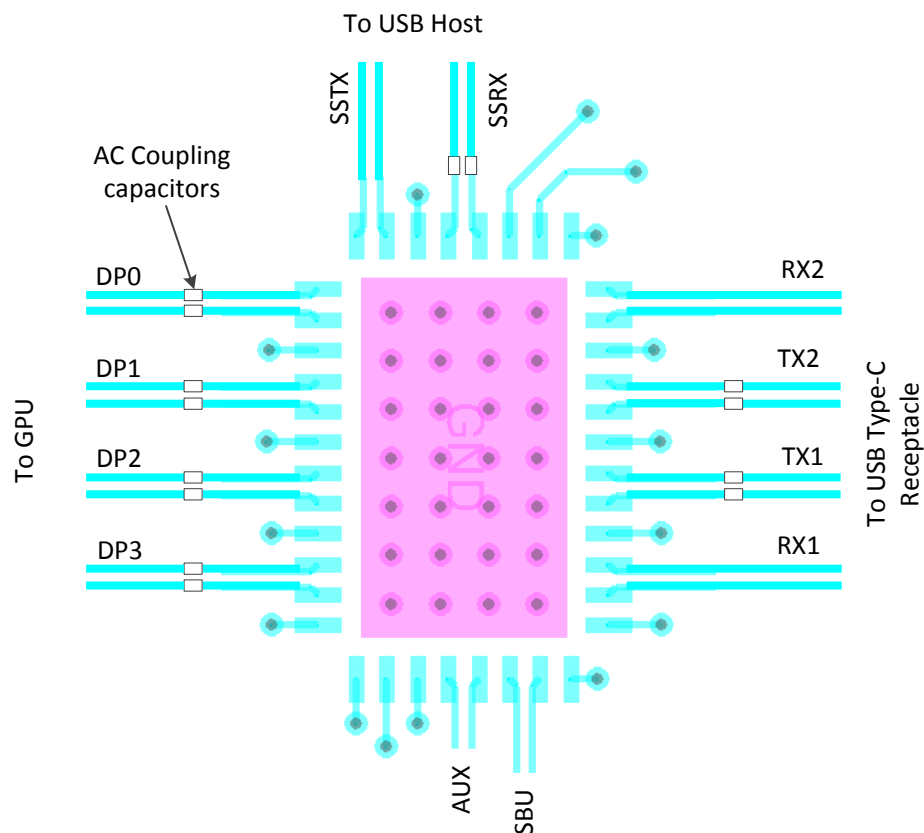

**Figure 36. Layout Example**

## 12 器件和文档支持

### 12.1 相关链接

下表列出了快速访问链接。类别包括技术文档、支持与社区资源、工具和软件，以及申请样片或购买产品的快速链接。

表 20. 相关链接

| 器件             | 产品文件夹                | 样片与购买                | 技术文档                 | 工具与软件                | 支持和社区                |
|----------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| TUSB1046A-DCI  | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |
| TUSB1046AI-DCI | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> | <a href="#">单击此处</a> |

### 12.2 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](http://TI.com.cn) 上的器件产品文件夹。单击右上角的 [通知我](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.4 商标

E2E is a trademark of Texas Instruments.

USB Type-C is a trademark of USB Implementers Forum.

DisplayPort is a trademark of VESA.

VESA is a registered trademark of Video Electronics Standards Association Corporation California.

All other trademarks are the property of their respective owners.

### 12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.6 术语表

[SLYZ022](#) — *TI 术语表*。

这份术语表列出并解释术语、缩写和定义。

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。



## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2019 德州仪器半导体技术（上海）有限公司

## PACKAGING INFORMATION

| Orderable Device   | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|--------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TUSB1046A-DCIRNQR  | ACTIVE        | WQFN         | RNQ                | 40   | 3000           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | 0 to 70      | TUSB46                  | <a href="#">Samples</a> |
| TUSB1046A-DCIRNQT  | ACTIVE        | WQFN         | RNQ                | 40   | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | 0 to 70      | TUSB46                  | <a href="#">Samples</a> |
| TUSB1046AI-DCIRNQR | ACTIVE        | WQFN         | RNQ                | 40   | 3000           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 85    | TUSB46                  | <a href="#">Samples</a> |
| TUSB1046AI-DCIRNQT | ACTIVE        | WQFN         | RNQ                | 40   | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 85    | TUSB46                  | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

---

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

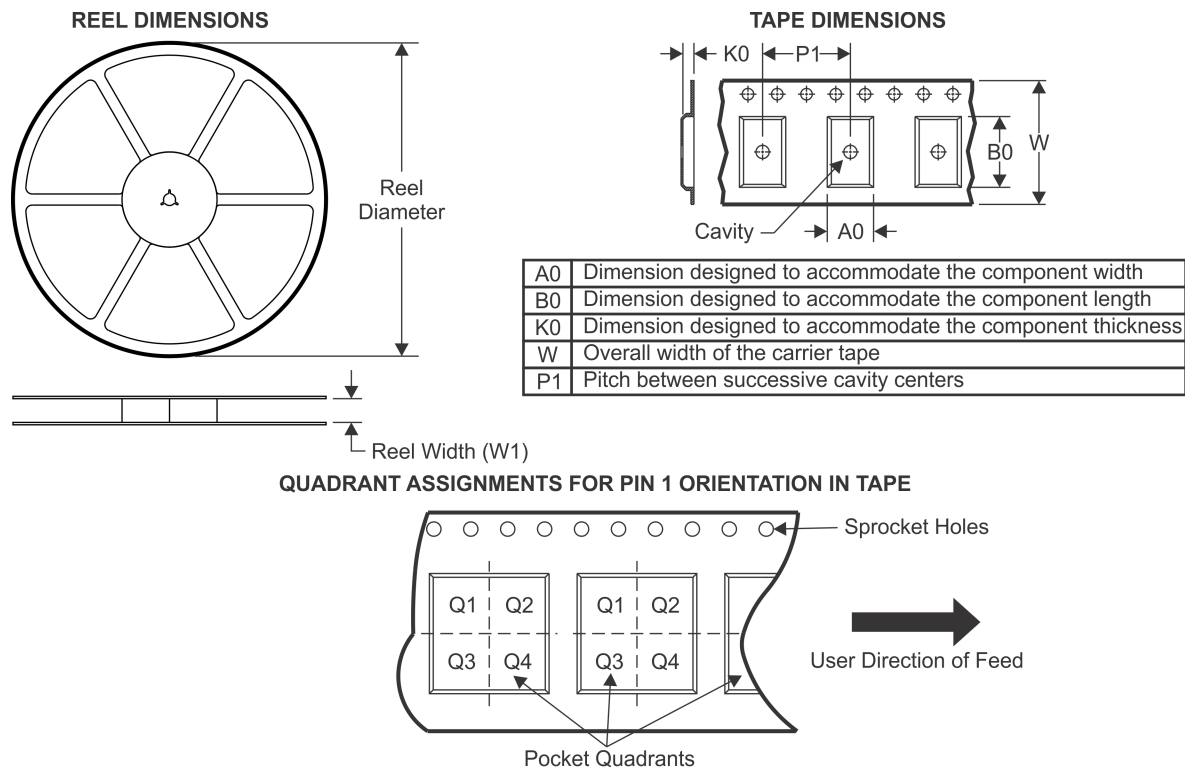**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TUSB1046A-DCIRNQR  | WQFN         | RNQ             | 40   | 3000 | 330.0              | 12.4               | 4.3     | 6.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TUSB1046A-DCIRNQT  | WQFN         | RNQ             | 40   | 250  | 180.0              | 12.4               | 4.3     | 6.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TUSB1046AI-DCIRNQR | WQFN         | RNQ             | 40   | 3000 | 330.0              | 12.4               | 4.3     | 6.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TUSB1046AI-DCIRNQT | WQFN         | RNQ             | 40   | 250  | 180.0              | 12.4               | 4.3     | 6.3     | 1.1     | 8.0     | 12.0   | Q2            |


## TAPE AND REEL BOX DIMENSIONS

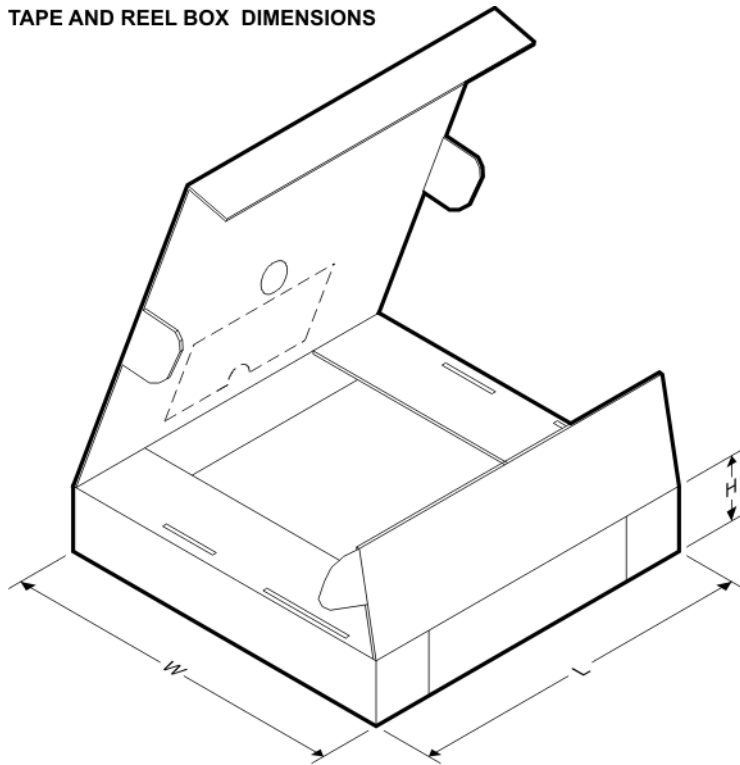

\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TUSB1046A-DCIRNQR  | WQFN         | RNQ             | 40   | 3000 | 367.0       | 367.0      | 35.0        |
| TUSB1046A-DCIRNQT  | WQFN         | RNQ             | 40   | 250  | 210.0       | 185.0      | 35.0        |
| TUSB1046AI-DCIRNQR | WQFN         | RNQ             | 40   | 3000 | 367.0       | 367.0      | 35.0        |
| TUSB1046AI-DCIRNQT | WQFN         | RNQ             | 40   | 250  | 210.0       | 185.0      | 35.0        |


# RNQ0040A



## PACKAGE OUTLINE

### WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

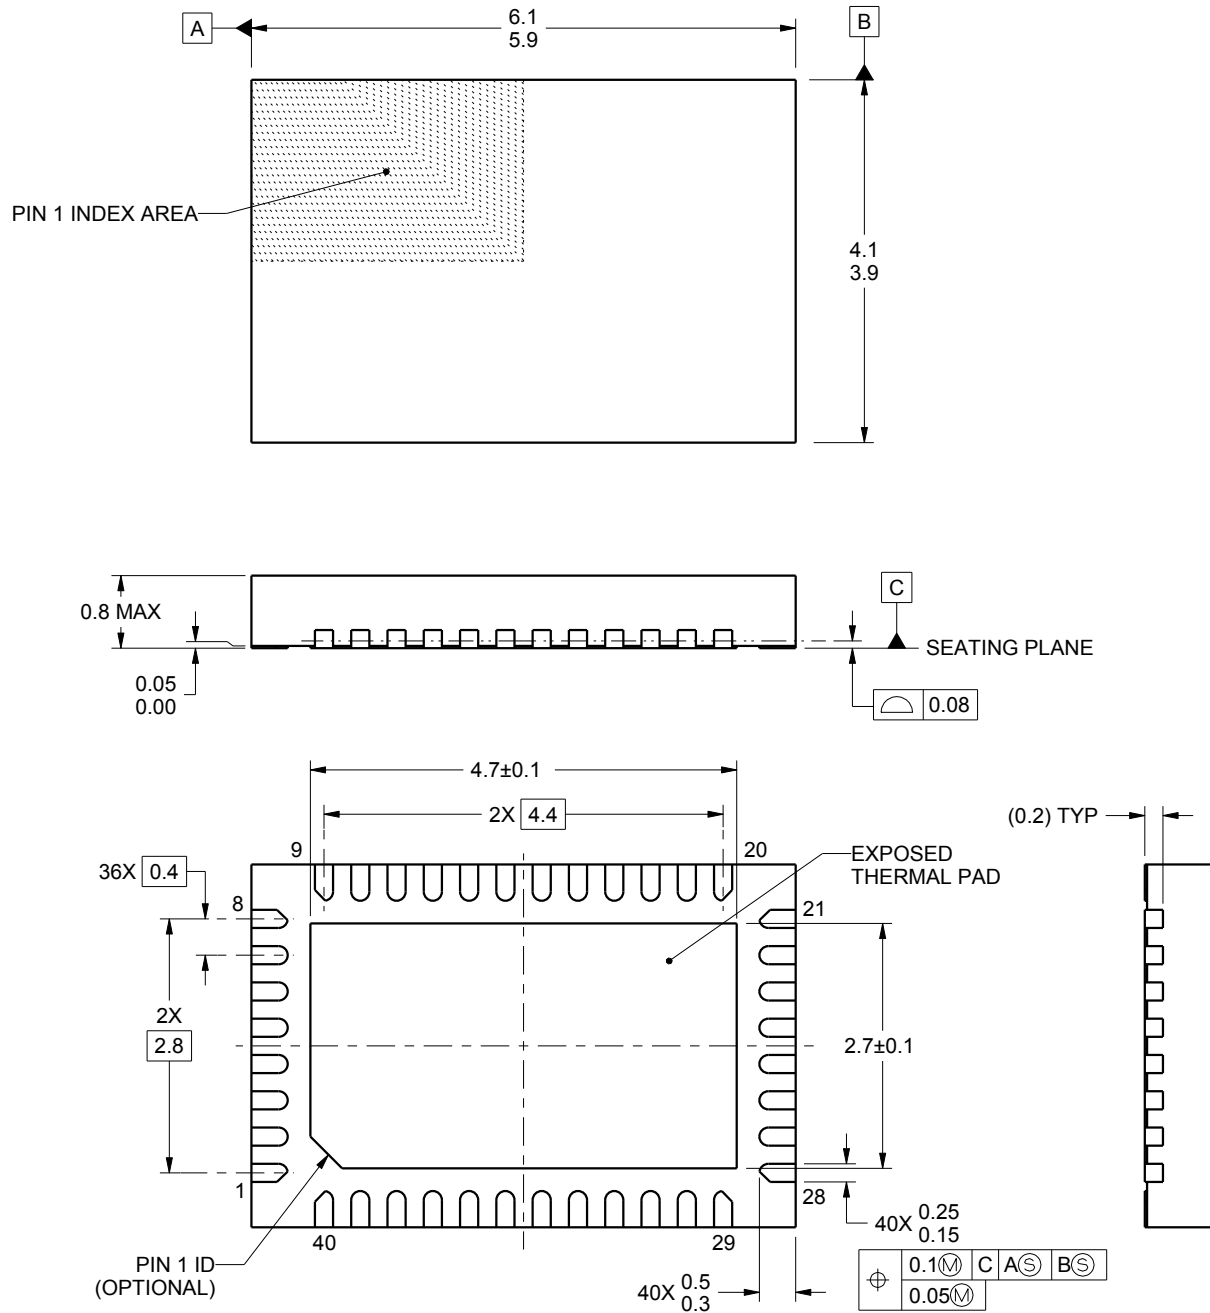

4222125/B 01/2016


#### NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



**RNQ0040A**

**WQFN - 0.8 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

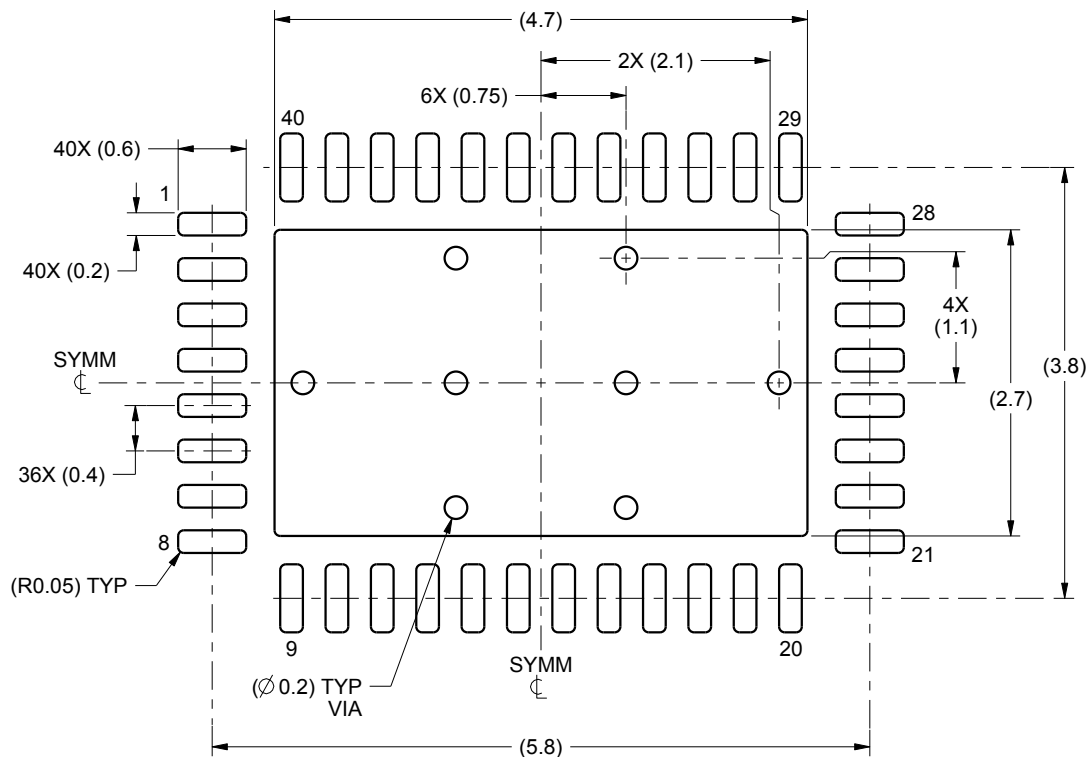

LAND PATTERN EXAMPLE  
SCALE:15X

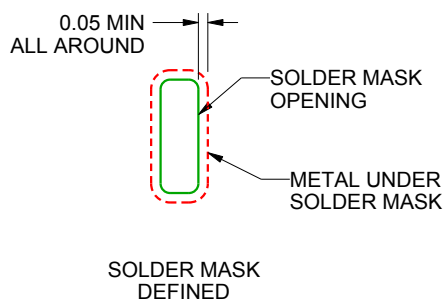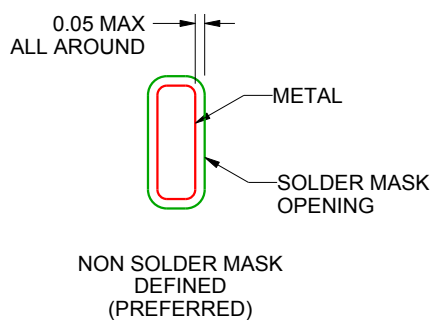

## SOLDER MASK DETAILS

4222125/B 01/2016

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).

# EXAMPLE STENCIL DESIGN

RNQ0040A

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

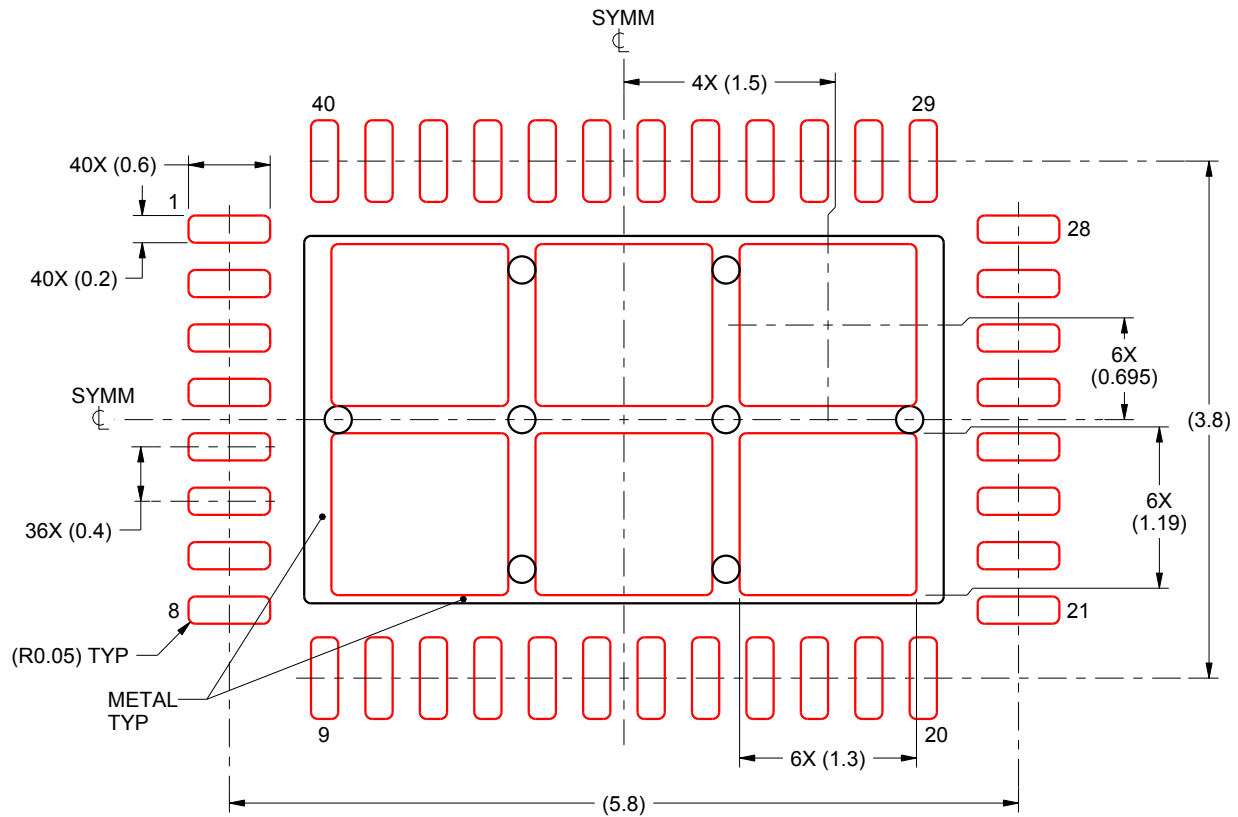

**SOLDER PASTE EXAMPLE**  
BASED ON 0.1 mm THICK STENCIL

EXPOSED PAD  
73% PRINTED SOLDER COVERAGE BY AREA  
SCALE:18X

4222125/B 01/2016

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



## 重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122  
Copyright © 2020 德州仪器半导体技术（上海）有限公司