

# 具有 JESD204B 接口和片上 GSM PLL 的 DAC38RFxx 双通道、单端、14 位、6GSPS 和 9GSPS、射频采样 DAC

## 1 特性

- 14 位分辨率
- 最大 DAC 采样率：
  - 9.0GSPS (DAC38RF86、DAC38RF96)
  - 6.2GSPS (DAC38RF87、DAC38RF97)
- 主要规格：
  - 2.1GHz 时的射频满量程输出功率：0dBm
  - 频谱性能，DAC38RF87/97
    - $f_{\text{DAC}} = 5898.24\text{MSPS}$ ,  $f_{\text{OUT}} = 2.14\text{GHz}$ 
      - WCDMA ACLR: 73dBc
      - WCDMA 备选 ACLR: 77dBc
  - 频谱性能，DAC38RF86/96
    - $f_{\text{DAC}} = 8847.36\text{MSPS}$ ,  $f_{\text{OUT}} = 3.7\text{GHz}$ 
      - 20MHz LTE ACLR: 66dBc
    - $f_{\text{DAC}} = 9\text{GSPS}$ ,  $f_{\text{OUT}} = 1.8\text{GHz}$ , -6dBFS
      - IMD3 = 70dBc (10MHz 音调间隔)
- 每个 DAC 配有双频带数字上变频器
  - 6、8、10、12、16、18、20 或 24 倍插值运算
  - 分辨率为 48 位的 4 个独立 NCO
- JESD204B 接口，子类 1
  - 支持多芯片同步
  - 最高通道速率：12.5Gbps
- 具有集成巴伦的单端输出 覆盖 700MHz 至 3800MHz
- 内部 PLL 和 VCO
  - DAC38RF86/96:  $f_{\text{C(VCO)}} = 8.85\text{GHz}$
  - DAC38RF87/97:  $f_{\text{C(VCO)}} = 5.90\text{GHz}$
- 功耗：每通道 1.4W 至 2.2W
- 电源：-1.8V、1V、1.8V
- 封装：10mm x 10mm BGA，间距为 0.8mm，具有 144 个焊球

## 2 应用

- 无线通信
- 通信测试设备
- 任意波形发生器
- 军用软件定义的无线电
- 雷达和卫星通信 (SATCOM)

## 3 说明

DAC38RF86/96 是一款高性能、双通道/通道、14 位、9GSPS、射频采样数模转换器 (DAC)，能够合成 0GHz 至 4.5GHz 范围内的宽带信号。DAC38RF87/97 也是一款高性能、双通道、14 位、6GSPS、射频采样数模转换器 (DAC)，能够合成 0GHz 至 3GHz 范围内的宽带信号。高动态范围允许 DAC38RFxx 系列为各种应用生成信号，包括用于无线基站和雷达的 3G/4G 信号。


该器件具有一个低功耗 JESD204B 接口，其通道多达 8 条，最高位率为 12.5Gbps/通道，复合输入数据速率为 1.25GSPS/通道。DAC38RFxx 为每个通道提供两个数字上变频器，具有多种内插速率选项。具有频率灵活的独立 NCO 的数字正交调制器可用于支持多频段操作。集成了兼容 GSM 的低相位噪声 PLL/VCO，可通过允许使用频率较低的参考时钟来简化 DAC 采样时钟的生成

器件信息<sup>(1)</sup>

| 器件型号      | 输出类型 | 通道数量 |
|-----------|------|------|
| DAC38RF86 | 单端   | 2    |
| DAC38RF96 |      |      |
| DAC38RF87 |      |      |
| DAC38RF97 |      |      |

(1) 如需了解所有可用器件选项，请参阅[器件比较表](#)。

### 1.84GHz 和 2.14GHz 下的 2 x 20MHz LTE，展频为 800MHz

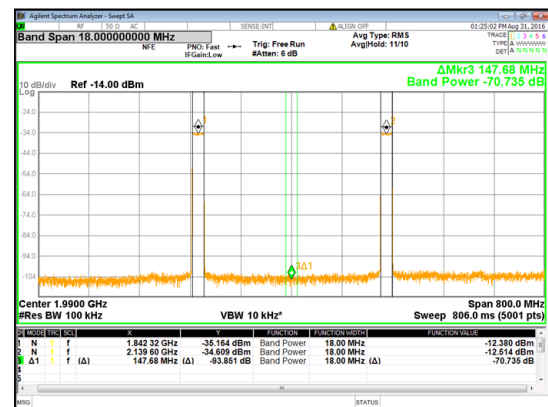

## 目录

|      |                                                           |    |      |                                                                   |     |
|------|-----------------------------------------------------------|----|------|-------------------------------------------------------------------|-----|
| 1    | 特性 .....                                                  | 1  | 8.3  | Feature Description .....                                         | 29  |
| 2    | 应用 .....                                                  | 1  | 8.4  | Device Functional Modes .....                                     | 64  |
| 3    | 说明 .....                                                  | 1  | 8.5  | Register Maps .....                                               | 68  |
| 4    | 修订历史记录 .....                                              | 2  | 9    | <b>Application and Implementation</b> .....                       | 130 |
| 5    | <b>Device Comparison Table</b> .....                      | 5  | 9.1  | Application Information .....                                     | 130 |
| 6    | <b>Pin Configuration and Functions</b> .....              | 6  | 9.2  | Typical Application: Multi-band Radio Frequency Transmitter ..... | 131 |
| 7    | <b>Specifications</b> .....                               | 9  | 10   | <b>Power Supply Recommendations</b> .....                         | 134 |
| 7.1  | Absolute Maximum Ratings .....                            | 9  | 10.1 | Power Supply Sequencing .....                                     | 135 |
| 7.2  | ESD Ratings .....                                         | 9  | 11   | <b>Layout</b> .....                                               | 135 |
| 7.3  | Recommended Operating Conditions .....                    | 9  | 11.1 | Layout Guidelines .....                                           | 135 |
| 7.4  | Thermal Information .....                                 | 10 | 11.2 | Layout Example .....                                              | 137 |
| 7.5  | Electrical Characteristics - DC Specifications .....      | 10 | 12   | <b>器件和文档支持</b> .....                                              | 138 |
| 7.6  | Electrical Characteristics - Digital Specifications ..... | 13 | 12.1 | 相关链接 .....                                                        | 138 |
| 7.7  | Electrical Characteristics - AC Specifications .....      | 16 | 12.2 | 接收文档更新通知 .....                                                    | 138 |
| 7.8  | PLL/VCO Electrical Characteristics .....                  | 19 | 12.3 | 社区资源 .....                                                        | 138 |
| 7.9  | Timing Requirements .....                                 | 20 | 12.4 | 商标 .....                                                          | 138 |
| 7.10 | Typical Characteristics, DAC38RF86 and DAC38RF96 .....    | 21 | 12.5 | 静电放电警告 .....                                                      | 138 |
| 8    | <b>Detailed Description</b> .....                         | 27 | 12.6 | Glossary .....                                                    | 138 |
| 8.1  | Overview .....                                            | 27 | 13   | <b>机械、封装和可订购信息</b> .....                                          | 138 |
| 8.2  | Functional Block Diagrams .....                           | 27 |      |                                                                   |     |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision A (April 2017) to Revision B                                                                                      | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------|------|
| 已更改 说明 .....                                                                                                                            | 1    |
| 更改了器件信息表 .....                                                                                                                          | 1    |
| Changed From: alarm_out_pol To: alm_out_pol in ALARM pin description in the <i>Pin Functions</i> table .....                            | 7    |
| Changed the Description of pins A3, A4, A7, A6, A9, A10, A12, F11, F7, G6, G12, H5, H7, J6, J11 in the <i>Pin Functions</i> table ..... | 7    |
| Added description to TXENABLE pin in the <i>Pin Functions</i> table .....                                                               | 8    |
| Changed the MAX value of VEE18N rail in the <i>Absolute Maximum Ratings</i> From: 0.5 V To: 0.3 V .....                                 | 9    |
| Added "Supply Voltage Range" to the <i>Recommended Operating Conditions</i> table .....                                                 | 9    |
| Added "Reference voltage drift" to the <i>Electrical Characteristics - DC Specifications</i> table .....                                | 10   |
| Added Isolation vs Output Frequency plot in <a href="#">Figure 14</a> .....                                                             | 22   |
| Added Isolation vs output frequency plot for DAC38RF87/97 in <a href="#">Figure 30</a> .....                                            | 26   |
| Changed the MPY values in <a href="#">Table 4</a> .....                                                                                 | 31   |
| Added MPY value for 16.5x to <a href="#">Table 4</a> .....                                                                              | 31   |
| Changed x To: $\sqrt{}$ in the <i>JESD204B Formats for DAC38RFxx</i> table .....                                                        | 34   |
| Changed JESD204B frame format for LMFSHd=84111 in <a href="#">Table 12</a> .....                                                        | 35   |
| Changed JESD204B frame format for LMFSHd=44210 in <a href="#">Table 14</a> .....                                                        | 36   |
| Changed JESD204B frame format for LMFSHd=24410 in <a href="#">Table 16</a> .....                                                        | 36   |
| Changed JESD204B frame format for LMFSHd=44210 in <a href="#">Table 17</a> .....                                                        | 36   |
| Changed JESD204B frame format for LMFSHd=88210 in <a href="#">Table 18</a> .....                                                        | 37   |
| Changed JESD204B frame format for LMFSHd=24410 in <a href="#">Table 19</a> .....                                                        | 37   |
| Changed JESD204B frame format for LMFSHd=48410 in <a href="#">Table 20</a> .....                                                        | 37   |
| Changed JESD204B frame format for LMFSHd=24310 in <a href="#">Table 21</a> .....                                                        | 37   |
| Changed JESD204B frame format for LMFSHd=48310 in <a href="#">Table 22</a> .....                                                        | 37   |

## 修订历史记录 (接下页)

|                                                                                                                        |     |
|------------------------------------------------------------------------------------------------------------------------|-----|
| • Changed <a href="#">Table 33</a> .....                                                                               | 50  |
| • Changed register field programming values for LMFSD=24410 and 24310 in <a href="#">Table 36</a> .....                | 55  |
| • Changed the bit positions of N_M1 register field in <a href="#">Table 37</a> .....                                   | 55  |
| • Changed the bit positions of N_M1' N_M1' (NPRIME_M1) register field in <a href="#">Table 37</a> .....                | 55  |
| • Deleted ISFIRCD_ENA and ISFIR_AB regsiter fields. Added ISFIR_ENA register field in <i>Inverse Sinc Filter</i> ..... | 57  |
| • Changed the description of DAC PLL alarm in <i>Alarm Monitoring</i> .....                                            | 60  |
| • Changed from BIST_ENA to Reserved in <a href="#">Table 56</a> .....                                                  | 80  |
| • Changed from BIST_ZERO to Reserved in <a href="#">Table 56</a> .....                                                 | 80  |
| • Changed the description of OUTSUM_SEL field in <a href="#">Table 64</a> .....                                        | 86  |
| • 已更改 the junction temp and loop filter voltage range for PLL tuning in <a href="#">图 150</a> .....                    | 130 |

## Changes from Original (February 2017) to Revision A

Page

|                                                                                                                                                               |     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| • 将标题从“双通道或单通道、单端、14位、9GSPS...”更改为“双通道、单端、14 位、6GSPS 和 9GSPS...”                                                                                              | 1   |
| • Changed the Description of SYSREF+ From: "LVPECL SYSREF positive input." To: "LVPECL SYSREF positive input, self biased." in the <i>Pin Functions</i> table | 8   |
| • Deleted Latency and PLL/VCO parameters from the end of the <i>Electrical Characteristics - DC Specifications</i> table                                      | 15  |
| • Changed the <i>Electrical Characteristics - AC Specifications</i> table, and added "0 dBFS" amplitude of input digital data in test conditions              | 16  |
| • Added the <i>PLL/VCO Electrical Characteristics</i> table                                                                                                   | 19  |
| • Added JESD204B clock phase register setting to <a href="#">Table 36</a>                                                                                     | 55  |
| • Removed descriptions for CLKJESD_DIV register from <a href="#">Table 36</a>                                                                                 | 55  |
| • Added JESD204B clock phase register setting to <a href="#">Table 37</a>                                                                                     | 55  |
| • Added information about the DAC output total current for various full scale current settings in <i>DAC Fullscale Output Current</i>                         | 62  |
| • Changed <a href="#">Table 125</a>                                                                                                                           | 125 |
| • Changed description of SERDES_REFCLK_DIV register field in <a href="#">Table 126</a>                                                                        | 126 |
| • Changed Bit 12:11, 6:5 and 4:2 of <a href="#">Table 129</a>                                                                                                 | 128 |

## 5 Device Comparison Table

| Device    | No. of Channels | Output       | Interpolation | VCO Center Frequency |
|-----------|-----------------|--------------|---------------|----------------------|
| DAC38RF86 | 2               | Single ended | 6-24          | 8.85 GHz             |
| DAC38RF96 |                 |              | 12-24         | 8.85 GHz             |
| DAC38RF87 |                 |              | 6-24          | 5.9 GHz              |
| DAC38RF97 |                 |              | 12-24         | 5.9 GHz              |

## 6 Pin Configuration and Functions

AAV Package 144-Pin (FCBGA)  
144-Pin FCBGA  
Top View

|    | A        | B         | C       | D         | E         | F       | G        | H        | J      | K        | L      | M     |    |
|----|----------|-----------|---------|-----------|-----------|---------|----------|----------|--------|----------|--------|-------|----|
| 12 | DACCLKSE | VSSCLK    | AGND    | AGND      | VOUT2     | AGND    | VDDOUT18 | VDDOUT18 | AGND   | VOUT1    | AGND   | AGND  | 12 |
| 11 | VSSCLK   | VSSCLK    | AGND    | AGND      | AGND      | VDDA1   | VDDA18   | VDDA18   | VDDA1  | AGND     | AGND   | AGND  | 11 |
| 10 | DACCLK+  | VDDAPLL18 | EXTIO   | VEE18N    | VEE18N    | VSSCLK  | VDDL2_1  | VDDL2_1  | VSSCLK | VEE18N   | VEE18N | SDIO  | 10 |
| 9  | DACCLK-  | VDDAPLL18 | RBIAS   | VDDAVCO18 | VDDAVCO18 | VSSCLK  | VDDCLK1  | VDDCLK1  | VSSCLK | RESET\   | SCLK   | SDO   | 9  |
| 8  | VSSCLK   | VSSCLK    | ATEST   | VDDPLL1   | VDDPLL1   | VSSCLK  | VDDL1_1  | VDDL1_1  | VSSCLK | ALARM    | SLEEP  | SDEN\ | 8  |
| 7  | CLKTX+   | VDDTX18   | SYNC1+  | VDDDIG1   | DGND      | VDDE1   | DGND     | VDDE1    | DGND   | GPI0     | GPO0   | GPI1  | 7  |
| 6  | CLKTX-   | VDDTX1    | SYNC1-  | DGND      | VDDDIG1   | DGND    | VDDE1    | DGND     | VDDE1  | TXENABLE | GPO1   | DGND  | 6  |
| 5  | VDDDIG1  | VDDDIG1   | VDDDIG1 | VDDDIG1   | VDDDIG1   | VDDDIG1 | VDDDIG1  | VDDIO18  | TRST\  | TMS      | DGND   | RX3+  | 5  |
| 4  | SYSREF-  | VDDS18    | SYNC0+  | VSENSE    | VDDDIG1   | VDDDIG1 | VDDDIG1  | TDI      | TDO    | TCLK     | DGND   | RX3-  | 4  |
| 3  | SYSREF+  | VDDS18    | SYNC0-  | IFORCE    | VDDDIG1   | AMUX1   | AMUX0    | VDDT1    | VDDT1  | TESTMODE | DGND   | RX2-  | 3  |
| 2  | DGND     | DGND      | DGND    | DGND      | DGND      | DGND    | DGND     | VDDR18   | VDDR18 | DGND     | DGND   | RX2+  | 2  |
| 1  | RX7+     | RX7-      | RX6-    | RX6+      | RX5+      | RX5-    | RX4-     | RX4+     | RX0+   | RX0-     | RX1-   | RX1+  | 1  |
|    | A        | B         | C       | D         | E         | F       | G        | H        | J      | K        | L      | M     |    |

## Pin Functions

| PIN      |                                                                            | I/O | DESCRIPTION                                                                                                                                                                      |
|----------|----------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME     | NO.                                                                        |     |                                                                                                                                                                                  |
| AGND     | C11, C12, D11, E11, F12, J12, K11, L11, M11, M12, D12, L12                 | -   | Analog ground.                                                                                                                                                                   |
| ALARM    | K8                                                                         | O   | CMOS output for ALARM condition. Default polarity is active low, but can be changed to active high via RESET_CONFIG alm_out_pol control bit.                                     |
| AMUX0    | G3                                                                         | O   | Analog test pin for SerDes, Lane 0 to Lane 3. Can be left floating.                                                                                                              |
| AMUX1    | F3                                                                         | O   | Analog test pin for SerDes, Lane 4 to Lane 7. Can be left floating.                                                                                                              |
| ATEST    | C8                                                                         | O   | Analog test pin for DAC, references and PLL. Can be left floating.                                                                                                               |
| CLKTX+   | A7                                                                         | O   | Divided output clock, internal 100 $\Omega$ differential termination, self-biased, positive terminal.                                                                            |
| CLKTX-   | A6                                                                         | O   | Divided output clock, internal 100 $\Omega$ differential termination, self-biased, negative terminal.                                                                            |
| DACCLK+  | A10                                                                        | I   | Device clock, internal 100 $\Omega$ differential termination, self-biased, positive terminal.                                                                                    |
| DACCLK-  | A9                                                                         | I   | Device clock, internal 100 $\Omega$ differential termination, self-biased, negative terminal.                                                                                    |
| DACCLKSE | A12                                                                        | I   | Single ended device clock optional input. Can be left floating if not used. internal 50 $\Omega$ termination.                                                                    |
| DGND     | A2, B2, C2, D2, D6, E2, E7, F2, F6, G2, G7, H6, J7, K2, L2, L3, L4, L5, M6 | -   | Digital ground.                                                                                                                                                                  |
| EXTIO    | C10                                                                        |     | Requires a 0.1 $\mu$ F decoupling capacitor to AGND.                                                                                                                             |
| GPIO     | L6                                                                         |     | Factory use only. User should GND.                                                                                                                                               |
| GPIO1    | M7                                                                         |     | Factory use only. User should GND.                                                                                                                                               |
| GPO0     | L7                                                                         |     | Used for CMOS SYNC0\ signal.                                                                                                                                                     |
| GPIO1    | K7                                                                         |     | Used for CMOS SYNC1\ signal.                                                                                                                                                     |
| IFORCE   | D3                                                                         |     | Test pin for on chip parametrics. Can be left floating.                                                                                                                          |
| RBIAS    | C9                                                                         | I/O | Full-scale output current bias. Change the full-scale output current through DACFS in register DACFS (8.5.72). Expected to be 3.6 k $\Omega$ to GND for 40 mA full scale output. |
| RESET    | K9                                                                         | I   | Active low input for chip RESET, which resets all the programming registers to their default state. Internal pull-up.                                                            |
| RX0+     | J1                                                                         | I   | CML SerDes interface lane 0 input, positive                                                                                                                                      |
| RX0-     | K1                                                                         | I   | CML SerDes interface lane 0 input, negative                                                                                                                                      |
| RX1+     | M1                                                                         | I   | CML SerDes interface lane 1 input, positive                                                                                                                                      |
| RX1-     | L1                                                                         | I   | CML SerDes interface lane 1 input, negative                                                                                                                                      |
| RX2+     | M2                                                                         | I   | CML SerDes interface lane 2 input, positive                                                                                                                                      |
| RX2-     | M3                                                                         | I   | CML SerDes interface lane 2 input, negative                                                                                                                                      |
| RX3+     | M5                                                                         | I   | CML SerDes interface lane 3 input, positive                                                                                                                                      |
| RX3-     | M4                                                                         | I   | CML SerDes interface lane 3 input, negative                                                                                                                                      |
| RX4+     | H1                                                                         | I   | CML SerDes interface lane 4 input, positive                                                                                                                                      |
| RX4-     | G1                                                                         | I   | CML SerDes interface lane 4 input, negative                                                                                                                                      |
| RX5+     | E1                                                                         | I   | CML SerDes interface lane 5 input, positive                                                                                                                                      |
| RX5-     | F1                                                                         | I   | CML SerDes interface lane 5 input, negative                                                                                                                                      |
| RX6+     | D1                                                                         | I   | CML SerDes interface lane 6 input, positive                                                                                                                                      |
| RX6-     | C1                                                                         | I   | CML SerDes interface lane 6 input, negative                                                                                                                                      |
| RX7+     | A1                                                                         | I   | CML SerDes interface lane 7 input, positive                                                                                                                                      |
| RX7-     | B1                                                                         | I   | CML SerDes interface lane 7 input, negative                                                                                                                                      |
| SCLK     | L9                                                                         | I   | Serial interface clock. Internal pull-down.                                                                                                                                      |
| SDEN     | M8                                                                         | I   | Active low serial data enable, always an input to the DAC38RFxx. Internal pull-up.                                                                                               |
| SDIO     | M10                                                                        | I/O | Serial interface data. Bi-directional in 3-pin mode (default) and uni-directional input 4-pin mode. Internal pull-down.                                                          |
| SDO      | M9                                                                         | O   | Uni-directional serial interface data output in 4-pin mode. The SDO pin is tri-stated in 3-pin interface mode (default).                                                         |
| SLEEP    | L8                                                                         | I   | Active high asynchronous hardware power-down input. Internal pull-down.                                                                                                          |
| SYNC0+   | C4                                                                         | O   | Synchronization request to transmitter for JESD204B link 0, LVDS positive output.                                                                                                |
| SYNC0-   | C3                                                                         | O   | Synchronization request to transmitter for JESD204B link 0, LVDS negative output.                                                                                                |
| SYNC1+   | C7                                                                         | O   | Synchronization request to transmitter for JESD204B link 1, LVDS positive output.                                                                                                |
| SYNC1-   | C6                                                                         | O   | Synchronization request to transmitter for JESD204B link 1, LVDS negative output.                                                                                                |

### Pin Functions (continued)

| PIN       |                                                    | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                  |
|-----------|----------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME      | NO.                                                |     |                                                                                                                                                                                                                                                                                                                                              |
| SYSREF+   | A3                                                 | I   | LVPECL SYSREF positive input, internal 100 $\Omega$ differential termination, self biased. This positive/negative pair is captured with the rising edge of DACCLKP/N. It is used for multiple DAC synchronization.                                                                                                                           |
| SYSREF-   | A4                                                 | I   | LVPECL SYSREF negative input, internal 100 $\Omega$ differential termination, self biased. (See the SYSREF+ description)                                                                                                                                                                                                                     |
| TCLK      | K4                                                 | I   | JTAG test clock. Internal pull-down                                                                                                                                                                                                                                                                                                          |
| TDI       | H4                                                 | I   | JTAG test data in. Internal pull-up                                                                                                                                                                                                                                                                                                          |
| TDO       | J4                                                 | O   | JTAG test data out. Internal pull-up                                                                                                                                                                                                                                                                                                         |
| TESTMODE  | K3                                                 | I   | This pin is used for factory testing. Recommended to connect to ground.                                                                                                                                                                                                                                                                      |
| TMS       | K5                                                 | I   | JTAG test mode select. Internal pull-up                                                                                                                                                                                                                                                                                                      |
| TRST      | J5                                                 | I   | JTAG test reset. Must be connected to ground if not used. Internal pull-up                                                                                                                                                                                                                                                                   |
| TXENABLE  | K6                                                 | I   | Transmit enable active high input. Internal pull-down. This pin is ORed with spi_txenable bit in JESD_FIFO register to enable analog output data transmission. To enable analog output data transmission, pull the CMOS TXENABLE pin to high. To disable analog output, pull CMOS TXENABLE pin to low. The DAC output is forced to midscale. |
| VDDA1     | F11, J11                                           | I   | Analog 1V supply voltage. Must be separated from VDDD1G1 for best performance.                                                                                                                                                                                                                                                               |
| VDDA18    | G11, H11                                           | I   | Analog 1.8V supply voltage. (1.8 V)                                                                                                                                                                                                                                                                                                          |
| VDDPLL1   | D8, E8                                             | I   | Analog 1V supply for PLL.                                                                                                                                                                                                                                                                                                                    |
| VDDAPLL18 | B9, B10                                            | I   | PLL analog supply voltage. (1.8 V)                                                                                                                                                                                                                                                                                                           |
| VDDAVCO18 | D9, E9                                             | I   | Analog supply voltage for VCO (1.8 V)                                                                                                                                                                                                                                                                                                        |
| VDDCLK1   | G9, H9                                             | I   | Internal clock buffer supply voltage (1 V)<br>It is recommended to isolate this supply from VDDD1G1 and VDDA1.                                                                                                                                                                                                                               |
| VDDL1_1   | G8, H8                                             | I   | DAC core supply voltage. (1 V)                                                                                                                                                                                                                                                                                                               |
| VDDL2_1   | G10, H10                                           | I   | DAC core supply voltage. (1 V)                                                                                                                                                                                                                                                                                                               |
| VDDD1G1   | A5, B5, C5, D5, D7, E3, E4, E5, E6, F4, F5, G4, G5 | I   | Digital supply voltage. (1 V)<br>It is recommended to isolate this supply from VDDCLK1 and VDDA1.                                                                                                                                                                                                                                            |
| VDDE1     | F7, H7, G6, J6                                     | I   | Digital Encoder supply voltage (1 V).<br>Must be separated from VDDD1G1 for best performance.                                                                                                                                                                                                                                                |
| VDDIO18   | H5                                                 | I   | Supply voltage for all digital I/O and CMOS I/O. (1.8 V)                                                                                                                                                                                                                                                                                     |
| VDDOUT18  | G12, H12                                           | I   | DAC supply voltage (1.8 V)                                                                                                                                                                                                                                                                                                                   |
| VDDR18    | H2, J2                                             | I   | Supply voltage for SerDes. (1.8 V)                                                                                                                                                                                                                                                                                                           |
| VDDS18    | B3, B4                                             | I   | Supply voltage for LVDS SYNC0+/- and SYNC1+/- (1.8V)                                                                                                                                                                                                                                                                                         |
| VDDT1     | H3, J3                                             | I   | Supply voltage for SerDes termination. (1 V)                                                                                                                                                                                                                                                                                                 |
| VDDTX1    | B6                                                 | I   | Supply voltage for divided clock output. (1 V)                                                                                                                                                                                                                                                                                               |
| VDDTX18   | B7                                                 | I   | Supply voltage for divided clock output. (1.8 V)                                                                                                                                                                                                                                                                                             |
| VEE18N    | D10, E10, K10, L10                                 | I   | Analog supply voltage. (-1.8 V)                                                                                                                                                                                                                                                                                                              |
| VOU1      | K12                                                | O   | DAC channel 1 single ended output.                                                                                                                                                                                                                                                                                                           |
| VOU2      | E12                                                | O   | DAC channel 2 single ended output.                                                                                                                                                                                                                                                                                                           |
| VSENSE    | D4                                                 | I   | Test pin for on chip parametrics. Can be left floating.                                                                                                                                                                                                                                                                                      |
| VSSCLK    | A8, A11, B8, B11, B12, F8, F9, F10, J8, J9, J10    | -   | Clock ground.                                                                                                                                                                                                                                                                                                                                |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                |                                                                                                                                                             | MIN  | MAX               | UNIT |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------|------|
| Supply Voltage Range <sup>(2)</sup>            | VDDDAC1, VDDDIG1, VDDL1_1, VDDL2_1, VDDCLK1, VDDT1, VDDCLK1, VDDTX1, VDDE1                                                                                  | –0.3 | 1.3               | V    |
|                                                | VDDR18, VDDIO18, VDDS18, VDDAPLL18, VDDOUT18, VDDA18, VDDAVCO18, VDDTX18                                                                                    | –0.3 | 2.45              | V    |
|                                                | VEE18N                                                                                                                                                      | –2   | 0.3               | V    |
| Voltage between AGND and DGND                  |                                                                                                                                                             | –0.3 | 0.3               | V    |
| Pin Voltage Range <sup>(2)</sup>               | RX[0..7]+/-                                                                                                                                                 | –0.5 | VDDDIG1 + 0.5 V   | V    |
|                                                | $\overline{\text{SDEN}}$ , SCLK, SDIO, SDO, TXENABLE, ALARM, RESET, SLEEP, TMS, TCLK, TDI, TDO, $\overline{\text{TRST}}$ , TESTMODE, GPIO, GPI1, GPO0, GPO1 | –0.5 | VDDIO + 0.5 V     | V    |
|                                                | CLKOUT+/-                                                                                                                                                   | –0.5 | VDDTX18 + 0.5 V   | V    |
|                                                | DACCLK+/-, SYSREF+/-, DACCLKSE                                                                                                                              | –0.5 | VDDCLK1 + 0.5 V   | V    |
|                                                | $\overline{\text{SYNC0}}$ +/-, $\overline{\text{SYNC1}}$ +/-                                                                                                | –0.5 | VDDS18 + 0.5 V    | V    |
|                                                | VOUT1+/-, VOUT2+/-                                                                                                                                          | –0.5 | VDDAOUT18 + 0.5 V | V    |
|                                                | RBIAS, EXTIO, ATEST                                                                                                                                         | –0.5 | VDDAOUT18 + 0.5 V | V    |
|                                                | IFORCE, VSENSE                                                                                                                                              | –0.5 | VDDDIG1 + 0.5 V   | V    |
|                                                | AMUX1, AMUX0                                                                                                                                                | –0.5 | VDDT1 + 0.5 V     | V    |
| Peak input current (any input)                 |                                                                                                                                                             |      | 20                | mA   |
| Peak total input current (all inputs)          |                                                                                                                                                             | –30  |                   | mA   |
| Junction temperature T <sub>J</sub>            |                                                                                                                                                             |      | 150               | °C   |
| Operating free-air temperature, T <sub>A</sub> |                                                                                                                                                             | –40  | 85                | °C   |
| Storage temperature, T <sub>stg</sub>          |                                                                                                                                                             | –65  | 150               | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Measured with respect to AGND or DGND.

### 7.2 ESD Ratings

|                                            |                                                                                | VALUE | UNIT |
|--------------------------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1000 | V    |
|                                            | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±250  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                      |                                                                            | MIN   | NOM  | MAX   | UNIT |
|----------------------|----------------------------------------------------------------------------|-------|------|-------|------|
| T <sub>J</sub>       | Recommended operating temperature                                          |       |      | 105   | °C   |
|                      | Maximum rated operating junction temperature <sup>(1)</sup>                | 125   |      |       | °C   |
| T <sub>A</sub>       | Recommended free-air temperature                                           | –40   |      | 85    | °C   |
| Supply Voltage Range | VDDA18, VDDAPLL18, VDDS18, VDDIO18, VDDR18, VDDAPLL18, VDDOUT18, VDDAVCO18 | 1.71  | 1.8  | 1.89  | V    |
|                      | VDDDIG1, VDDA1, VDDT1, VDDAPLL1, VDDCLK1, VDDL1_1, VDDL2_1, VDDTX1, VDDE1  | 0.95  | 1    | 1.05  | V    |
|                      | VEE18N                                                                     | –1.89 | –1.8 | –1.71 | V    |

- (1) Prolonged use at this junction temperature may increase the device failure-in-time (FIT) rate

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | AAV (FCBGA) | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | 144 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 25          | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 1.0         | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 7.7         | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.1         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 7.7         | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | N/A         | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics - DC Specifications

Typical values at T<sub>A</sub> = 25°C, full temperature range is T<sub>MIN</sub> = –40°C to T<sub>MAX</sub> = 85°C, nominal supplies, unless otherwise noted.

| PARAMETER                                                                               | TEST CONDITIONS                                                                                                                                                                       | MIN  | TYP  | MAX | UNIT   |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-----|--------|
| <b>DC ACCURACY</b>                                                                      |                                                                                                                                                                                       |      |      |     |        |
| Resolution                                                                              |                                                                                                                                                                                       | 14   |      |     | bits   |
| <b>ANALOG OUTPUT</b>                                                                    |                                                                                                                                                                                       |      |      |     |        |
| Full scale output signal current                                                        |                                                                                                                                                                                       | 10   | 30   | 40  | mA     |
| P <sub>(OUTFS)</sub> Full scale output power                                            | 50-Ω load<br>2.1 GHz output frequency                                                                                                                                                 |      | 0    |     | dBm    |
| Output Compliance Range                                                                 |                                                                                                                                                                                       | 1.3  |      | 2.3 | V      |
| <b>REFERENCE OUTPUT: EXTIO</b>                                                          |                                                                                                                                                                                       |      |      |     |        |
| V <sub>REF</sub> Reference output voltage                                               |                                                                                                                                                                                       |      | 0.9  |     | V      |
| Reference output current                                                                |                                                                                                                                                                                       |      | 100  |     | nA     |
| Reference voltage drift                                                                 |                                                                                                                                                                                       |      | ±8   |     | ppm/°C |
| <b>POWER SUPPLY CURRENT AND CONSUMPTION</b>                                             |                                                                                                                                                                                       |      |      |     |        |
| 1 V Digital supplies: VDDDIG1                                                           | MODE 1: 2 TX, 1IQ/slice, LMFS = 8411, PLL on, 12x Interpolation, f <sub>INPUT</sub> = 737.28 MSPS, f <sub>DAC</sub> = 8847.36 MSPS, NCO's = 2.14 GHz, CLKTX Disabled                  | 1478 | 2290 |     | mA     |
| 1 V Analog supplies: VDDA1<br>VDDACLK1 VDDTX1 VDDAPLL1<br>VDDT1 VDDE1                   |                                                                                                                                                                                       | 1510 | 1758 |     | mA     |
| 1.8 V Supplies: VDDA18 VDDOUT18<br>VDDAVCO18 VDDAPLL18 VDDR18<br>VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       | 281  | 290  |     | mA     |
| -1.8 V Supply: VEE18N                                                                   |                                                                                                                                                                                       | 159  | 180  |     | mA     |
| P <sub>DIS</sub> Power Dissipation                                                      |                                                                                                                                                                                       | 3779 | 4894 |     | mW     |
| 1 V Digital supplies: VDDDIG1                                                           | MODE 2: 1 TX, 1IQ/slice, LMFS = 4211, PLL on, 12x Interpolation, f <sub>INPUT</sub> = 737.28 MSPS, f <sub>DAC</sub> = 8847.36 MSPS, NCO = 2.14 GHz, CLKTX Disabled                    | 1110 |      |     | mA     |
| 1 V Analog supplies: VDDA1<br>VDDACLK1 VDDTX1 VDDAPLL1<br>VDDT1 VDDE1                   |                                                                                                                                                                                       | 1303 |      |     | mA     |
| 1.8 V Supplies: VDDA18 VDDOUT18<br>VDDAVCO18 VDDAPLL18 VDDR18<br>VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       | 257  |      |     | mA     |
| -1.8 V Supply: VEE18N                                                                   |                                                                                                                                                                                       | 159  |      |     | mA     |
| P <sub>DIS</sub> Power Dissipation                                                      |                                                                                                                                                                                       | 3162 |      |     | mW     |
| 1V Digital supplies: VDDDIG1                                                            | MODE 3: 2 TX, 2 IQ/slice, LMFS = 8821, PLL on, 24x Interpolation, f <sub>INPUT</sub> = 368.64 MSPS, f <sub>DAC</sub> = 8847.36 MSPS, NCO1 = 1.84 GHz, NCO2 = 2.15 GHz, CLKTX Disabled | 2253 |      |     | mA     |
| 1 V Analog supplies: VDDA1<br>VDDACLK1 VDDTX1 VDDAPLL1<br>VDDT1 VDDE1                   |                                                                                                                                                                                       | 1522 |      |     | mA     |
| 1.8 V Supplies: VDDA18 VDDOUT18<br>VDDAVCO18 VDDAPLL18 VDDR18<br>VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       | 280  |      |     | mA     |
| -1.8 V Supply: VEE18N                                                                   |                                                                                                                                                                                       | 159  |      |     | mA     |
| P <sub>DIS</sub> Power Dissipation                                                      |                                                                                                                                                                                       | 4565 |      |     | mW     |

## Electrical Characteristics - DC Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , nominal supplies, unless otherwise noted.

| PARAMETER                                                                         | TEST CONDITIONS                                                                                                                                                                       | MIN | TYP  | MAX | UNIT |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| 1 V Digital supplies: VDDDIG1                                                     | MODE 4: 1 TX, 2 IQ/slice, LMFS = 4421, PLL on, 24x Interpolation, $f_{\text{INPUT}} = 368.64$ MSPS, $f_{\text{DAC}} = 8847.36$ MSPS, NCO1 = 1.84 GHz, NCO2 = 2.15 GHz, CLKTX Disabled |     | 1701 |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 1314 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 256  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 3763 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                     | MODE 5: 2 TX, 1 IQ/slice, LMFS = 4421, PLL on, 18x Interpolation, $f_{\text{INPUT}} = 491.52$ MSPS, $f_{\text{DAC}} = 8847.36$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled                  |     | 1328 |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 1312 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 249  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 3374 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                     | MODE 6: 1 TX, 1 IQ/slice, LMFS = 2221, PLL on, 18x Interpolation, $f_{\text{INPUT}} = 491.52$ MSPS, $f_{\text{DAC}} = 8847.36$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled                  |     | 1027 |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 1206 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 248  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 2964 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                     | MODE 7: 2 TX, 1 IQ/slice, LMFS = 8411, PLL on, 6x Interpolation, $f_{\text{INPUT}} = 983.04$ MSPS, $f_{\text{DAC}} = 5898.24$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled                   |     | 1157 |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 1125 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 246  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 3011 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                     | MODE 8: 1 TX, 1 IQ/slice, LMFS = 4211, PLL on, 6x Interpolation, $f_{\text{INPUT}} = 983.04$ MSPS, $f_{\text{DAC}} = 5898.24$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled                   |     | 848  |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 647  |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 230  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 2195 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                     | MODE 9: 2 TX, 2 IQ/slice, LMFS = 4831, PLL on, 24x Interpolation, $f_{\text{INPUT}} = 368.64$ MSPS, $f_{\text{DAC}} = 8847.36$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled                  |     | 2131 |     | mA   |
| 1 V Analog supplies: VDDA1 VDDACLK1 VDDTX1 VDDAPLL1 VDDT1 VDDE1                   |                                                                                                                                                                                       |     | 1324 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18 VDDAVCO18 VDDAPLL18 VDDR18 VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                                       |     | 251  |     | mA   |
| -1.8 V Supply: VEE18N                                                             |                                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{DIS}}$ Power Dissipation                                                |                                                                                                                                                                                       |     | 4192 |     | mW   |

## Electrical Characteristics - DC Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , nominal supplies, unless otherwise noted.

| PARAMETER                                                                               | TEST CONDITIONS                                                                                                                                                       | MIN | TYP  | MAX | UNIT |
|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| 1 V Digital supplies: VDDDIG1                                                           | MODE 10: 1 TX, 2 IQ/slice, LMFS = 2431, PLL on, 24x Interpolation, $f_{\text{INPUT}} = 368.64$ MSPS, $f_{\text{DAC}} = 8847.36$ MSPS, NCO1 = 2.14 GHz, CLKTX Disabled |     | 1635 |     | mA   |
| 1 V Analog supplies: VDDA1<br>VDDACLK1 VDDTX1 VDDAPLL1<br>VDDT1 VDDE1                   |                                                                                                                                                                       |     | 1212 |     | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18<br>VDDAVCO18 VDDAPLL18 VDDR18<br>VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                       |     | 250  |     | mA   |
| -1.8 V Supply: VEE18N                                                                   |                                                                                                                                                                       |     | 159  |     | mA   |
| $P_{\text{Dis}}$ Power Dissipation                                                      |                                                                                                                                                                       |     | 3583 |     | mW   |
| 1 V Digital supplies: VDDDIG1                                                           | MODE 11: Power down mode, no clock, DACs in sleep, SerDes in sleep                                                                                                    |     | 63   | 568 | mA   |
| 1 V Analog supplies: VDDA1<br>VDDACLK1 VDDTX1 VDDAPLL1<br>VDDT1 VDDE1                   |                                                                                                                                                                       |     | 18   | 105 | mA   |
| 1.8 V Supplies: VDDA18 VDDOUT18<br>VDDAVCO18 VDDAPLL18 VDDR18<br>VDDIO18 VDDS18 VDDTX18 |                                                                                                                                                                       |     | 47   | 51  | mA   |
| -1.8 V Supply: VEE18N                                                                   |                                                                                                                                                                       |     | 23   | 28  | mA   |
| $P_{\text{Dis}}$ Power Dissipation                                                      |                                                                                                                                                                       |     | 208  | 815 | mW   |
| VDDTX1                                                                                  | $f_{\text{DAC}} = 8847$ MSPS, Clock Out Divider Enabled                                                                                                               |     | 25   |     | mA   |
|                                                                                         | $f_{\text{DAC}} = 5898$ MSPS, Clock Out Divider Enabled                                                                                                               |     | 19   |     | mA   |
| VDDTX18                                                                                 | Clock Out Enabled                                                                                                                                                     |     | 16   |     | mA   |

## 7.6 Electrical Characteristics - Digital Specifications

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , nominal supplies, unless otherwise noted.

| PARAMETER                                                                                                                                                                                  |                                         | TEST CONDITIONS             | MIN         | TYP  | MAX | UNIT              |    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------------------|-------------|------|-----|-------------------|----|
| CML SerDes INPUTS: RX[7:0]+/-                                                                                                                                                              |                                         |                             |             |      |     |                   |    |
| V <sub>DIFF</sub>                                                                                                                                                                          | Receiver input amplitude                |                             | 50          | 1200 |     | mV                |    |
| V <sub>COM</sub>                                                                                                                                                                           | Input common mode voltage               | TERM = 111                  | 600         |      |     | mV                |    |
|                                                                                                                                                                                            |                                         | TERM = 001                  | 700         |      |     |                   |    |
|                                                                                                                                                                                            |                                         | TERM = 100                  | 0           |      |     |                   |    |
|                                                                                                                                                                                            |                                         | TERM = 101                  | 250         |      |     |                   |    |
| Z <sub>DDIFF</sub>                                                                                                                                                                         | Internal differential termination       |                             | 85          | 100  | 115 | Ω                 |    |
| f <sub>SerDes</sub>                                                                                                                                                                        | SerDes bit rate                         |                             | 0.78125     | 12.5 |     | Gbps              |    |
| DIFFERENTIAL CLOCK INPUTS: SYSREF+/-, DACCLK+/-                                                                                                                                            |                                         |                             |             |      |     |                   |    |
| f <sub>DACCLK</sub>                                                                                                                                                                        | DACCLK input frequency                  |                             | 0.1         | 9    |     | GHz               |    |
| V <sub>COM</sub>                                                                                                                                                                           | Differential input common mode voltage  |                             | 0.5         |      |     | V                 |    |
| V <sub>I(DPP)</sub>                                                                                                                                                                        | Differential input peak-to-peak voltage |                             | 800         |      |     | 2000              | mV |
| Z <sub>T</sub>                                                                                                                                                                             | Internal termination                    |                             | 100         |      |     |                   | Ω  |
| C <sub>L</sub>                                                                                                                                                                             | Input capacitance                       |                             | 2           |      |     |                   | pF |
|                                                                                                                                                                                            | Duty cycle (DACCLK only)                |                             | 40%         | 60%  |     |                   |    |
| LVDS OUTPUT: SYNC0+/-, SYNC1+/-                                                                                                                                                            |                                         |                             |             |      |     |                   |    |
| V <sub>COM</sub>                                                                                                                                                                           | Output common mode voltage              |                             | 1.2         |      |     |                   | V  |
| Z <sub>T</sub>                                                                                                                                                                             | Internal termination                    |                             | 100         |      |     |                   | Ω  |
| V <sub>OD</sub>                                                                                                                                                                            | Differential output voltage swing       |                             | 500         |      |     |                   | mV |
| CML OUTPUT: CLKTX+/-                                                                                                                                                                       |                                         |                             |             |      |     |                   |    |
| V <sub>OD</sub>                                                                                                                                                                            | CML OUTPUT: CLKTX+/-                    |                             | 1300        |      |     |                   | mV |
| CMOS INTERFACE: $\overline{\text{SDEN}}$ , SCLK, SDIO, SDO, TXENABLE, ALARM, $\overline{\text{RESET}}$ , SLEEP, TMS, TCLK, TDI, TDO, $\overline{\text{TRST}}$ , TESTMODE, SYNCSE1, SYNCSE2 |                                         |                             |             |      |     |                   |    |
| V <sub>IH</sub>                                                                                                                                                                            | High-level input voltage                |                             | 0.7 x VDDIO |      |     |                   | V  |
| V <sub>IL</sub>                                                                                                                                                                            | Low-level input voltage                 |                             | 0.3 x VDDIO |      |     |                   | V  |
| I <sub>IH</sub>                                                                                                                                                                            | High-level input current                |                             | -40         | 40   |     |                   | μA |
| I <sub>IL</sub>                                                                                                                                                                            | Low-level input current                 |                             | -40         | 40   |     |                   | μA |
| C <sub>I</sub>                                                                                                                                                                             | CMOS input capacitance                  |                             | 2           |      |     |                   | pF |
| V <sub>OH</sub>                                                                                                                                                                            | High-level output voltage               | I <sub>LOAD</sub> = -100 μA | VDDIO - 0.2 |      |     | V                 |    |
|                                                                                                                                                                                            |                                         | I <sub>LOAD</sub> = -2 mA   | 0.8 x VDDIO |      |     |                   |    |
| V <sub>OL</sub>                                                                                                                                                                            | Low-level output voltage                | I <sub>LOAD</sub> = 100 μA  | 0.2         |      |     | V                 |    |
|                                                                                                                                                                                            |                                         | I <sub>LOAD</sub> = 2 mA    | 0.5         |      |     |                   |    |
| LATENCY                                                                                                                                                                                    |                                         |                             |             |      |     |                   |    |
| RX SerDes Digital Delay                                                                                                                                                                    | full rate, RATE = "00"                  |                             | 34          |      |     | UI                |    |
|                                                                                                                                                                                            | half rate, RATE = "01"                  |                             | 29          |      |     |                   |    |
|                                                                                                                                                                                            | quarter rate, RATE = "10"               |                             | 26.5        |      |     |                   |    |
|                                                                                                                                                                                            | eighth rate, RATE = "11"                |                             | 26.25       |      |     |                   |    |
| SerDes output to JED204B elastic buffer input latency                                                                                                                                      |                                         |                             | 21 - 39     |      |     | JESD clock cycles |    |

## Electrical Characteristics - Digital Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , nominal supplies, unless otherwise noted.

| PARAMETER                                  | TEST CONDITIONS                            | MIN | TYP  | MAX | UNIT             |
|--------------------------------------------|--------------------------------------------|-----|------|-----|------------------|
| Digital Latency: JESD Buffer to DAC Output | LMFSHD = 82121, 6x Interpolation           |     | 856  |     | DAC clock cycles |
|                                            | LMFSHD = 82121, 8x Interpolation           |     | 1120 |     |                  |
|                                            | LMFSHD = 82121, 12x Interpolation          |     | 1602 |     |                  |
|                                            | LMFSHD = 82121, 16x Interpolation          |     | 2091 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 6x Interpolation  |     | 817  |     |                  |
|                                            | LMFSHD = 42111 or 84111, 8x Interpolation  |     | 1057 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 10x Interpolation |     | 1184 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 12x Interpolation |     | 1532 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 16x Interpolation |     | 1997 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 18x Interpolation |     | 2142 |     |                  |
|                                            | LMFSHD = 42111 or 84111, 24x Interpolation |     | 2941 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 8x Interpolation  |     | 1020 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 12x Interpolation |     | 1473 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 16x Interpolation |     | 1917 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 18x Interpolation |     | 2050 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 20x Interpolation |     | 2275 |     |                  |
|                                            | LMFSHD = 22210 or 44210, 24x Interpolation |     | 2821 |     |                  |
|                                            | LMFSHD = 12410 or 24410, 16x Interpolation |     | 1912 |     |                  |
|                                            | LMFSHD = 12410 or 24410, 24x Interpolation |     | 2786 |     |                  |
|                                            | LMFSHD = 44210 or 88210, 8x Interpolation  |     | 916  |     |                  |
|                                            | LMFSHD = 44210 or 88210, 12x Interpolation |     | 1317 |     |                  |
|                                            | LMFSHD = 44210 or 88210, 16x Interpolation |     | 1709 |     |                  |
|                                            | LMFSHD = 44210 or 88210, 24x Interpolation |     | 2509 |     |                  |
|                                            | LMFSHD = 24410 or 48410, 16x Interpolation |     | 1672 |     |                  |
|                                            | LMFSHD = 24410 or 48410, 24x Interpolation |     | 1593 |     |                  |

## Electrical Characteristics - Digital Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , nominal supplies, unless otherwise noted.

| PARAMETER                 | TEST CONDITIONS                            | MIN | TYP | MAX | UNIT                    |
|---------------------------|--------------------------------------------|-----|-----|-----|-------------------------|
| SYSREF TO JESD LMFC RESET | LMFSHD = 82121, 6x Interpolation           |     | 5   |     | JESD<br>clock<br>cycles |
|                           | LMFSHD = 82121, 8x Interpolation           |     | 5   |     |                         |
|                           | LMFSHD = 82121, 12x Interpolation          |     | 5   |     |                         |
|                           | LMFSHD = 82121, 16x Interpolation          |     | 5   |     |                         |
|                           | LMFSHD = 42111 or 84111, 6x Interpolation  |     | 16  |     |                         |
|                           | LMFSHD = 42111 or 84111, 8x Interpolation  |     | 16  |     |                         |
|                           | LMFSHD = 42111 or 84111, 10x Interpolation |     | 15  |     |                         |
|                           | LMFSHD = 42111 or 84111, 12x Interpolation |     | 15  |     |                         |
|                           | LMFSHD = 42111 or 84111, 16x Interpolation |     | 13  |     |                         |
|                           | LMFSHD = 42111 or 84111, 18x Interpolation |     | 15  |     |                         |
|                           | LMFSHD = 42111 or 84111, 24x Interpolation |     | 15  |     |                         |
|                           | LMFSHD = 22210 or 44210, 8x Interpolation  |     | 8   |     |                         |
|                           | LMFSHD = 22210 or 44210, 12x Interpolation |     | 7   |     |                         |
|                           | LMFSHD = 22210 or 44210, 16x Interpolation |     | 6   |     |                         |
|                           | LMFSHD = 22210 or 44210, 18x Interpolation |     | 7   |     |                         |
|                           | LMFSHD = 22210 or 44210, 20x Interpolation |     | 5   |     |                         |
|                           | LMFSHD = 22210 or 44210, 24x Interpolation |     | 4   |     |                         |
|                           | LMFSHD = 12410 or 24410, 16x Interpolation |     | 9   |     |                         |
|                           | LMFSHD = 12410 or 24410, 24x Interpolation |     | 7   |     |                         |
|                           | LMFSHD = 44210 or 88210, 8x Interpolation  |     | 29  |     |                         |
|                           | LMFSHD = 44210 or 88210, 12x Interpolation |     | 27  |     |                         |
|                           | LMFSHD = 44210 or 88210, 16x Interpolation |     | 26  |     |                         |
|                           | LMFSHD = 44210 or 88210, 24x Interpolation |     | 25  |     |                         |
|                           | LMFSHD = 24410 or 48410, 16x Interpolation |     | 8   |     |                         |
|                           | LMFSHD = 24410 or 48410, 24x Interpolation |     | 6   |     |                         |

## 7.7 Electrical Characteristics - AC Specifications

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , internal PLL/VCO clock mode, 12x Interpolation, 0 dBFS,  $f_{\text{OUT}} = 2.14\text{ GHz}$ ,  $I_{\text{OUTFS}} = 40\text{ mA}$ , nominal supplies, LMFSHd = 84111, unless otherwise noted.

| PARAMETER           |                                                                                 | TEST CONDITIONS                                          | DAC38RF87/97 |     |     | DAC38RF86/96 |     |     | UNIT |
|---------------------|---------------------------------------------------------------------------------|----------------------------------------------------------|--------------|-----|-----|--------------|-----|-----|------|
|                     |                                                                                 |                                                          | MIN          | TYP | MAX | MIN          | TYP | MAX |      |
| ANALOG OUTPUT       |                                                                                 |                                                          |              |     |     |              |     |     |      |
| f <sub>DAC</sub>    | Maximum DAC sample rate                                                         |                                                          | 6.2          |     |     | 9            |     |     | GPS  |
| AC PERFORMANCE - CW |                                                                                 |                                                          |              |     |     |              |     |     |      |
| SFDR                | Spurious Free Dynamic Range 0 – f <sub>DAC</sub> /2                             | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 501 MHz   | 65           |     |     |              |     |     | dBc  |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 951 MHz   | 63           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 1851 MHz  | 59           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz , f <sub>OUT</sub> = 2651 MHz | 57           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 501 MHz     |              |     |     | 64           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 951 MHz     |              |     |     | 65           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 1851 MHz    |              |     |     | 62           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 2651 MHz    |              |     |     | 50           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz , f <sub>OUT</sub> = 3651 MHz   |              |     |     | 51           |     |     |      |
| SFDR                | Spurious Free Dynamic Range within 500 MHz f <sub>OUT</sub> ± 250 MHz           | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 501 MHz   | 94           |     |     |              |     |     | dBc  |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 951 MHz   | 88           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 1851 MHz  | 85           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 2651 MHz  | 78           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 501 MHz     |              |     |     | 92           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 951 MHz     |              |     |     | 88           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 1851 MHz    |              |     |     | 85           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 2651 MHz    |              |     |     | 82           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 3651 MHz    |              |     |     | 78           |     |     |      |
| SFDR                | Spurious Free Dynamic Range excluding HD2, HD3 and CMP2 0 – f <sub>DAC</sub> /2 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 501 MHz   | 65           |     |     |              |     |     | dBc  |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 951 MHz   | 69           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 1851 MHz  | 66           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 2651 MHz  | 64           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 501 MHz     |              |     |     | 64           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz , f <sub>OUT</sub> = 951 MHz    |              |     |     | 66           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 1851 MHz    |              |     |     | 65           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 2651 MHz    |              |     |     | 64           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 3651 MHz    |              |     |     | 62           |     |     |      |
| HD2                 | 2nd Order Harmonic                                                              | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 501 MHz   | 70           |     |     |              |     |     | dBc  |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 951 MHz   | 63           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 1851 MHz  | 59           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 2651 MHz  | 57           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 501 MHz     |              |     |     | 71           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 951 MHz     |              |     |     | 67           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 1851 MHz    |              |     |     | 62           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 2651 MHz    |              |     |     | 49           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 3651 MHz    |              |     |     | 51           |     |     |      |
| HD3                 | 3rd Order Harmonic                                                              | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 501 MHz   | 74           |     |     |              |     |     | dBc  |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 951 MHz   | 72           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 1851 MHz  | 72           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 6.2 GHz, f <sub>OUT</sub> = 2651 MHz  | 74           |     |     |              |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 501 MHz     |              |     |     | 74           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 951 MHz     |              |     |     | 73           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 1851 MHz    |              |     |     | 72           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 2651 MHz    |              |     |     | 69           |     |     |      |
|                     |                                                                                 | f <sub>CLK</sub> = 9 GHz, f <sub>OUT</sub> = 3651 MHz    |              |     |     | 69           |     |     |      |

## Electrical Characteristics - AC Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , internal PLL/VCO clock mode, 12x Interpolation, 0 dBFS,  $f_{\text{OUT}} = 2.14\text{ GHz}$ ,  $I_{\text{OUTFS}} = 40\text{ mA}$ , nominal supplies, LMFSHd = 84111, unless otherwise noted.

| PARAMETER                                                                           | TEST CONDITIONS                                                                                  | DAC38RF87/97 |      |     | DAC38RF86/96 |     |     | UNIT        |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|--------------|------|-----|--------------|-----|-----|-------------|
|                                                                                     |                                                                                                  | MIN          | TYP  | MAX | MIN          | TYP | MAX |             |
| CMP2<br>Fs/2 clock mixing product<br>( $F_s/2 - f_{\text{OUT}}$ )                   | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                            |              | 79   |     |              |     |     | dBc         |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                            |              | 80   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                           |              | 76   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                           |              | 76   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                              |              |      |     | 70           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                              |              |      |     | 67           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                             |              |      |     | 67           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                             |              |      |     | 63           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 3651\text{ MHz}$                             |              |      |     | 59           |     |     |             |
| CMP4+<br>Fs/N (N = 4, 8, 16) clock<br>mixing product ( $f_{\text{OUT}} \pm F_s/N$ ) | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                            |              | 90   |     |              |     |     | dBc         |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                            |              | 87   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                           |              | 83   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                           |              | 76   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                              |              |      |     | 91           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                              |              |      |     | 88           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                             |              |      |     | 85           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                             |              |      |     | 81           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 3651\text{ MHz}$                             |              |      |     | 74           |     |     |             |
| IMD3<br>Third-order two-tone<br>intermodulation distortion                          | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 501 \pm 5\text{ MHz}$ , -6 dBFS each tone  |              | 83   |     |              |     |     | dBc         |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 951 \pm 5\text{ MHz}$ , -6 dBFS each tone  |              | 78   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 1851 \pm 5\text{ MHz}$ , -6 dBFS each tone |              | 76   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 2651 \pm 5\text{ MHz}$ , -6 dBFS each tone |              | 76   |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 501 \pm 5\text{ MHz}$ , -6 dBFS each tone    |              |      |     | 84           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 951 \pm 5\text{ MHz}$ , -6 dBFS each tone    |              |      |     | 80           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 1851 \pm 5\text{ MHz}$ , -6 dBFS each tone   |              |      |     | 74           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 2651 \pm 5\text{ MHz}$ , -6 dBFS each tone   |              |      |     | 73           |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 3651 \pm 5\text{ MHz}$ , -6 dBFS each tone   |              |      |     | 71           |     |     |             |
| NSD<br>Noise Spectral Density > 50<br>MHz offset                                    | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                            |              | -161 |     |              |     |     | dBFS/<br>Hz |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                            |              | -160 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                           |              | -156 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                           |              | -151 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$                              |              |      |     | -171         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$                              |              |      |     | -166         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$                             |              |      |     | -156         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$                             |              |      |     | -155         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 3651\text{ MHz}$                             |              |      |     | -153         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 501\text{ MHz}$ , -9 dBFS                  |              | -163 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 951\text{ MHz}$ , -9 dBFS                  |              | -163 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 6.2\text{ GHz}$ , $f_{\text{OUT}} = 1851\text{ MHz}$ , -9 dBFS                 |              | -160 |     |              |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 2651\text{ MHz}$ , -9 dBFS                   |              |      |     | -162         |     |     |             |
|                                                                                     | $f_{\text{CLK}} = 9\text{ GHz}$ , $f_{\text{OUT}} = 3651\text{ MHz}$ , -9 dBFS                   |              |      |     | -160         |     |     |             |

## Electrical Characteristics - AC Specifications (continued)

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , internal PLL/VCO clock mode, 12x Interpolation, 0 dBFS,  $f_{\text{OUT}} = 2.14\text{ GHz}$ ,  $I_{\text{OUTFS}} = 40\text{ mA}$ , nominal supplies, LMFSHd = 84111, unless otherwise noted.

| PARAMETER                          |                                                 | TEST CONDITIONS                                             | DAC38RF87/97 |     |     | DAC38RF86/96 |     |     | UNIT |
|------------------------------------|-------------------------------------------------|-------------------------------------------------------------|--------------|-----|-----|--------------|-----|-----|------|
|                                    |                                                 |                                                             | MIN          | TYP | MAX | MIN          | TYP | MAX |      |
| Isolation                          | Isolation between DAC A and DAC B analog output | f <sub>OUT</sub> = 1856 MHz                                 | 60           |     |     | 60           |     |     | dBc  |
|                                    |                                                 | f <sub>OUT</sub> = 3105 MHz                                 | 55           |     |     | 55           |     |     |      |
| AC PERFORMANCE – Modulated Signals |                                                 |                                                             |              |     |     |              |     |     |      |
| ACPR                               | WCDMA 1 carrier adjacent channel power ratio    | f <sub>CLK</sub> = 5898.24 MHz, f <sub>OUT</sub> = 950 MHz  | 77           |     |     |              |     |     | dBc  |
|                                    |                                                 | f <sub>CLK</sub> = 5898.24 MHz, f <sub>OUT</sub> = 2140 MHz | 73           |     |     |              |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz , f <sub>OUT</sub> = 950 MHz |              |     |     | 75           |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz, f <sub>OUT</sub> = 2140 MHz |              |     |     | 69           |     |     |      |
| Alt-ACLR                           | WCDMA 1 carrier alternate channel ACPR          | f <sub>CLK</sub> = 5898.24 MHz , f <sub>OUT</sub> = 950 MHz | 82           |     |     |              |     |     | dBc  |
|                                    |                                                 | f <sub>CLK</sub> = 5898.24 MHz, f <sub>OUT</sub> = 2140 MHz | 78           |     |     |              |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz , f <sub>OUT</sub> = 950 MHz |              |     |     | 81           |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz, f <sub>OUT</sub> = 2140 MHz |              |     |     | 77           |     |     |      |
| LTE20                              | 20 MHz LTE adjacent channel power ratio         | f <sub>CLK</sub> = 5898.24 MHz, f <sub>OUT</sub> = 800 MHz  | 75           |     |     |              |     |     | dBc  |
|                                    |                                                 | f <sub>CLK</sub> = 5898.24 MHz, f <sub>OUT</sub> = 2650 MHz | 69           |     |     |              |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz , f <sub>OUT</sub> = 800 MHz |              |     |     | 73           |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz, f <sub>OUT</sub> = 2650 MHz |              |     |     | 67           |     |     |      |
|                                    |                                                 | f <sub>CLK</sub> = 8847.36 MHz, f <sub>OUT</sub> = 3700 MHz |              |     |     | 64           |     |     |      |

## 7.8 PLL/VCO Electrical Characteristics

Typical values at  $T_A = 25^\circ\text{C}$ , full temperature range is  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , internal PLL/VCO clock mode, 12x Interpolation, 0 dBFS,  $f_{\text{OUT}} = 1.8\text{ GHz}$ ,  $I_{\text{OUTFS}} = 40\text{ mA}$ , nominal supplies, LMFSHd = 84111, unless otherwise noted.

| PARAMETER            |                                         | TEST CONDITIONS                                                                                     | DAC38RF87/97 |     |                     | DAC38RF86/96 |     |                     | UNIT   |
|----------------------|-----------------------------------------|-----------------------------------------------------------------------------------------------------|--------------|-----|---------------------|--------------|-----|---------------------|--------|
|                      |                                         |                                                                                                     | MIN          | TYP | MAX                 | MIN          | TYP | MAX                 |        |
| PLL/VCO              |                                         |                                                                                                     |              |     |                     |              |     |                     |        |
| f <sub>ref</sub>     | Reference clock frequency               |                                                                                                     | 100          |     | f <sub>VCO</sub> /4 | 100          |     | f <sub>VCO</sub> /4 | MHz    |
| f <sub>PFD</sub>     | Frequency of phase & frequency detector |                                                                                                     | 100          |     | 500                 | 100          |     | 500                 | MHz    |
| f <sub>VCO</sub> L   | Low VCO operating frequency             |                                                                                                     | 5240         |     | 6720                |              |     |                     | MHz    |
| f <sub>VCO</sub> H   | High VCO operating frequency            |                                                                                                     |              |     |                     | 7970         |     | 9000                | MHz    |
| f <sub>BW</sub>      | Loop filter bandwidth                   |                                                                                                     |              | 500 |                     |              | 500 |                     | KHz    |
| Low VCO Phase Noise  |                                         |                                                                                                     |              |     |                     |              |     |                     |        |
| Frequency Offset     | 600 KHz                                 | f <sub>VCO</sub> = 6 GHz,CP = 5, f <sub>PFD</sub> = 500 MHz, measured at output frequency = 1.8 GHz | -125         |     |                     |              |     |                     | dBc/Hz |
|                      | 1.2 MHz                                 |                                                                                                     | -132         |     |                     |              |     |                     |        |
|                      | 1.8 MHz                                 |                                                                                                     | -137         |     |                     |              |     |                     |        |
|                      | 6.0 MHz                                 |                                                                                                     | -148         |     |                     |              |     |                     |        |
| High VCO Phase Noise |                                         |                                                                                                     |              |     |                     |              |     |                     |        |
| Frequency Offset     | 600 kHz                                 | f <sub>VCO</sub> = 9 GHz, CP=5, f <sub>PFD</sub> = 500 MHz, measured at output frequency = 1.8 GHz  |              |     |                     | -124         |     |                     | dBc/Hz |
|                      | 1.2 MHz                                 |                                                                                                     |              |     |                     | -133         |     |                     |        |
|                      | 1.8 MHz                                 |                                                                                                     |              |     |                     | -138         |     |                     |        |
|                      | 6.0 MHz                                 |                                                                                                     |              |     |                     | -149         |     |                     |        |

## 7.9 Timing Requirements

|                                     |                                                           |                                                                                       | MIN | NOM | MAX | UNIT |
|-------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------|-----|-----|-----|------|
| DIGITAL INPUT TIMING SPECIFICATIONS |                                                           |                                                                                       |     |     |     |      |
| TIMING: SYSREF+/-                   |                                                           |                                                                                       |     |     |     |      |
| t <sub>s</sub> (SYSREF)             | Setup time, SYSREF+/- valid to rising edge of DACCLK+/-   | SYSREF Capture assist disabled                                                        |     | 50  |     | ps   |
| t <sub>h</sub> (SYSREF)             | Hold time, SYSREF+/- valid after rising edge of DACCLK+/- | SYSREF Capture assist disabled                                                        |     | 50  |     | ps   |
| TIMING: SERIAL PORT                 |                                                           |                                                                                       |     |     |     |      |
| t <sub>s</sub> (SDEN)               | Setup time, $\overline{SDEN}$ to rising edge of SCLK      |                                                                                       |     | 20  |     | ns   |
| t <sub>s</sub> (SDIO)               | Setup time, SDIO valid to rising edge of SCLK             |                                                                                       |     | 10  |     | ns   |
| t <sub>h</sub> (SDIO)               | Hold time, SDIO valid after rising edge of SCLK           |                                                                                       |     | 5   |     | ns   |
| t <sub>(SCLK)</sub>                 | Period of SCLK                                            | temperature sensor read                                                               |     | 1   |     | μs   |
|                                     |                                                           | All other registers                                                                   |     | 100 |     | ns   |
| t <sub>d</sub> (Data)               | Data output delay after falling edge of SCLK              |                                                                                       |     | 25  |     | ns   |
| t <sub>RESET</sub>                  | Minimum $\overline{RESET}$ pulse width                    |                                                                                       |     | 25  |     | ns   |
| ANALOG OUTPUT                       |                                                           |                                                                                       |     |     |     |      |
| t <sub>s</sub> (DAC)                | Output settling time to 0.1%                              |                                                                                       |     | 1   |     | ns   |
| t <sub>r</sub>                      | Output rise time 10% to 90%                               |                                                                                       |     | 50  |     | ns   |
| t <sub>f</sub>                      | Output fall time 90% to 10%                               |                                                                                       |     | 50  |     | ns   |
| LATENCY                             |                                                           |                                                                                       |     |     |     |      |
| RX SerDes AnalogDelay               |                                                           |                                                                                       |     | 250 |     | ps   |
| DAC wake-up time                    |                                                           | I <sub>OUT</sub> current settling to 1% of I <sub>OUTFS</sub> from deep sleep         |     | 90  |     | μs   |
| DAC sleep time                      |                                                           | I <sub>OUT</sub> current settling to less than 1% of I <sub>OUTFS</sub> in deep sleep |     | 90  |     | μs   |

## 7.10 Typical Characteristics, DAC38RF86 and DAC38RF96

Unless otherwise noted, all plots are at  $T_A = 25^\circ\text{C}$ , nominal supply voltages,  $f_{\text{DAC}} = 9 \text{ GSPS}$ , 12x interpolation, 0 dBFS digital input, 40 mA full scale output current, LMFSHd = 84111 and on-chip PLL mode is enabled.

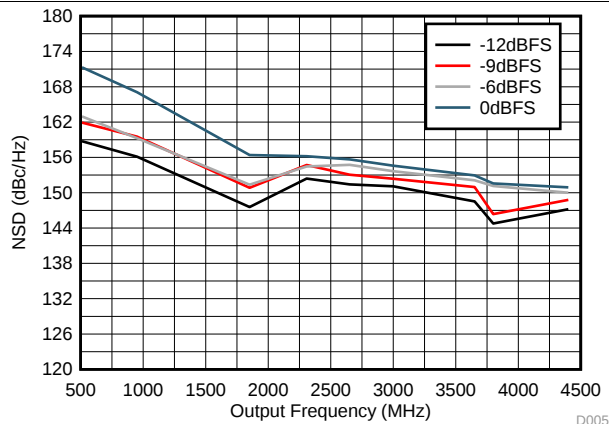


Figure 1. NSD vs Output Frequency Over Input Scale

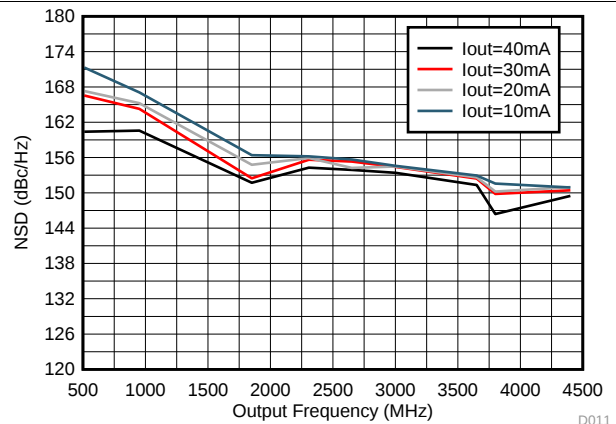


Figure 2. NSD vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$

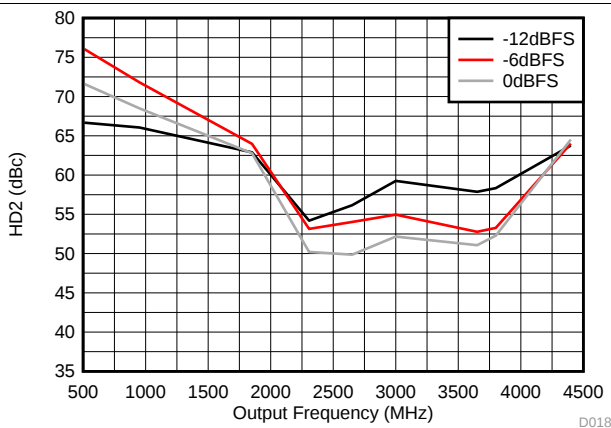


Figure 3. HD2 vs Output Frequency Over Input Scale

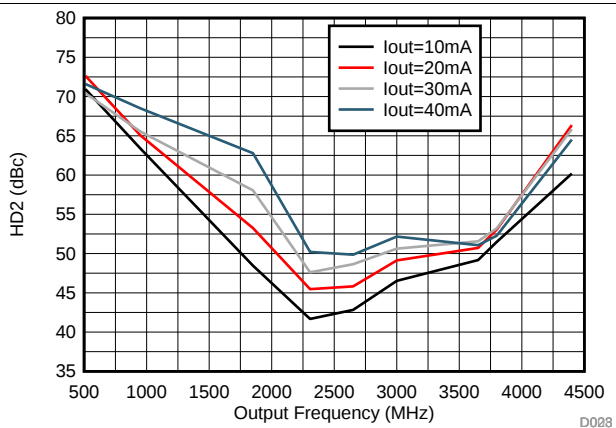


Figure 4. HD2 vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$

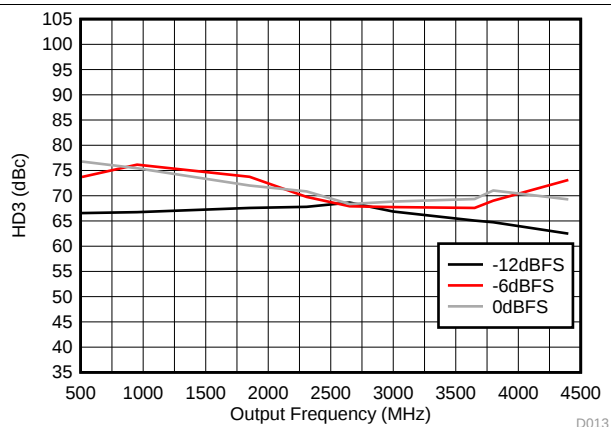


Figure 5. HD3 vs Output Frequency Over Input Scale

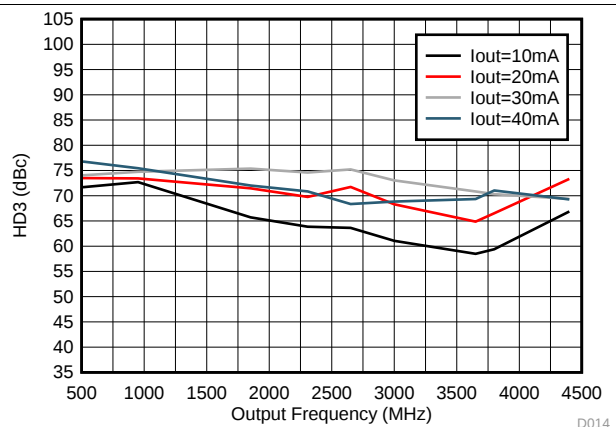


Figure 6. HD3 vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$

## Typical Characteristics, DAC38RF86 and DAC38RF96 (continued)

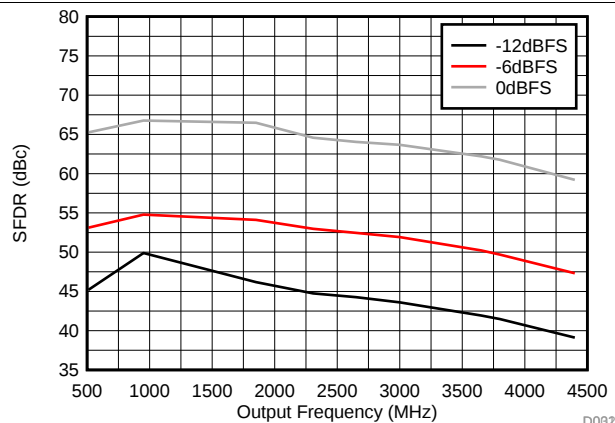


Figure 7. SFDR vs Output Frequency Over Input Scale

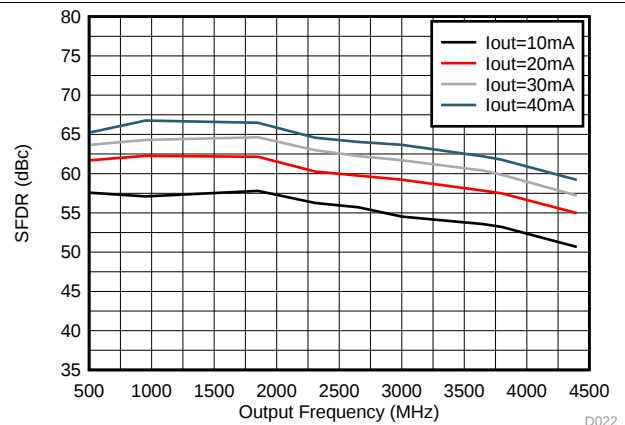


Figure 8. SFDR vs Output Frequency Over Output Current  
 $I_{outFS}$

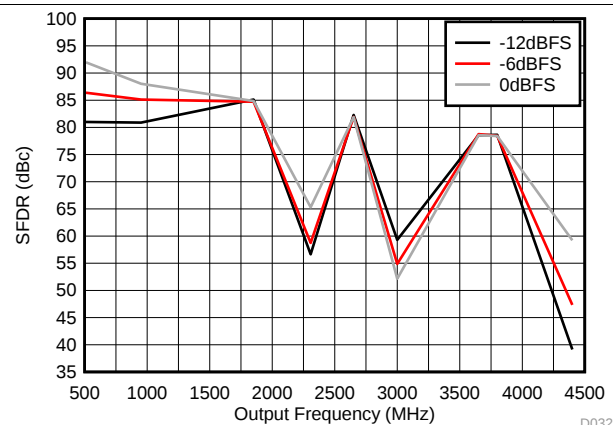


Figure 9. SFDR vs Output Frequency Over Input Scale

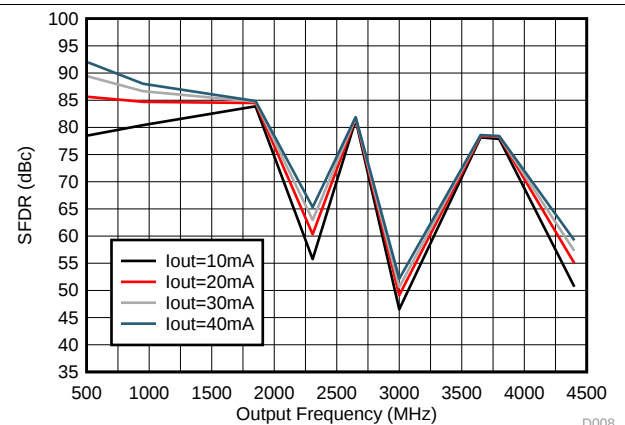


Figure 10. SFDR vs Output Frequency Over Output Current  
 $I_{outFS}$

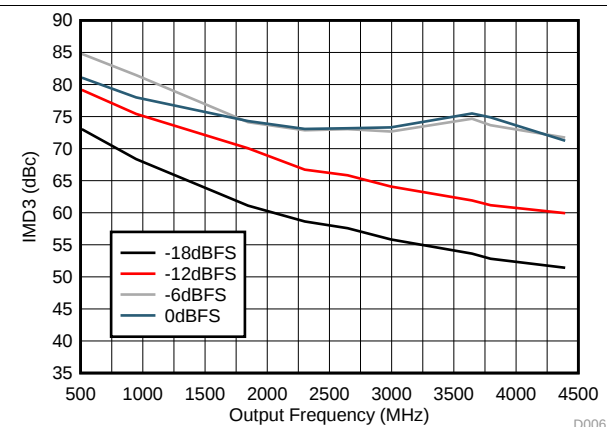


Figure 11. IMD3 vs Output Frequency Over Input Scale

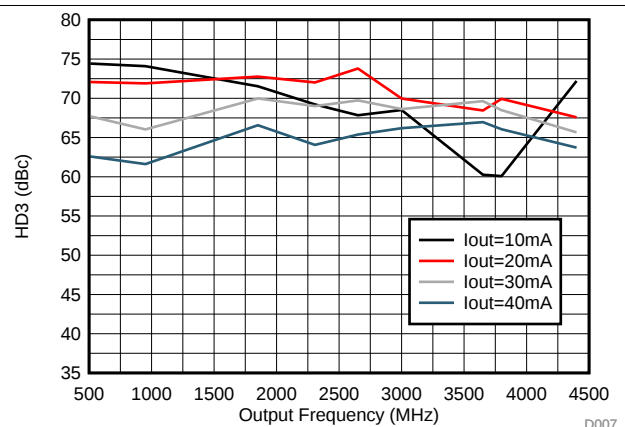


Figure 12. IMD3 vs Output Frequency Over Output Current  
 $I_{outFS}$

## Typical Characteristics, DAC38RF86 and DAC38RF96 (continued)

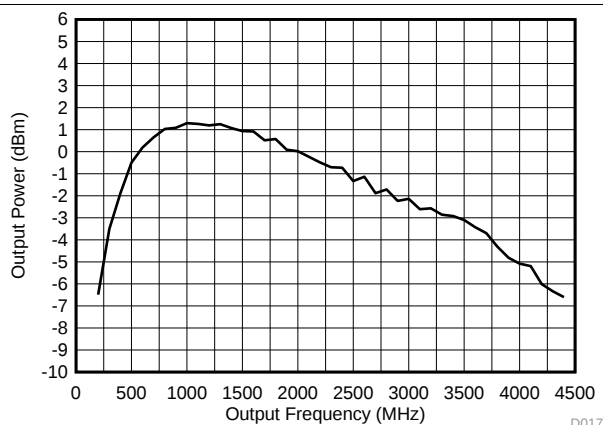


Figure 13. Power vs Output Frequency



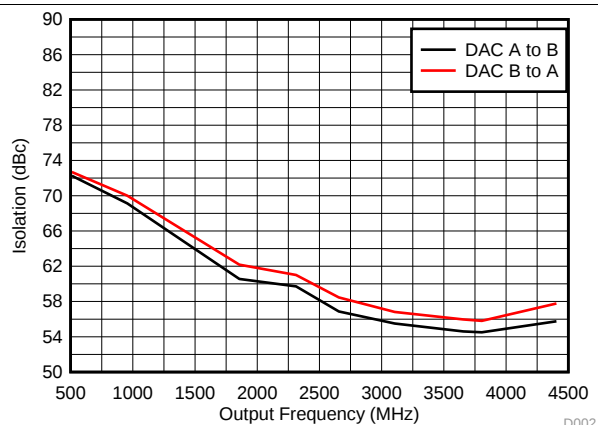


Figure 14. Isolation vs Output Frequency

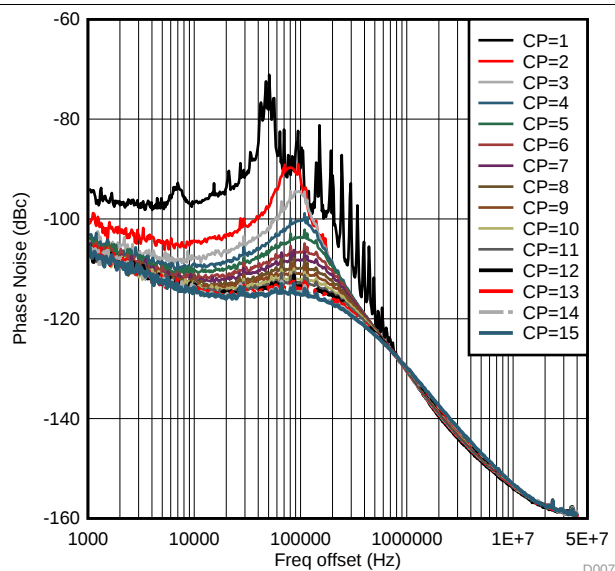

VCO frequency = 8.85 GHz Measured at 1.8 GHz

Figure 15. VCO Phase Noise vs Offset Frequency Over Charge pump current

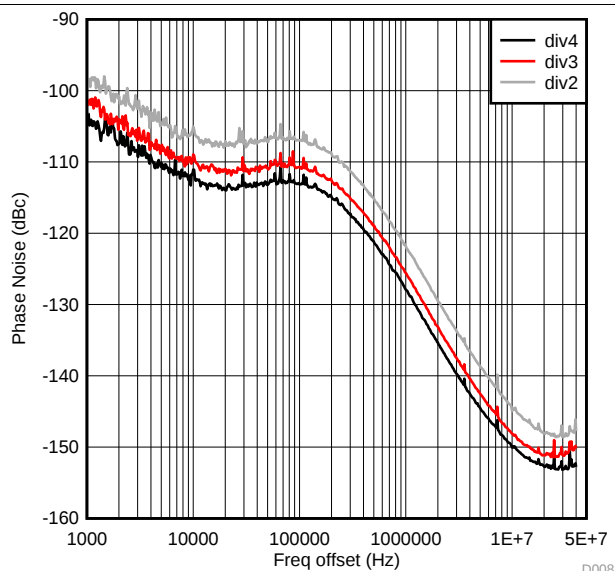


VCO frequency = 8.85 GHz

Figure 16. VCO1 Output Clock Phase Noise vs Offset frequency Over Divider Ratio


### 7.10.1 Typical Characteristics, DAC38RF87 and DAC38RF97

Unless otherwise noted, all plots are at  $T_A = 25^\circ\text{C}$ , nominal supply voltages,  $f_{\text{DAC}} = 6.2 \text{ GSPS}$ , 12x interpolation, 0dBFS digital input, 40 mA full scale output current, LMFSHD = 84111 and on-chip PLL mode is enabled.

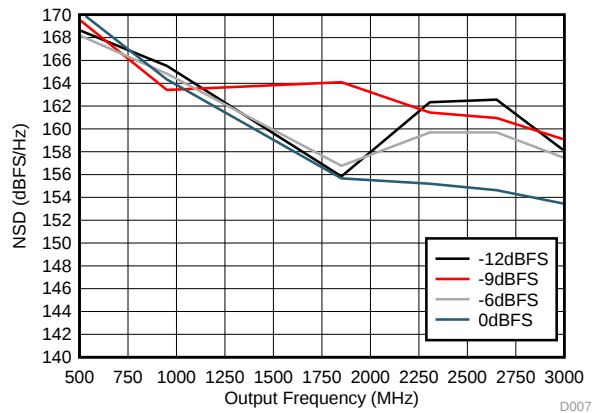

Measured 50 MHz from carrier

Figure 17. NSD vs Output Frequency Over Input Scale

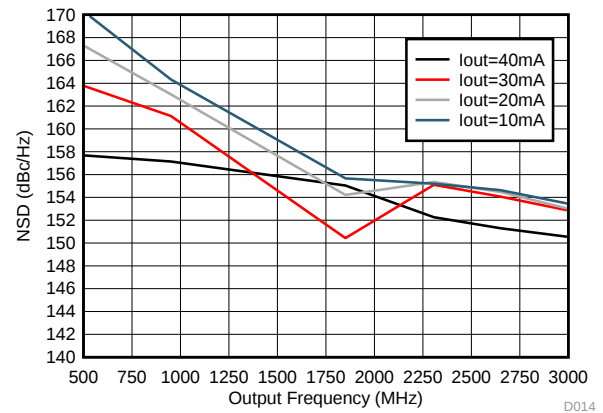

Measured 50 MHz from carrier

Figure 18. NSD vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$

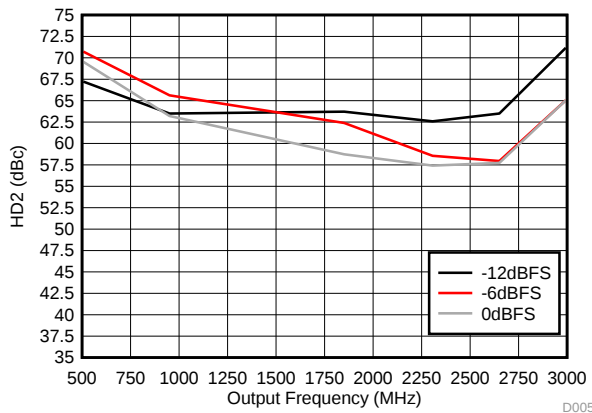


Figure 19. HD2 vs Output Frequency Over Input Scale

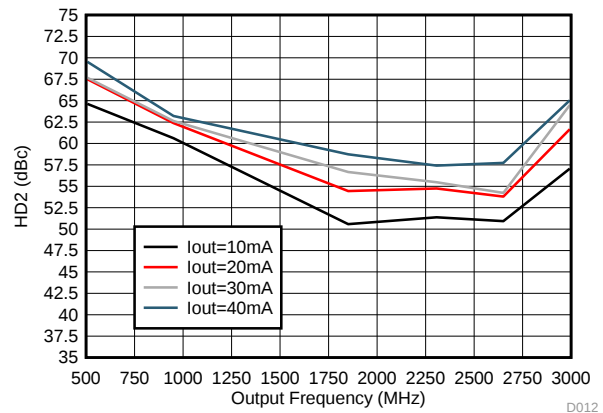


Figure 20. HD2 vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$

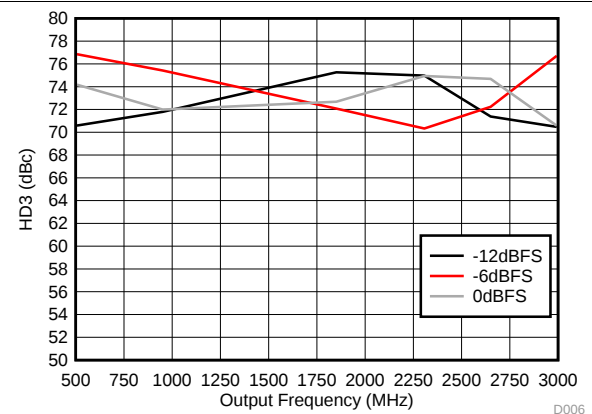


Figure 21. HD3 vs Output Frequency Over Input Scale



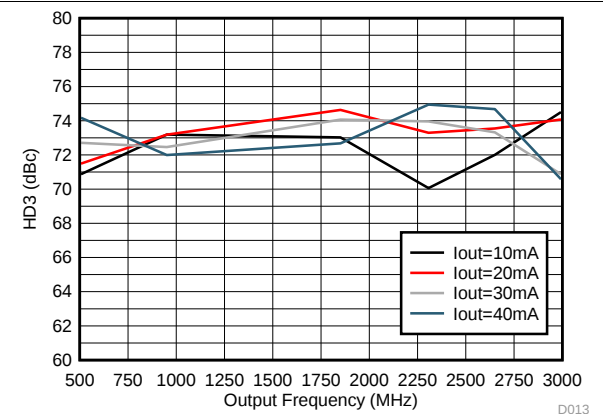


Figure 22. HD3 vs Output Frequency Over Output Current  
 $I_{\text{outFS}}$


## Typical Characteristics, DAC38RF87 and DAC38RF97 (continued)

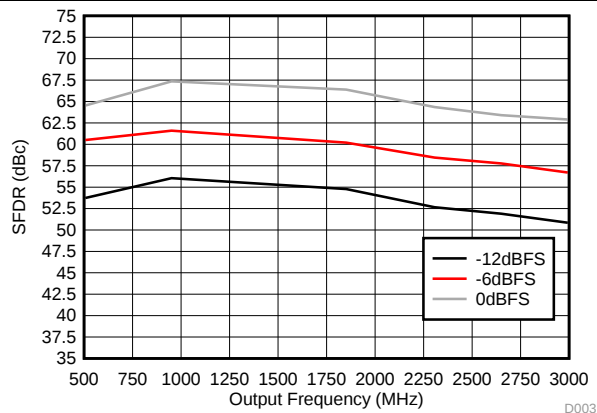


**Figure 23. SFDR vs Output Frequency Over Input Scale**

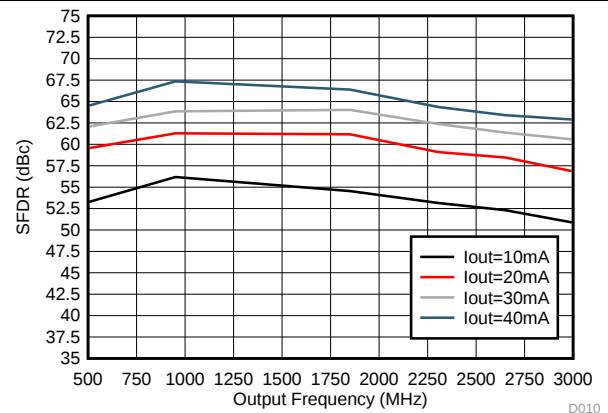


**Figure 24. SFDR vs Output Frequency Over Output Current  $I_{outFS}$**

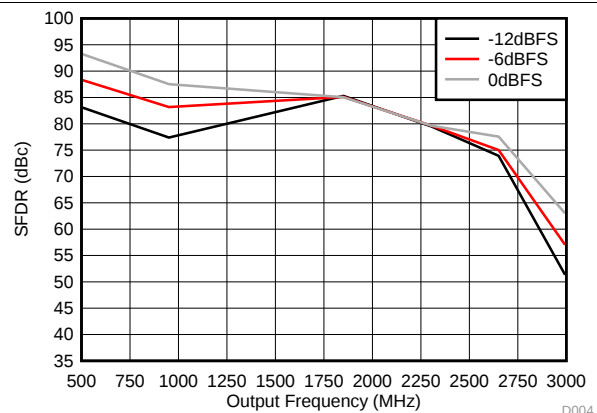


**Figure 25. SFDR vs Output Frequency Over Input Scale**

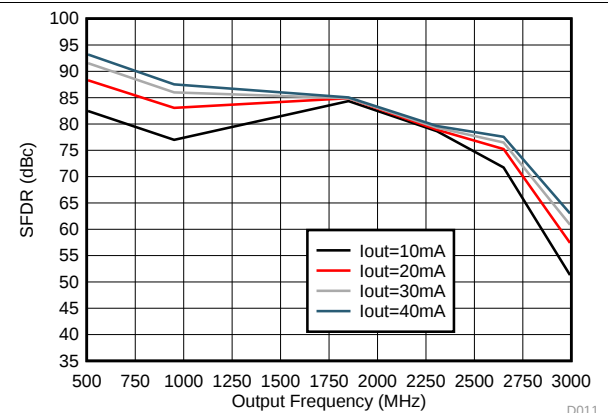

**Figure 26. SFDR vs Output Frequency Over Output Current  $I_{outFS}$**

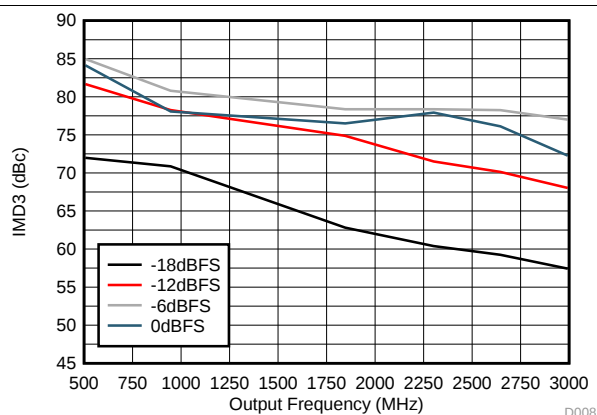

**Figure 27. IMD3 vs Output Frequency Over Input Scale**

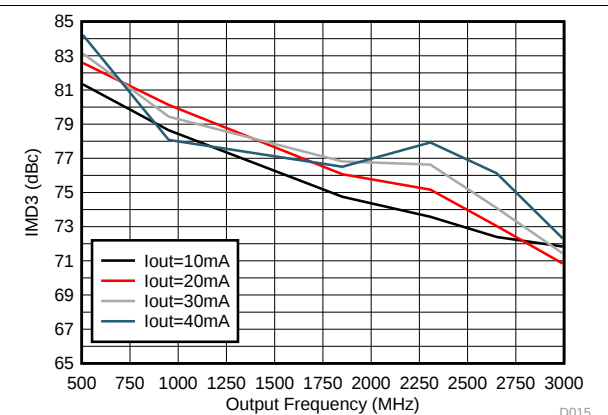

**Figure 28. IMD3 vs Output Frequency Over Output Current  $I_{outFS}$**

## Typical Characteristics, DAC38RF87 and DAC38RF97 (continued)

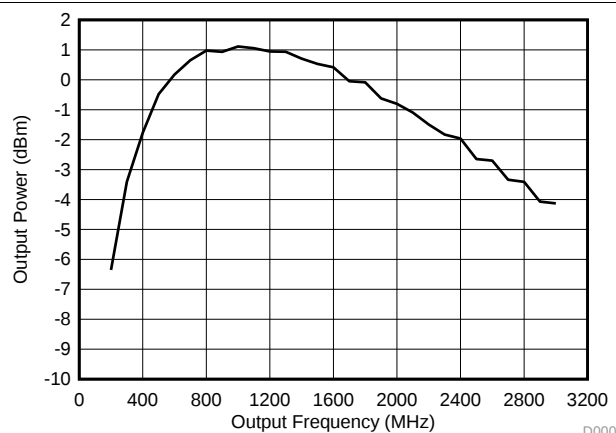


Figure 29. Power vs Output Frequency



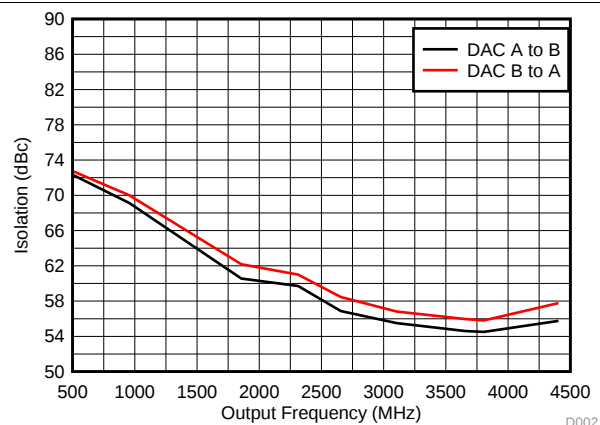


Figure 30. Isolation vs Output Frequency

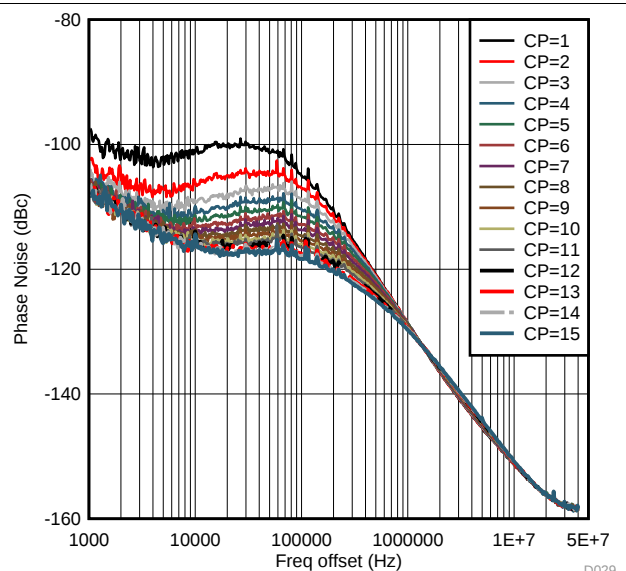

VCO frequency = 5.9 GHz measured at 1.8 GHz

Figure 31. VCO Phase Noise vs Offset Frequency Over Charge Pump Current

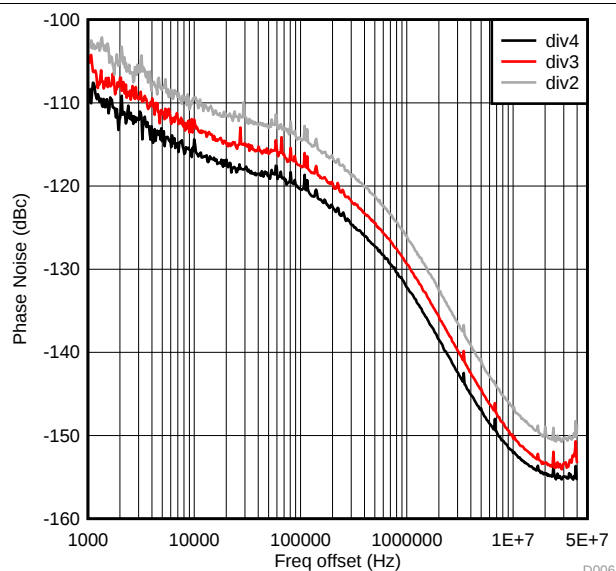

VCO frequency = 5.9 GHz

Figure 32. VCO Output clock Phase Noise vs Offset Frequency Over Divider Ratio


## 8 Detailed Description

### 8.1 Overview

The DAC38RF86/96 is a family of high-performance, dual-channel, 14-bit, 9-GSPS, RF-sampling digital-to-analog converters (DACs) that are capable of synthesizing wideband signals from 0 to 4.5 GHz. The DAC38RF87/97 is also a family of high-performance, dual-channel, 14-bit, 6-GSPS, RF-sampling digital-to-analog converters (DACs) that are capable of synthesizing wideband signals from 0 to 3 GHz. A high dynamic range allows the DAC38RFxx family to generate signals for a wide range of applications including 3G/4G signals for wireless base-stations.

The devices feature a low-power JESD204B Interface with up to 8 lanes, and provides a maximum bit rate and input data rate of 12.5 Gbps and 1.25 GSPS complex per channel respectively. The DAC38RFxx provides two digital up-converters per channel, with multiple options for interpolation rates. A digital quadrature modulator with independent, frequency flexible NCOs are available to support multi-band operation. A GSM compliant low phase noise PLL/VCO is integrated to simplify the DAC sampling clock generation by allowing the use of a lower frequency reference clock


### 8.2 Functional Block Diagrams

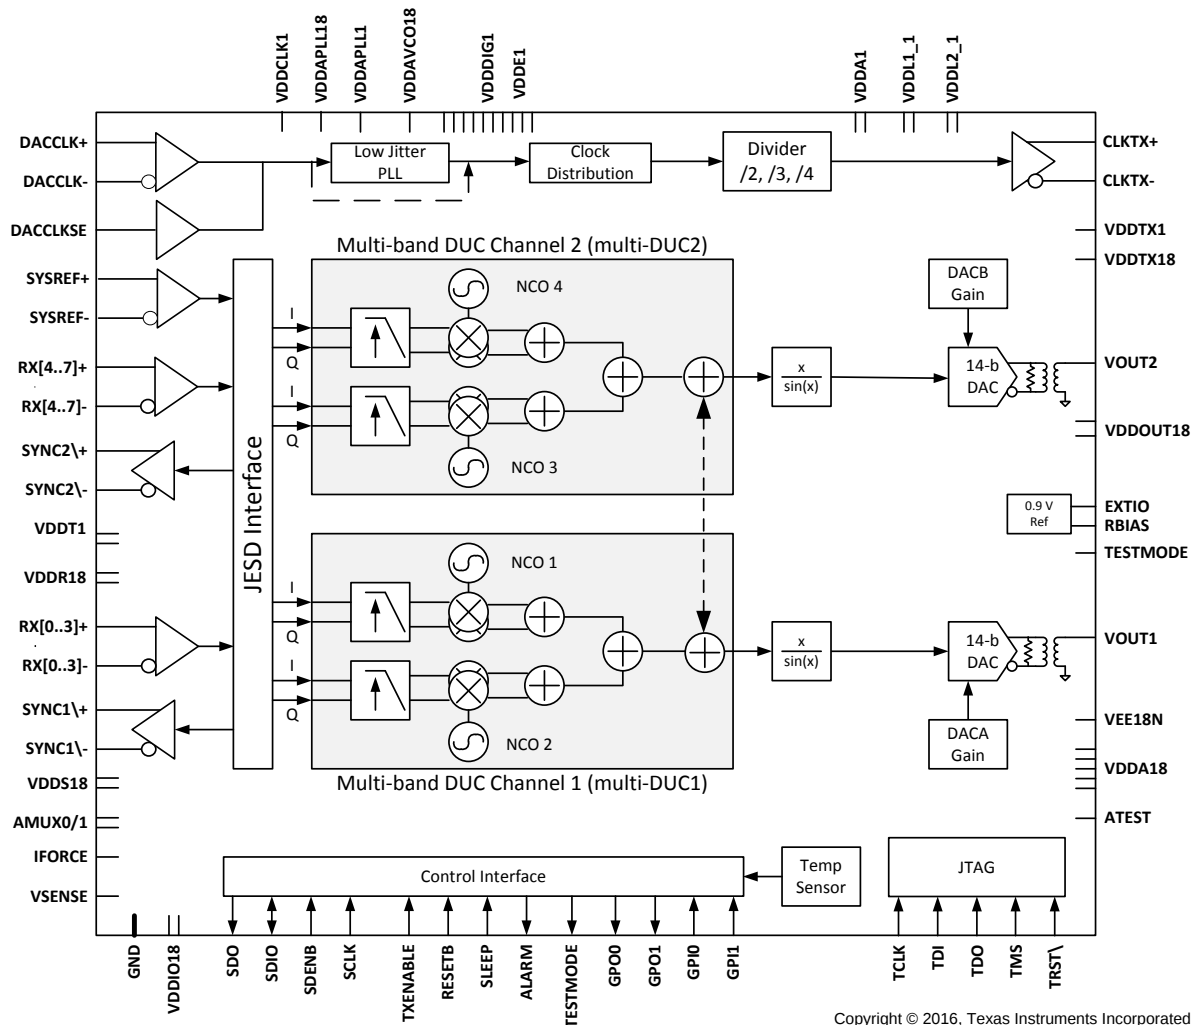

Copyright © 2016, Texas Instruments Incorporated

Figure 33. DAC38RF86, DAC38RF87 Block Diagram

## Functional Block Diagrams (continued)

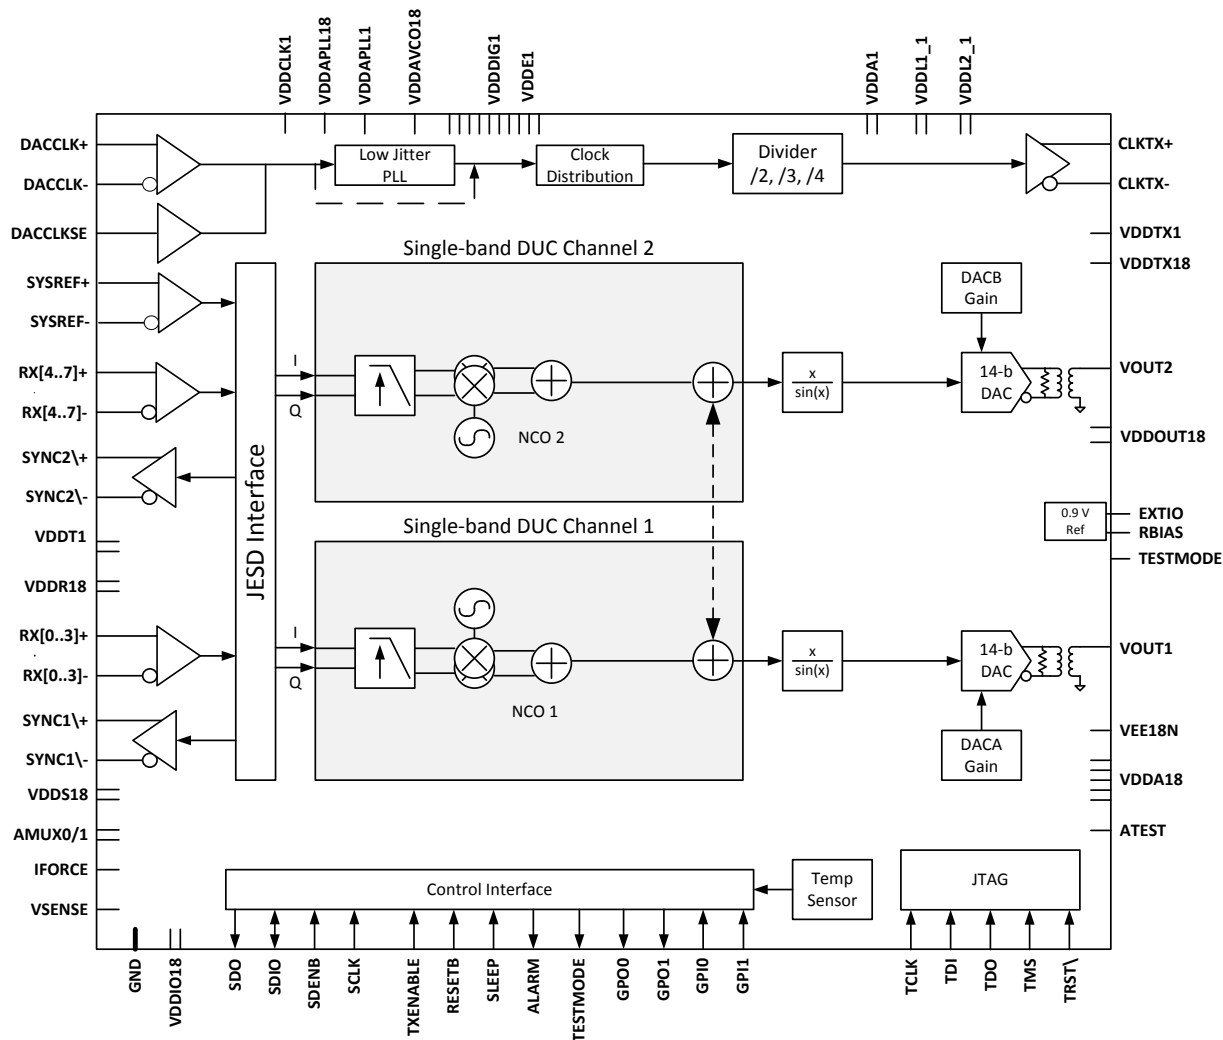


Copyright © 2016, Texas Instruments Incorporated

Figure 34. DAC38RF96, DAC38RF97 Block Diagram

## 8.3 Feature Description

### 8.3.1 SerDes Inputs

The DAC38RFxx RX [0..7]+/- differential inputs are each internally terminated to a common point via 50  $\Omega$ , as shown in Figure 35.

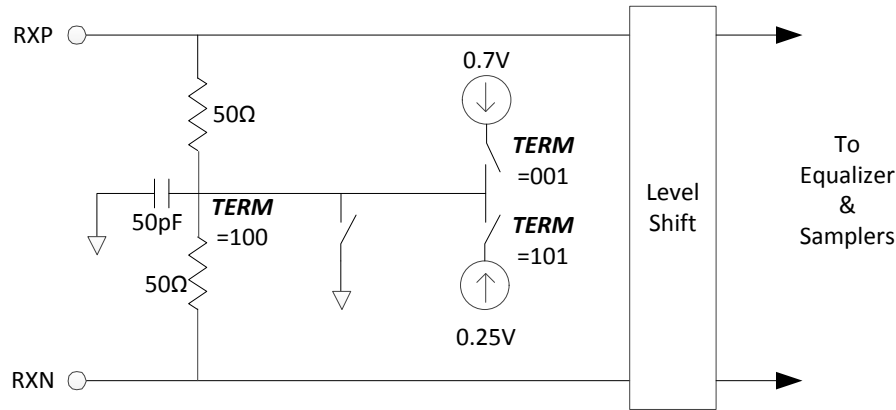

**Figure 35. Serial Lane Input Termination**

Common mode termination is via a 50 pF capacitor to GND. The common mode voltage and termination of the differential signal can be controlled in a number of ways to suit a variety of applications via field TERM in register SRDS\_CFG2 (8.5.87), as described in Table 1.

#### NOTE

AC coupling is recommended for JESD204B compliance.

**Table 1. Receiver Termination Selection**

| TERM | EFFECT                                                                                                                                                                                                                                               |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 000  | Reserved                                                                                                                                                                                                                                             |
| 001  | Common point set to 0.7 V. This configuration is for AC coupled systems. The transmitter has no effect on the receiver common mode, which is set to optimize the input sensitivity of the receiver. Note: this mode is not compatible with JESD204B. |
| 01x  | Reserved                                                                                                                                                                                                                                             |
| 100  | Common point set to GND. This configuration is for applications that require a 0 V common mode.                                                                                                                                                      |
| 101  | Common point set to 0.25 V. This configuration is for applications that require a low common mode.                                                                                                                                                   |
| 110  | Reserved                                                                                                                                                                                                                                             |
| 111  | Common point floating. This configuration is for DC coupled systems in which the common mode voltage is set by the attached transmit link partner to 0 and 0.6 V. Note: this mode is not compatible with JESD204B                                    |

Input data is sampled by the differential sensing amplifier using clocks derived from the clock recovery algorithm. The polarity of RX+ and RX- can be inverted by setting the bit of the corresponding lane in field INVPAIR in register SRDS\_POL (8.5.88) to “1”. This can potentially simplify PCB layout and improve signal integrity by avoiding the need to swap over the differential signal traces.

Due to processing effects, the devices in the RX+ and RX- differential sense amplifiers will not be perfectly matched and there will be some offset in switching threshold. The DAC38RFxx contains circuitry to detect and correct for this offset. This feature can be enabled by setting ENOC in register SRDS\_CFG1 (8.5.86) to “1”. It is anticipated the most users will enable this feature. During the compensation process, LOOPBACK in register SRDS\_CFG1 (8.5.86) must be set to “00”.

### 8.3.2 SerDes Rate


The DAC38RFxx has eight configurable JESD204B serial lanes. The highest speed of each SerDes lane is 12.5 Gbps. Because the primary operating frequency of the SerDes is determined by its reference clock and PLL multiplication factor, there is a limit on the lowest SerDes rate supported. To support lower speed application, each receiver should be configured to operate at half, quarter or eighth of the full rate via field RATE in register SRDS\_CFG2 (8.5.87). Refer to Table 2 for details.

**Table 2. Lane Rate Selection**

| RATE | EFFECT                                                                        |
|------|-------------------------------------------------------------------------------|
| 00   | Full rate. Four data samples taken per SerDes PLL output clock cycle.         |
| 01   | Half rate. Two data samples taken per SerDes PLL output clock cycle.          |
| 10   | Quarter rate. One data samples taken per SerDes PLL output clock cycle.       |
| 11   | Eighth rate. One data samples taken every two SerDes PLL output clock cycles. |

### 8.3.3 SerDes PLL

The DAC38RFxx has two integrated PLLs, one PLL is to provide the clocking of DAC; the other PLL is to provide the clocking for the high speed SerDes. The reference frequency of the SerDes PLL can be in the range of 100-800 MHz nominal, and 300-800 MHz optimal. The reference frequency is derived from DACCLK divided down by the value in field SerDes\_REFCLK\_DIV in register SRDS\_CLK\_CFG (8.5.84), as shown in Figure 36. Field SerDes\_CLK\_SEL in register SRDS\_CLK\_CFG (8.5.84) determines if the DACCLK input or DAC PLL output is used as the source of the SerDes PLL reference. If the DACCLK input is used, a pre-divider set by field SerDes\_REFCLK\_PREDIV in register SRDS\_CLK\_CFG (8.5.84) should be used to reduce the frequency of the DACCLK.

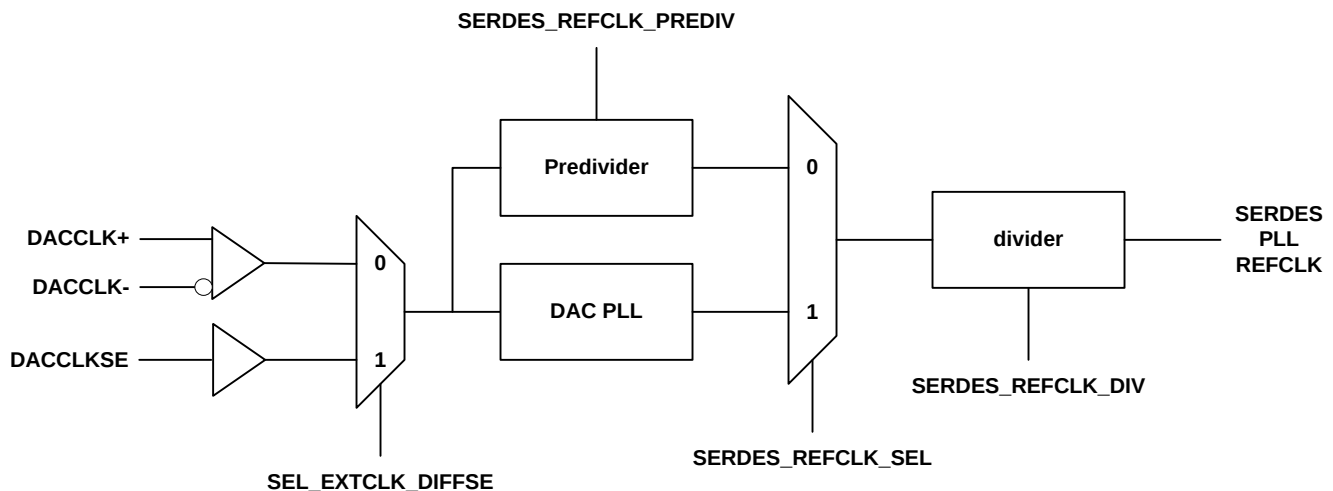

**Figure 36. Reference Clock of SerDes PLL**

During normal operation, the clock generated by PLL is 4-25 times the reference frequency, according to the multiply factor selected via the field MPY in register SRDS\_PLL\_CFG (8.5.85). In order to select the appropriate multiply factor and reference clock frequency, it is first necessary to determine the required PLL output clock frequency. The relationship between the PLL output clock frequency and the lane rate is determined by field RATE in register SRDS\_CFG2 (8.5.87) is shown in Table 3. Having computed the PLL output frequency, the reference frequency can be obtained by dividing this by the multiply factor specified via MPY.

**Table 3.**

| RATE | LINE RATE | PLL OUTPUT FREQUENCY |
|------|-----------|----------------------|
| 00   | x Gbps    | 0.25x GHz            |
| 01   | x Gbps    | 0.5x GHz             |
| 10   | x Gbps    | 1x GHz               |
| 11   | x Gbps    | 2x GHz               |

**Table 4. SerDes PLL Modes Selection**

| MPY         | EFFECT   |
|-------------|----------|
| 0x20        | 4x       |
| 0x28        | 5x       |
| 0x30        | 6x       |
| 0x40        | 8x       |
| 0x42        | 8.25x    |
| 0x50        | 10x      |
| 0x60        | 12x      |
| 0x64        | 12.5x    |
| 0x78        | 15x      |
| 0x80        | 16x      |
| 0x84        | 16.5x    |
| 0xA0        | 20x      |
| 0xB0        | 22x      |
| 0xC8        | 25x      |
| Other codes | Reserved |

The wide range of multiply factors combined with the different rate modes means it is often possible to achieve a given line rate from multiple different reference frequencies. The configuration which utilizes the highest reference frequency achievable is always preferable.

The SerDes PLL VCO must be in the nominal range of 1.5625 - 3.125 GHz. It is necessary to adjust the loop filter depending on the operating frequency of the VCO. If the PLL output frequency is below 2.17 GHz, VRANGE in register SRDS\_PLL\_CFG (8.5.84) should be set high.

Performance of the integrated PLL can be optimized according to the jitter characteristics of the reference clock by setting the appropriate loop bandwidth via field LB in register SRDS\_PLL\_CFG (8.5.84). The loop bandwidth is obtained by dividing the reference frequency by BWSCALE, where the BWSCALE is a function of both LB and PLL output frequency as shown in Table 5.

**Table 5. SerDes PLL Loop Bandwidth Selection**


| LB | EFFECT                    | BWSCALE vs PLL OUTPUT FREQUENCY |          |            |
|----|---------------------------|---------------------------------|----------|------------|
|    |                           | 3.125 GHz                       | 2.17 GHz | 1.5625 GHz |
| 00 | Medium loop bandwidth     | 13                              | 14       | 16         |
| 01 | Ultra high loop bandwidth | 7                               | 8        | 8          |
| 10 | Low loop bandwidth        | 21                              | 23       | 30         |
| 11 | High loop bandwidth       | 10                              | 11       | 14         |

An approximate loop bandwidth of 8 – 30 MHz is suitable and recommended for most systems where the reference clock is via low jitter clock input buffer. For systems where the reference clock is via a low jitter input cell, but of low quality, an approximate loop bandwidth of less than 8 MHz may offer better performance. For systems where the reference clock is cleaned via an ultra-low jitter LC-based cleaner PLL, a high loop bandwidth up to 60 MHz is more appropriate. Note that the use of ultra-high loop bandwidth setting is not recommended for PLL multiply factor of less than 8.

A free running clock output is available when field ENDIVCLK in register SRDS\_PLL\_CFG (8.5.85) is set high. It runs at a fixed divided-by-80 of the PLL output frequency and can be output on the ALARM pin by setting field DTEST to “0001” (lanes 0 – 3) or “0010” (lanes 4 – 7) in register DTEST (8.5.76).

### 8.3.4 SerDes Equalizer

All channels of the DAC38RFxx incorporate an adaptive equalizer, which can compensate for channel insertion loss by attenuating the low frequency components with respect to the high frequency components of the signal, thereby reducing inter-symbol interference. Figure 37 shows the response of the equalizer, which can be expressed in terms of the amount of low frequency gain and the frequency up to which this gain is applied (i.e., the frequency of the 'zero'). Above the zero frequency, the gain increases at 6 dB/octave until it reaches the high frequency gain.

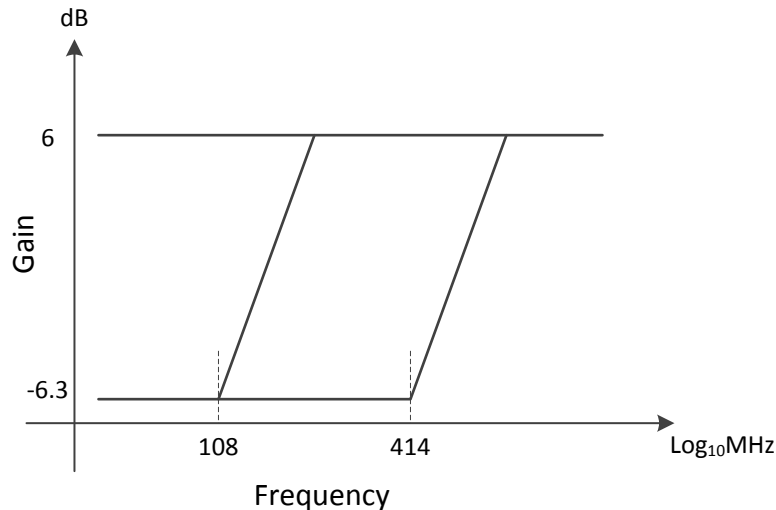

**Figure 37. Equalizer Frequency Response**

The equalizer can be configured via fields EQ and EQHLD in register SRDS\_CFG1 (8.5.86). Table 6 and Table 7 summarize the options. When enabled, the receiver equalization logic analyzes data patterns and transition times to determine whether the low frequency gain should be increased or decreased. The decision logic is implemented as a voting algorithm with a relatively long analysis interval. The slow time constant that results reduces the probability of incorrect decisions but allows the equalizer to compensate for the relatively stable response of the channel. The lock time for the adaptive equalizer is data dependent, and so it is not possible to specify a generally applicable absolute limit. However, assuming random data, the maximum lock time will be  $6 \times 10^6$  divided by the CDR activity level. For field CDR in register SRDS\_CFG1 (8.5.86) = 110, the activity level is  $1.5 \times 10^6$  UI.

When EQ = 0, finer control of gain boost is available using the EQBOOST IEEE1500 tuning chain field, as shown in Table 8.

**Table 6. Receiver Equalization Configuration**

| EQ    |    | EFFECT                                                                                                                                                                                                                                                                                                  |
|-------|----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [1-0] | 00 | No equalization. The equalizer provides a flat response at the maximum gain. This setting may be appropriate if jitter at the receiver occurs predominantly as a result of crosstalk rather than frequency dependent loss.                                                                              |
|       | 01 | Fully adaptive equalization. The zero position is determined by the selected operating rate, and the low frequency gain of the equalizer is determined algorithmically by analyzing the data patterns and transition positions in the received data. This setting should be used for most applications. |
|       | 10 | Precursor equalization analysis. The data patterns and transition positions in the received data are analyzed to determine whether the transmit link partner is applying more or less precursor equalization than necessary.                                                                            |
|       | 11 | Postcursor equalization analysis. The data patterns and transition positions in the received data are analyzed to determine whether the transmit link partner is applying more or less post-cursor equalization than necessary.                                                                         |

**Table 6. Receiver Equalization Configuration (continued)**

| EQ  |   | EFFECT                                                                                                                                                       |
|-----|---|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [2] | 0 | Default                                                                                                                                                      |
|     | 1 | Boost. Equalizer gain boosted by 6 dB, with a 20% reduction in bandwidth, and an increase of 5mW power consumption. May improve performance over long links. |

**Table 7. Receiver Equalizer Hold**

| EQHOLD | EFFECT                                                                                                                           |
|--------|----------------------------------------------------------------------------------------------------------------------------------|
| 0      | Equalizer adaption enabled. The equalizer adaption and analysis algorithm is enabled. This should be the default state.          |
| 1      | Equalizer adaption held. The equalizer is held in its current state. Additionally, the adaption and analysis algorithm is reset. |

**Table 8. Relationship Between Lane Rate and SerDes PLL Output Frequency**

| EQBOOST | GAIN BOOST (dB) | BANDWIDTH CHANGE (%) | POWER INCREASE (mW) |
|---------|-----------------|----------------------|---------------------|
| 00      | 0               | 0                    | 0                   |
| 01      | 2               | -30                  | 0                   |
| 01      | 4               | 10                   | 5                   |
| 11      | 6               | -20                  | 5                   |

When EQ is set to 010 or 011, the equalizer is reconfigured to provide analytical data about the amount of pre and post cursor equalization respectively present in the received signal. This can in turn be used to adjust the equalization settings of the transmitting link partner, where a suitable mechanism for communicating this data back to the transmitter exists. Status information is provided by setting field DTEST in register DTEST (8.5.76) to “0111” for EQOVER and “0110” for EQUNDER. The procedure is as follows:

1. Enable the equalizer by setting fields EQHLD low and EQ to “001” (register SRDS\_CFG1 8.5.86). Allow sufficient time for the equalizer to adapt;
2. Set EQHLD to 1 to lock the equalizer and reset the adaption algorithm. This also causes both EQOVER and EQUNDER to become low;
3. Wait at least 48 UI, and proportionately longer if the CDR activity is less than 100%, to ensure the 1 on EQHLD is sampled and acted upon;
4. Set EQ to “010” or “011”, and EQHLD to 0. The equalization characteristics of the received signal are analysed (the equalizer response will continue to be locked);
5. Wait at least  $150 \times 10^3$  UI to allow time for the analysis to occur, proportionately longer if the CDR activity is less than 100%;
6. Examine EQOVER and EQUNDER for results of analysis
  - If EQOVER is high, it indicates the signal is over equalized;
  - If EQUNDER is high, it indicates the signal is under equalized;
7. Set EQHLD to 1;
8. Repeat items 3–7 if required;
9. Set EQ to “001”, and EQHLD to 0 to exit analysis mode and return to normal adaptive equalization.

#### NOTE

When changing EQ from one non-zero value to another, EQHLD must already be 1. If this is not the case, there is a chance the equalizer could be reset by a transitory input state (i.e., if EQ is momentarily 000). EQHLD can be set to 0 at the same time as EQ is changed.

As the equalizer adaption algorithm is designed to equalize the post cursor, EQOVER or EQUNDER will only be set during post cursor analysis if the amount of post cursor equalization required is more or less than the adaptive equalizer can provide.

### 8.3.5 JESD204B Descrambler

The descrambler is a 16-bit parallel self-synchronous descrambler based on the polynomial  $1 + x^{14} + x^{15}$ . From the JESD204B specification, the scrambling/descrambling process only occurs on the user data, not on the code group synchronization or the ILA sequence. Each multi-DUC has a separate descrambler that can be enabled independently. The descrambler is enabled by field SCR in the multi-DUC paged register JESD\_N\_HD\_SCR (8.5.49).

### 8.3.6 JESD204B Frame Assembly

The DAC38RFxx may be programmed as a single or dual DAC device, with one JESD RX block designated for each DAC. The two JESD RX blocks can be programmed to operate as two separate links or as a single link.

The JESD204B defines the following parameters:

- L is the number of lanes
- M is the number of I or Q streams per device (2 = 1 IQ pair, 4 = 2 IQ pairs, 8 = 4 IQ pairs)
- F is the number of octets per frame clock period
- S is the number of samples per frame
- HD is the High-Density bit which controls whether a sample may be divided over more lanes
- N = NPRIME is the number of bits per sample (12 or 16 - bits)

Fields K and L are found in multi-DUC paged register JESD\_K\_L (8.5.46), M and S in multi-DUC paged register JESD\_M\_S (8.5.48), and N, NPRIME and HD in multi-DUC paged register JESD\_N\_HD\_SCR (8.5.49).

Table 9 lists the available JESD204B formats, interpolation rates and sample rate limits for the DAC38RFxx. The ranges are limited by the SerDes PLL VCO frequency range, the SerDes PLL reference clock range, the maximum SerDes line rate, and the maximum DAC sample frequency. Table 10 through Table 22 lists the frame formats for each mode. In the frame format tables, i CH (N) [x:y] and q CH (N) [x:y] are bits x through y of the I and Q samples at time N of DUC channel CH. If [x..y] is not listed, the full sample is assumed. For example, i0(0)[15:8] are bits 15 – 8 of the I sample at time 0 of DUC #0, and q1(1) is the full Q sample at time 1 of DUC #1.

**Table 9. JESD204B Formats for DAC38RFxx**

| L-M-F-S-Hd<br>1 TX | L-M-F-S-Hd<br>2 TX | Frame<br>Format                        | Input<br>Resolutio<br>n | IQ pairs<br>per DAC | Interp | Input rate<br>max<br>(MSPS) | f <sub>DAC</sub> Max<br>(MSPS) | DAC38RF86,<br>DAC38RF87 | DAC38RF96,<br>DAC38RF97 |
|--------------------|--------------------|----------------------------------------|-------------------------|---------------------|--------|-----------------------------|--------------------------------|-------------------------|-------------------------|
| 82121              | NA                 | 1 TX:<br>Table 10                      | 16                      | 1                   | 6      | 1250                        | 7500                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 8      | 1125                        | 9000                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 12     | 750                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 16     | 562.5                       | 9000                           | √                       | √                       |
| 42111              | 84111              | 1 TX:<br>Table 11<br>2 TX:<br>Table 12 | 16                      | 1                   | 6      | 1250                        | 7500                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 8      | 1125                        | 9000                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 10     | 900                         | 9000                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 12     | 750                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 16     | 562.5                       | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 18     | 500                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 24     | 375                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 24     | 375                         | 9000                           | √                       | √                       |
| 22210              | 44210              | 1 TX:<br>Table 13<br>2 TX:<br>Table 14 | 16                      | 1                   | 8      | 625                         | 5000                           | √                       |                         |
|                    |                    |                                        | 16                      | 1                   | 12     | 625                         | 7500                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 16     | 562.5                       | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 18     | 500                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 20     | 450                         | 9000                           | √                       | √                       |
|                    |                    |                                        | 16                      | 1                   | 24     | 375                         | 9000                           | √                       | √                       |

| L-M-F-S-Hd<br>1 TX | L-M-F-S-<br>Hd<br>2 TX | Frame<br>Format                        | Input<br>Resolutio<br>n | IQ pairs<br>per DAC | Interp | Input rate<br>max<br>(MSPS) | f <sub>DAC</sub> Max<br>(MSPS) | DAC38RF86,<br>DAC38RF87 | DAC38RF96,<br>DAC38RF97 |
|--------------------|------------------------|----------------------------------------|-------------------------|---------------------|--------|-----------------------------|--------------------------------|-------------------------|-------------------------|
| 12410              | 24410                  | 1 TX:<br>Table 15<br>2 TX:<br>Table 16 | 16                      | 1                   | 16     | 312.5                       | 5000                           | √                       | √                       |
|                    |                        |                                        | 16                      | 1                   | 24     | 312.5                       | 7500                           | √                       | √                       |
| 44210              | 88210                  | 1 TX:<br>Table 17<br>2 TX:<br>Table 18 | 16                      | 2                   | 8      | 625                         | 5000                           | √                       |                         |
|                    |                        |                                        | 16                      | 2                   | 12     | 625                         | 7500                           | √                       |                         |
|                    |                        |                                        | 16                      | 2                   | 16     | 562.5                       | 9000                           | √                       |                         |
|                    |                        |                                        | 16                      | 2                   | 24     | 375                         | 9000                           | √                       |                         |
| 24410              | 48410                  | 1 TX:<br>Table 19<br>2 TX:<br>Table 20 | 16                      | 2                   | 16     | 312.5                       | 5000                           | √                       |                         |
|                    |                        |                                        | 16                      | 2                   | 24     | 312.5                       | 7500                           | √                       |                         |
| 24310              | 48310                  | 1 TX:<br>Table 21<br>2 TX:<br>Table 22 | 12                      | 2                   | 24     | 375                         | 9000                           | √                       |                         |

**Table 10. JESD204B Frame Format for LMFSHd = 82121**

|           |          |    |
|-----------|----------|----|
| # un bits | 4        | 8  |
| # en bits | 5        | 10 |
| Nibble    | 1        | 2  |
| lane RX0  | i0[15:8] |    |
| lane RX1  | i0[7:0]  |    |
| lane RX2  | i1[15:8] |    |
| lane RX3  | i1[7:0]  |    |
| lane RX4  | q0[15:8] |    |
| lane RX5  | q0[7:0]  |    |
| lane RX6  | q1[15:8] |    |
| lane RX7  | q1[7:0]  |    |

**Table 11. JESD204B Frame Format for LMFSHd = 42111**

|           |          |    |
|-----------|----------|----|
| # un bits | 4        | 8  |
| # en bits | 5        | 10 |
| Nibble    | 1        | 2  |
| lane RX0  | i0[15:8] |    |
| lane RX1  | i0[7:0]  |    |
| lane RX2  | q0[15:8] |    |
| lane RX3  | q0[7:0]  |    |

**Table 12. JESD204B Frame Format for LMFSHd = 84111**

|           |                           |    |
|-----------|---------------------------|----|
| # un bits | 4                         | 8  |
| # en bits | 5                         | 10 |
| Nibble    | 1                         | 2  |
| lane RX0  | A-i0[15:8] <sup>(1)</sup> |    |
| lane RX1  | A-i0[7:0] <sup>(2)</sup>  |    |
| lane RX2  | A-q0[15:8]                |    |
| lane RX3  | A-q0[7:0]                 |    |
| lane RX4  | B-i0[15:8]                |    |

(1) DAC A, I sample 0, MSB byte

(2) DAC A, I sample 0, LSB byte

**Table 12. JESD204B Frame Format for LMFSHd = 84111 (continued)**

|          |            |
|----------|------------|
| lane RX5 | B-i0[7:0]  |
| lane RX6 | B-q0[15:8] |
| lane RX7 | B-q0[7:0]  |

**Table 13. JESD204B Frame Format for LMFSHd = 22210**

|           |    |    |    |    |
|-----------|----|----|----|----|
| # un bits | 4  | 8  | 12 | 16 |
| # en bits | 5  | 10 | 15 | 20 |
| Nibble    | 1  | 2  | 3  | 4  |
| lane RX0  | i0 |    |    |    |
| lane RX1  | q0 |    |    |    |

**Table 14. JESD204B Frame Format for LMFSHd = 44210**

|           |                     |    |    |    |
|-----------|---------------------|----|----|----|
| # un bits | 4                   | 8  | 12 | 16 |
| # en bits | 5                   | 10 | 15 | 20 |
| Nibble    | 1                   | 2  | 3  | 4  |
| lane RX0  | A-i0 <sup>(1)</sup> |    |    |    |
| lane RX1  | A-q0                |    |    |    |
| lane RX2  | B-i0                |    |    |    |
| lane RX3  | B-q0                |    |    |    |

(1) DAC A, I sample 0

**Table 15. JESD204B Frame Format for LMFSHd = 12410**

|           |    |    |    |    |    |    |    |    |
|-----------|----|----|----|----|----|----|----|----|
| # un bits | 4  | 8  | 12 | 16 | 20 | 24 | 28 | 32 |
| # en bits | 5  | 10 | 15 | 20 | 25 | 30 | 35 | 40 |
| Nibble    | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  |
| lane RX0  | i0 |    |    |    | q0 |    |    |    |

**Table 16. JESD204B Frame Format for LMFSHd = 24410**

|           |                     |    |    |    |      |    |    |    |
|-----------|---------------------|----|----|----|------|----|----|----|
| # un bits | 4                   | 8  | 12 | 16 | 20   | 24 | 28 | 32 |
| # en bits | 5                   | 10 | 15 | 20 | 25   | 30 | 35 | 40 |
| Nibble    | 1                   | 2  | 3  | 4  | 5    | 6  | 7  | 8  |
| lane RX0  | A-i0 <sup>(1)</sup> |    |    |    | A-q0 |    |    |    |
| lane RX1  | B-i0                |    |    |    | B-q0 |    |    |    |

(1) DAC A, I sample 0

**Table 17. JESD204B Frame Format for LMFSHd = 44210**

|           |                      |    |    |    |
|-----------|----------------------|----|----|----|
| # un bits | 4                    | 8  | 12 | 16 |
| # en bits | 5                    | 10 | 15 | 20 |
| Nibble    | 1                    | 2  | 3  | 4  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    |    |
| lane RX1  | A1-q0 <sup>(2)</sup> |    |    |    |
| lane RX2  | A2-i0                |    |    |    |
| lane RX3  | A2-q0                |    |    |    |

(1) DAC A, MultiDUC 1, I sample 0

(2) DAC A, MultiDUC 2, I sample 0

**Table 18. JESD204B Frame Format for LMFSHd = 88210**

|           |                      |    |    |    |
|-----------|----------------------|----|----|----|
| # un bits | 4                    | 8  | 12 | 16 |
| # en bits | 5                    | 10 | 15 | 20 |
| Nibble    | 1                    | 2  | 3  | 4  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    |    |
| lane RX1  | A1-q0                |    |    |    |
| lane RX2  | A2-i0                |    |    |    |
| lane RX3  | A2-q0                |    |    |    |
| lane RX4  | B1-i0                |    |    |    |
| lane RX5  | B1-q0                |    |    |    |
| lane RX6  | B2-i0                |    |    |    |
| lane RX7  | B1-q0                |    |    |    |

(1) DAC A, MultiDUC 1, I sample 0

**Table 19. JESD204B Frame Format for LMFSHd = 24410**

|           |                      |    |    |    |       |    |    |    |
|-----------|----------------------|----|----|----|-------|----|----|----|
| # un bits | 4                    | 8  | 12 | 16 | 20    | 24 | 28 | 32 |
| # en bits | 5                    | 10 | 15 | 20 | 25    | 30 | 35 | 40 |
| Nibble    | 1                    | 2  | 3  | 4  | 5     | 6  | 7  | 8  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    |    | A1-q0 |    |    |    |
| lane RX1  | A2-i0                |    |    |    | A2-q0 |    |    |    |

(1) DAC A, MultiDUC 1, I sample 0

**Table 20. JESD204B Frame Format for LMFSHd = 48410**

|           |                      |    |    |    |       |    |    |    |
|-----------|----------------------|----|----|----|-------|----|----|----|
| # un bits | 4                    | 8  | 12 | 16 | 20    | 24 | 28 | 32 |
| # en bits | 5                    | 10 | 15 | 20 | 25    | 30 | 35 | 40 |
| Nibble    | 1                    | 2  | 3  | 4  | 5     | 6  | 7  | 8  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    |    | A1-q0 |    |    |    |
| lane RX1  | A2-i0                |    |    |    | A2-q0 |    |    |    |
| lane RX2  | B1-i0                |    |    |    | B1-q0 |    |    |    |
| lane RX3  | B2-i0                |    |    |    | B2-q0 |    |    |    |

(1) DAC A, MultiDUC 1, I sample 0

**Table 21. JESD204B Frame Format for LMFSHd = 24310**

|           |                      |    |    |       |    |    |
|-----------|----------------------|----|----|-------|----|----|
| # un bits | 4                    | 8  | 12 | 16    | 20 | 24 |
| # en bits | 5                    | 10 | 15 | 20    | 25 | 30 |
| Nibble    | 1                    | 2  | 3  | 4     | 5  | 6  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    | A1-q0 |    |    |
| lane RX1  | A2-i0                |    |    | A2-q0 |    |    |

(1) DAC A, MultiDUC 1, I sample 0

**Table 22. JESD204B Frame Format for LMFSHd = 48310**

|           |                      |    |    |       |    |    |
|-----------|----------------------|----|----|-------|----|----|
| # un bits | 4                    | 8  | 12 | 16    | 20 | 24 |
| # en bits | 5                    | 10 | 15 | 20    | 25 | 30 |
| Nibble    | 1                    | 2  | 3  | 4     | 5  | 6  |
| lane RX0  | A1-i0 <sup>(1)</sup> |    |    | A1-q0 |    |    |
| lane RX1  | A2-i0                |    |    | A2-q0 |    |    |
| lane RX2  | B1-i0                |    |    | B1-q0 |    |    |
| lane RX3  | B2-i0                |    |    | B2-q0 |    |    |

(1) DAC A, MultiDUC 1, I sample 0

### 8.3.7 SYNC Interface

The DAC38RFxx JESD204B interface has two differential  $\overline{\text{SYNC}}$  outputs called  $\overline{\text{SYNC0}}$  and  $\overline{\text{SYNC1}}$  to support one or two links. Alternatively, GPO0 and GPO1 can be used to output SYNC as a single-ended CMOS level. Each of the differential or CMOS outputs is enabled by a 2-bit register (fields GPO0\_SEL, GPO1\_SEL, SYNC0B\_SEL, SYNC1B\_SEL in register IO\_CONFIG 8.5.2), with bit 0 enabling multi-DUC1  $\overline{\text{SYNC}}$  and bit 1 enabling multi-DUC2  $\overline{\text{SYNC}}$ . If both are enabled, the SYNC\ signals are OR'ed.

The  $\overline{\text{SYNC}}$  signal can be asserted low by the receiver either to make a synchronization request to initialize/reinitialize the link or to report an error to the transmitter. Synchronization requests must have a minimum duration of five frames plus nine octets rounded up to the nearest whole number of frames. To report an error, the SYNC signal is asserted for exactly two frames. The transmitter interprets any negative edge of its  $\overline{\text{SYNC}}$  input as an error and any  $\overline{\text{SYNC}}$  assertion lasting four frames or longer as a synchronization request. See the following sections in the standard for more details.

- 7.6.3 Errors requiring re-initialization
- 7.6.4 Error reporting via  $\overline{\text{SYNC}}$  interface
- 8.4  $\overline{\text{SYNC}}$  signal decoding

### 8.3.8 Single or Dual Link Configuration

The DAC38RFxx JESD204B interface can be configured with one or two links. The advantage of using two links, one for each DAC, is that one link can be re-established without affecting the other link and DAC.

The configuration for each mode of operation are:

1. Dual DAC, dual link
  - a. Program fields OCTETPATH0\_SEL to OCTETPATH7\_SEL in multi-DUC paged registers JESD\_CROSSBAR1 (8.5.57) and JESD\_CROSSBAR2 (8.5.58) so that each multi-DUC will pick data off of the appropriate SerDes lane.
  - b. Appropriate bits in field LANE\_ENA in multi-DUC paged register JESD\_LN\_EN (8.5.45) must be set for each multi-DUC enable the lanes used.
  - c. Field ONE\_DAC\_ONLY in register RESET\_CONFIG (8.5.1) should be '0' (default).
2. Dual DAC, single link
  - a. Program OCTETPATH0\_SEL to OCTETPATH7\_SEL in multi-DUC paged registers JESD\_CROSSBAR1 (8.5.57) and JESD\_CROSSBAR2 (8.5.58) so that each multi-DUC will pick data off the appropriate SerDes lane.
  - b. Appropriate bits in field LANE\_ENA in multi-DUC paged register JESD\_LN\_EN (8.5.45) must be set for each multi-DUC enable the lanes used.
  - c. Set field ONE\_LINK\_ONLY to '1' to configure TXENABLE output.
3. Single DAC, single link
  - a. Set Field ONE\_DAC\_ONLY in register RESET\_CONFIG (8.5.1) to '1' to gate clocks to unused multi-DUC2 for power savings.
  - b. ONE\_LINK\_ONLY bit does not matter in this case.

### 8.3.9 Multi-Device Synchronization

In many applications, such as multi antenna systems where the various transmit channels information is correlated, it is required that the latency across the link is deterministic and multiple DAC devices are completely synchronized such that their outputs are phase aligned. The DAC38RFxx achieves the deterministic latency using SYSREF (JESD204B Subclass 1).

SYSREF is generated from the same clock domain as DACCLK. After having resynchronized its local multiframe clock (LMFC) to SYSREF, the DAC will request a link re-initialization via SYNC interface. Processing of the signal on the SYSREF input can be enabled and disabled via the SPI interface.

The SYSREF capture circuit and the timing requirements relative to device clock are described in [SYSREF Capture Circuit](#).

### 8.3.10 SYSREF Capture Circuit

The JESD204B standard for Device Subclass 1 introduces a SYSREF signal that can be used as a global timing reference to align the phase of the internal local multiframe clock (LMFC) and frame clock across multiple devices. This allows the system to achieve deterministic latency and align data samples across several data converters. The SYSREF signal accomplishes this goal by identifying a device clock edge for each chip that can be used as an alignment reference. In particular, the LMFC and frame clock align to the device clock edge upon which the SYSREF transition from “0” to “1” is sampled. SYSREF may be periodic, one-shot, or “gapped” periodic and its period must be a multiple of the LMFC period.

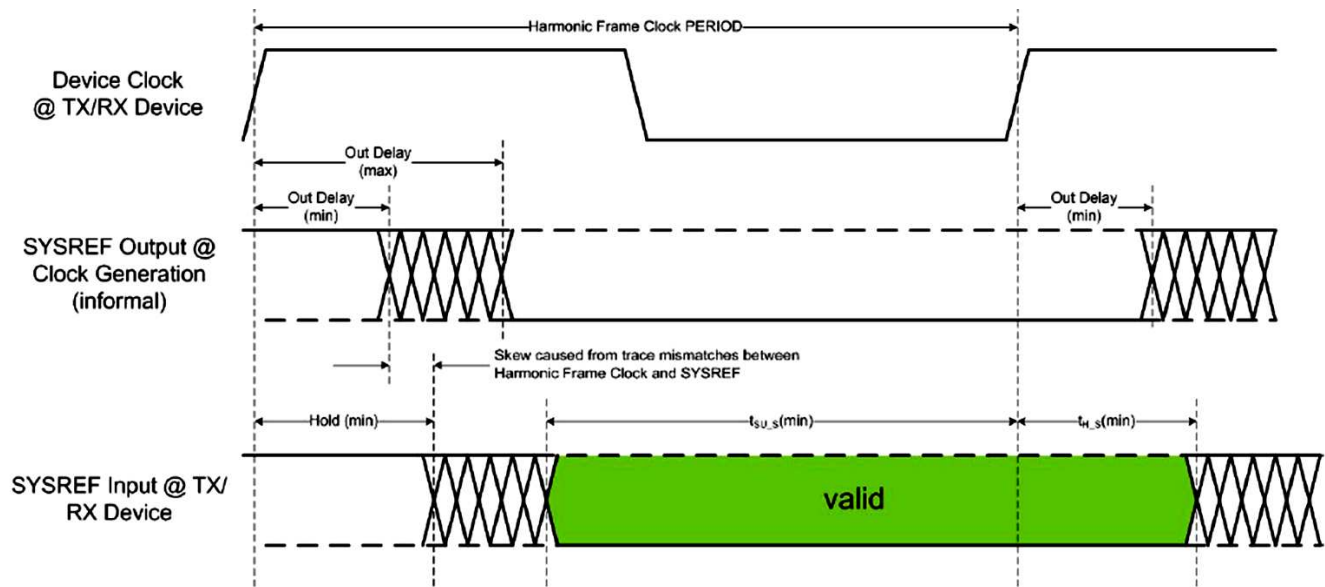


Figure 38. SYSREF Signal Timing

With high-speed device clocks, the phase of the SYSREF signals relative to the device clock must meet the setup/hold time requirements of each individual device clock. Historically, this has been done by controlling the board-level routing delay and/or employing commercial clock distribution capable of generating device clocks and SYSREF signals with programmable delays and with the option of splitting SYSREF into multiple SYSREFS, each with its own fine-tuned delay. Since the DAC38RFxx family supports device clock frequencies up to 9 GHz, a SYSREF capture circuit is included in the DAC38RFxx that allows a relaxation in meeting the device clock setup and hold.

The SYSREF capture circuit provides:

- tolerance to manufacturing and environmental variations in SYSREF phase
- immunity to sampling errors due to setup/hold/meta-stability
- information about phase of SYSREF relative to DAC clock inside the data converter
- software compensation for phase misalignment due to PCB design errors

The concepts behind the SYSREF capture scheme are illustrated in [Figure 39](#).

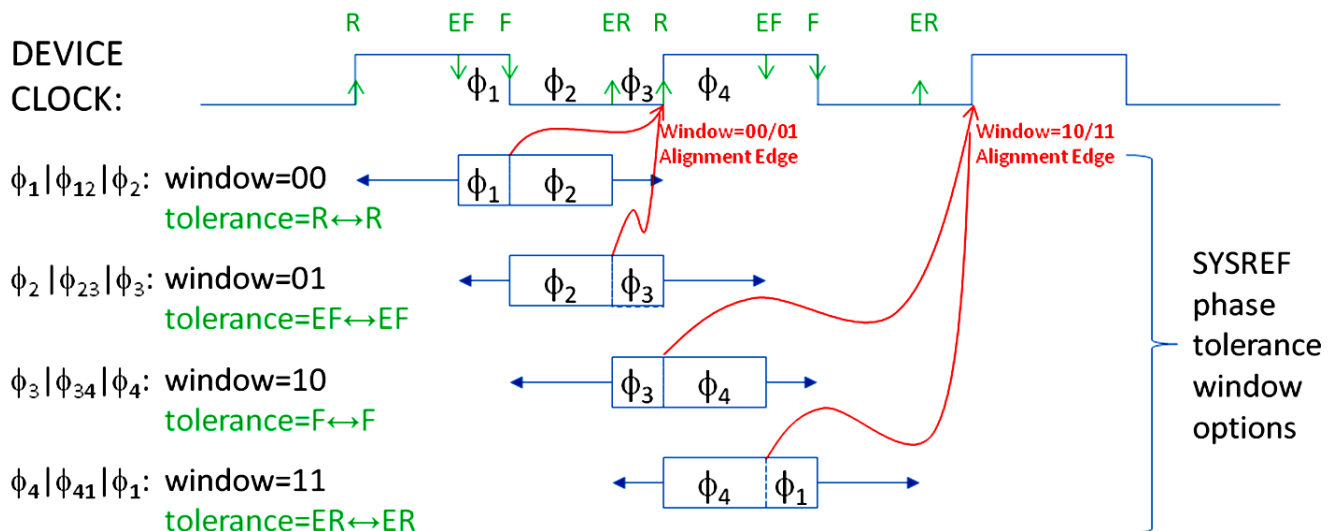


Figure 39. SYSREF Capture Strategy and Phase Tolerance Windows

To understand Figure 39, to begin with we'll ignore the SYSREF phase tolerance windows in the lower portion of the figure and focus on the blue clock waveform at the top of the figure. This waveform represents the device clock input to a particular DAC chip. The green arrows, labeled "R" and "F", correspond to the rising and falling edges of this clock (ignoring for the moment the additional arrows labeled "ER" and "EF"). Lower frequency devices captured SYSREF only on the rising edge of the device clock, the new scheme samples SYSREF on the falling edge as well, which provides more flexibility when optimizing the setup and hold time of the SYSREF capture path. Moreover, each time a rising SYSREF edge is captured, the chip remembers the clock phase during which the event occurred, and the system designer can later read back the phase information to observe the SYSREF timing relative to the device clock at the internal capture point. If SYSREF transitions close to the rising or falling clock edge sampling points the capture flop setup and hold time may not be met and the observed phase may be unreliable and subject to meta-stability phenomenon.

To reduce the sensitivity to setup/hold/meta-stability concerns an "early" version of the device clock is generated within the DAC and additional SYSREF samples are taken at the "early falling" and "early rising" edges of the clock (labeled "EF" and "ER", respectively, in Figure 39). The resulting set of four samples is used to narrow down the timing of the rising SYSREF edge to one of four possible clock phases. If the rising SYSREF transition takes place between the "EF" and "F" samples, then SYSREF is said to occur in phase 01. Similarly, if it takes place between the "F" and "ER" samples, then it is said to occur in phase 02. If SYSREF transitions between the "ER" and "R" samples, then it is said to occur in phase 03. And, finally, if the SYSREF rising edge event happens between the "R" and "EF" samples, then it is said to occur in phase 04. As mentioned before, the chip remembers all observed SYSREF phases and the user can later read them back. Since the delay between "early" and "on time" versions of the clock is intentionally chosen to be larger than the setup/hold/meta-stability window, at most one of the four samples can be affected even when the SYSREF transitions right at one of the four sampling points. Thus, the uncertainty in the observed SYSREF timing is limited to adjacent phases, and with twice as many sampling phases the resolution of the timing information is improved by a factor of two.


Referring to the lower portion of Figure 39, the user can now see how this information regarding the observed SYSREF phases is used to devise a reliable SYSREF capture methodology with a high degree of tolerance to manufacturing and environmental variations in SYSREF phase. Based on the SYSREF phases observed for a particular DAC chip during system characterization, the system designer can select one of four so-called "phase tolerance window" options (denoted "00", "01", "10", and "11") to maximize immunity to manufacturing and environmental variations. For example, consider the default phase tolerance window labeled "window=00" in the figure. If, during characterization, the system designer observes (by reading back the recorded phase observations) that the rising SYSREF edge nominally occurs in either 01 or 02 or both (i.e. 012) then he would

program that particular DAC chip to use phase tolerance window “00”. This mapping is indicated in the figure with the label “ $\phi_1|\phi_{12}|\phi_2$ : window=00”. Having programmed the device to use window “00”, all future SYSREF events that occur in  $\phi_1$  or  $\phi_2$  would trigger the LMFC and frame clock to be aligned using the following rising clock edge as the alignment reference (as indicated by the red arrow pointing to rising clock edge “R” and labeled “Window=00/01 alignment edge”).

The full extent of each phase tolerance window is indicated in the figure using “box and whisker” plots. For the “window=00” example, the “box” portion of the plot indicates that the phase tolerance window is centered on  $\phi_{12}$  (to be precise on the boundary between  $\phi_1$  and  $\phi_2$ ) and the “whisker” portion indicates that even if the rising edge of SYSREF occurs as early as the preceding  $\phi_4$  or as late as the following  $\phi_3$  it still results in LMFC and frame clock alignment to the same rising clock edge indicated by the red arrow labeled “Window=00/01 alignment edge”. When programmed for phase tolerance window “00”, the DAC chip is tolerant to variations in the SYSREF timing ranging from a rising SYSREF edge that occurs just after one rising edge of clock to just before the next rising edge of the clock. The qualifying phrases “just after” and “just before” are used here to indicate that the SYSREF transition must occur far enough away from the rising edges of the clock to avoid setup/hold violations and prevent the device from concluding that the SYSREF transition has crossed out off the phase tolerance window when in fact it has not. The tolerance range for window “00” is from rising clock edge to rising clock edge and is indicated in the figure by the green text labeled “tolerance =  $R \leftrightarrow R$ ”.

Following the above example, if characterization reveals SYSREF timing centered on  $\phi_{23}$  then phase tolerance window “01” (with tolerance for SYSREF rising edge events from EF to EF) should be chosen. Notice that this option is tolerant even to rising SYSREF edges that occur after the rising device clock edge (i.e. in  $\phi_4$ ) and will treat them just as if they had occurred in one of the earlier three phases, aligning to the same rising device clock edge indicated by the red arrow labeled “Window=00/01 Alignment Edge”. This allows the system designer to tolerate PCB design errors and/or environmental and manufacturing variations – achieving his intended alignment without having to make physical changes to the board to adjust the SYSREF timing.

Similarly, if characterization indicates that SYSREF timing is centered on  $\phi_{34}$  or  $\phi_{41}$  then phase tolerance window “10” or “11” can be selected, resulting in tolerance for “ $F \leftrightarrow F$ ” or “ $ER \leftrightarrow ER$ ” SYSREF timing, respectively. Note, however, that in these two cases the alignment reference edge is by default taken to be the subsequent rising edge of the device clock. Since this may not be the desired behavior, the DAC38RFxx allows the user to program in an optional alignment offset of  $\pm 1$  if the default offset of 0 does not achieve the desired alignment. This feature is illustrated in Figure 40 where the user can see that by setting the alignment offset to -1, phase tolerance windows “10” and “11” can be made to trigger alignment to the earlier rising device clock edge used by windows “00” and “01”. Alternatively, the window “00” and “01” alignment edge can be pushed one cycle later by setting their alignment offset to +1.

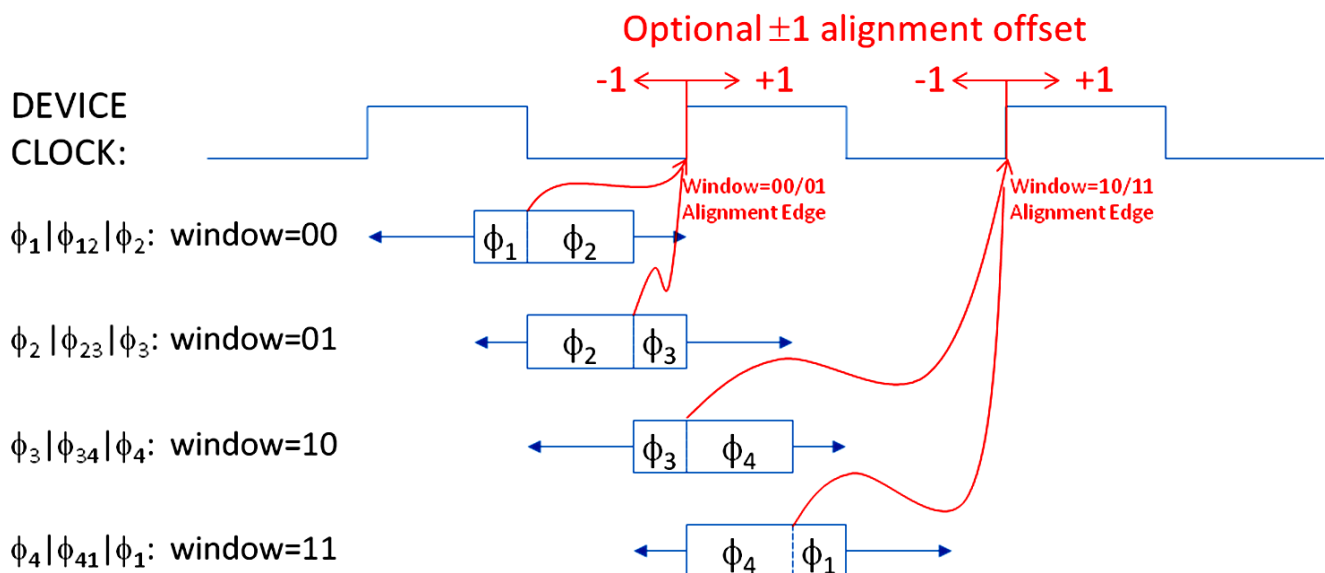

**Figure 40. Optional SYSREF Alignment Offset**

Several important controls related to SYSREF alignment and capture timing are contained in register `SYSR_CAPTURE` (8.5.78). For example, as mentioned before, the device is capable of monitoring the observed phases of the rising SYSREF edge events; however, in order to avoid unwanted noise coupling from the SYSREF circuits into the DAC output, the SYSREF monitoring circuits are disabled by default. Field `SYSR_STATUS_ENA` enables SYSREF status monitoring. Field `SYSR_PHASE_WDW` contains the phase tolerance window selected for normal operation, which is optimized during characterization. Field `SYSR_ALIGN_DLY` contains the control that allows the system designer to optionally offset the SYSREF alignment event by  $\pm 1$  device clock cycles. Field `SYSR_STATUS_ENA` enables the SYSREF capture alignment accumulation and will generate alarms when enabled. Writing a “1” to field `SYSR_ALIGN_SYNC` clears the accumulated SYSREF alignment statistics. The SYSREF alignment block can be bypassed completely by field `SYSREF_BYPASS_ALIGN`, in which case SYSREF is latched by the rising edge of `DACCLK`.

When field `SYSR_STATUS_ENA` is high the device records the phase associated with each SYSREF event for use in characterizing the SYSREF capture timing and selecting an appropriate phase tolerance window. The phase data is available in two forms. First, each of the four phases has a corresponding “sticky” alarm flag indicating which phases have been observed since the last time the register was cleared. In addition, the device also accumulates statistics on the relative number of occurrences of each phase spanning multiple SYSREF events using saturating 8-bit counters. These accumulated real-time SYSREF statistics allow us to account for time-varying effects during characterization such as potential timing differences between the 1st and Nth edges in a “gapped” SYSREF pulse train. The counters are fields `PHASE1_CNT` and `PHASE2_CNT` in register `SYSREF12_CNT` (8.5.10), `PHASE3_CNT` and `PHASE4_CNT` in register `SYSREF34_CNT` (8.5.11), and `ALIGN_TO_R1_CNT` and `ALIGN_TO_R3_CNT` in register `SYSREF_ALIGN_R` (8.5.9).

The accumulated SYSREF statistics can be cleared by writing ‘1’ to `SYSR_ALIGN_SYNC`. This sync signal affects only the SYSREF statistics monitors and does not cause a sync of any other portions of the design. Before collecting phase statistics, the user must first enable the SYSREF status monitoring logic by setting the `SYSR_STATUS_ENA` bit. The user must then generate a repeating SYSREF input before using `SYSR_ALIGN_SYNC` to clear the statistic counters. This is necessary to flush invalid data out of the status pipeline.

The “sticky” alarm flags indicating which of the four phases have been observed since the last `SYSR_ALIGN_SYNC` write of ‘1’ are fields `ALM_SYSRPHASE1` to `ALM_SYSRPHASE4` and are contained in the `ALM_SYSREF_DET` register (8.5.6).

### 8.3.11 JESD204B Subclass 0 support

Some functionality has been implemented to support Subclass 0 operation. Note that programming the `SUBCLASSV` configuration parameter has no functional impact on the logic. The value programmed for `SUBCLASSV` is only used in the initial lane alignment (ILA) sequence. The following configuration parameters are used to support Subclass 0 operation:

- Field `SYSREF_MODE` in register `JESD_SYSR_MODE` (8.5.56) = 0
- Field `DISABLE_ERR_RPT` in register `JESD_ERR_OUT` (8.5.53) = 1
- Field `MIN_LATENCY_ENA` in register `JESD_MATCH` (8.5.50) = 1

### 8.3.12 SerDes Test Modes through Serial Programming

The DAC38RFxx supports a number of basic pattern generation and verification of SerDes via the serial interface. Three pseudo random bit stream (PRBS) sequences are available, along with an alternating 0/1 pattern and a 20-bit user-defined sequence. The  $2^7 - 1$ ,  $2^{31} - 1$  or  $2^{23} - 1$  sequences implemented can often be found programmed into standard test equipment, such as a Bit Error Rate Tester (BERT). Pattern generation and verification selection is via field TESTPATT in register SRDS\_CFG1 (8.5.86), as shown in Table 23.

**Table 23. SerDes Test Pattern Selection**

| TESTPATT | EFFECT                                                                                                                                 |
|----------|----------------------------------------------------------------------------------------------------------------------------------------|
| 000      | Test mode disabled.                                                                                                                    |
| 001      | Alternating 0/1 Pattern. An alternating 0/1 pattern with a period of 2 UI.                                                             |
| 010      | Verify $2^7 - 1$ PRBS. Uses a 7-bit LFSR with feedback polynomial $x^7 + x^6 + 1$ .                                                    |
| 011      | Verify $2^{23} - 1$ PRBS. Uses an ITU O.150 conformant 23-bit LFSR with feedback polynomial $x^{23} + x^{18} + 1$ .                    |
| 100      | Verify $2^{31} - 1$ PRBS. Uses an ITU O.150 conformant 31-bit LFSR with feedback polynomial $x^{31} + x^{28} + 1$ .                    |
| 101      | User-defined 20-bit pattern. Uses the USR PATT IEEE1500 Tuning instruction field to specify the pattern. The default value is 0x66666. |
| 11x      | Reserved.                                                                                                                              |

Pattern verification compares the output of the serial to parallel converter with an expected pattern. When there is a mismatch, the TESTFAIL bit is driven high, which can be programmed to come out the ALARM terminal by setting field DTEST in register DTEST (8.5.76) to “0011”.

### 8.3.13 SerDes Test Modes through IEEE 1500 Programming

DAC38RFxx also provide a number of advanced diagnostic capabilities controlled by the IEEE 1500 interface. These are:

- Accumulation of pattern verification errors;
- The ability to map out the width and height of the receive eye, known as Eye Scan;
- Real-time monitoring of internal voltages and currents;

The SerDes blocks support the following IEEE1500 instructions:

**Table 24. IEEE1500 Instruction for SerDes Receivers**

| INSTRUCTION   | OPCODE | DESCRIPTION                                                                                                    |
|---------------|--------|----------------------------------------------------------------------------------------------------------------|
| ws_bypass     | 0x00   | Bypass. Selects a 1-bit bypass data register. Use when accessing other macros on the same IEEE1500 scan chain. |
| ws_cfg        | 0x35   | Configuration. Write protection options for other instructions.                                                |
| ws_core       | 0x30   | Core. Fields also accessible via dedicated core-side ports.                                                    |
| ws_tuning     | 0x31   | Tuning. Fields for fine tuning macro performance.                                                              |
| ws_debug      | 0x32   | Debug. Fields for advanced control, manufacturing test, silicon characterization and debug.                    |
| ws_unshadowed | 0x34   | Unshadowed. Fields for silicon characterization.                                                               |
| ws_char       | 0x33   | Char. Fields used for eye scan.                                                                                |

The data for each SerDes instruction is formed by chaining together sub-components called head, body (receiver or transmitter) and tail. DAC38RFxx uses two SerDes receiver blocks R0 and R1, each of which contains 4 receive lanes (channels), the data for each IEEE1500 instruction is formed by chaining {head, receive lane 0, receive lane 1, receive lane 2, receive lane 3, tail}. A description of bits in head, body and tail for each instruction is given as follows:

#### NOTE

All multi-bit signals in each chain are packed with bits reversed e.g. mpy[7:0] in ws\_core head subchain is packed as {retime, enpll, mpy[0:7], vrange, lb[0:1]}. All DATA REGISTER READS from SerDes Block R0 should read 1 bit more than the desired number of bits and discard the first bit received on TDO e.g., to read 40-bit data from R0 block, 41 bits should be read off from TDO and the first bit received should be discarded. Similarly, any data written to SerDes Block R0 Data Registers should be prefixed with an extra 0.

**Table 25. ws\_cfg Chain**

| FIELD                                 | DESCRIPTION                |
|---------------------------------------|----------------------------|
| HEAD (STARTING FROM THE MSB OF CHAIN) |                            |
| RETIME                                | No function.               |
| CORE_WE                               | Core chain write enable.   |
| RECEIVER (FOR EACH LANE 0, 1, 2, 3)   |                            |
| CORE_WE                               | Core chain write enable.   |
| TUNING_WE                             | Tuning chain write enable. |
| DEBUG_WE                              | Reserved.                  |
| CHAR_WE                               | Char chain write enable.   |
| UNSHADOWED_WE                         | Reserved.                  |
| TAIL (ENDING WITH THE LSB OF CHAIN)   |                            |
| CORE_WE                               | Core chain write enable.   |
| TUNING_WE                             | Tuning chain write enable. |
| DEBUG_WE                              | Reserved.                  |
| RETIME                                | No function.               |
| CHAIN LENGTH = 26 BITS                |                            |

**Table 26. ws\_core Chain**

| FIELD                                 | DESCRIPTION                                          |
|---------------------------------------|------------------------------------------------------|
| HEAD (STARTING FROM THE MSB OF CHAIN) |                                                      |
| RETIME                                | No function.                                         |
| ENPLL                                 | PLL enable.                                          |
| MPY[7:0]                              | PLL multiply.                                        |
| VRANGE                                | VCO range.                                           |
| ENDIVCLK                              | Enable DIVCLK output                                 |
| LB[1:0]                               | Loop bandwidth                                       |
| RECEIVER (FOR EACH LANE 0,1,2,3)      |                                                      |
| ENRX                                  | Receiver enable.                                     |
| SLEEPRX                               | Receiver sleep mode.                                 |
| BUSWIDTH[2:0]                         | Bus width.                                           |
| RATE[1:0]                             | Operating rate.                                      |
| INVPAIR                               | Invert polarity.                                     |
| TERM[2:0]                             | Termination.                                         |
| ALIGN[1:0]                            | Symbol alignment.                                    |
| LOS[2:0]                              | Loss of signal enable.                               |
| CDR[2:0]                              | Clock/data recovery.                                 |
| EQ[2:0]                               | Equalizer.                                           |
| EQHLD                                 | Equalizer hold.                                      |
| ENOC                                  | Offset compensation.                                 |
| LOOPBACK[1:0]                         | Loopback.                                            |
| BSINRXP                               | Boundary scan initialization.                        |
| BSINRXN                               | Boundary scan initialization.                        |
| RESERVED                              | Reserved.                                            |
| Testpatt[2:0]                         | Test pattern selection.                              |
| TESTFAIL                              | Test failure (real time).                            |
| LOSTDTC                               | Loss of signal detected (real time).                 |
| BSRXP                                 | Boundary scan data.                                  |
| BSRXN                                 | Boundary scan data.                                  |
| OCIP                                  | Offset compensation in progress.                     |
| EQOVER                                | Receiver signal over equalized.                      |
| EQUUNDER                              | Receiver signal under equalized.                     |
| LOSTDTC                               | Loss of signal detected (sticky).                    |
| SYNC                                  | Re-alignment done, or aligned comma output (sticky). |
| RETIME                                | No function.                                         |
| TAIL (ENDING WITH THE LSB CHAIN)      |                                                      |
| CLKBYP[1:0]                           | Clock bypass.                                        |
| SLEEPPLL                              | PLL sleep mode.                                      |
| RESERVED                              | Reserved.                                            |
| LOCK                                  | PLL lock (real time).                                |
| BSINITCLK                             | Boundary scan initialization clock.                  |
| ENBSTX                                | Enable TX boundary scan.                             |
| ENBSRX                                | Enable RX boundary scan.                             |
| ENBSPT                                | RX pulse boundary scan.                              |
| RESERVED                              | Reserved.                                            |
| NEARLOCK                              | PLL near to lock.                                    |
| UNLOCK                                | PLL lock (sticky).                                   |

**Table 26. ws\_core Chain (continued)**

| FIELD                   | DESCRIPTION              |
|-------------------------|--------------------------|
| CFG OVR                 | Configuration over-ride. |
| RETIME                  | No function.             |
| CHAIN LENGTH = 196 BITS |                          |

**Table 27. ws\_tuning Chain**

| FIELD                                 | DESCRIPTION                             |
|---------------------------------------|-----------------------------------------|
| HEAD (STARTING FROM THE MSB OF CHAIN) |                                         |
| RETIME                                | No function.                            |
| RECEIVER (FOR EACH LANE 0,1,2,3)      |                                         |
| PATTERRTHR[2:0]                       | Resync error threshold.                 |
| PATT TIMER                            | PRBS timer.                             |
| RXDSEL[3:0]                           | Status select.                          |
| ENCOR                                 | Enable clear-on-read for error counter. |
| EQZERO[4:0]                           | EQZ OVRi Equalizer zero.                |
| EQZ OVR                               | Equalizer zero over-ride.               |
| EQLEVEL[15:0]                         | EQ OVRi Equalizer gain observe or set.  |
| EQ OVR                                | Equalizer over-ride.                    |
| EQBOOST[1:0]                          | Equalizer gain boost.                   |
| RXASEL[2:0]                           | Selects amux output.                    |
| TAIL (ENDING WITH THE LSB CHAIN)      |                                         |
| ASEL[3:0]                             | Selects amux output.                    |
| USR PATT[19:0]                        | User-defined test pattern.              |
| RETIME                                | No function.                            |
| CHAIN LENGTH = 174 BITS               |                                         |

**Table 28. ws\_char Chain**

| FIELD                                 | DESCRIPTION                       |
|---------------------------------------|-----------------------------------|
| HEAD (STARTING FROM THE MSB OF CHAIN) |                                   |
| RETIME                                | No function.                      |
| RECEIVER (FOR EACH LANE 0,1,2,3)      |                                   |
| TESTFAIL                              | Test failure (sticky).            |
| ECOUNT[11:0]                          | Error counter.                    |
| ESWORD[7:0]                           | Eye scan word masking.            |
| ES[3:0]                               | Eye scan.                         |
| ESPO[6:0]                             | Eye scan phase offset.            |
| ES BIT SELECT[4:0]                    | Eye scan compare bit select.      |
| ESVO[5:0]                             | Eye scan voltage offset.          |
| ESVO OVR                              | Eye scan voltage offset override. |
| ESLEN[1:0]                            | Eye scan run length.              |
| ESRUN                                 | Eye scan run.                     |
| ESDONE                                | Eye scan done.                    |
| TAIL (ENDING WITH THE LSB CHAIN)      |                                   |
| RETIME                                | No function.                      |
| CHAIN LENGTH = 194 BITS               |                                   |

### 8.3.14 Error Counter

All receive channels include a 12-bit counter for accumulating pattern verification errors. This counter is accessible via the ECOUNT IEEE1500 Char field. It is an essential part of the eye scan capability (see the [Eye Scan](#) section).

The counter increments once for every cycle that the TESTFAIL bit is detected. The counter does not increment when at its maximum value (i.e., all 1s). When an IEEE1500 capture is performed, the count value is loaded into the ECOUNT scan elements (so that it can be scanned out), and the counter is then reset, provided NCOR is set high.

ECOUNT can be used to get a measure of the bit error rate. However, as the error rate increases, it becomes less accurate due to limitations of the pattern verification capabilities. Specifically, the pattern verifier checks multiple bits in parallel (as determined by the Rx bus width), and it is not possible to distinguish between 1 or more errors.

### 8.3.15 Eye Scan

All receive channels provide features which facilitate mapping the received data eye or extracting a symbol response. A number of fields accessible via the IEEE1500 Char scan chain allow the required low level data to be gathered. The process of transforming this data into a map of the eye or a symbol response must then be performed externally, typically in software.

The basic principle used is as follows:

- Enable dedicated eye scan input samplers, and generate an error when the value sampled differs from the normal data sample;
- Apply a voltage offset to the dedicated eye scan input samplers, to effectively reduce their sensitivity;
- Apply a phase offset to adjust the point in the eye that the dedicated eye scan data samples are taken;
- Reset the error counter to remove any false errors accumulated as a result of the voltage or phase offset adjustments;
- Run in this state for a period of time, periodically checking to see if any errors have occurred;
- Change voltage and/or phase offset, and repeat.

Alternatively, the algorithm can be configured to optimize the voltage offset at a specified phase offset, over a specified time interval.

Eye scan can be used in both synchronous and asynchronous systems, while receiving normal data traffic. The IEEE1500 Char fields used to directly control eye scan and symbol response extraction are ES, ESWORD, ES BIT SELECT, ELEN, ESPO, ESVO, ESVO OVR, ESRUN and ESDONE. Eye scan errors are accumulated in ECOUNT.

The required eyescan mode is selected via the ES field, as shown in [Table 29](#). When enabled, only data from the bit position within the 20-bit word specified via ES BIT SELECT is analyzed. In other words, only eye scan errors associated with data output at this bit position will accumulate in ECOUNT. The maximum legal ES BIT SELECT is 10011.

**Table 29. Eye Scan Mode Selection**

| ES[3:0]      | EFFECT                                                                                                                                                                         |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0000         | Disabled. Eye scan is disabled.                                                                                                                                                |
| 0x01         | Compare. Counts mismatches between the normal sample and the eye scan sample if ES[2] = 0, and matches otherwise.                                                              |
| 0x10         | Compare zeros. As ES = 0x01, but only analyses zeros, and ignores ones.                                                                                                        |
| 0x11         | Compare ones. As ES = 0x01, but only analyses ones, and ignores zeroes.                                                                                                        |
| 0100         | Count ones. Increments ECOUNT when the eye scan sample is a 1.                                                                                                                 |
| 1x00         | Average. Adjusts ESVO to the average eye opening over the time interval specified by ELEN. Analyses zeroes when ES[2] = 0, and ones when ES[2] = 1.                            |
| 1001<br>1110 | Outer. Adjusts ESVO to the outer eye opening (i.e. lowest voltage zero, highest voltage 1) over the time interval specified by ELEN. 1001 analyses zeroes, 1110 analyses ones. |
| 1010<br>1101 | Inner. Adjusts ESVO to the inner eye opening (i.e. highest voltage zero, lowest voltage 1) over the time interval specified by ELEN. 1010 analyses zeroes, 1101 analyses ones. |

**Table 29. Eye Scan Mode Selection (continued)**

| ES[3:0] | EFFECT                                                                                                                                        |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 1x11    | Timed Compare. As ES = 001x, but analyses over the time interval specified by ESLEN. Analyses zeroes when ES[2] = 0, and ones when ES[2] = 1. |

When ES[3] = 0, the selected analysis runs continuously. However, when ES[3] = 1, only the number of qualified samples specified by ESLED, as shown in [Table 30](#). In this case, analysis is started by writing a 1 to ESRUN (it is not necessary to set it back to 0). When analysis completes, ESDONE is set to 1.

**Table 30. Eye Scan Run Length**

| ESLen | NUMBER OF SAMPLES ANALYZED |
|-------|----------------------------|
| 00    | 127                        |
| 01    | 1023                       |
| 10    | 8095                       |
| 11    | 65535                      |

When ESVO OVR = 1, the ESVO field determines the amount of offset voltage that is applied to the eye scan data samplers associated with rxpi and rxni. The amount of offset is variable between 0 and 300 mV in increments of ~10 mV, as shown [Table 31](#). When ES[3] = 1, ESVO OVR must be 0 to allow the optimized voltage offset to be read back via ESVO.

**Table 31. Eye Scan Voltage Offset**

| ESVO   | OFFSET (mV) |
|--------|-------------|
| 100000 | -310        |
| ...    | ...         |
| 111110 | -20         |
| 111111 | -10         |
| 000000 | 0           |
| 000001 | 10          |
| 000010 | 20          |
| ...    | ...         |
| 011111 | 300         |

The phase position of the samplers associated with rxpi and rxni, is controlled to a precision of 1/32UI. When ES is not 00, the phase position can be adjusted forwards or backwards by more than one UI using the ESPO field, as shown in [Table 32](#). In normal use, the range should be limited to  $\pm 0.5$  UI (+15 to -16 phase steps).

**Table 32. Eye Scan Phase Offset**

| ESPO   | OFFSET (1/32 UI) |
|--------|------------------|
| 011111 | +63              |
| ...    | ...              |
| 000001 | +1               |
| 000000 | 0                |
| 111111 | -1               |
| ...    | ...              |
| 100000 | -64              |

### 8.3.16 JESD204B Pattern Test

The DAC38RFxx supports the following test patterns for JESD204B:

- Link layer test pattern by setting field JESD\_TEST\_SEQ in register JESD\_LN\_EN (8.5.45) and monitoring the lane alarms (1 = fail, 0 = pass)
  - Verify repeating /D.21.5/ high frequency pattern for random jitter (RJ)
  - Verify repeating /K.28.5/ mixed frequency pattern for deterministic jitter (DJ)
  - Verify repeating initial lane alignment (ILA) sequence
- RPAT, JSPAT or JTSPAT pattern can be verified using errors counter of 8b/10b errors produced over an amount of time to get an estimate of BER.
- Transport layer test pattern: implements a short transport layer pattern check based on F = 1, 2, 4 or 8. The short test pattern has a duration of one frame period and is repeated continuously for the duration of the test. Each sample has a unique value that can be identified with the position of the sample in the user data format. The sample values are such that correct sample values will never be decoded at the receiver if there is a mismatch between the mapping formats being used at the transmitter and receiver devices. This can generally be accomplished by ensuring there are no repeating sub patterns within the stream of samples being transmitted. Refer to the JESD204B standard section 5.1.6 for more details.

The DAC38RFxx expects the test samples, in a frame, transmitted by an logic device as per [Table 33](#):

**Table 33. Short Test Patterns**

| JESD Mode | i0                                                | q0         | i1   | q1   |
|-----------|---------------------------------------------------|------------|------|------|
| 82121     | 7CB8, F431                                        | 6DA9, E520 | n/a  | n/a  |
| 42111     | 7CB8                                              | F431       | n/a  | n/a  |
| 22210     | 7CB8                                              | F431       | n/a  | n/a  |
| 12410     | 7CB8                                              | F431       | n/a  | n/a  |
| 44210     | 7CB8                                              | F431       | 6DA9 | E520 |
| 24410     | 7CB8                                              | F431       | 6DA9 | E520 |
| 41121     | 7CB8, F431                                        | n/a        | n/a  | n/a  |
| 81180     | 7C00, B800, F400, 3100, 6D00,<br>A900, E500, 2000 | n/a        | n/a  | n/a  |
| 24310     | 7CB0                                              | F430       | 6DA0 | E520 |
| 41380     | 7CB0, F430, 6DA0, E520, F870,<br>E960, DA50, CB40 | n/a        | n/a  | n/a  |

The short test pattern has duration of one frame period and is repeated continuously for the duration of the test. Each sample has a unique value that can be identified with the position of the sample in the user data format. The sample values are such that correct sample values will never be decoded at the receiver if there is a mismatch between the mapping formats being used at the transmitter and receiver devices. This can generally be accomplished by ensuring there are no repeating sub patterns within the stream of samples being transmitted.

Following are the steps required to execute the short test functionality in DAC38RFxx.

1. Configure other registers, make sure clocks are up and running.
2. Start driving short test patterns
3. Clear short test alarm by writing '0' to field ALM\_FROM\_SHORTTEST in register ALM\_SYSREF\_PAP ([8.5.67](#)). This is a paged register, one for each Multi-DUC.
4. Enable short test by writing a '1' to field SHORTTEST\_ENA in register MULTIDUC\_CFG2 ([8.5.14](#)).
5. Read the short test alarm from field ALM\_FROM\_SHORTTEST in register ALM\_SYSREF\_PAP ([8.5.67](#)). This is a paged register, one for each Multi-DUC

If the alarm read from the register is high, the short test has detected an error.

### 8.3.17 Multiband DUC (multi-DUC)

Each DAC output in the DAC38RFxx is supported by a dual band digital upconverter (DUC), which is called a multi-DUC. [Figure 41](#) shows the signal processing features of each of the two multi-DUCs. The two paths are identical and independent. The SPI interface registers for the multi-DUCs are addressed through paging, with page 0 supporting multi-DUC1 and page 1 supporting multi-DUC2. Register PAGE\_SET ([8.5.8](#)) is used to set the pages. Both pages can be selected at the same time to program both multi-DUCs simultaneously with the same settings.

Each multi-DUC has 2 DUC channels, called path AB and path CD. The output of one multi-DUC can be added to the signal of the other multi-DUC to allow a configuration with 4 total DUCs summed together for 1 DAC. After quadrature modulation is a  $\sin(x)/x$  compensation filter, followed by the multiband summation block. The multiband summation block had the ability to add the signals from the other multi-DUC for a combined 4 DUCs, each with independent frequency control. The final block is an output delay block with 0 – 15 sample range.

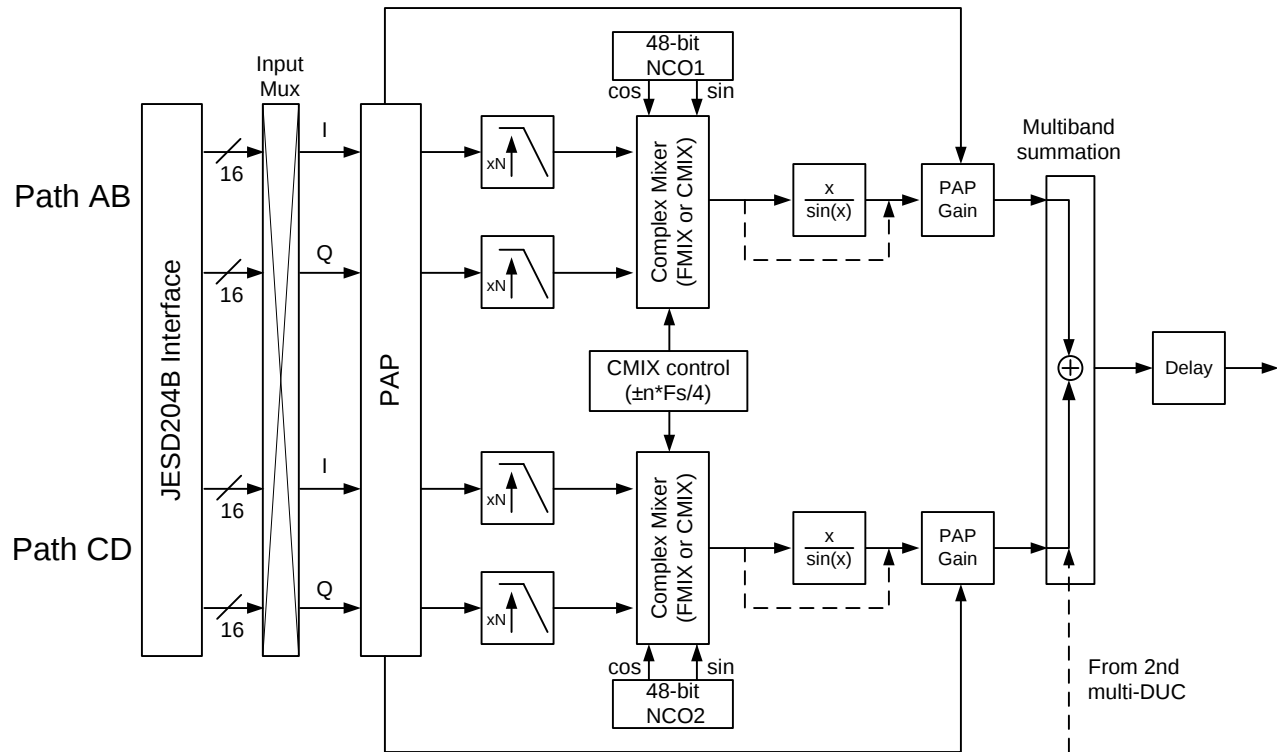


Figure 41. DAC38RFxx multi-DUC Signal Processing Block Diagram

### 8.3.17.1 Multi-DUC input

Each multi-DUC, accepts data from up to 8 SerDes lanes. A crossbar switch allows any SerDes lane to be mapped to any other SerDes lane. The crossbar switch is controlled by fields OCTETPATHx\_SEL (x = [0..7]) in Registers JESD\_CROSSBAR1 (8.5.57) and JESD\_CROSSBAR2 (8.5.58).

As shown in Table 9, the multiband DUC can be configured as either a single DUC with 1 IQ input, or a dual DUC with 2 IQ inputs, which is selected by asserting field DUAL\_IQ in register MULTIDUC\_CFG1 (8.5.13).


### 8.3.17.2 Interpolation Filters

The digital upconverter first increases the sample rate of the IQ signal from the input sample rate to the final DAC sample rate through a series of interpolation filters. Different sets of filters are used to achieve different rates, as shown in Table 34. The interpolation rate is selected by field INTERP in register MULTIDUC\_CFG1 (8.5.13).


Table 34. FIR filters Used for Different Interpolation Rates

| Interpolation Rate | FILTERS USED |           |           |           |           |           |           |
|--------------------|--------------|-----------|-----------|-----------|-----------|-----------|-----------|
|                    | FIR0 (2x)    | FIR1 (2x) | LPFIR0_5X | FIR2 (2x) | LPFIR0_3X | FIR3 (2x) | LPFIR1_3X |
| 6                  | x            |           |           |           | x         |           |           |
| 8                  | x            | x         |           | x         |           |           |           |
| 10                 | x            |           | x         |           |           |           |           |
| 12                 | x            | x         |           |           |           |           | x         |
| 16                 | x            | x         |           | x         |           | x         |           |
| 18                 | x            |           |           |           | x         |           | x         |
| 20                 | x            | x         | x         |           |           |           |           |
| 24                 | x            | x         |           | x         |           |           | x         |


The FIR filter coefficients are shown in [Table 35](#). The FIR filters are design with a passband BW of  $0.4 \times f_{\text{INPUT}}$ , a stopband attenuation of 90 dBc and ripple of  $< 0.001$  dB. The composite frequency response for each interpolation factor are shown in [Figure 42](#) to [Figure 49](#).

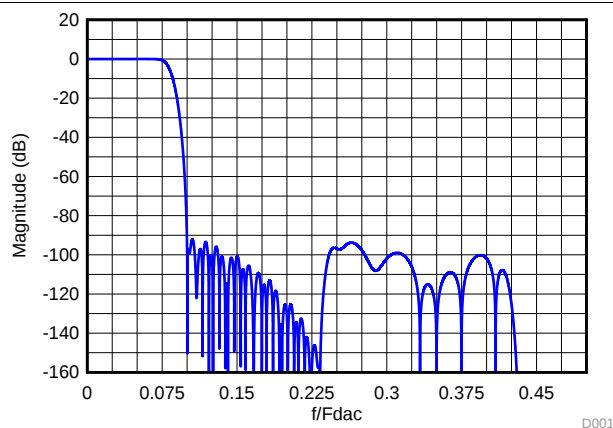


**Figure 42. Composite Magnitude Response for 6x Interpolation**

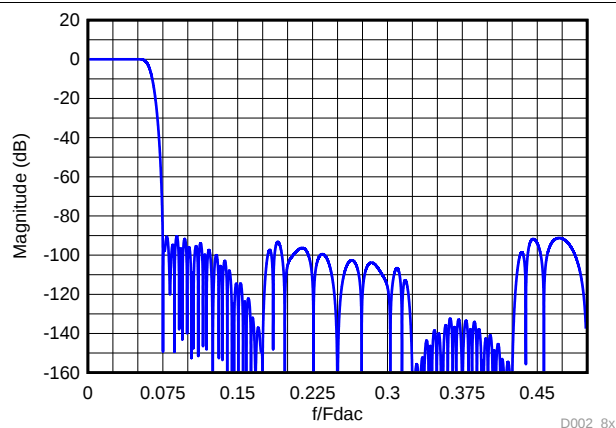


**Figure 43. Composite Magnitude Response for 8x Interpolation**

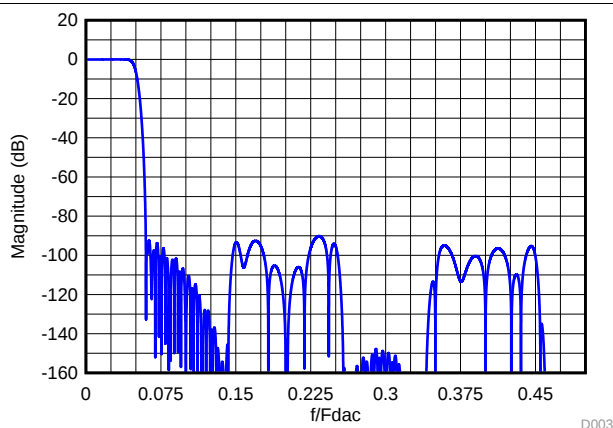


**Figure 44. Composite Magnitude Response for 10x Interpolation**

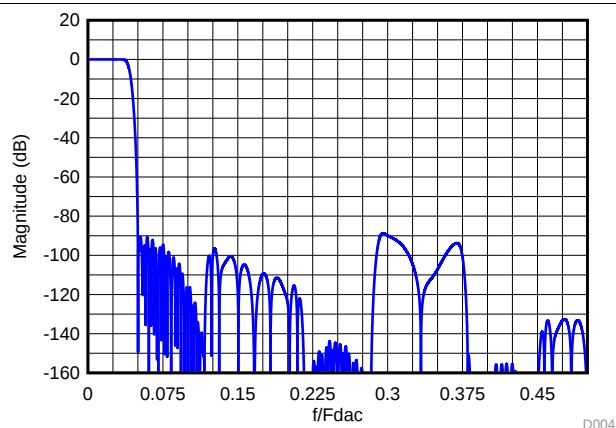


**Figure 45. Composite Magnitude Response for 12x Interpolation**

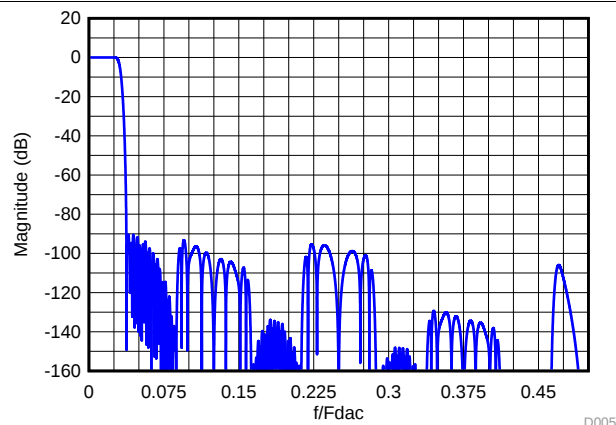


**Figure 46. Composite Magnitude Response for 16x Interpolation**

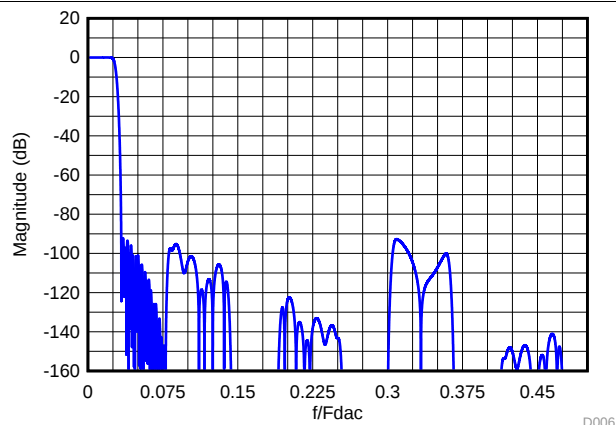

**Figure 47. Composite Magnitude Response for 18x Interpolation**

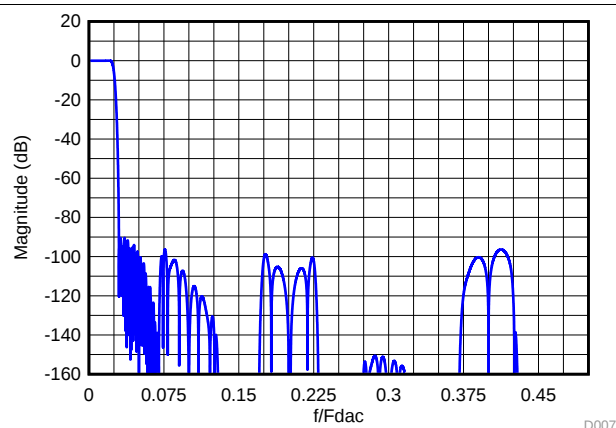

**Figure 48. Composite Magnitude Response for 20x Interpolation**

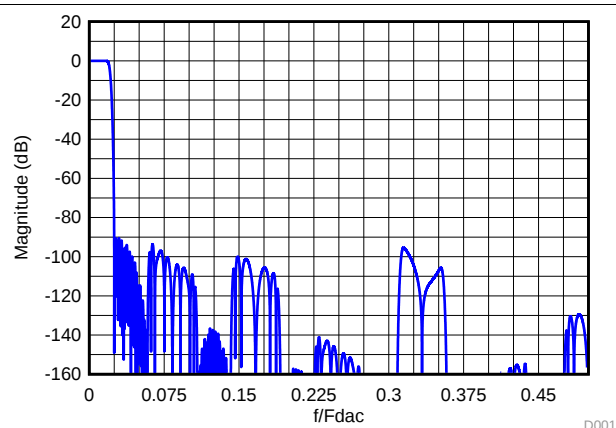

**Figure 49. Composite Magnitude Response for 24x Interpolation**

**Table 35. FIR Filter Coefficients**

| tap | FIR0 | FIR1  | LPFIR0_5X | FIR2 | LPFIR0_3X | FIR3 | LPFIR1_3X | INVSINC |
|-----|------|-------|-----------|------|-----------|------|-----------|---------|
| 1   | 6    | -12   | -6        | 29   | -14       | 3    | 25        | 1       |
| 2   | 0    | 0     | -22       | 0    | -61       | 0    | 88        | -4      |
| 3   | -19  | 84    | -51       | -214 | -125      | -25  | 22        | 13      |
| 4   | 0    | 0     | -89       | 0    | -95       | 0    | -576      | -50     |
| 5   | 47   | -336  | -117      | 1209 | 181       | 150  | -1764     | 592     |
| 6   | 0    | 0     | -106      | 2048 | 681       | 256  | -2263     | -50     |
| 7   | -100 | 1006  | -18       | 1209 | 972       | 150  | 491       | 13      |
| 8   | 0    | 0     | 171       | 0    | 347       | 0    | 8139      | -4      |
| 9   | 192  | -2691 | 449       | -214 | -1475     | -25  | 18625     | 1       |
| 10  | 0    | 0     | 745       | 0    | -3519     | 0    | 26365     |         |
| 11  | -342 | 10141 | 930       | 29   | -3528     | 3    | 26365     |         |
| 12  | 0    | 16384 | 841       |      | 707       |      | 18625     |         |
| 13  | 572  | 10141 | 338       |      | 9337      |      | 8139      |         |
| 14  | 0    | 0     | -618      |      | 19445     |      | 491       |         |
| 15  | -914 | -2691 | -1892     |      | 26299     |      | -2263     |         |
| 16  | 0    | 0     | -3147     |      | 26299     |      | -1764     |         |
| 17  | 1409 | 1006  | -3872     |      | 19445     |      | -576      |         |

**Table 35. FIR Filter Coefficients (continued)**

| tap | FIR0   | FIR1 | LPFIR0_5X | FIR2 | LPFIR0_3X | FIR3 | LPFIR1_3X | INVSINC |
|-----|--------|------|-----------|------|-----------|------|-----------|---------|
| 18  | 0      | 0    | -3500     |      | 9337      |      | 22        |         |
| 19  | -2119  | -336 | -1564     |      | 707       |      | 88        |         |
| 20  | 0      | 0    | 2121      |      | -3528     |      | 25        |         |
| 21  | 3152   | 84   | 7336      |      | -3519     |      |           |         |
| 22  | 0      | 0    | 13430     |      | -1475     |      |           |         |
| 23  | -4729  | -12  | 19426     |      | 347       |      |           |         |
| 24  | 0      |      | 24231     |      | 972       |      |           |         |
| 25  | 7420   |      | 26904     |      | 681       |      |           |         |
| 26  | 0      |      | 26904     |      | 181       |      |           |         |
| 27  | -13334 |      | 24231     |      | -95       |      |           |         |
| 28  | 0      |      | 19426     |      | -125      |      |           |         |
| 29  | 41527  |      | 13430     |      | -61       |      |           |         |
| 30  | 65536  |      | 7336      |      | -14       |      |           |         |
| 31  | 41527  |      | 2121      |      |           |      |           |         |
| 32  | 0      |      | -1564     |      |           |      |           |         |
| 33  | -13334 |      | -3500     |      |           |      |           |         |
| 34  | 0      |      | -3872     |      |           |      |           |         |
| 35  | 7420   |      | -3147     |      |           |      |           |         |
| 36  | 0      |      | -1892     |      |           |      |           |         |
| 37  | -4729  |      | -618      |      |           |      |           |         |
| 38  | 0      |      | 338       |      |           |      |           |         |
| 39  | 3152   |      | 841       |      |           |      |           |         |
| 40  | 0      |      | 930       |      |           |      |           |         |
| 41  | -2119  |      | 745       |      |           |      |           |         |
| 42  | 0      |      | 449       |      |           |      |           |         |
| 43  | 1409   |      | 171       |      |           |      |           |         |
| 44  | 0      |      | -18       |      |           |      |           |         |
| 45  | -914   |      | -106      |      |           |      |           |         |
| 46  | 0      |      | -117      |      |           |      |           |         |
| 47  | 572    |      | -89       |      |           |      |           |         |
| 48  | 0      |      | -51       |      |           |      |           |         |
| 49  | -342   |      | -22       |      |           |      |           |         |
| 50  | 0      |      | -6        |      |           |      |           |         |
| 51  | 192    |      |           |      |           |      |           |         |
| 52  | 0      |      |           |      |           |      |           |         |
| 53  | -100   |      |           |      |           |      |           |         |
| 54  | 0      |      |           |      |           |      |           |         |
| 55  | 47     |      |           |      |           |      |           |         |
| 56  | 0      |      |           |      |           |      |           |         |
| 57  | -19    |      |           |      |           |      |           |         |
| 58  | 0      |      |           |      |           |      |           |         |
| 59  | 6      |      |           |      |           |      |           |         |

### 8.3.17.3 JESD204B Modes, Interpolation and Clock phase Programming

Table 36 lists the register field values required for each JESD204B mode, interpolation mode and clock phase. The register field addresses are listed in Table 37.

**Table 36. Register Programming for JESD and Interpolation Mode**

| Mode                   |            | Register Field Programming |                 |                      |                          |               |               |               |               |    |                     |
|------------------------|------------|----------------------------|-----------------|----------------------|--------------------------|---------------|---------------|---------------|---------------|----|---------------------|
| L-M-F-S-Hd<br>1 TX/2TX | Inter<br>p | CLOCK<br>PHASES<br>(1-0)   | INTERP<br>(4-0) | CLKJESD_DIV<br>(3-0) | CLKJESD_OUT_DIV<br>(3-0) | L_M1<br>(4-0) | F_M1<br>(7-0) | M_M1<br>(7-0) | S_M1<br>(4-0) | HD | N_M1/N'_M1<br>(4-0) |
| 82121/NA               | 6          | 11                         | 00011           | 0110                 | 0011                     | 00111         | 0x00          | 0x01          | 00001         | 1  | 01111               |
|                        | 8          | 11                         | 00100           | 0111                 | 0100                     |               |               |               |               |    |                     |
|                        | 12         | 11                         | 00110           | 1010                 | 0110                     |               |               |               |               |    |                     |
|                        | 16         | 11                         | 01000           | 1011                 | 0111                     |               |               |               |               |    |                     |
| 42111/84111            | 6          | 10                         | 00011           | 0010                 | 0011                     | 00011         | 0x00          | 0x01          | 00000         | 1  | 01111               |
|                        | 8          | 11                         | 00100           | 0011                 | 0100                     |               |               |               |               |    |                     |
|                        | 10         | 11                         | 00101           | 0101                 | 0101                     |               |               |               |               |    |                     |
|                        | 12         | 11                         | 00110           | 0110                 | 0110                     |               |               |               |               |    |                     |
|                        | 16         | 11                         | 01000           | 0111                 | 0111                     |               |               |               |               |    |                     |
|                        | 18         | 11                         | 01001           | 1001                 | 1000                     |               |               |               |               |    |                     |
| 22210/44210            | 24         | 11                         | 01100           | 1010                 | 1010                     | 00001         | 0x01          | 0x01          | 00000         | 0  | 01111               |
|                        | 8          | 01                         | 00100           | 0001                 | 0100                     |               |               |               |               |    |                     |
|                        | 12         | 10                         | 00110           | 0010                 | 0110                     |               |               |               |               |    |                     |
|                        | 16         | 11                         | 01000           | 0011                 | 0111                     |               |               |               |               |    |                     |
|                        | 18         | 11                         | 01001           | 0100                 | 1000                     |               |               |               |               |    |                     |
| 12410/24410            | 20         | 11                         | 01010           | 0101                 | 1001                     | 00000         | 0x03          | 0x01          | 00000         | 0  | 01111               |
|                        | 24         | 11                         | 01100           | 0110                 | 1010                     |               |               |               |               |    |                     |
|                        | 16         | 01                         | 01000           | 0001                 | 0111                     |               |               |               |               |    |                     |
| 44210/88210            | 24         | 10                         | 00110           | 0110                 | 1010                     | 00011         | 0x01          | 0x03          | 00000         | 0  | 01111               |
|                        | 8          | 01                         | 00100           | 0001                 | 0100                     |               |               |               |               |    |                     |
|                        | 12         | 10                         | 00110           | 0010                 | 0110                     |               |               |               |               |    |                     |
|                        | 16         | 11                         | 01000           | 0011                 | 0111                     |               |               |               |               |    |                     |
| 24410/48410            | 24         | 11                         | 01100           | 0110                 | 1010                     | 00001         | 0x03          | 0x03          | 00000         | 0  | 01111               |
|                        | 16         | 01                         | 01000           | 0001                 | 0111                     |               |               |               |               |    |                     |
| 24310/48310            | 24         | 10                         | 01100           | 0010                 | 1010                     | 00001         | 0x02          | 0x03          | 00000         | 0  | 01011               |
|                        | 24         | 11                         | 01100           | 0011                 | 1010                     |               |               |               |               |    |                     |

**Table 37. Register Field Addresses for JESD204B Modes, Interpolation and Clock Phase Programming**

| Register Field Name | Register      | Register Address | Bit(s) | Hyperlink              |
|---------------------|---------------|------------------|--------|------------------------|
| INTERP              | MULTIDUC_CFG1 | 0x0A             | 12-8   | <a href="#">8.5.13</a> |
| CLKJESD_DIV         | SerDes_CLK    | 0x25             | 15-12  | <a href="#">8.5.28</a> |
| CLKJESD_OUT_DIV     |               |                  | 11-8   |                        |
| L_M1                | JESD_K_L      | 0x4C             | 4-0    | <a href="#">8.5.47</a> |
| F_M1                | JESD_RBD_F    | 0x4B             | 7-0    | <a href="#">8.5.46</a> |
| M_M1                | JESD_M_S      | 0x4D             | 15-8   | <a href="#">8.5.48</a> |
| S_M1                |               |                  | 4-0    |                        |
| HD                  | JESD_N_HD_SCR | 0x4E             | 6      | <a href="#">8.5.49</a> |
| N_M1                |               |                  | 4-0    |                        |
| N_M1' (NPRIME_M1)   |               |                  | 12-8   |                        |
| JESD_PHASE_MODE     | JESD_LN_EN    | 0x4A             | 1-0    | <a href="#">8.5.45</a> |

All registers are paged!

### 8.3.17.4 Digital Quadrature Modulator

Each DUC in the DAC38RFxx has digital quadrature modulator (DQM) blocks with independent Numerically Controlled Oscillators (NCO) that converts the complex input signal to a real signal with flexible frequency placement between 0 and  $f_{DAC}/2$ . The NCOs are enabled by fields NCOAB\_ENA and NCOCD\_ENA in register MULTIDUC\_CFG2 (8.5.14). The NCOs have 48-bit frequency registers (FREQ\_NCOAB (8.5.25) and FREQ\_NCOCD (8.5.26)) and 16-bit phase registers (PHASE\_NCOAB (8.5.23) and PHASE\_NCOCD (8.5.24)) that generate the sine and cosine terms for the complex mixing. The NCO block diagram is shown in Figure 50.

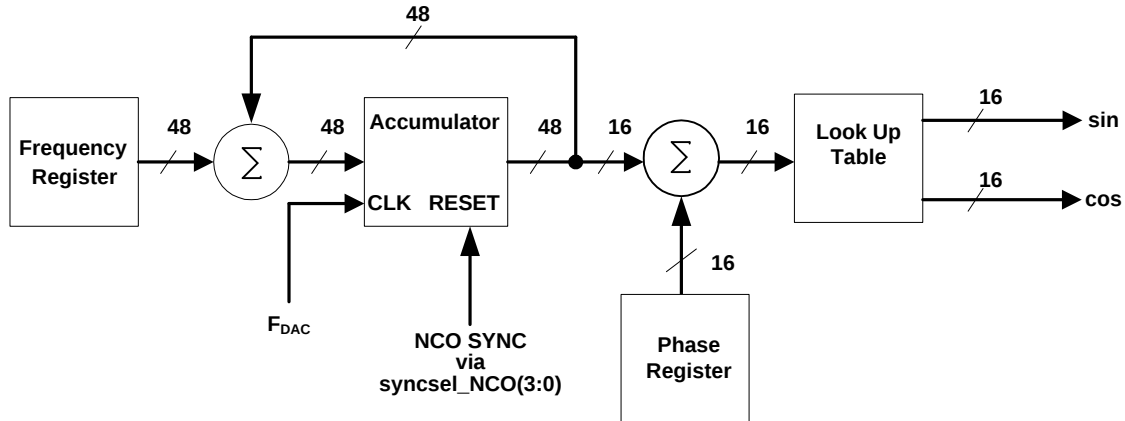


Figure 50. NCO Block Diagram

Synchronization of the NCOs occurs by resetting the NCO accumulators to zero. The synchronization source is selected by fields SYNCSEL\_NCOAB and SYNCSEL\_NCOCD in register SYNCSEL1 (8.5.29). The frequency word in the FREQ\_NCOAB and FREQ\_NCOCD registers are added to the accumulators every clock cycle,  $f_{DAC}$ .

The frequency and phase offset of the NCOs are:

$$f_{NCOAB(or CD)} = \frac{FREQ\_NCOAB(or CD) \times f_{DAC}}{2^{48}} \quad (1)$$

$$\delta_{AB(or CD)} = 2\pi \times \frac{PHASE\_NCOAB(or CD)}{2^{16}} \quad (2)$$

Treating the complex channels as complex vectors of the form  $I + jQ$ , the output of the DQM is:

$$Output_{AB} = \{I_{INPUTAB} \times \cos(2\pi f_{NCOAB}t + \delta_{AB}) - Q_{INPUTAB} \times \sin(2\pi f_{NCOAB}t + \delta_{AB})\} \times 2^{(MIXERAB\_GAIN-1)} \quad (3)$$

$$Output_{CD} = \{I_{INPUTCD} \times \cos(2\pi f_{NCOCD}t + \delta_{CD}) - Q_{INPUTCD} \times \sin(2\pi f_{NCOCD}t + \delta_{CD})\} \times 2^{(MIXERCD\_GAIN-1)} \quad (4)$$

Where  $t$  is the time since the last resetting of the NCO accumulator and the fields MIXERAB\_GAIN and MIXERCD\_GAIN in register MULTIDUC\_CFG2 (8.5.13) are either 0 or 1.

The maximum output amplitude of the DQM occurs if  $I_{IN}(t)$  and  $Q_{IN}(t)$  are simultaneously full scale amplitude and the sine and cosine arguments are equal to an integer multiple of  $\pi/4$ .

With MIXERAB\_GAIN or MIXERCD\_GAIN = 0, the gain through the DQM is  $\sqrt{2}/2$  or -3 dB. This loss in signal power is in most cases undesirable, and it is recommended that the gain function be used to increase the signal by 3 dB to compensate. With MIXERAB\_GAIN or MIXERCD\_GAIN = 1, the gain through the DQM is  $\sqrt{2}$  or +3 dB, which can cause clipping of the signal if  $I_{IN}(t)$  and  $Q_{IN}(t)$  are simultaneously near full scale amplitude and should therefore be used with caution.

### 8.3.17.5 Low Power Coarse Resolution Mixing Modes

In addition to the NCO the DAC38RFxx also has a coarse mixer block capable of shifting the input signal spectrum by the fixed mixing frequencies  $\pm N \times f_{DAC}/8$ . Using the coarse mixer instead of the full mixers will result in lower power consumption.

Treating the two complex channels as complex vectors of the form  $I(t) + jQ(t)$ , the outputs of the coarse mixer is equivalent to:

$$\text{Output}_{AB} = I_{\text{INPUTAB}} \times \cos(2\pi f_{\text{CMIX\_AB}} t) - Q_{\text{INPUTAB}} \times \sin(2\pi f_{\text{CMIX\_AB}} t) \quad (5)$$

$$\text{Output}_{CD} = I_{\text{INPUTCD}} \times \cos(2\pi f_{\text{CMIX\_CD}} t) - Q_{\text{INPUTCD}} \times \sin(2\pi f_{\text{CMIX\_CD}} t) \quad (6)$$

Where  $f_{\text{CMIX\_AB}}$  and  $f_{\text{CMIX\_CD}}$  and the fixed mixing frequency selected by fields CMIX\_AB or CMIX\_CD in register CMIX (8.5.21). The coarse mixer blocks are disabled by setting CMIX\_AB and CMIX\_CD to 0x0.

The NCO and coarse mixers can be enabled simultaneously, although this is not useful in most cases as the full frequency range can be covered by the NCO.

### 8.3.17.6 Inverse Sinc Filter

The DAC38RFxx have a 9-tap inverse Sinc filter (INVSINC) that runs at the DAC update rate ( $f_{\text{DAC}}$ ) that can be used to flatten the frequency response of the sample-and-hold output. The DAC sample-and-hold output sets the output current and holds it constant for one DAC clock cycle until the next sample, resulting in the well known  $\sin(x)/x$  or Sinc(x) frequency response (Figure 51, red line). The inverse sinc filter response (Figure 51, blue line) has the opposite frequency response from 0 to  $0.4 \times f_{\text{DAC}}$ , resulting in the combined response (Figure 51, green line). Between 0 to  $0.4 \times f_{\text{DAC}}$ , the inverse sinc filter compensates the sample-and-hold roll-off with less than 0.03 dB error.

The inverse sinc filter has a gain  $> 1$  at all frequencies. Therefore, the signal input to INVSINC must be reduced from full scale to prevent saturation in the filter. The amount of back-off required depends on the signal frequency, and is set such that at the signal frequencies the combination of the input signal and filter response is less than 1 (0 dB). For example, if the signal input to INVSINC is at  $0.25 \times f_{\text{DAC}}$ , the response of INVSINC is 0.9 dB, and the signal must be backed off from full scale by 0.9 dB to avoid saturation. The advantage of INVSINC having a positive gain at all frequencies is that the user is then able to optimize the back-off of the signal based on its frequency.

The inverse Sinc filters are enabled by field ISFIR\_ENA in register MULTIDUC\_CFG1 (9.5.9).

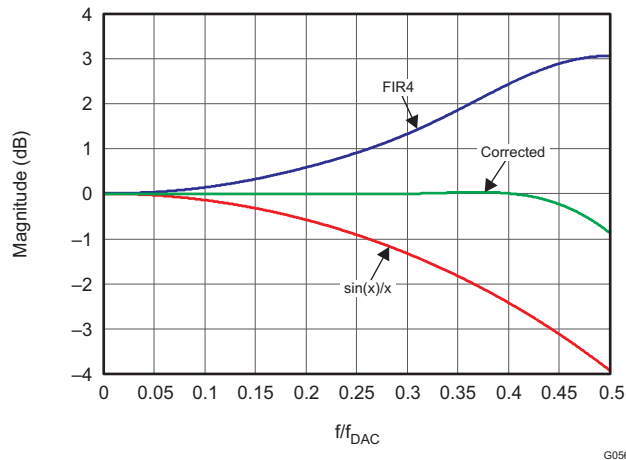


Figure 51. Composite Magnitude Spectrum for INVSINC

### 8.3.17.7 Summation Block for Dual DUC Modes

When using the dual DUC modes, the outputs of the two AQM blocks are summed together to form a composite signal for the DAC output, configured by field OUTSUM\_SEL in register OUTSUM (8.5.22). The input signals to the DUCs must be scaled such that the signal does not exceed fullscale during summation. This field can also be configured to add the signals from the adjacent multi-DUC to enable a four DUC signal.

### 8.3.18 PA Protection Block

The DAC38RFxx incorporates an optional power amplifier protection (PAP) block to monitor when the input signal is too large, for example when an interface error occurs, and reduces the output signal power of the DAC. The PAP block achieves the functionality of reducing the input signal that crosses the threshold through three main sub-blocks. These are PAP trigger generation block, PAP gain state machine and GAIN block.

The PAP block keeps track of the input signal power by maintaining a sliding window accumulation of last N samples. N is selectable to be 32, 64 or 128 based on the setting (Table 38) of fields PAPAB\_SEL\_DLY in register PAP\_CFG\_AB (8.5.35) and PAPCD\_SEL\_DLY in register PAP\_CFG\_CD (8.5.36). The average amplitude of input signal is computed by dividing accumulated value by the number of samples in the delay-line (N). The result is then compared against the threshold in fields PAPAB\_THRESH in register PAP\_CFG\_AB (8.5.35) and PAPCD\_THRESH in register PAP\_CFG\_CD (8.5.36). If the threshold is violated, gain state machine is triggered which generated gain value to ramp down the DAC output signal amplitude. After the input signal returns to normal value, the state machine ramps up the DAC output signal amplitude.


**Table 38. PAP Delay Line Selection**

| pap_sel_dly[1:0] | # of samples averaged |
|------------------|-----------------------|
| 00               | 32                    |
| 01               | 64                    |
| 10               | 128                   |
| 11               | Reserved              |

The generation of the PAP trigger as explained as follows:

- The I and Q samples are treated separately – either can trigger attenuation
- In dual DUC modes, each IQ pair is treated separately and has a separate gain block
- 8 samples at the input are put through an absolute value circuit (all 2's complement)
- Next these values are vector summed to get a 12 bit result
- Then 12 bit result is placed into the delay line and summed into the accumulator
- The accumulator is also subtracting out the delayed 12 bit word corresponding to N = 32, N = 64 or N = 128
- Finally the accumulator output is divided down by N and rounded to 13 bits. These 13 bits are compared to the threshold in the SPI registers. A pap\_trig occurs if the threshold is exceeded.

The PAP gain state machine generates the pap gain value to be applied on the output stream to reduce the output signal amplitude. The state machine below is used to control the attenuation of the DAC output and the gaining up of the signal again once the trigger is released.

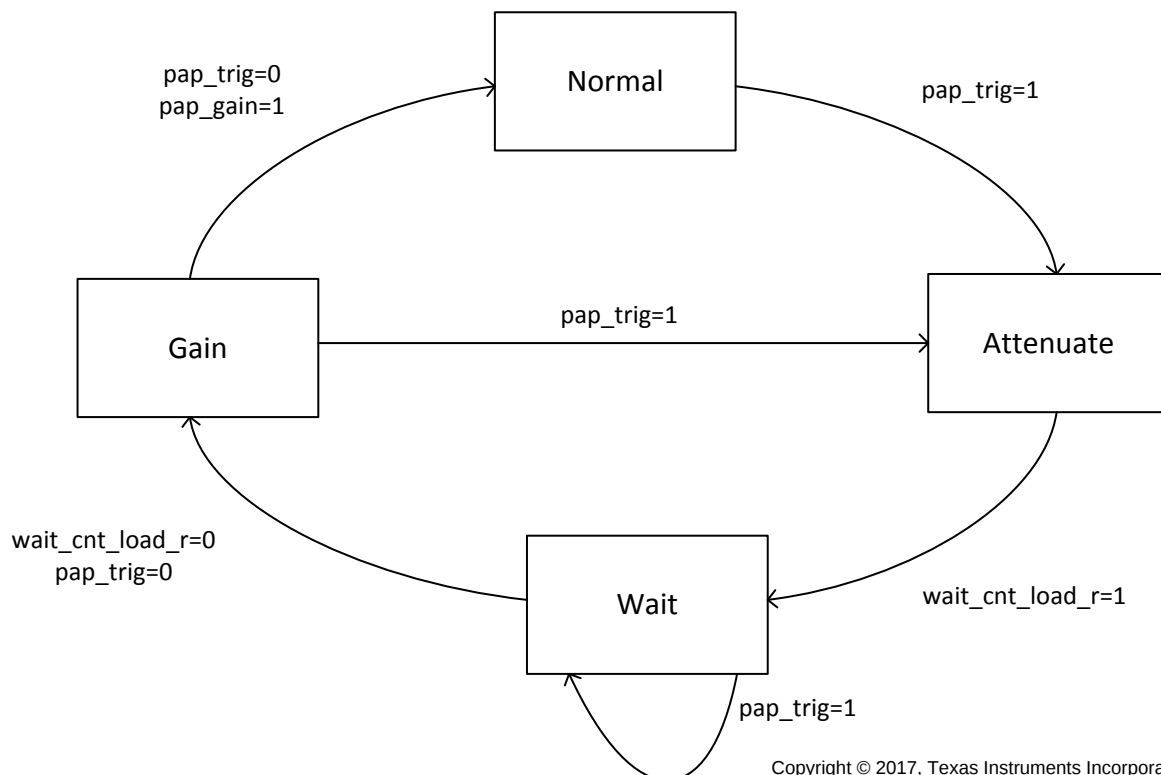

Copyright © 2017, Texas Instruments Incorporated

**Figure 52. PAP Gain State Machine**

The normal operating condition for the PAP block is the NORMAL state in [Figure 52](#). However, when the PAP block detects an error condition it sets the pap\_trig signal to '1' causing a state transition from NORMAL operation to the ATTENUATE state.

In the ATTENUATE state the data path gain is scaled from 1.0 down to 0.0 by a programmable step amount set by fields PAPAB\_GAIN\_STEP in register PAP\_GAIN\_AB ([8.5.31](#)) and PAPCD\_GAIN\_STEP in register PAP\_GAIN\_CD ([8.5.33](#)). This value is always positive with the decimal place located between the MSB and MSB-1. Unity is equal to "1000000000". Each clock cycle (16 samples) the PAP\_GAIN is stepped down by PAPAB\_GAIN\_STEP and PAPCD\_GAIN\_STEP until the gain is 0.

After PAP\_GAIN is 0, the state machine moves on to the WAIT state. Here a programmable counter counts clock cycles to allow the condition for the pap\_trig to be fixed. Fields PAPAB\_WAIT in register PAP\_WAIT\_AB ([8.5.32](#)) and PAPCD\_WAIT in register PAP\_WAIT\_CD ([8.5.34](#)) are used to select the number of clock cycles (samples = 16 x PAPAB\_WAIT or 16 x PAPCD\_WAIT) to wait before moving to the next state. Once the WAIT counter equals zero and pap\_trig='0', the state machine moves on to the GAIN state. If the WAIT equals 0 but pap\_trig still equals '1' then the state machine stays in the WAIT state until pap\_trig ='0'.

### 8.3.19 Gain Block

The GAIN block also has additional output gain control through fields GAINAB in register GAINAB ([8.5.39](#)) and GAINCD in register GAINCD ([8.5.40](#)). Similar to PAP\_GAIN value, the output gain is always positive with unity when GAINAB or GAINCD = "010000000000".

To reduce the power, the gain block clock has been gated whenever the pap is disabled and GAINAB or GAINCD is set to unity.

### 8.3.20 Output Summation

The OUTSUM block allows addition of samples from each DUC in the multi-DUC. It is also possible to add the output samples from the adjacent multi-DUC. Field OUTSUM\_SEL in register OUTSUM ([8.5.22](#)) controls the summation for each multi-DUC. The functionality of the block can be represented by the following equation:

$$OUTSUM_{output} = SAME_{AB} + SAME_{CD} + ADJ_{AB} + ADJ_{CD} \quad (7)$$

In order to avoid overflow, rounding operation is performed after the addition to reduce the word size back to 16-bits. Exact number of bits rounded depends on the number of channels added. [Table 39](#) shows the description of round after the summation.

**Table 39. OUTSUM Scaling and Rounding**

| # OF CHANNELS ADDED | # OF BITS ROUNDED                                              |
|---------------------|----------------------------------------------------------------|
| 0                   | 0, Use bits[15:0] from the result                              |
| 1                   | Use bits[16:1] from the result and bit[0] used for rounding    |
| 2                   | Use bits[17:2] from the result and bits[1:0] used for rounding |
| 3                   | Use bits[18:3] from the result and bit[2:0] used for rounding  |
| 4                   | Use bits[19:4] from the result and bit[3:0] used for rounding  |

### 8.3.21 Output Delay

The signal following output summation can be programmably delayed by 0-15 DACCLK cycles through field OUTPUT\_DELAY in register OUTSUM ([8.5.20](#)). The block takes 16 sample words (vec16) from both the A and B paths and shifts the them to 32 sample long delay line.

### 8.3.22 Polarity Inversion

The signal following the output delay can be inverted by a 2's complement conversion allowing the + and - DAC outputs to be swapped by asserting field DAC\_COMPLEMENT in register MULTIDUC\_CFG1 ([8.5.13](#)).

### 8.3.23 Temperature Sensor

The DAC38RFxx incorporates a temperature sensor block which monitors the die temperature by measuring the voltage across 2 transistors. The voltage is converted to an 8-bit digital word using a successive approximation (SAR) analog to digital conversion process. The result is scaled, limited and formatted as a twos complement value representing the temperature in degrees Celsius.

The sampling is controlled by the serial interface signals  $\overline{\text{SDEN}}$  and SCLK. If the temperature sensor is enabled by writing a 0 to field TSENSE\_SLEEP in register SLEEP\_CONFIG (8.5.70), a conversion takes place each time the serial port is written or read. The data is only read and sent out by the digital block when the temperature sensor is read in field TEMPDATA in register TEMP\_PLLVOLT (8.5.7). The conversion uses the first eight clocks of the serial clock as the capture and conversion clock, the data is valid on the falling eighth SCLK. The data is then clocked out of the chip on the rising edge of the ninth SCLK. No other clocks to the chip are necessary for the temperature sensor operation. As a result the temperature sensor is enabled even when the device is in sleep mode.

In order for the process described above to operate properly, the serial port read from register TEMP\_PLLVOLT must be done with an SCLK period of at least 1  $\mu\text{s}$ . If this is not satisfied the temperature sensor accuracy is greatly reduced.


### 8.3.24 Alarm Monitoring

The DAC38RFxx includes a flexible set of alarm monitoring that can be used to alert of a possible malfunction scenario. All the alarm events can be accessed either through the SIP registers and/or through the ALARM output. Once an alarm is set, the corresponding alarm bit must be reset through the serial interface to allow further testing. The set of alarms includes the following conditions:

- JESD alarms
  - Fields ALM\_LANEx\_ERR in registers JESD\_ALM\_Lx (x = 0-7, 8.5.59 to 8.5.66):
    - multiframe alignment\_error. Occurs when multiframe alignment fails
    - frame alignment error. Occurs when multiframe alignment fails
    - link configuration error. Occurs when there is wrong link configuration
    - elastic buffer overflow. Occurs when bad RBD value is used
    - elastic buffer match error. Occurs when the first non-/K/ doesn't match the programmed data
    - code synchronization error
    - 8b/10b not-in-table decode error
    - 8b/10b disparity error
  - Field ALM\_FROM\_SHORTTEST in register ALM\_SYSREF\_PAP (8.5.67): Occurs when the short pattern test fails.
- SerDes alarms
  - Field ALM\_SD\_LOTDET in register ALM\_SD\_DET (8.5.5): Occurs when there are loss of signal detect from SerDes lanes.
  - Fields ALM\_FIFOx\_FLAGS in registers JESD\_ALM\_Lx (x = 0-7, 8.5.59 to 8.5.66):
    - FIFO write error. Occurs if write request and FIFO is full.
    - FIFO write full: Occurs if FIFO is full.
    - FIFO read error. Occurs if read request and FIFO is empty.
    - FIFO read empty: Occurs if FIFO is empty.
  - Field ALM\_SD0\_PLL in register ALM\_SYSREF\_DET (8.5.6): Occurs if the PLL in the SerDes block 0 goes out of lock.
  - Field ALM\_SD1\_PLL in register ALM\_SYSREF\_DET (8.5.6): Occurs if the PLL in the SerDes block 1 goes out of lock.
- SYSREF alarm
  - Field ALM\_SYSREF\_ERR in register ALM\_SYSREF\_PAP (8.5.67): Occurs when the SYSREF is received at an unexpected time. If too many of these occur it will cause the JESD to go into synchronization mode again.
- DAC PLL alarm
  - Field PLL\_LOCK in register ALM\_SYSREF\_DET (8.5.6). This register field is asserted when the PLL is unlocked. When used as an alarm output, a high signal indicates that the PLL is unlocked if the ALM\_OUT\_POL bit in register RESET\_CONFIG is set to 1.
- PAP alarm
  - Field ALM\_PAP in register ALM\_SYSREF\_PAP (8.5.67): Occurs when the average power is above the threshold. While any alarm\_pap is asserted the attenuation for the appropriate data path is applied.

### 8.3.25 Differential Clock Inputs

Figure 53 shows the preferred configuration for driving the DACCLK+/- and SYSREF+/- with a differential ECL/PECL source.

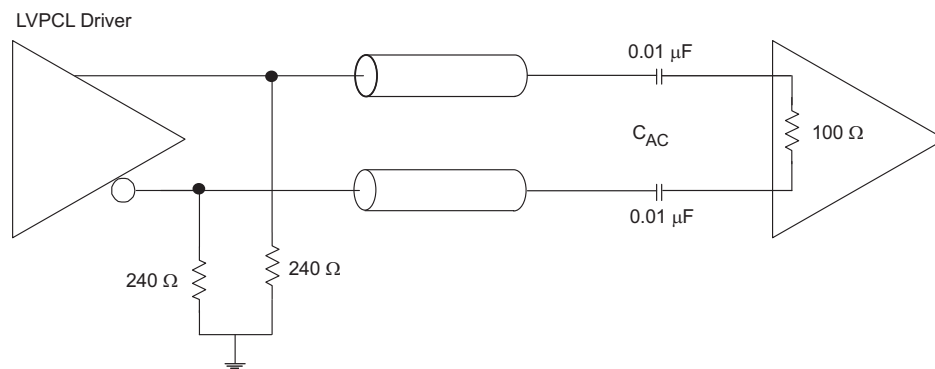


Copyright © 2016, Texas Instruments Incorporated

**Figure 53. Preferred Clock Input Configuration With a Differential ECL/PECL Clock Source**

### 8.3.26 CMOS Digital Inputs

Figure 54 shows a schematic of the equivalent CMOS digital inputs of the DAC38RFxx. SDIO, SCLK, TCLK, SLEEP, TESTMODE and TXENABLE have internal pull-down resistors while SDEN, RESET, TMS, TDI and TRST have internal pull-up resistors. See the [Specifications](#) table for logic thresholds. The pull-up and pull-down circuitry is approximately equivalent to 10 kΩ.

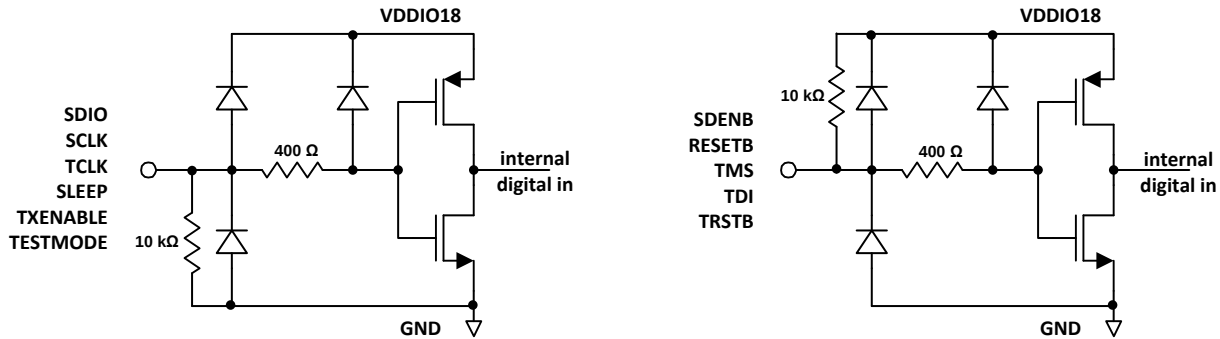

Copyright © 2016, Texas Instruments Incorporated

**Figure 54. CMOS Digital Equivalent Input**

### 8.3.27 DAC Fullscale Output Current

The DAC38RFxx uses a bandgap reference and control amplifier for biasing the full-scale output current. The DAC full scale output current is set by a combination of the fixed current through the external resistor R<sub>BIAS</sub> (connected to pin BIASJ) and current from coarse trim current sources:

$$I_{OUTFS} = I_{RBIAS} + I_{coarsetrim} \quad (8)$$

The bias current I<sub>BIAS</sub> through resistor R<sub>BIAS</sub> is defined by the on-chip bandgap reference voltage V<sub>BG</sub> (nominally 0.9 V) and control amplifier. For normal operation, it is recommended that R<sub>BIAS</sub> is set to 3.6 kΩ for a fixed current through R<sub>BIAS</sub> of 250 μA. This current is scaled 128x internally, giving:

$$I_{RBIAS} = 128 \times \frac{V_{BG}}{R_{BIAS}} = 128 \times \frac{0.9V}{3.6 k\Omega} = 32 mA \quad (9)$$

The coarse trim current sources are configured through SPI register field DACFS in register DACFS ([8.5.72](#)), as follows:

$$I_{coarsetrim} = 2mA \times (DACFS - 11) \quad (10)$$

From the discussion above, the DAC full scale output current can be configured from 40 mA (DACFS[3:0] = 1111) down to 10 mA (DACFS[3:0] = 0000). In addition to the full scale signal current set by SPI register DACFS ([8.5.72](#)), an extra DC bias current is required to set the operating point of the output current sources ([Table 40](#)).

**Table 40. DAC output current**

| DACFS ( <a href="#">8.5.72</a> ) | Signal current (mA) | Total bias current (mA) <sup>(1)</sup> |
|----------------------------------|---------------------|----------------------------------------|
| 0                                | 10                  | 1                                      |
| 1                                | 12                  | 1                                      |
| 2                                | 14                  | 2                                      |
| 3                                | 16                  | 2                                      |
| 4                                | 18                  | 3                                      |
| 5                                | 20                  | 3                                      |
| 6                                | 22                  | 4                                      |
| 7                                | 24                  | 5                                      |
| 8                                | 26                  | 5                                      |
| 9                                | 28                  | 6                                      |

(1) The bias current per each complementary output is half the total bias current

Table 40. DAC output current (continued)

| DACFS ( 8.5.72) | Signal current (mA) | Total bias current (mA) <sup>(1)</sup> |
|-----------------|---------------------|----------------------------------------|
| 10              | 30                  | 6                                      |
| 11              | 32                  | 7                                      |
| 12              | 34                  | 7                                      |
| 13              | 36                  | 8                                      |
| 14              | 38                  | 8                                      |
| 15              | 40                  | 9                                      |

An external decoupling capacitor  $C_{EXT}$  of 0.1  $\mu$ F should be connected externally to terminal EXTIO for compensation.  $R_{BIAS}$  of 3.6 k $\Omega$  is recommended for setting the full-scale output current.

### 8.3.28 Current Steering DAC Architecture

The DACs in the DAC38RFxx consist of a segmented array of NMOS current sources, capable of sinking a full-scale output current up to 40 mA (see Figure 55). Differential current switches direct the current to either one of the complimentary output nodes VOUT1/2+ or VOUT1/2-. These complementary output nodes are internal to the device because of the integrated balun. Complimentary output currents enable differential operation, thus canceling out common mode noise sources (digital feed-through, on-chip and PCB noise), dc offsets, even order distortion components, and increasing signal output power by a factor of four.

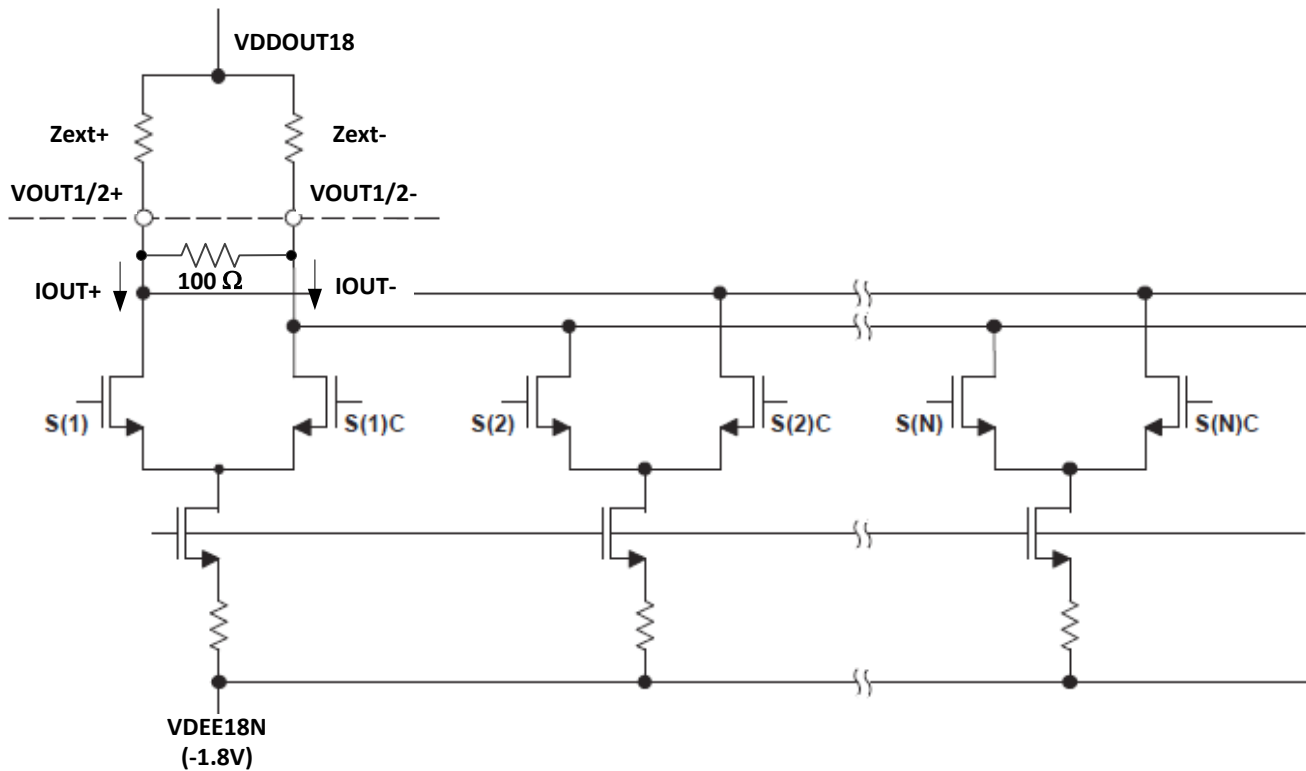


Figure 55. Current Steering DAC Architecture

Referring to Figure 55, the total output current  $IOUT_{FS}$  is fixed, and is switched to either the + or – output by switches  $S(N)$ :

$$IOUT_{FS} = IOUT + + IOUT- \quad (11)$$

Since the output stage is a current sinking architecture, we will denote current into the DAC as + current, and the current flows  $IOUT+$  and  $IOUT-$  into terminals VOUT1/2+ and VOUT1/2- respectively.  $IOUT+$  and  $IOUT-$  can be expressed as:

$$I_{OUT+} = \frac{I_{OUT_{FS}} \times CODE}{16384} \quad (12)$$

$$I_{OUT-} = \frac{I_{OUT_{FS}} \times (16383 - CODE)}{16384} \quad (13)$$

where CODE is the decimal representation of the 14-bit DAC core data input word. Note the signal path up to the DAC is 16-bits and the 2 LSBs are truncated for the DAC core data input word.

### 8.3.29 DAC Transfer Function

The DAC38RFxx has a wide bandwidth integrated balun (nominally 700 MHz to 3.8 GHz passband) to convert the DAC core differential signal to a single ended signal. The single ended output is expected to drive a 50-Ω load (see Figure 56). With full-scale current of 40 mA, the theoretical output power delivered to a 50-Ω load is 4 dBm. However the actual power delivered will be less than the theoretical value and Figure 13 shows the output power across frequency.

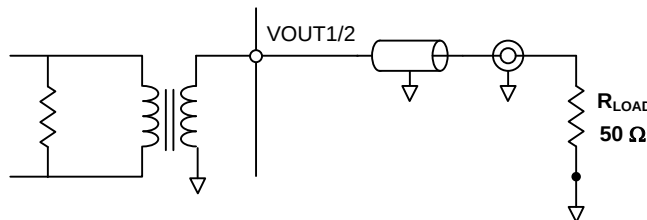


Figure 56. Driving a 50-Ω Load

## 8.4 Device Functional Modes

### 8.4.1 Clocking Modes

The DAC38RFxx has both a single ended clock input DACCLKSE and a differential clock input DACCLK+/- to clock the device. The clock input is selected by field SEL\_EXTCLK\_DIFFSE in register CLK\_PLL\_CFG (8.5.79). The DAC38RFxx can be clocked directly with a high frequency input clock at the DAC sample rate (PLL Bypass Mode), or an optional on-chip low-jitter phase-locked loop (PLL) can be used to generate the high frequency DAC sample clock internally from a lower frequency reference clock input (PLL Mode).

### 8.4.2 PLL Bypass Mode Programming

In PLL bypass mode a high quality clock is sourced to the DACCLK inputs. This clock is used to directly clock the DAC38RFxx DAC cores. This mode gives the device best performance and is recommended for extremely demanding applications.


The bypass mode is selected by setting the following:

1. Set field PLL\_ENA in register CLK\_PLL\_CFG (8.5.79) to "0" to bypass the PLL circuitry.
2. Set field PLL\_SLEEP in register SLEEP\_CONFIG (8.5.70) to "1" to put the PLL and VCO into sleep mode.

### 8.4.3 Internal PLL/VCO

The DAC38RFxx has an internal clock generation circuit consisting of a PLL and two identical VCOs connected in parallel, as shown in Figure 57.

## Device Functional Modes (continued)

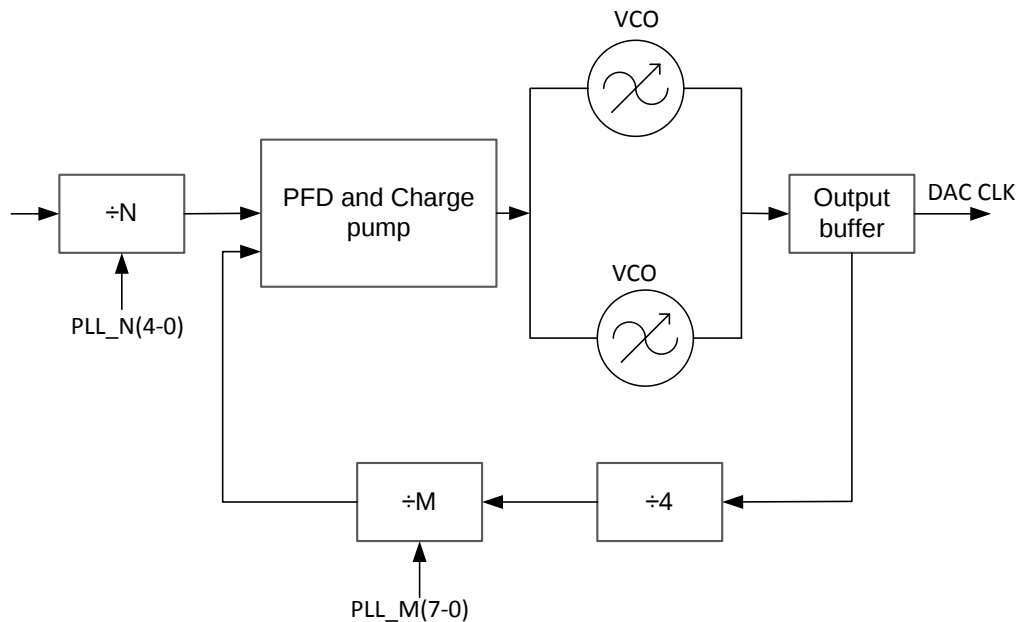

**Figure 57. Internal PLL/VCO Block Diagram**

The two parallel VCOs are tuned to a target center frequency of 5.9 GHz (low VCO) in DAC38RF87 and DAC38RF97. They are tuned to a target center frequency of 8.85 GHz (high VCO) in DAC38RF86 and DAC38RF96. The field PLL\_VCOSEL in register PLL\_CONFIG2 (8.5.81) must always be set to 0 in DAC38RF87/97 and always set to '1' in DAC38RF86/96/88/81. Also GSMPLL\_ENA in register PLL\_CONFIG2 must always be set to '1' in all devices to ensure the two identical VCOs are connected in parallel. The 7 bit VCO tuning code in field PLL\_VCO in register PLL\_CONFIG2 is used to tune the VCO frequency in the range of 5.24 GHz to 6.72 GHz for the low VCO and 7.96 GHz to 9.0 GHz for the high VCO. For the low VCO the center VCO frequency is achieved with PLL\_VCO = 63<sub>decimal</sub> and for the high VCO the target VCO center frequency is also achieved with PLL\_VCO = 63<sub>decimal</sub>.

The supply current, and therefore; the analog signal amplitude in the VCO is controlled using the field PLL\_VCO\_RDAC in register PLL\_CONFIG1 (8.5.80). This control signal should be set 15<sub>decimal</sub> initially for 18 mA supply current in the VCO and ~1.4 V<sub>pp</sub> single ended oscillation amplitude.

The PLL has no prescaler, so the DAC sample rate is the VCO frequency. In the PLL feedback path a fixed ÷ 4 frequency divider block receives the VCO output clock and divides its frequency by 4. The maximum operating frequency of the phase-frequency detector (PFD) is approximately 550 MHz. The M (feedback) clock divider takes the output clock signal from the fixed ÷4 block and divides it by a programmable ratio set by the 8-bit field in field PLL\_M\_M1 in register PLL\_CONFIG1 (8.5.80). The programmable division ratio range is ÷1 to ÷256, and is the value of the 8 bit unsigned binary code + 1. Although it is possible to program the M divider to ÷1, ÷2 and ÷3, these values should not be used. As stated previously the PFD and CP have a finite maximum operating frequency, which is the VCO frequency divided by the fixed divider ratio multiplied by the minimum allowable M divider ratio.

$$PFD\_CP_{Fmax} = F_{vco} / (Fixed\_div \times Mdiv_{min}) \quad (14)$$

The N (reference) divider determines the ratio between the input reference clock frequency and the PFD operating frequency, and is set by the 5-bit field PLL\_N\_M1 in register CLK\_PLL\_CFG (8.5.79). The division ratio range is ÷1 to ÷32, and is the value of the 5-bit unsigned binary code + 1.

## Device Functional Modes (continued)

The charge pump output current amplitude is set using the 4-bit field PLL\_CP\_ADJ in register PLL\_CONFIG2 (8.5.81). The current amplitude is simply the digital code multiplied by the unit current amplitude of 100  $\mu$ A. In a nominal condition, with the LF VCO running at 5.898 GHz, and with the M divider set to  $\div 4$ , the PFD will run at 368.625 MHz, and the charge pump current should be set to 6<sub>decimal</sub>, which gives 600  $\mu$ A charge pump output current for a good phase margin of 69 degrees. If a higher M ratio (for lower PFD frequencies) are required the charge pump output current must be increased to maintain good loop stability and prevent excessive peaking in the phase noise response. The charge pump output current setting PLL\_CP\_ADJ should be adjusted in relation to the feedback (M) divider ratio PLL\_M\_M1 according to the following table to maintain a constant phase margin of 69 degrees.

**Table 41. M vs Kp for Maintaining Good Stability**

| M  | CP_ADJ |
|----|--------|
| 4  | 6      |
| 6  | 9      |
| 8  | 12     |
| 10 | 15     |

Similarly for the HF VCO running at 8.847 GHz, and with the M divider set to  $\div 4$ , the PFD will run at 552.9375 MHz as shown above. Here the charge pump current should be set to 6<sub>decimal</sub>, which gives 600  $\mu$ A charge pump output current for a good phase margin of 69 degrees.

### 8.4.4 CLKOUT

The DAC38RFxx has a programmable output clock on CLKTX+/- balls that is a divided version of the internal DAC sample clock, either with or without PLL. Two frequency dividers, either DACCLK/3 or DACCLK/4, are available by programming field CLK\_TX\_DIV4 in register CLK\_OUT (8.5.71). The output swing voltage is programmable from approximately 125 to 1460 mV<sub>PP-DIFF</sub> through field CLK\_TX\_SWING in register CLK\_OUT (8.5.71).

Field CLK\_TX\_IDLE in register CLK\_OUT (8.5.71) enables an idle state, in which the pins are driven to the proper common-mode levels in order to charge the external AC coupling caps but the clock output is disabled. The output clock circuit can be put to sleep by field CLK\_TX\_SLEEP in register SLEEP\_CONFIG (8.5.70).

### 8.4.5 Serial Peripheral Interface (SPI)

The serial port of the DAC38RFxx is a flexible serial interface which communicates with industry standard microprocessors and microcontrollers. The interface provides read/write access to all registers used to define the operating modes of DAC38RFxx. It is compatible with most synchronous transfer formats and can be configured as a 3 or 4 terminal interface by SIF4\_ENA in register IO\_CONFIG (8.5.2). In both configurations, SCLK is the serial interface input clock and  $\overline{\text{SDEN}}$  is serial interface enable. For 3 terminal configuration, SDIO is a bidirectional terminal for both data in and data out. For 4 terminal configuration, SDIO is bidirectional and SDO is data out only. Data is input into the device with the rising edge of SCLK. Data is output from the device on the falling edge of SCLK.

The SPI registers are reset by writing a 1 to SPI\_RESET in register RESET\_CONFIG (8.5.1).

Each read/write operation is framed by signal  $\overline{\text{SDEN}}$  (Serial Data Enable Bar) asserted low. The first frame byte is the instruction cycle which identifies the following data transfer cycle as read or write as well as the 7-bit address to be accessed. Figure 58 indicates the function of each bit in the instruction cycle and is followed by a detailed description of each bit. The data transfer cycle consists of two bytes.


**Figure 58. Instruction Byte of the Serial Interface**

| Bit         | 7 (MSB) | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
|-------------|---------|----|----|----|----|----|----|----|
| Description | R/W     | A6 | A5 | A4 | A3 | A2 | A1 | A0 |

R/W - Identifies the following data transfer cycle as a read or write operation. A high indicates a read operation from DAC38RFxx and a low indicates a write operation to DAC38RFxx


A6:A0 - Identifies the address of the register to be accessed during the read or write operation.

Figure 59 shows the serial interface timing diagram for a DAC38RFxx write operation. SCLK is the serial interface clock input to DAC38RFxx. Serial data enable SDEN is an active low input to DAC38RFxx. SDIO is serial data input. Input data to DAC38RFxx is clocked on the rising edges of SCLK.

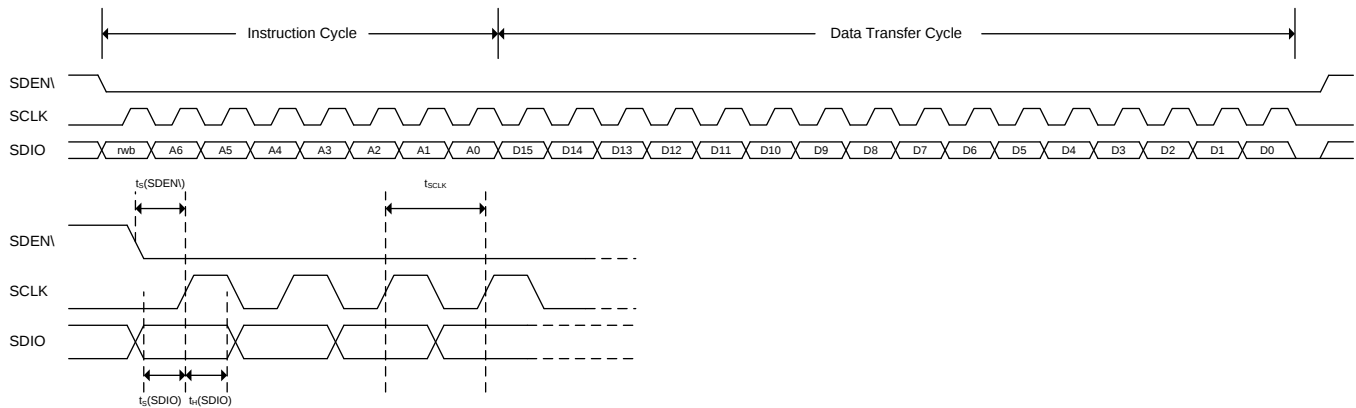

**Figure 59. Serial Interface Write Timing Diagram**

Figure 60 shows the serial interface timing diagram for a DAC38RFxx read operation. SCLK is the serial interface clock input to DAC38RFxx. Serial data enable SDEN is an active low input to DAC38RFxx. SDIO is serial data input during the instruction cycle. In 3 pin configuration, SDIO is data out from the DAC38RFxx during the data transfer cycle, while SDO is in a high-impedance state. In 4 pin configuration, both SDIO and SDO are data out from the DAC38RFxx during the data transfer cycle. At the end of the data transfer, SDIO and SDO will output low on the final falling edge of SCLK until the rising edge of SDEN when they will 3-state.

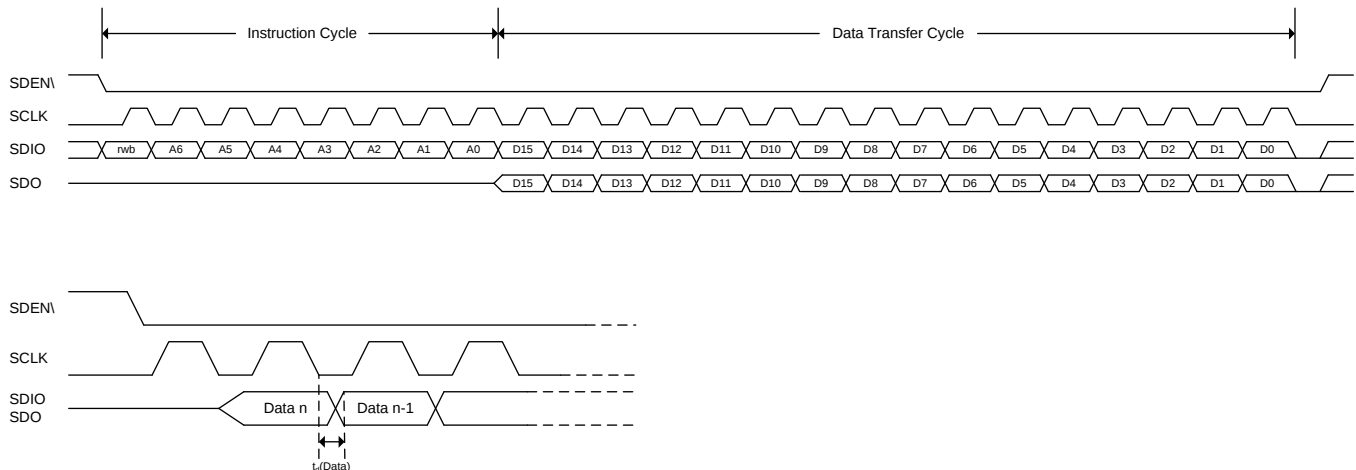

**Figure 60. Serial Interface Read Timing Diagram**

n the SIF interface there are four types of registers:

#### 8.4.5.1 NORMAL (RW)

The NORMAL register type allows data to be written and read from. All 16-bits of the data are registered at the same time. There is no synchronizing with an internal clock thus all register writes are asynchronous with respect to internal clocks. There are three subtypes of NORMAL:

1. AUTOSYNC: A NORMAL register that causes a sync to be generated after the write is finished. These are used when it is desirable to synchronize the block after writing the register or for a single field that spans across multiple registers. For instance, the NCO requires three 16-bit register writes to set the frequency. Upon writing the last of these registers an autosync is generated to deliver the entire field to the NCO block at once, rather than in pieces after each individual register write. For a field that spans multiple registers, all non-AUTOSYNC registers for the field must be written first before the actual AUTOSYNC register.

2. No RESET Value: These are NORMAL registers, but the reset value cannot be specified. This could be because the register has some read\_only bits or some internal logic partially controls the bit values.
3. READ\_ONLY (R): Registers that can only be read.

#### 8.4.5.2 WRITE\_TO\_CLEAR (W0C)

These registers are just like NORMAL registers with one exception. They can be written and read, however, when the internal logic asynchronously sets a bit high in one of these registers, that bit stays high until it is written to '0'. This way interrupts will be captured and stay constant until cleared by the user.

## 8.5 Register Maps

**Table 42. Register Summary**

| Address                                                                                                   | Reset    | Acronym        | Register Name                                | Section                |
|-----------------------------------------------------------------------------------------------------------|----------|----------------|----------------------------------------------|------------------------|
| <b>General Configuration Registers (PAGE_SET[2:0] = 000)</b>                                              |          |                |                                              |                        |
| 0x00                                                                                                      | 0x5803   | RESET_CONFIG   | Chip Reset and Configuration                 | <a href="#">8.5.1</a>  |
| 0x01                                                                                                      | 0x1800   | IO_CONFIG      | IO Configuration                             | <a href="#">8.5.2</a>  |
| 0x02                                                                                                      | 0xFFFF   | ALM_SD_MASK    | Lane Signal Detect Alarm Mask                | <a href="#">8.5.3</a>  |
| 0x03                                                                                                      | 0xFFFF   | ALM_CLK_MASK   | Clock Alarms Mask                            | <a href="#">8.5.4</a>  |
| 0x04                                                                                                      | 0x0000   | ALM_SD_DET     | SERDES Loss of Signal Detection Alarms       | <a href="#">8.5.5</a>  |
| 0x05                                                                                                      | 0x0000   | ALM_SYSREF_DET | SYSREF Alignment Circuit Alarms              | <a href="#">8.5.6</a>  |
| 0x06                                                                                                      | variable | TEMP_PLLVOLT   | Temperature Sensor and PLL Loop Voltage      | <a href="#">8.5.7</a>  |
| 0x07-0x08                                                                                                 | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x09                                                                                                      | 0x0000   | PAGE_SET       | Page Set                                     | <a href="#">8.5.8</a>  |
| 0x0A-0x77                                                                                                 | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x78                                                                                                      | 0x0000   | SYSREF_ALIGN_R | SYSREF Align to r1 and r3 Count              | <a href="#">8.5.9</a>  |
| 0x79                                                                                                      | 0x0000   | SYSREF12_CNT   | SYSREF Phase Count 1 and 2                   | <a href="#">8.5.10</a> |
| 0x7A                                                                                                      | 0x0000   | SYSREF34_CNT   | SYSREF Phase Count 3 and 4                   | <a href="#">8.5.11</a> |
| 0x7B-0x7E                                                                                                 | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x7F                                                                                                      | 0x0008   | VENDOR_VER     | Vendor ID and Chip Version                   | <a href="#">8.5.12</a> |
| <b>Multi-DUC Configuration Registers (PAGE_SET[0] = 1 for multi-DUC1, PAGE_SET[1] = 1 for multi-DUC2)</b> |          |                |                                              |                        |
| 0x0A                                                                                                      | 0x02B0   | MULTIDUC_CFG1  | Multi-DUC Configuration (PAP, Interpolation) | <a href="#">8.5.13</a> |
| 0x0B                                                                                                      | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x0C                                                                                                      | 0x2402   | MULTIDUC_CFG2  | Multi-DUC Configuration (Mixers)             | <a href="#">8.5.14</a> |
| 0x0D                                                                                                      | 0x8300   | JESD_FIFO      | JESD FIFO Control                            | <a href="#">8.5.15</a> |
| 0x0E                                                                                                      | 0x00FF   | ALM_MASK1      | Alarm Mask 1                                 | <a href="#">8.5.16</a> |
| 0x0F                                                                                                      | 0x1F83   | ALM_MASK2      | Alarm Mask 2                                 | <a href="#">8.5.17</a> |
| 0x10                                                                                                      | 0xFFFF   | ALM_MASK3      | Alarm Mask 3                                 | <a href="#">8.5.18</a> |
| 0x11                                                                                                      | 0xFFFF   | ALM_MASK4      | Alarm Mask 4                                 | <a href="#">8.5.19</a> |
| 0x12                                                                                                      | 0x0000   | JESD_LN_SKEW   | JESD Lane Skew                               | <a href="#">8.5.20</a> |
| 0x13-0x16                                                                                                 | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x17                                                                                                      | 0x0000   | CMIX           | CMIX Configuration                           | <a href="#">8.5.21</a> |
| 0x18                                                                                                      | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x19                                                                                                      | 0x0000   | OUTSUM         | Output Summation and Delay                   | <a href="#">8.5.22</a> |
| 0x1A-0x1B                                                                                                 | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x1C                                                                                                      | 0x0000   | PHASE_NCOAB    | Phase offset for AB path NCO                 | <a href="#">8.5.23</a> |
| 0x1D                                                                                                      | 0x0000   | PHASE_NCOCD    | Phase offset for CD path NCO                 | <a href="#">8.5.24</a> |
| 0x1E-0x20                                                                                                 | 0x0000   | FREQ_NCOAB     | Frequency for AB path NCO                    | <a href="#">8.5.25</a> |
| 0x21-0x23                                                                                                 | 0x0000   | FREQ_NCOCD     | Frequency for CD path NCO                    | <a href="#">8.5.26</a> |
| 0x24                                                                                                      | 0x0010   | SYSREF_CLKDIV  | SYSREF Use for Clock Divider                 | <a href="#">8.5.27</a> |
| 0x25                                                                                                      | 0x7700   | SERDES_CLK     | Serdes Clock Control                         | <a href="#">8.5.28</a> |
| 0x26                                                                                                      | 0x0000   | Reserved       | Reserved                                     |                        |
| 0x27                                                                                                      | 0x1144   | SYNCSEL1       | Sync Source Selection                        | <a href="#">8.5.29</a> |
| 0x28                                                                                                      | 0x0000   | SYNCSEL2       | Sync Source Selection                        | <a href="#">8.5.30</a> |

## Register Maps (continued)

**Table 42. Register Summary (continued)**

| Address                                                                            | Reset  | Acronym        | Register Name                               | Section                |
|------------------------------------------------------------------------------------|--------|----------------|---------------------------------------------|------------------------|
| 0x29                                                                               | 0x0000 | PAP_GAIN_AB    | PAP path AB Gain Attenuation Step           | <a href="#">8.5.31</a> |
| 0x2A                                                                               | 0x0000 | PAP_WAIT_AB    | PAP path AB Wait Time at Gain = 0           | <a href="#">8.5.32</a> |
| 0x2B                                                                               | 0x0000 | PAP_GAIN_CD    | PAP path CD Gain Attenuation Step           | <a href="#">8.5.33</a> |
| 0x2C                                                                               | 0x0000 | PAP_WAIT_CD    | PAP path CD Wait Time at Gain = 0           | <a href="#">8.5.34</a> |
| 0x2D                                                                               | 0x1FFF | PAP_CFG_AB     | PAP path AB Configuration                   | <a href="#">8.5.35</a> |
| 0x2E                                                                               | 0x1FFF | PAP_CFG_CD     | PAP path CD Configuration                   | <a href="#">8.5.36</a> |
| 0x2F                                                                               | 0x0000 | SPIDAC_TEST1   | Configuration for DAC SPI Constant          | <a href="#">8.5.37</a> |
| 0x30                                                                               | 0x0000 | SPIDAC_TEST2   | DAC SPI Constant                            | <a href="#">8.5.38</a> |
| 0x31                                                                               | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x32                                                                               | 0x0800 | GAINAB         | Gain for path AB                            | <a href="#">8.5.39</a> |
| 0x33                                                                               | 0x0800 | GAINCD         | Gain for path CD                            | <a href="#">8.5.40</a> |
| 0x34-0x40                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x41                                                                               | 0x0000 | JESD_ERR_CNT   | JESD Error Counter                          | <a href="#">8.5.41</a> |
| 0x42-0x45                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x46                                                                               | 0x0044 | JESD_ID1       | JESD ID 1                                   | <a href="#">8.5.42</a> |
| 0x47                                                                               | 0x190A | JESD_ID2       | JESD ID 2                                   | <a href="#">8.5.43</a> |
| 0x48                                                                               | 0x31C3 | JESD_ID3       | JESD ID 3 and Subclass                      | <a href="#">8.5.44</a> |
| 0x49                                                                               | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x4A                                                                               | 0x0003 | JESD_LN_EN     | JESD Lane Enable                            | <a href="#">8.5.45</a> |
| 0x4B                                                                               | 0x1300 | JESD_RBD_F     | JESD RBD Buffer and Frame Octets            | <a href="#">8.5.46</a> |
| 0x4C                                                                               | 0x1303 | JESD_K_L       | JESD K and L Parameters                     | <a href="#">8.5.47</a> |
| 0x4D                                                                               | 0x0100 | JESD_M_S       | JESD M and S Parameters                     | <a href="#">8.5.48</a> |
| 0x4E                                                                               | 0x0F4F | JESD_N_HD_SCR  | JESD N, HD and SCR Parameters               | <a href="#">8.5.49</a> |
| 0x4F                                                                               | 0x1CC1 | JESD_MATCH     | JESD Character Match and Other              | <a href="#">8.5.50</a> |
| 0x50                                                                               | 0x0000 | JESD_LINK_CFG  | JESD Link Configuration Data                | <a href="#">8.5.51</a> |
| 0x51                                                                               | 0x00FF | JESD_SYNC_REQ  | JESD Sync Request                           | <a href="#">8.5.52</a> |
| 0x52                                                                               | 0x00FF | JESD_ERR_OUT   | JESD Error Output                           | <a href="#">8.5.53</a> |
| 0x53                                                                               | 0x0100 | JESD_ILA_CFG1  | JESD Configuration Value used for ILA Check | <a href="#">8.5.54</a> |
| 0x54                                                                               | 0x8E60 | JESD_ILA_CFG2  | JESD Configuration Value used for ILA Check | <a href="#">8.5.55</a> |
| 0x55-0x5B                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x5C                                                                               | 0x0001 | JESD_SYSR_MODE | JESD SYSREF Mode                            | <a href="#">8.5.56</a> |
| 0x5D-0x5E                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x5F                                                                               | 0x0123 | JESD_CROSSBAR1 | JESD Crossbar Configuration 1               | <a href="#">8.5.57</a> |
| 0x60                                                                               | 0x4567 | JESD_CROSSBAR2 | JESD Crossbar Configuration 2               | <a href="#">8.5.58</a> |
| 0x61-0x63                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| 0x64                                                                               | 0x0000 | JESD_ALM_L0    | JESD Alarms for Lane 0                      | <a href="#">8.5.59</a> |
| 0x65                                                                               | 0x0000 | JESD_ALM_L1    | JESD Alarms for Lane 1                      | <a href="#">8.5.60</a> |
| 0x66                                                                               | 0x0000 | JESD_ALM_L2    | JESD Alarms for Lane 2                      | <a href="#">8.5.61</a> |
| 0x67                                                                               | 0x0000 | JESD_ALM_L3    | JESD Alarms for Lane 3                      | <a href="#">8.5.62</a> |
| 0x68                                                                               | 0x0000 | JESD_ALM_L4    | JESD Alarms for Lane 4                      | <a href="#">8.5.63</a> |
| 0x69                                                                               | 0x0000 | JESD_ALM_L5    | JESD Alarms for Lane 5                      | <a href="#">8.5.64</a> |
| 0x6A                                                                               | 0x0000 | JESD_ALM_L6    | JESD Alarms for Lane 6                      | <a href="#">8.5.65</a> |
| 0x6B                                                                               | 0x0000 | JESD_ALM_L7    | JESD Alarms for Lane 7                      | <a href="#">8.5.66</a> |
| 0x6C                                                                               | 0x0000 | ALM_SYSREF_PAP | SYSREF and PAP Alarms                       | <a href="#">8.5.67</a> |
| 0x6D                                                                               | 0x0000 | ALM_CLKDIV1    | Clock Divider Alarms 1                      | <a href="#">8.5.68</a> |
| 0x6E-0x77                                                                          | 0x0000 | Reserved       | Reserved                                    |                        |
| <b>Miscellaneous Configuration Registers (PAGE_SET[1:0] = 00, PAGE_SET[2] = 1)</b> |        |                |                                             |                        |
| 0x0A                                                                               | 0xFC03 | CLK_CONFIG     | Clock Configuration                         | <a href="#">8.5.69</a> |

## Register Maps (continued)

**Table 42. Register Summary (continued)**

| Address   | Reset  | Acronym          | Register Name                            | Section                |
|-----------|--------|------------------|------------------------------------------|------------------------|
| 0x0B      | 0x0022 | SLEEP_CONFIG     | Sleep Configuration                      | <a href="#">8.5.70</a> |
| 0x0C      | 0xA002 | CLK_OUT          | Divided Output Clock Configuration       | <a href="#">8.5.71</a> |
| 0x0D      | 0xF000 | DACFS            | DAC Fullscale Current                    | <a href="#">8.5.72</a> |
| 0x0E-0x0F | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x10      | 0x0000 | LCMGEN           | Internal sysref generator                | <a href="#">8.5.73</a> |
| 0x11      | 0x0000 | LCMGEN_DIV       | Counter for internal sysref generator    | <a href="#">8.5.74</a> |
| 0x12      | 0x0000 | LCMGEN_SPISYSREF | SPI SYSREF for internal sysref generator | <a href="#">8.5.75</a> |
| 0x13-0x1A | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x1B      | 0x0000 | DTEST            | Digital Test Signals                     | <a href="#">8.5.76</a> |
| 0x1C-0x22 | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x23      | 0x03F3 | SLEEP_CNTL       | Sleep Pin Control                        | <a href="#">8.5.77</a> |
| 0x24      | 0x1000 | SYSR_CAPTURE     | SYSREF Capture Circuit Control           | <a href="#">8.5.78</a> |
| 0x25-0x30 | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x31      | 0x0200 | CLK_PLL_CFG      | Clock Input and PLL Configuration        | <a href="#">8.5.79</a> |
| 0x32      | 0x0308 | PLL_CONFIG1      | PLL Configuration 1                      | <a href="#">8.5.80</a> |
| 0x33      | 0x4018 | PLL_CONFIG2      | PLL Configuration 2                      | <a href="#">8.5.81</a> |
| 0x34      | 0x0000 | LVDS_CONFIG      | LVDS Output Configuration                | <a href="#">8.5.82</a> |
| 0x35      | 0x0018 | PLL_FDIV         | Fuse farm clock divider                  | <a href="#">8.5.83</a> |
| 0x36-0x3A | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x3B      | 0x0002 | SRDS_CLK_CFG     | Serdes Clock Configuration               | <a href="#">8.5.84</a> |
| 0x3C      | 0x8228 | SRDS_PLL_CFG     | Serdes PLL Configuration                 | <a href="#">8.5.85</a> |
| 0x3D      | 0x0088 | SRDS_CFG1        | Serdes Configuration 1                   | <a href="#">8.5.86</a> |
| 0x3E      | 0x0909 | SRDS_CFG2        | Serdes Configuration 2                   | <a href="#">8.5.87</a> |
| 0x3F      | 0x0000 | SRDS_POL         | Serdes Polarity Control                  | <a href="#">8.5.88</a> |
| 0x40-0x75 | 0x0000 | Reserved         | Reserved                                 |                        |
| 0x76      | 0x0000 | SYNCBOUT         | JESD204B SYNCB Output                    | <a href="#">8.5.89</a> |

### 8.5.1 Chip Reset and Configuration Register (address = 0x00) [reset = 0x5803]

**Figure 61. Chip Reset and Configuration Register (RESET\_CONFIG)**

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| 15 | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| 0  | 0  | 0  | 0  | 0  | 0  | 0  | x  |
| RW | RW | RW | RW | RW | RW | RW | RW |
| 7  | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| RW | RW | RW | RW | RW | RW | RW | RW |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 43. RESET\_CONFIG Field Descriptions**

| Bit  | Field         | Type | Reset | Description                                                                                                          |
|------|---------------|------|-------|----------------------------------------------------------------------------------------------------------------------|
| 15   | SPI_RESET     | RW   | 0     | This will reset all the SPI registers once programmed.                                                               |
| 14   | ALM_OUT_POL   | RW   | 1     | Changes the polarity of the alarm output.<br>0= active low<br>1= active high                                         |
| 13   | ALM_OUT_ENA   | RW   | 0     | Turn on the alarm pin                                                                                                |
| 12   | SYSCLK_ENA    | RW   | 1     | Turns on the dividers for the SYSCLK to the Fusefarm                                                                 |
| 11   | AUTOLOAD_TRIG | RW   | 1     | Causes a Fuse AUTOLOAD to be executed.                                                                               |
| 10:7 | Reserved      | RW   | 0000  | Reserved                                                                                                             |
| 6    | ONE_DAC_ONLY  | RW   | 0     | When set high only the SLICE0 is available.                                                                          |
| 5    | ONE_LINK_ONLY | RW   | 0     | This needs to be set high when a single link setup is being programmed to get the correct TXENABLE signal generation |
| 4:2  | Reserved      | RW   | 000   | Reserved                                                                                                             |
| 1    | INIT_SLICE1   | RW   | 1     | Puts the multi-DAC2 JESD into initialization state                                                                   |
| 0    | INIT_SLICE0   | RW   | 1     | Puts the multi-DAC1 JESD into initialization state                                                                   |

## 8.5.2 IO Configuration Register (address = 0x01) [reset = 0x1800]

**Figure 62. IO Configuration Register (IO\_CONFIG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 1   | 1   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 44. IO\_CONFIG Field Descriptions**

| Bit   | Field      | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------|------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:14 | GPO0_SEL   | RW   | 00     | Selects the JESD SYNC_N signal coming out the GPO0 pin. Both bits can be asserted which does an oring of the SYNC_N signals from each multi-DUC.<br>bit 0 = 1 then multi-DUC1 SYNC_N used<br>bit 1 = 1 then multi-DUC2 SYNC_N is used                                                                                                                                                                                 |
| 13:12 | SYNC0B_SEL | RW   | 01     | Selects the JESD SYNC_N signal coming out the SYNC0B pin. Both bits can be asserted which does an oring of the SYNC_N signals from each multi-DUC.<br>bit 0 = 1 then multi-DUC1 SYNC_N used<br>bit 1 = 1 then multi-DUC2 SYNC_N is used                                                                                                                                                                               |
| 11:10 | SYNC1B_SEL | RW   | 10     | Selects the JESD SYNC_N signal coming out the SYNC1B pin. Both bits can be asserted which does an oring of the SYNC_N signals from each multi-DUC.<br>bit 0 = 1 then multi-DUC1 SYNC_N used<br>bit 1 = 1 then multi-DUC2 SYNC_N is used                                                                                                                                                                               |
| 9:8   | GPO1_SEL   | RW   | 00     | Selects the JESD SYNC_N signal coming out the GPO1 pin. Both bits can be asserted which does an oring of the SYNC_N signals from each multi-DUC.<br>bit 0 = 1 then multi-DUC1 SYNC_N used<br>bit 1 = 1 then multi-DUC2 SYNC_N is used                                                                                                                                                                                 |
| 7     | SPI4_ENA   | RW   | 0      | When set to a '1' the chip is in 4 pin SPI interface mode.                                                                                                                                                                                                                                                                                                                                                            |
| 6     | Reserved   | RW   | 0      | Reserved                                                                                                                                                                                                                                                                                                                                                                                                              |
| 5:0   | ATEST      | RW   | 000000 | Select the analog test points:<br>000000: ATEST is off (ATEST Must be off during normal operation)<br>000001, 010001, 000110: VSSCLK<br>000010: VDDPLL1<br>000101: VDDCLK<br>000111, 001010, 010000: VDDAPLL18<br>001011: VDDAVCO18<br>001101: VDDS18<br>001110: VDDE1<br>001111, 111010, 111011, 111100: DGND<br>010011: VDDTX1<br>101001, 110001: AGND<br>101111, 111101, 111110, 111111: VDDDIG1<br>110000: VDDA18 |

### 8.5.3 Lane Single Detect Alarm Mask Register (address = 0x02) [reset = 0xFFFF]

**Figure 63. Lane Single Detect Alarm Mask Register (ALM\_SD\_MASK)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 0   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 45. ALM\_SD\_MASK Field Descriptions**

| Bit  | Field       | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                             |
|------|-------------|------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALM_SD_MASK | R/W  | 0xFFFF | Used to mask alarms<br>bit 15 - bit 8 : Reserved<br>bit7 : lane 7 loss of signal detect<br>bit6 : lane 6 loss of signal detect<br>bit5 : lane 5 loss of signal detect<br>bit4 : lane 4 loss of signal detect<br>bit3 : lane 3 loss of signal detect<br>bit2 : lane 2 loss of signal detect<br>bit1 : lane1 loss of signal detect<br>bit0 : lane 0 loss of signal detect |

### 8.5.4 Clock Alarms Mask Register (address = 0x03) [reset = 0xFFFF]

**Figure 64. Clock Alarms Mask Register (ALM\_CLK\_MASK)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 0   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 46. ALM\_CLK\_MASK Field Descriptions**

| Bit  | Field        | Type | Reset  | Description                                                                                                                                                                                                                                                                          |
|------|--------------|------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALM_CLK_MASK | R/W  | 0xFFFF | Used to mask alarms<br>bit 15 - bit 8 : Reserved<br>bit 7 : alarm_sysrefphase4<br>bit 6 : alarm_sysrefphase3<br>bit 5 : alarm_sysrefphase2<br>bit 4 : alarm_sysrefphase1<br>bit 3 : alarm_align_to_r3<br>bit 2 : alarm_align_to_r1<br>bit 1 : alarm_sd0_pll<br>bit 0 : alarm_sd1_pll |

### 8.5.5 SERDES Loss of Signal Detection Alarms Register (address = 0x04) [reset = 0x0000]

**Figure 65. SERDES Loss of Signal Detection Alarms Register (ALM\_SD\_DET)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 0   | 1   | 0   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset

**Table 47. ALM\_SD\_DET Field Descriptions**

| Bit  | Field         | Type | Reset | Description                                                                                                                                                                                                                                                                                                          |
|------|---------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | Reserved      | W0C  | 0x00  | Reserved                                                                                                                                                                                                                                                                                                             |
| 7:0  | ALM_SD_LOSDET | W0C  | 0x00  | Loss of signal detect outputs from the SERDES lanes:<br>bit 7 = lane7 loss of signal<br>bit 6 = lane6 loss of signal<br>bit 5 = lane5 loss of signal<br>bit 4 = lane4 loss of signal<br>bit 3 = lane3 loss of signal<br>bit 2 = lane2 loss of signal<br>bit 1 = lane1 loss of signal<br>bit 0 = lane0 loss of signal |

### 8.5.6 SYSREF Alignment Circuit Alarms Register (address = 0x05) [reset = 0x0000]

**Figure 66. SYSREF Alignment Circuit Alarms Register (ALM\_SYSREF\_DET)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 0   | 1   | 0   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset

**Table 48. ALM\_SYSREF\_DET Field Descriptions**

| Bit  | Field           | Type | Reset   | Description                                                                                                                                                                                       |
|------|-----------------|------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:9 | Reserved        | W0C  | 0000000 | Reserved                                                                                                                                                                                          |
| 8    | ALM_SYSRPHASE4  | W0C  | 0       | If high the sysrefphase4 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync.                                                                          |
| 7    | ALM_SYSRPHASE3  | W0C  | 0       | If high the sysrefphase3 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync.                                                                          |
| 6    | ALM_SYSRPHASE2  | W0C  | 0       | If high the sysrefphase2 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync.                                                                          |
| 5    | ALM_SYSRPHASE1  | W0C  | 0       | If high the sysrefphase1 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync.                                                                          |
| 4    | ALM_ALIGN_TO_R3 | W0C  | 0       | If high the align_to_r3 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync. TI Internal use only.                                                     |
| 3    | ALM_ALIGN_TO_R1 | W0C  | 0       | If high the align_to_r1 state has been observed in the sysrefalign logic at least once since the last sysrefalign sync. TI Internal use only.                                                     |
| 2    | ALM_SD0_PLL     | W0C  | 0       | Driven high if the PLL in the Serdes 0 block goes out of lock. A false alarm is generated at startup when the PLL is locking. User will have to reset this bit after start to monitor accurately. |
| 1    | ALM_SD1_PLL     | W0C  | 0       | Driven high if the PLL in the Serdes 1 block goes out of lock. A false alarm is generated at startup when the PLL is locking. User will have to reset this bit after start to monitor accurately. |
| 0    | PLL_LOCK        | W0C  | 0       | Asserted when PLL is unlocked.                                                                                                                                                                    |

### 8.5.7 Temperature Sensor and PLL Loop Voltage Register (address = 0x06) [reset = variable]

**Figure 67. Temperature Sensor and PLL Loop Voltage Register (TEMP\_PLLVOLT)**

|    |    |    |    |    |    |   |   |
|----|----|----|----|----|----|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 0  | 0  | 0  | 0  | 1  | 1 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 49. TEMP\_PLLVOLT Field Descriptions**

| Bit  | Field      | Type | Reset | Description                                |
|------|------------|------|-------|--------------------------------------------|
| 15:8 | TEMPDATA   | R    | 0x00  | 8 bits of data from the temperature sensor |
| 7:5  | PLL_LFVOLT | R    | 0b000 | PLL Loop filter voltage                    |
| 4:0  | Reserved   | R    | 0b000 | Reserved                                   |

### 8.5.8 Page Set Register (address = 0x09) [reset = 0x0000]

**Figure 68. Page Set Register (PAGE\_SET)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 50. PAGE\_SET Field Descriptions**

| Bit  | Field    | Type | Reset  | Description                                                                                                                                                                                                                                                          |
|------|----------|------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | PAGE_SET | R/W  | 0x0000 | Each bit selects a page that is active. Multiple pages can be selected at the same time. No bits asserted means that MASTER is the only page selected.<br>bit 0 = page0 : multi-DUC1<br>bit 1 = page1 : multi-DUC2<br>bit 2 = page2 : DIG_MISC<br>bit 3-15: Reserved |

### 8.5.9 SYSREF Align to r1 and r3 Count Register (address = 0x78) [reset = 0x0000]

**Figure 69. SYSREF Align to r1 and r3 Count Register (SYSREF\_ALIGN\_R)**

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|----|----|----|----|----|----|---|---|
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 1  | 1  | 1  | 0  | 0 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 51. SYSREF\_ALIGN\_R Field Descriptions**

| Bit  | Field           | Type | Reset | Description                    |
|------|-----------------|------|-------|--------------------------------|
| 15:8 | ALIGN_TO_R1_CNT | R    | 0x00  | Part of the SYSREF Align block |
| 7:0  | ALIGN_TO_R3_CNT | R    | 0x00  | Part of the SYSREF Align block |

### 8.5.10 SYSREF Phase Count 1 and 2 Register (address = 0x79) [reset = 0x0000]

**Figure 70. SYSREF Phase Count 1 and 2 Register (SYSREF12\_CNT)**

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|----|----|----|----|----|----|---|---|
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 1  | 1  | 1  | 0  | 0 | 1 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 52. SYSREF12\_CNT Field Descriptions**

| Bit  | Field      | Type | Reset | Description                    |
|------|------------|------|-------|--------------------------------|
| 15:8 | PHASE2_CNT | R    | 0x00  | Part of the SYSREF Align block |
| 7:0  | PHASE1_CNT | R    | 0x00  | Part of the SYSREF Align block |

### 8.5.11 SYSREF Phase Count 3 and 4 Register (address = 0x7A) [reset = 0x0000]

**Figure 71. SYSREF Phase Count 3 and 4 Register (SYSREF34\_CNT)**

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|----|----|----|----|----|----|---|---|
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 1  | 1  | 1  | 0  | 1 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 53. SYSREF34\_CNT Field Descriptions**

| Bit  | Field      | Type | Reset | Description                    |
|------|------------|------|-------|--------------------------------|
| 15:8 | PHASE4_CNT | R    | 0x00  | Part of the SYSREF Align block |
| 7:0  | PHASE3_CNT | R    | 0x00  | Part of the SYSREF Align block |

### 8.5.12 Vendor ID and Chip Version Register (address = 0x7F) [reset = 0x0008]

**Figure 72. Vendor ID and Chip Version Register (VENDOR\_VER)**

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|----|----|----|----|----|----|---|---|
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 1  | 1  | 1  | 1  | 1 | 1 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 54. VENDOR\_VER Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                           |
|-------|---------------|------|-------|-------------------------------------------------------|
| 15    | AUTOLOAD_DONE | R    | 0     | Asserted when the Fusefarm Autoload sequence is done  |
| 14:10 | EFC_ERR       | R    | 00000 | The error output from the fuse farm.                  |
| 9:5   | Reserved      | R    | 00000 | Reserved                                              |
| 4:3   | VENDORID      | R    | 01    | TI identification                                     |
| 2:0   | VERSION       | R    | 001   | Bits to determine what version of build for the chip. |

### 8.5.13 Multi-DUC Configuration (PAP, Interpolation) Register (address = 0x0A) [reset = 0x02B0]

**Figure 73. Multi-DUC Configuration (PAP, Interpolation) Register (MULTIDUC\_CFG1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 1   | 0   | 0   | 0   | 1   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 55. MULTIDUC\_CFG1 Field Descriptions**

| Bit  | Field          | Type | Reset | Description                                                                                                                                                                               |
|------|----------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15   | DUAL_IQ        | R/W  | 0     | When asserted the SLICE uses both IQ paths                                                                                                                                                |
| 14   | ISFIR_ENA      | R/W  | 0     | Turns on the inverse sync filter for the AB and CD paths when programmed to 1.                                                                                                            |
| 13   | Not used       | R/W  | 0     | Not used                                                                                                                                                                                  |
| 12:8 | INTERP         | R/W  | 00010 | Determines the interpolation amount.<br>00000: 1x<br>00001: 2x<br>00010: 4x<br>00011: 6x<br>00100: 8x<br>00101: 10x<br>00110: 12x<br>01000: 16x<br>01001: 18x<br>01010: 20x<br>01100: 24x |
| 7    | ALM_ZEROS_TXEN | R/W  | 1     | When asserted any alarm that isn't masked will mid-level the DAC output by setting the txenable_from_dig to '0'                                                                           |
| 6    | DAC_COMPLEMENT | R/W  | 0     | When asserted the DAC output will be 2's complemented. This helps with hookup at the board level.                                                                                         |
| 5    | ALM_ZEROS_JESD | R/W  | 1     | When asserted any alarm that isn't masked will zero the data coming out of the JESD block.                                                                                                |
| 4    | ALM_OUT_ENA    | R/W  | 1     | When asserted the output from the selected SLICE will be passed on to the MASTER alarm control if it is also turned on then the alarm will be sent to the pad_alarm pin.                  |
| 3    | PAPA_ENA       | R/W  | 0     | Turns on the Power Amp Protection logic for path A.                                                                                                                                       |
| 2    | PAPB_ENA       | R/W  | 0     | Turns on the Power Amp Protection logic for path B.                                                                                                                                       |
| 1    | PAPC_ENA       | R/W  | 0     | Turns on the Power Amp Protection logic for path C.                                                                                                                                       |
| 0    | PAPD_ENA       | R/W  | 0     | Turns on the Power Amp Protection logic for path D.                                                                                                                                       |

## 8.5.14 Multi-DUC Configuration (Mixers) Register (address = 0x0C) [reset = 0x2402]

**Figure 74. Multi-DUC Configuration (Mixers) Register (MULTIDUC\_CFG2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 1   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 56. MULTIDUC\_CFG2 Field Descriptions**

| Bit   | Field           | Type | Reset | Description                                                                                                                                                |
|-------|-----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:14 | DAC_BITWIDTH    | R/W  | 0b00  | Determines the bit width of the data going to the DAC<br>00: 14 bits<br>01: 14 bits<br>10: 12 bits<br>11: 11 bits                                          |
| 13    | ZERO_INVLD_DATA | R/W  | 1     | When asserted; the data from the JESD block is zeroed in the mapper to prevent goofy output from the DAC. For test purposes this bit should be desasserted |
| 12    | SHORTTEST_ENA   | R/W  | 0     | Turns on the JESD SHORT pattern test (5.1.6.2)                                                                                                             |
| 11    | Reserved        | R/W  | 0     | Reserved                                                                                                                                                   |
| 10    | Reserved        | R/W  | 1     | Reserved                                                                                                                                                   |
| 9     | MIXERAB_ENA     | R/W  | 0     | Turns on the mixer for the A and B streams                                                                                                                 |
| 8     | MIXERCD_ENA     | R/W  | 0     | Turns on the mixer for the C and D streams                                                                                                                 |
| 7     | MIXERAB_GAIN    | R/W  | 0     | Adds 6dB of gain when asserted                                                                                                                             |
| 6     | MIXERCD_GAIN    | R/W  | 0     | Adds 6dB of gain when asserted                                                                                                                             |
| 5     | NCOAB_ENA       | R/W  | 0     | When high the full NCO block is turned on.                                                                                                                 |
| 4     | NCOCD_ENA       | R/W  | 0     | When high the full NCO block is turned on.                                                                                                                 |
| 3:2   | Reserved        | R/W  | 00    | Reserved                                                                                                                                                   |
| 1     | TWOS            | R/W  | 1     | When asserted the chip is expecting 2's complement data is arriving through the JESD; otherwise offset binary is expected                                  |
| 0     | Reserved        | R/W  | 0     | Reserved                                                                                                                                                   |

### 8.5.15 JESD FIFO Control Register (address = 0x0D) [reset = 0x1300]

**Figure 75. JESD FIFO Control Register (JESD\_FIFO)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 57. JESD\_FIFO Field Descriptions**

| Bit   | Field             | Type | Reset | Description                                                                                                                                   |
|-------|-------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | FIFO_ZEROS_DATA   | R/W  | 1     | When asserted FIFO errors zero the data out of the JESD block. For test purposes this could be turned off to allow test patterns in the FIFO. |
| 14:13 | NOT USED          | R/W  | 000   | Not Used                                                                                                                                      |
| 12    | SRDS_FIFO_ALM_CLR | R/W  | 0     | Set to 1 to clear FIFO errors. Must be set to 0 for proper FIFO operation                                                                     |
| 11    | Not used          | R/W  | 0     | Not used                                                                                                                                      |
| 10:8  | FIFO_OFFSET       | R/W  | 0000  | Used to set the difference between read and write pointers in the JESD FIFO.                                                                  |
| 7:1   | Reserved          | R/W  | 0     | Reserved                                                                                                                                      |
| 0     | SPI_TXENABLE      | R/W  | 0     | When asserted the internal value of txenable = '1'                                                                                            |

### 8.5.16 Alarm Mask 1 Register (address = 0x0E) [reset = 0x00FF]

**Figure 76. Alarm Mask 1 Register (ALM\_MASK1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 58. ALM\_MASK1 Field Descriptions**

| Bit  | Field     | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALM_MASK1 | R/W  | 0x00FF | Each bit is used to mask an alarm. Assertion masks the alarm:<br>bit 15 = mask lane7 lane errors<br>bit 14 = mask lane6 lane errors<br>bit 13 = mask lane5 lane errors<br>bit 12 = mask lane4 lane errors<br>bit 11 = mask lane3 lane errors<br>bit 10 = mask lane2 lane errors<br>bit 9 = mask lane1 lane errors<br>bit 8 = mask lane0 lane errors<br>bit 7 = mask lane7 FIFO flags<br>bit 6 = mask lane6 FIFO flags<br>bit 5 = mask lane5 FIFO flags<br>bit 4 = mask lane4 FIFO flags<br>bit 3 = mask lane3 FIFO flags<br>bit 2 = mask lane2 FIFO flags<br>bit 1 = mask lane1 FIFO flags<br>bit 0 = mask lane0 FIFO flags |

### 8.5.17 Alarm Mask 2 Register (address = 0x0F) [reset = 0xFFFF]

**Figure 77. Alarm Mask 2 Register (ALM\_MASK2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 59. ALM\_MASK2 Field Descriptions**

| Bit  | Field      | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|------------|------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALMS_MASK2 | R/W  | 0xFFFF | Each bit is used to mask an alarm. Assertion masks the alarm:<br>bit 15 = not used<br>bit 14 = not used<br>bit 13 = not used<br>bit 12 = mask SYSREF errors on link0<br>bit 11 = mask alarm from JESD shorttest<br>bit 10 = mask alarm from PAPD<br>bit 9 = mask alarm from PAPC<br>bit 8 = mask alarm from PAPB<br>bit 7 = mask alarm from PAPA<br>bit 6 = not used<br>bit 5 = not used<br>bit 4 = not used<br>bit 3 = not used<br>bit 2 = not used<br>bit 1 = mask alarm_clkdiv192_eq_zero<br>bit 0 = mask alarm_clkdiv192_eq_mult1 |

### 8.5.18 Alarm Mask 3 Register (address = 0x10) [reset = 0xFFFF]

**Figure 78. Alarm Mask 3 Register (ALM\_MASK3)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|     | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 60. ALM\_MASK3 Field Descriptions**

| Bit  | Field      | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|------------|------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALMS_MASK3 | R/W  | 0xFFFF | Each bit is used to mask an alarm. Assertion masks the alarm:<br>bit 15 = mask alarm_clkdiv8_eq_zero<br>bit 14 = mask alarm_clkdiv12_eq_zero<br>bit 13 = mask alarm_clkdiv16_eq_zero<br>bit 12 = mask alarm_clkdiv18_eq_zero<br>bit 11 = mask alarm_clkdiv20_eq_zero<br>bit 10 = mask alarm_clkdiv32_eq_zero<br>bit 9 = mask alarm_clkdiv36_eq_zero<br>bit 8 = mask alarm_clkdiv40_eq_zero<br>bit 7 = mask alarm_clkdiv48_eq_zero<br>bit 6 = mask alarm_clkdiv64_eq_zero<br>bit 5 = mask alarm_clkdiv72_eq_zero<br>bit 4 = mask alarm_clkdiv80_eq_zero<br>bit 3 = mask alarm_clkdiv96_eq_zero<br>bit 2 = mask alarm_clkdiv128_eq_zero<br>bit 1 = mask alarm_clkdiv144_eq_zero<br>bit 0 = mask alarm_clkdiv160_eq_zero |

## 8.5.19 Alarm Mask 4 Register (address = 0x11) [reset = 0xFFFF]

**Figure 79. Alarm Mask 4 Register (ALM\_MASK4)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 61. ALM\_MASK4 Field Descriptions**

| Bit  | Field      | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|------------|------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | ALMS_MASK4 | R/W  | 0xFFFF | Each bit is used to mask an alarm. Assertion masks the alarm:<br>bit 15 = mask alarm_clkdiv8_eq_mult1<br>bit 14 = mask alarm_clkdiv12_eq_mult1<br>bit 13 = mask alarm_clkdiv16_eq_mult1<br>bit 12 = mask alarm_clkdiv18_eq_mult1<br>bit 11 = mask alarm_clkdiv20_eq_mult1<br>bit 10 = mask alarm_clkdiv32_eq_mult1<br>bit 9 = mask alarm_clkdiv36_eq_mult1<br>bit 8 = mask alarm_clkdiv40_eq_mult1<br>bit 7 = mask alarm_clkdiv48_eq_mult1<br>bit 6 = mask alarm_clkdiv64_eq_mult1<br>bit 5 = mask alarm_clkdiv72_eq_mult1<br>bit 4 = mask alarm_clkdiv80_eq_mult1<br>bit 3 = mask alarm_clkdiv96_eq_mult1<br>bit 2 = mask alarm_clkdiv128_eq_mult1<br>bit 1 = mask alarm_clkdiv144_eq_mult1<br>bit 0 = mask alarm_clkdiv160_eq_mult1 |

### 8.5.20 JESD Lane Skew Register (address = 0x12) [reset = 0x0000]

**Figure 80. JESD Lane Skew Register (JESD\_LN\_SKEW)**

| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|----|----|----|----|----|----|---|---|
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 0  | 0  | 1  | 0  | 0  | 1 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 62. JESD\_LN\_SKEW Field Descriptions**

| Bit  | Field           | Type | Reset   | Description                                                     |
|------|-----------------|------|---------|-----------------------------------------------------------------|
| 15:5 | NOT USED        | R    | 0x0000  | Not used                                                        |
| 4:0  | MEMIN_LANE_SKEW | R    | 0b00000 | Measure of the lane skew for each link only. Bits are READ_ONLY |

### 8.5.21 CMIX Configuration Register (address = 0x17) [reset = 0x0000]

**Figure 81. CMIX Configuration Register (CMIX)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 0   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 63. CMIX Field Descriptions**

| Bit   | Field    | Type | Reset         | Description                                                                                                                                                                                                                                                                                                                                                                                  |
|-------|----------|------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:12 | CMIX_AB  | R/W  | 0x0           | These bits turn on the different coarse mixing options. Combining the different options together can result in every possible $n \times F_s/8$ [ $n=0 \rightarrow 7$ ]. Below is the valid programming table:<br>cmix=(mem_fs8; mem_fs4; mem_fs2; mem_fsm4)<br>0000 : no mixing<br>0001 : -fs/4<br>0010 : fs/2<br>0100 : fs/4<br>1000 : fs/8<br>1100 : 3fs/8<br>1010 : 5fs/8<br>1110 : 7fs/8 |
| 11:4  | Reserved | R/W  | 00000000<br>0 | Reserved                                                                                                                                                                                                                                                                                                                                                                                     |
| 3:0   | CMIX_CD  | R/W  | 0x0           | These bits turn on the different coarse mixing options. Combining the different options together can result in every possible $n \times F_s/8$ [ $n=0 \rightarrow 7$ ]. Below is the valid programming table:<br>cmix=(mem_fs8; mem_fs4; mem_fs2; mem_fsm4)<br>0000 : no mixing<br>0001 : -fs/4<br>0010 : fs/2<br>0100 : fs/4<br>1000 : fs/8<br>1100 : 3fs/8<br>1010 : 5fs/8<br>1110 : 7fs/8 |

### 8.5.22 Output Summation and Delay Register (address = 0x19) [reset = 0x0000]

**Figure 82. Output Summation and Delay Register (OUTSUM)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 1   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 64. OUTSUM Field Descriptions**

| Bit   | Field        | Type | Reset | Description                                                                                                                                                                                                                                                            |
|-------|--------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:12 | OUTPUT_DELAY | R/W  | 0x0   | Delays the output to the DAC 0 to 15 clock cycles                                                                                                                                                                                                                      |
| 11:4  | Reserved     | R/W  | 0x00  | Reserved                                                                                                                                                                                                                                                               |
| 3:0   | OUTSUM_SEL   | R/W  | 0x0   | Selects the output summing functions. Each bit selects another sample to sum. Multiple bits can be selected.<br>bit 0 = add the path AB sample<br>bit 1 = add the path CD sample<br>bit 2 = add adjacent DAC path AB sample<br>bit 3 = add adjacent DAC path CD sample |

### 8.5.23 NCO Phase Path AB Register (address = 0x1C) [reset = 0x0000]

**Figure 83. NCO Phase Path AB Register (PHASE\_NCOAB)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 65. PHASE\_NCOAB Field Descriptions**

| Bit  | Field      | Type      | Reset  | Description                                            |
|------|------------|-----------|--------|--------------------------------------------------------|
| 15:0 | PHASE_NCO1 | Auto Sync | 0x0000 | The phase offset for the FULL NCO1 in the AB datapath. |

### 8.5.24 NCO Phase Path CD Register (address = 0x1D) [reset = 0x0000]

**Figure 84. NCO Phase Path CD Register (PHASE\_NCOCD)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 66. PHASE\_NCOCD Field Descriptions**

| Bit  | Field       | Type      | Reset  | Description                                            |
|------|-------------|-----------|--------|--------------------------------------------------------|
| 15:0 | PHASE_NCO12 | Auto Sync | 0x0000 | The phase offset for the FULL NCO2 in the CD datapath. |

### 8.5.25 NCO Frequency Path AB Register (address = 0x1E-0x20) [reset = 0x0000 0000 0000]

**Figure 85. NCO Frequency Path AB Register (FREQ\_NCOAB)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 1   | 1   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 67. FREQ\_NCOAB Field Descriptions**

| Bit  | Field      | Type | Reset                  | Description                          |
|------|------------|------|------------------------|--------------------------------------|
| 47:0 | FREQ_NCOAB | R/W  | 0x0000<br>0000<br>0000 | NCO frequency word for AB data path. |

### 8.5.26 NCO Frequency Path CD Register (address = 0x21-0x23) [reset = 0x0000 0000 0000]

**Figure 86. NCO Frequency Path CD Register (FREQ\_NCOCD)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 68. FREQ\_NCOCD Field Descriptions**

| Bit  | Field      | Type | Reset                  | Description                          |
|------|------------|------|------------------------|--------------------------------------|
| 47:0 | FREQ_NCOCD | R/W  | 0x0000<br>0000<br>0000 | NCO frequency word for CD data path. |

### 8.5.27 SYSREF Use for Clock Divider Register (address = 0x24) [reset = 0x0010]

**Figure 87. SYSREF Use for Clock Divder Register (SYSREF\_CLKDIV)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 0   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 69. SYSREF\_CLKDIV Field Descriptions**

| Bit   | Field              | Type | Reset | Description                                                                                                                                                                                                                                                                                          |
|-------|--------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | Reserved           | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                             |
| 14:12 | CDRVSER_SYSREF_DLY | R/W  | 000   | Programmable delay the SYSREF by N dacclk cycles to the CDRV_SER clock dividers. By offsetting the clock to the different multi-DUC blocks, clock mixing could potentially be reduced.                                                                                                               |
| 11:7  | Not used           | R/W  | 00000 | Not used                                                                                                                                                                                                                                                                                             |
| 6:4   | SYSREF_MODE        | R/W  | 001   | Determines how SYSREF is used to sync the clock dividers in the CDRV_SER block.<br>000 = Don't use SYSREF pulse<br>001 = Use all SYSREF pulses<br>010 = Use only the next SYSREF pulse<br>011 = Skip one SYSREF pulse then use only the next one<br>100 = Skip one SYSREF pulse then use all pulses. |
| 3:2   | SYSREF_DLY         | R/W  | 00    | Delays the SYSREF into the CDRV_SER capture FF through 1 of 4 choices. This allows for extra delay in case the timing of the clock or SYSREF path isn't as good as we think.                                                                                                                         |
| 1:0   | Reserved           | R/W  | 00    | Reserved                                                                                                                                                                                                                                                                                             |

### 8.5.28 Serdes Clock Control Register (address = 0x25) [reset = 0x7700]

**Figure 88. Serdes Clock Control Register (SERDES\_CLK)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 0   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 70. SERDES\_CLK Field Descriptions**

| Bit   | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                 |
|-------|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:12 | CLKJESD_DIV     | R/W  | 0x7   | This controls the selection of the clk_jesd output<br>0000 = div4<br>0001 = div8<br>0010 = div12<br>0011 = div16<br>0100 = div18<br>0101 = div20<br>0110 = div24<br>0111 = div32<br>1001 = div36<br>1010 = div48<br>1011 = div64<br>1100 = div5.333<br>1101 = div10.666<br>1110 = div21p333 |
| 11:8  | CLKJESD_OUT_DIV | R/W  | 0x7   | This controls the selection of the clk_jesd_out output<br>0000 = div8<br>0001 = div16<br>0010 = div32<br>0011 = div48<br>0100 = div64<br>0101 = div80<br>0110 = div96<br>0111 = div128<br>1000 = div144<br>1001 = div160<br>1010 = div192                                                   |
| 7:0   | Reserved        | R/W  | 0x0   | Reserved                                                                                                                                                                                                                                                                                    |

## 8.5.29 Sync Source Control 1 Register (address = 0x27) [reset = 0x1144]

**Figure 89. Sync Source Control 1 Register (SYNCSEL1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 0   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 71. SYNCSEL1 Field Descriptions**

| Bit   | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                  |
|-------|-----------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:12 | SYNCSEL_MIXERAB | R/W  | 0x1   | Controls the syncing of the double buffered SPI registers for the mixerAB block. These bits are enables so a '1' in the bit place allows the sync to pass to the block.<br>bit 0 = auto-sync from SPI register write<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync |
| 11:8  | SYNCSEL_MIXERCD | R/W  | 0x1   | Controls the syncing of the double buffered SPI registers for the mixerCD block. These bits are enables so a '1' in the bit place allows the sync to pass to the block.<br>bit 0 = auto-sync from SPI register write<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync |
| 7:4   | SYNCSEL_NCOAB   | R/W  | 0x4   | Controls the syncing of NCOAB accumulators. These bits are enables so a '1' in the bit place allows the sync to pass to the block.<br>bit 0 = '0'<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync                                                                    |
| 3:0   | SYNCSEL_NCOCD   | R/W  | 0x4   | Controls the syncing of NCOCD accumulators. These bits are enables so a '1' in the bit place allows the sync to pass to the block.<br>bit 0 = '0'<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync                                                                    |

### 8.5.30 Sync Source Control 2 Register (address = 0x28) [reset = 0x0000]

**Figure 90. Sync Source Control 2 Register (SYNCSEL2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 72. SYNCSEL2 Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                                                                                                 |
|-------|---------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------|
| 15:12 | Reserved      | R/W  | 0x0   | Reserved                                                                                                                    |
| 11:8  | SYNCSEL_PAPAB | R/W  | 0x0   | Select the sync for the PAP A and B.<br>bit 0 = '0'<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync |
| 7:4   | SYNCSEL_PAPCD | R/W  | 0x0   | Select the sync for the PAP C and D.<br>bit 0 = '0'<br>bit 1 = sysref<br>bit 2 = sync_out from JESD<br>bit 3 = mem_spi_sync |
| 3:2   | Reserved      | R/W  | 0b00  | Reserved                                                                                                                    |
| 1     | SPI_SYNC      | R/W  | 0     | This is used to generate the SPI_SYNC signal                                                                                |
| 0     | Reserved      | R/W  | 0     | Reserved                                                                                                                    |

### 8.5.31 PAP path AB Gain Attenuation Step Register (address = 0x29) [reset = 0x0000]

**Figure 91. PAP path AB Gain Attenuation Step Register (PAP\_GAIN\_AB)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 73. PAP\_GAIN\_AB Field Descriptions**

| Bit   | Field           | Type | Reset  | Description           |
|-------|-----------------|------|--------|-----------------------|
| 15:10 | NOT USED        | RW   | 000000 | Not Used              |
| 9:0   | PAPAB_GAIN_STEP |      | 0x000  | Gain attenuation step |

### 8.5.32 PAP path AB Wait Time Register (address = 0x2A) [reset = 0x0000]

**Figure 92. PAP path AB Wait Time Register (PAP\_WAIT\_AB)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 74. PAP\_WAIT\_AB Field Descriptions**

| Bit   | Field      | Type   | Reset | Description                                   |
|-------|------------|--------|-------|-----------------------------------------------|
| 15:10 | Reserved   | 000000 | R/W   | Reserved                                      |
| 9:0   | PAPAB_WAIT | 0x000  | R/W   | Number of clock cycles to wait after gain = 0 |

### 8.5.33 PAP path CD Gain Attenuation Step Register (address = 0x2B) [reset = 0x0000]

**Figure 93. PAP path CD Gain Attenuation Step Register (PAP\_GAIN\_CD)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 75. PAP\_GAIN\_CD Field Descriptions**

| Bit   | Field           | Type | Reset  | Description           |
|-------|-----------------|------|--------|-----------------------|
| 15:10 | Not Used        | R/W  | 000000 | Not Used              |
| 9:0   | PAPCD_GAIN_STEP | R/W  | 0x000  | Gain attenuation step |

### 8.5.34 PAP Path CD Wait Time Register (address = 0x2C) [reset = 0x0000]

**Figure 94. PAP path CD Wait Time Register (PAP\_WAIT\_CD)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 76. PAP\_WAIT\_CD Field Descriptions**

| Bit   | Field      | Type | Reset  | Description                                   |
|-------|------------|------|--------|-----------------------------------------------|
| 15:10 | Reserved   | R/W  | 000000 | Reserved                                      |
| 9:0   | PAPCD_WAIT | R/W  | 0x000  | Number of clock cycles to wait after gain = 0 |

### 8.5.35 PAP path AB Configuration Register (address = 0x2D) [reset = 0x0FFF]

**Figure 95. PAP path AB Configuration Register (PAP\_CFG\_AB)**

| 15  | 14  | 13       | 12  | 11  | 10  | 9   | 8   |
|-----|-----|----------|-----|-----|-----|-----|-----|
| 0   | 0   | Reserved | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W      | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5        | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1        | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W      | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 77. PAP\_CFG\_AB Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                                                                                               |
|-------|---------------|------|-------|---------------------------------------------------------------------------------------------------------------------------|
| 15:14 | PAPAB_SEL_DLY | R/W  | 00    | Controls the length of the delayline in the PAP AB logic.<br>00 : N = 32<br>01 : N = 64<br>10 : N = 128<br>11 : Not Valid |
| 13    | Reserved      | R/W  | 0     | Reserved                                                                                                                  |
| 12:0  | PAPAB_THRESH  | R/W  | 0xFFF | The threshold for the PAP AB trigger.                                                                                     |

### 8.5.36 PAP path CD Configuration Register (address = 0x2E) [reset = 0x0FFF]

**Figure 96. PAP path CD Configuration Register (PAP\_CFG\_CD)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 1   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 78. PAP\_CFG\_CD Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                                                                                                |
|-------|---------------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 15:14 | PAPCD_SEL_DLY | R/W  | 00    | Controls the length of the delay line in the PAP CD logic.<br>00 : N = 32<br>01 : N = 64<br>10 : N = 128<br>11 : Not Valid |
| 13    | Reserved      | R/W  | 0     | Reserved                                                                                                                   |
| 12:0  | PAPCD_THRESH  | R/W  | 0xFFF | The threshold for the PAP CD trigger.                                                                                      |

### 8.5.37 DAC SPI Configuration Register (address = 0x2F) [reset = 0x0000]

**Figure 97. DAC SPI Constant 1 Register (SPIDAC\_TEST1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 1   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 79. SPIDAC\_TEST1 Field Descriptions**

| Bit  | Field      | Type | Reset  | Description                                                                                                                    |
|------|------------|------|--------|--------------------------------------------------------------------------------------------------------------------------------|
| 15:1 | Reserved   | R/W  | 0x0000 | Reserved                                                                                                                       |
| 0    | SPIDAC_ENA | R/W  | 0      | When asserted the DAC output is set to the value in register SPIDAC. This can be used for trim setting and other static tests. |

### 8.5.38 DAC SPI Constant Register (address = 0x30) [reset = 0x0000]

**Figure 98. DAC SPI Constant Register (SPIDAC\_TEST2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 80. SPIDAC\_TEST2 Field Descriptions**

| Bit  | Field  | Type | Reset  | Description                                                                                    |
|------|--------|------|--------|------------------------------------------------------------------------------------------------|
| 15:0 | SPIDAC | R/W  | 0x0000 | This value replaces the data at the output of the JESD so that the DAC value can be controlled |

### 8.5.39 Gain for path AB Register (address = 0x32) [reset = 0x0000]

**Figure 99. Gain for path AB Register (GAINAB)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 81. GAINAB Field Descriptions**

| Bit   | Field      | Type | Reset | Description                                                                                            |
|-------|------------|------|-------|--------------------------------------------------------------------------------------------------------|
| 15    | GAINAB_ENA | R/W  | 0     | Turns on the path AB gain block                                                                        |
| 14:12 | Reserved   | R/W  | 0x0   | Reserved                                                                                               |
| 11:0  | GAINAB     | R/W  | 0x400 | Extra control of gain in the GAINAB block. This allows a fix gain to be added to the signal if needed. |

### 8.5.40 Gain for path CD Register (address = 0x33) [reset = 0x0000]

**Figure 100. Gain for path CD Register (GAINCD)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 82. GAINCD Field Descriptions**

| Bit   | Field      | Type | Reset | Description                                                                                            |
|-------|------------|------|-------|--------------------------------------------------------------------------------------------------------|
| 15    | GAINCD_ENA | R/W  | 0     | Turns on the Path CD gain block                                                                        |
| 14:12 | Reserved   | R/W  | 0x0   | Reserved                                                                                               |
| 11:0  | GAINCD     | R/W  | 0x400 | Extra control of gain in the GAINCD block. This allows a fix gain to be added to the signal if needed. |

## 8.5.41 JESD Error Counter Register (address = 0x41) [reset = 0x0000]

**Figure 101. JESD Error Counter Register (JESD\_ERR\_CNT)**

|    |    |    |    |    |    |   |   |
|----|----|----|----|----|----|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 0  | 0  | 0  | 0  | 0 | 1 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 83. JESD\_ERR\_CNT Field Descriptions**

| Bit  | Field        | Type | Reset  | Description                                                                                                                                                        |
|------|--------------|------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:0 | JESD_ERR_CNT | R    | 0x0000 | This is the error count for the JESD link. This is a 16bit value that is not cleared until the JESD synchronization is required or errcnt_clr is programmed to '1' |

## 8.5.42 JESD ID 1 Register (address = 0x46) [reset = 0x0044]

**Figure 102. JESD ID 1 Register (JESD\_ID1)**

|    |    |    |    |    |    |   |   |
|----|----|----|----|----|----|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | x |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 0  | 0  | 0  | 1  | 1 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 84. JESD\_ID1 Field Descriptions**

| Bit   | Field    | Type | Reset | Description        |
|-------|----------|------|-------|--------------------|
| 15:11 | LID0     | R/W  | 00000 | JESD ID for lane 0 |
| 10:6  | LID1     | R/W  | 00001 | JESD ID for lane 1 |
| 5:1   | LID2     | R/W  | 00010 | JESD ID for lane 2 |
| 0     | Reserved | R/W  | 0     | Reserved           |

### 8.5.43 JESD ID 2 Register (address = 0x47) [reset = 0x190A]

**Figure 103. JESD ID 2 Register (JESD\_ID2)**

|    |    |    |    |    |    |   |   |
|----|----|----|----|----|----|---|---|
| 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| 0  | 0  | 0  | 0  | 0  | 0  | 0 | 0 |
| R  | R  | R  | R  | R  | R  | R | R |
| 7  | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| 0  | 1  | 0  | 0  | 0  | 1  | 1 | 1 |
| R  | R  | R  | R  | R  | R  | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 85. JESD ID 2 Register (JESD\_ID2)**

| Bit   | Field    | Type | Reset | Description        |
|-------|----------|------|-------|--------------------|
| 15:11 | LID3     | R/W  | 00011 | JESD ID for lane 3 |
| 10:6  | LID4     | R/W  | 00100 | JESD ID for lane 4 |
| 5:1   | LID5     | R/W  | 00101 | JESD ID for lane 5 |
| 0     | Reserved | R/W  | 0     | Reserved           |

### 8.5.44 JESD ID 3 and Subclass Register (address = 0x48) [reset = 0x31C3]

**Figure 104. JESD ID 3 Register (JESD\_ID3)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 86. JESD\_ID3 Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                                                                                                                                                 |
|-------|-----------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:11 | LID6      | R/W  | 00110 | JESD ID for lane 6                                                                                                                                                                                                                                          |
| 10:6  | LID7      | R/W  | 00111 | JESD ID for lane 7                                                                                                                                                                                                                                          |
| 5:4   | Reserved  | R/W  | 00    | Reserved                                                                                                                                                                                                                                                    |
| 3:1   | SUBCLASSV | R/W  | 001   | Selects the JESD subclass supported. Note: "001" is subclass 1 and "000" is subclass 0 they are the only modes supported; not used for operation but used for configuration. See field MIN_LATENCY_ENA in register JESD_MATCH (9.5.46) for use in subclass0 |
| 0     | JESDV     | R/W  | 1     | Selects the version of JESD support(0=A; 1=B) NOTE: JESD 204B is only supported version.                                                                                                                                                                    |

## 8.5.45 JESD Lane Enable Register (address = 0x4A) [reset = 0x0003]

**Figure 105. JESD Lane Enable Register (JESD\_LN\_EN)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 87. JESD\_LN\_EN Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                              |
|------|-----------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | LANE_ENA        |      | 0x00  | Turn on each lane as needed. Signal is active high.<br>bit 15 : lane7 enable<br>bit 14 : lane6 enable<br>bit 13 : lane5 enable<br>bit 12 : lane4 enable<br>bit 11 : lane3 enable<br>bit 10 : lane2 enable<br>bit 9 : lane1 enable<br>bit 8 : lane0 enable                                                                                                                |
| 7:6  | JESD_TEST_SEQ   |      | 00    | Set to select and verify link layer test sequences. The error for these sequences comes out the lane alarms bit0. 1= a fail and 0 = pass.<br>00 : test sequence disabled<br>01 : verify repeating D.21.5 high frequency pattern for random jitter<br>10 : verify repeating K.28.5 mixed frequency pattern for deterministic jitter<br>11 : verify repeating ILA sequence |
| 5:2  | Reserved        |      | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                 |
| 1:0  | JESD_PHASE_MODE |      | 11    | Used to tell the JESD block how many clock phases are being used for lanes.<br>00 = 1 phase<br>01 = 2 phases<br>10 = 4 phases<br>11 = 8 phases                                                                                                                                                                                                                           |

### 8.5.46 JESD RBD Buffer and Frame Octets Register (address = 0x4B) [reset = 0x1300]

**Figure 106. JESD RBD Buffer and Frame Octets Register (JESD\_RBD\_F)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|     |     |     | 0   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   |     | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 88. JESD\_RBD\_F Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                       |
|-------|----------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:13 | Reserved | R/W  | 00    | Reserved                                                                                                                                                                                                                          |
| 12:8  | RBD      | R/W  | 10011 | This controls the amount of elastic buffers being used in the JESD. Larger numbers will mean more latency; but smaller numbers may not hold enough data to capture the input skew. This value must always be $\leq \text{mem\_k}$ |
| 7:0   | F_M1     | R/W  | 0x00  | This is the number of octets in the frame - 1                                                                                                                                                                                     |

### 8.5.47 JESD K and L Parameters Register (address = 0x4C) [reset = 0x1303]

**Figure 107. JESD K and L Parameters Register (JESD\_K\_L)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 89. JESD\_K\_L Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                    |
|-------|----------|------|-------|----------------------------------------------------------------|
| 15:13 | Reserved | R/W  | 000   | Reserved                                                       |
| 12:8  | K_M1     | R/W  | 10011 | The number of frames in a multi-frame - 1. $0 \leq k - 1 < 32$ |
| 7:5   | Reserved | R/W  | 0     | Reserved                                                       |
| 4:0   | L_M1     | R/W  | 00011 | The number of lanes used by the JESD - 1. $0 \leq L - 1 < 8$   |

## 8.5.48 JESD M and S Parameters Register (address = 0x4D) [reset = 0x0100]

**Figure 108. JESD M and S Parameters Register (JESD\_M\_S)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 90. JESD\_M\_S Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                               |
|------|----------|------|-------|-----------------------------------------------------------|
| 15:8 | M_M1     | R/W  | 0x01  | The number of streams per frame - 1. $0 \leq M - 1 < 256$ |
| 7:5  | Reserved | R/W  | 000   | Reserved                                                  |
| 4:0  | S_M1     | R/W  | 00000 | The number of samples per stream per frame - 1.           |

## 8.5.49 JESD N, HD and SCR Parameters Register (address = 0x4E) [reset = 0x0F4F]

**Figure 109. JESD N, HD and SCR Parameters Register (JESD\_N\_HD\_SCR)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 1   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 91. JESD\_N\_HD\_SCR Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                            |
|-------|-----------|------|-------|--------------------------------------------------------|
| 15:13 | Reserved  | R/W  | 000   | Reserved                                               |
| 12:8  | NPRIME_M1 | R/W  | 01111 | The number of adjusted bits per sample - 1             |
| 7     | Reserved  | R/W  | 0     | Reserved                                               |
| 6     | HD        | R/W  | 1     | High density mode. Samples can cross the lane boundary |
| 5     | SCR       | R/W  | 0     | Turn on the scrambler                                  |
| 4:0   | N_M1      | R/W  | 01111 | The number of bits per sample - 1                      |

### 8.5.50 JESD Character Match and Other Register (address = 0x4F) [reset = 0x1CC1]

**Figure 110. JESD Character Match and Other Parameters Register (JESD\_MATCH)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 1   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 92. JESD\_MATCH Field Descriptions**

| Bit  | Field               | Type | Reset | Description                                                                                                                                                                                                                                |
|------|---------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | MATCH_DATA          | R/W  | 0x1C  | The character to match for buffer release. Normally it is a /R/=/K28.0/-0x1C but with these bits the user can program the value.                                                                                                           |
| 7    | MATCH_SPECIFIC      | R/W  | 1     | Match a specific charater to start the JESD buffering when asserted; otherwise the first non-K will start the buffering.                                                                                                                   |
| 6    | MATCH_CTRL          | R/W  | 1     | When asserted the match character is a CONTROL character instead of a DATA character.                                                                                                                                                      |
| 5    | NO_LANE_SYNC        | R/W  | 0     | Assert if the TX side does not support lane initialization. This way the RX won't flag errors in the configuration portion of the ILA.                                                                                                     |
| 4:2  | Not Used            | R/W  | 000   | Not Used                                                                                                                                                                                                                                   |
| 1    | MIN_LATENCY_ENA     | R/W  | 0     | Enable minimum latency when set. This is needed for subclass 0 support.                                                                                                                                                                    |
| 0    | JESD_COMMAALIGN_ENA | R/W  | 1     | When asserted the JESD block SERDES comma align signal will be added with the SERDES ALIGN bit(0) to control when to shut off comma alignment. When this bit is deasserted; then the programmed bit(spi_config62(11)) is the only control. |

### 8.5.51 JESD Link Configuration Data Register (address = 0x50) [reset = 0x0000]

**Figure 111. JESD Link Configuration Data Register (JESD\_LINK\_CFG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 0   | 0   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 93. JESD\_Link\_CFG Field Descriptions**

| Bit   | Field  | Type | Reset | Description                                                                                     |
|-------|--------|------|-------|-------------------------------------------------------------------------------------------------|
| 15-12 | ADJCNT | R/W  | 0x0   | Lane configuration data for link. Reserved by DAC38RF8x except for lane configuration checking. |
| 11    | ADJDIR | R/W  | 0     | Lane configuration data for link. Reserved by DAC38RF8x except for lane configuration checking. |
| 10-7  | BID    | R/W  | 0x0   | Lane configuration data for link. Reserved by DAC38RF8x except for lane configuration checking. |
| 6-2   | CF     | R/W  | 00000 | Lane configuration data for link. Reserved by DAC38RF8x except for lane configuration checking. |
| 1-0   | CS     | R/W  | 00    | Lane configuration data for link. Reserved by DAC38RF8x except for lane configuration checking. |

### 8.5.52 JESD Sync Request Register (address = 0x51) [reset = 0x00FF]

**Figure 112. JESD Sync Request Register (JESD\_SYNC\_REQ)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 94. JESD\_SYNC\_REQ Field Descriptions**

| Bit  | Field        | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|------|--------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | DID          | R/W  | 0x00  | Lane configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 7:0  | SYNC_REQUEST | R/W  | 0xFF  | These bits select which errors cause a sync request. Sync requests take priority over the error notification; so if sync request isn't desired; set these bits to a '0'.<br>bit 7 = multi-frame alignment error<br>bit 6 = frame alignment error<br>bit 5 = link configuration error<br>bit 4 = elastic buffer overflow (bad RBD value)<br>bit 3 = elastic buffer end char mismatch (match_ctrl match_data)<br>bit 2 = code synchronization error<br>bit 1 = 8b/10b not-in-table code error<br>bit 0 = 8b/10b disparity error |

### 8.5.53 JESD Error Output Register (address = 0x52) [reset = 0x00FF]

**Figure 113. JESD Error Output Register (JESD\_ERR\_OUT)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 0   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 95. JESD\_ERR\_OUT Field Descriptions**

| Bit   | Field           | Type | Reset  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------|-----------------|------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:10 | Reserved        | R/W  | 000000 | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 9     | DISABLE_ERR_RPT | R/W  | 0      | Assertion means that errors will not be reported on the sync_n output.                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 8     | PHADJ           | R/W  | 0      | Lane configuration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 7:0   | ERR_ENA         | R/W  | 0xFF   | These bits select the errors generated are counted in the err_c for the link. The bits also control what signals are sent out the pad_syncb pin for error notification.<br>bit 7 = multi-frame alignment error<br>bit 6 = frame alignment error<br>bit 5 = link configuration error<br>bit 4 = elastic buffer overflow (bad RBD value)<br>bit 3 = elastic buffer end char mismatch (match_ctrl match_data)<br>bit 2 = code synchronization error<br>bit 1 = 8b/10b not-in-table code error<br>bit 0 = 8b/10b disparity error |

### 8.5.54 JESD ILA Check 1 Register (address = 0x53) [reset = 0x0100]

**Figure 114. JESD ILA Check 1 Register (JESD\_ILA\_CFG1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 0   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 96. JESD\_ILA\_CFG1 Field Descriptions**

| Bit  | Field | Type | Reset | Description                                                                                               |
|------|-------|------|-------|-----------------------------------------------------------------------------------------------------------|
| 15:8 | ILA_M | R/W  | 0x01  | JESD M-1 configuration value used only for ILA checking; may be set independently of the actual JESD mode |
| 7:0  | ILA_F | R/W  | 0x00  | JESD F-1 configuration value used only for ILA checking; may be set independently of the actual JESD mode |

### 8.5.55 JESD ILA Check 2 Register (address = 0x54) [reset = 0x8E60]

**Figure 115. JESD ILA Check 2 Register (JESD\_ILA\_CFG2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 0   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 97. JESD\_ILA\_CFG2 Field Descriptions**

| Bit   | Field  | Type | Reset | Description                                                                                               |
|-------|--------|------|-------|-----------------------------------------------------------------------------------------------------------|
| 15    | ILA_HD | R/W  | 1     | JESD HD configuration value used only for ILA checking; may be set independently of the actual JESD mode  |
| 14:10 | ILA_L  | R/W  | 00011 | JESD L-1 configuration value used only for ILA checking; may be set independently of the actual JESD mode |
| 9:5   | ILA_K  | R/W  | 10011 | JESD K-1 configuration value used only for ILA checking; may be set independently of the actual JESD mode |
| 4:0   | ILA_S  | R/W  | 00000 | JESD S-1 configuration value used only for ILA checking; may be set independently of the actual JESD mode |

### 8.5.56 JESD SYSREF Mode Register (address = 0x5C) [reset = 0x0001]

**Figure 116. JESD SYSREF Mode Register (JESD\_SYSR\_MODE)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 1   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 98. JESD\_SYSR\_MODE Field Descriptions**

| Bit  | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                               |
|------|-------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:4 | Reserved    | R/W  | 0x000 | Reserved                                                                                                                                                                                                                                                                                                                                                                  |
| 3    | ERR_CNT_CLR | R/W  | 0     | A transition from 0->1 causes the error_cnt to be cleared                                                                                                                                                                                                                                                                                                                 |
| 2:0  | SYSREF_MODE | R/W  | 001   | Determines how SYSREF is used in the JESD synchronizing block.<br>000 = Don't use SYSREF pulse<br>001 = Use all SYSREF pulses<br>010 = Use only the next SYSREF pulse<br>011 = Skip one SYSREF pulse then use only the next one<br>100 = Skip one SYSREF pulse then use all pulses.<br>101 = skip two SYSREFs and then use one<br>110 = skip two SYSREFs and then use all |

### 8.5.57 JESD Crossbar Configuration 1 Register (address = 0x5F) [reset = 0x0123]

**Figure 117. JESD Crossbar Configuration 1 Register (JESD\_CROSSBAR1)**

|          |     |     |     |          |     |     |     |
|----------|-----|-----|-----|----------|-----|-----|-----|
| 15       | 14  | 13  | 12  | 11       | 10  | 9   | 8   |
| Reserved | 0   | 0   | 0   | Reserved | 0   | 0   | x   |
| R/W      | R/W | R/W | R/W | R/W      | R/W | R/W | R/W |
| 7        | 6   | 5   | 4   | 3        | 2   | 1   | 0   |
| 0        | 1   | 0   | 1   | 1        | 1   | 1   | 1   |
| R/W      | R/W | R/W | R/W | R/W      | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 99. JESD\_CROSSBAR1 Field Descriptions**

| Bit   | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                       |
|-------|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 14:12 | OCTETPATH0_SEL | R/W  | 000   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 11    | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 10:8  | OCTETPATH1_SEL | R/W  | 001   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 7     | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 6:4   | OCTETPATH2_SEL | R/W  | 010   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 3     | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 2:0   | OCTETPATH3_SEL | R/W  | 011   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |

### 8.5.58 JESD Crossbar Configuration 2 Register (address = 0x60) [reset = 0x4567]

**Figure 118. JESD\_CROSSBAR2 Field DBits to Determine What Version of Build for the chip.escrptions**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 100. JESD\_CROSSBAR2 Field Descriptions**

| Bit   | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                       |
|-------|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 14:12 | OCTETPATH4_SEL | R/W  | 100   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 11    | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 10:8  | OCTETPATH5_SEL | R/W  | 101   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 7     | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 6:4   | OCTETPATH6_SEL | R/W  | 110   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |
| 3     | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                          |
| 2:0   | OCTETPATH7_SEL | R/W  | 111   | These bits are used by the cross-bar switch to map any lane to any other lane. The 3 bit term tells the mapper block what lane this particular lane is supposed to be treated as.<br>000 = treat as lane0<br>001 = treat as lane1<br>010 = treat as lane2<br>011 = treat as lane3<br>100 = treat as lane4<br>101 = treat as lane5<br>110 = treat as lane6<br>111 = treat as lane7 |

### 8.5.59 JESD Alarms for Lane 0 Register (address = 0x64) [reset = 0x0000]

**Figure 119. JESD Alarms for Lane 0 Register (JBits to determine what version of build for the chip.ESD\_ALM\_L0)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 0   | 1   | 0   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 101. JESD\_ALM\_L0 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE0_ERR   | W0C  | 0x00  | Lane0 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO0_FLAGS | W0C  | 0x0   | Lane0 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

## 8.5.60 JESD Alarms for Lane 1 Register (address = 0x65 01100101) [reset = 0x0000]

**Figure 120. JESD Alarms for Lane 1 Register (JESD\_ALM\_L1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 0   | 1   | 0   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 102. JESD\_ALM\_L1 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE1_ERR   | W0C  | 0x00  | Lane1 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO1_FLAGS | W0C  | 0x0   | Lane1 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

### 8.5.61 JESD Alarms for Lane 2 Register (address = 0x66) [reset = 0x0000]

**Figure 121. JESD Alarms for Lane 2 Register (JESD\_ALM\_L2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 0   | 1   | 1   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 103. JESD\_ALM\_L2 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE2_ERR   | W0C  | 0x00  | Lane2 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO2_FLAGS | W0C  | 0x0   | Lane2 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

## 8.5.62 JESD Alarms for Lane 3 Register (address = 0x67) [reset = 0x0000]

**Figure 122. JESD Alarms for Lane 3 Register (JESD\_ALM\_L3)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 0   | 1   | 1   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 104. JESD\_ALM\_L3 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE3_ERR   | W0C  | 0x00  | Lane3 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO3_FLAGS | W0C  | 0x0   | Lane3 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

### 8.5.63 JESD Alarms for Lane 4 Register (address = 0x68) [reset = 0x0000]

**Figure 123. JESD Alarms for Lane 4 Register (JESD\_ALM\_L4)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 0   | 0   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 105. JESD\_ALM\_L4 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE4_ERR   | W0C  | 0x00  | Lane4 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO4_FLAGS | W0C  | 0x0   | Lane4 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

## 8.5.64 JESD Alarms for Lane 5 Register (address = 0x69) [reset = 0x0000]

**Figure 124. 8.4.60 JESD Alarms for Lane 5 Register (address = 0x69) [reset = 0x0000]**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 0   | 0   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 106. JESD\_ALM\_L5 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE5_ERR   | W0C  | 0x00  | Lane5 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO5_FLAGS | W0C  | 0x0   | Lane5 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

### 8.5.65 JESD Alarms for Lane 6 Register (address = 0x6A [reset = 0x0000])

**Figure 125. JESD Alarms for Lane 6 Register (JESD\_ALM\_L6)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 0   | 1   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 107. JESD\_ALM\_L6 Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE6_ERR   | W0C  | 0x00  | Lane6 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO6_FLAGS | W0C  | 0x0   | Lane6 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

### 8.5.66 JESD Alarms for Lane 7 Register (address = 0x6B) [reset = 0x0000]

**Figure 126. JESD Alarms for Lane 7 Register (JESD\_ALM\_L7)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 0   | 1   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 108. JESD Alarms for Lane 7 Register (JESD\_ALM\_L7)**

| Bit  | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|-----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | ALM_LANE7_ERR   | W0C  | 0x00  | Lane7 errors:<br>bit 15 = multiframe alignment error<br>bit 14 = frame alignment error<br>bit 13 = link configuration error<br>bit 12 = elastic buffer overflow (bad RBD value)<br>bit 11 = elastic buffer match error. The first non-/K/ doesn't match "match_ctrl" and "match_data" programmed values.<br>bit 10 = code synchronization error<br>bit 9 = 8b/10b not-in-table code error<br>bit 8 = 8b/10b disparity error |
| 7:4  | Reserved        | W0C  | 0x0   | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3:0  | ALM_FIFO7_FLAGS | W0C  | 0x0   | Lane7 FIFO errors:<br>bit 3 = write_error : High if write request and FIFO is full (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 2 = write_full : FIFO is FULL<br>bit 1 = read_error : High if read request with empty FIFO (NOTE: only released when JESD block is initialize with mem_init_state)<br>bit 0 = read_empty : FIFO is empty                                                  |

### 8.5.67 SYSREF and PAP Alarms Register (address = 0x6C) [reset = 0x0000]

**Figure 127. SYSREF and PAP Alarms Register (ALM\_SYSREF\_PAP)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 1   | 0   | 0   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 109. ALM\_SYSREF\_PAP Field Descriptions**

| Bit   | Field              | Type | Reset | Description                                                                                                       |
|-------|--------------------|------|-------|-------------------------------------------------------------------------------------------------------------------|
| 15:13 | Reserved           | W0C  | 0     | Reserved                                                                                                          |
| 12    | ALM_SYSREF_ERR     | W0C  |       | Alarm caused when the sysref is placed at an incorrect location                                                   |
| 11    | ALM_FROM_SHORTTEST | W0C  |       | This is the alarm from JESD during the SHORT TEST checking.                                                       |
| 10:7  | ALM_PAP            | W0C  | 0x0   | The alarms from the PAP blocks indicated which PAP was triggered. bit0 = PAPA bit1 = PAPB bit2 = PAPC bit3 = PAPD |
| 6:2   | Reserved           | W0C  | 0x0   | Reserved                                                                                                          |
| 1     | ALM_DIV192_ZERO    | W0C  | 0     | This is asserted if the clkdiv192 in the CDRV_SER shift register is all zeros.                                    |
| 0     | Not Used           | W0C  | 0     | Not Used                                                                                                          |

### 8.5.68 Clock Divider Alarms 1 Register (address = 0x6D) [reset = 0x0000]

**Figure 128. Clock Divider Alarms 1 Register (ALM\_CLKDIV1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 1   | 0   | 1   | 1   | 0   | 1   |
| W0C | W0C | W0C | W0C | W0C | W0C | W0C | W0C |

LEGEND: R/W = Read/Write; R = Read only; W0C = Write 0 to clear bit; -n = value after reset; -n = value after reset

**Table 110. ALM\_CLKDIV1 Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                         |
|-----|-----------------|------|-------|-----------------------------------------------------------------------------------------------------|
| 15  | ALM_DIV8_ZERO   | W0C  | 0     | Asserted if the clkdiv8 in the CDRV_SER shift register is all zeros.                                |
| 14  | ALM_DIV12_ZERO  | W0C  | 0     | Asserted if the clkdiv12 in the CDRV_SER shift register is all zeros.                               |
| 13  | ALM_DIV16_ZERO  | W0C  | 0     | Asserted if the clkdiv16 in the CDRV_SER shift register is all zeros.                               |
| 12  | ALM_DIV24_ZERO  | W0C  | 0     | Asserted if the clkdiv24 in the CDRV_SER shift register is all zeros. (Connected to the div18 port) |
| 11  | ALM_DIV20_ZERO  | W0C  | 0     | Asserted if the clkdiv20 in the CDRV_SER shift register is all zeros.                               |
| 10  | ALM_DIV32_ZERO  | W0C  | 0     | Asserted if the clkdiv32 in the CDRV_SER shift register is all zeros.                               |
| 9   | ALM_DIV36_ZERO  | W0C  | 0     | Asserted if the clkdiv36 in the CDRV_SER shift register is all zeros.                               |
| 8   | ALM_DIV40_ZERO  | W0C  | 0     | Asserted if the clkdiv40 in the CDRV_SER shift register is all zeros.                               |
| 7   | ALM_DIV48_ZERO  | W0C  | 0     | Asserted if the clkdiv48 in the CDRV_SER shift register is all zeros.                               |
| 6   | ALM_DIV64_ZERO  | W0C  | 0     | Asserted if the clkdiv64 in the CDRV_SER shift register is all zeros.                               |
| 5   | ALM_DIV72_ZERO  | W0C  | 0     | Asserted if the clkdiv72 in the CDRV_SER shift register is all zeros.                               |
| 4   | ALM_DIV80_ZERO  | W0C  | 0     | Asserted if the clkdiv80 in the CDRV_SER shift register is all zeros.                               |
| 3   | ALM_DIV96_ZERO  | W0C  | 0     | Asserted if the clkdiv96 in the CDRV_SER shift register is all zeros.                               |
| 2   | ALM_DIV128_ZERO | W0C  | 0     | Asserted if the clkdiv128 in the CDRV_SER shift register is all zeros.                              |
| 1   | ALM_DIV144_ZERO | W0C  | 0     | Asserted if the clkdiv144 in the CDRV_SER shift register is all zeros.                              |
| 0   | ALM_DIV160_ZERO | W0C  | 0     | Asserted if the clkdiv160 in the CDRV_SER shift register is all zeros.                              |

### 8.5.69 Clock Configuration Register (address = 0x0A) [reset = 0xF000]

**Figure 129. Clock Configuration Register (CLK\_CONFIG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 111. CLK\_CONFIG Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                     |
|-----|------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------|
| 15  | RCLK_SYNC_ENA    | RW   | 1     | When asserted the sysref is used to sync the clock divider in the centralclkdiv. This should be disabled after initial syncing. |
| 14  | FRCLK_DIV_ENA    | RW   | 1     | When asserted the full rate clock divider that provides the DIV4 phases to the DACs is enabled                                  |
| 13  | DACA_FRCLK_ENA   | RW   | 1     | When asserted the full rate clock to the DACA block is enabled                                                                  |
| 12  | DACB_FRCLK_ENA   | RW   | 1     | When asserted the full rate clock to the DACB block is enabled                                                                  |
| 11  | DACA_DUMDATA     | RW   | 0     | Enables distortion enhancement for DACA when set high                                                                           |
| 10  | DACB_DUMDATA     | RW   | 0     | Enables distortion enhancement for DACB when set high                                                                           |
| 9:2 | Reserved         | RW   | 0x000 | Reserved                                                                                                                        |
| 1   | QRCLOCK_DACA_ENA | RW   | 1     | Turns on the quarter rate clock for DACA when '1'                                                                               |
| 0   | QRCLOCK_DACB_ENA | RW   | 1     | Turns on the quarter rate clock for DACB when '1'                                                                               |

### 8.5.70 Sleep Configuration Register (address = 0x0B) [reset = 0x0022]

**Figure 130. Clock Configuration Register (SLEEP\_CONFIG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 112. SLEEP\_CONFIG Field Descriptions**

| Bit  | Field        | Type | Reset   | Description                                                                                                        |
|------|--------------|------|---------|--------------------------------------------------------------------------------------------------------------------|
| 15:9 | Reserved     | RW   | 0000000 | Reserved                                                                                                           |
| 8    | VBGR_SLEEP   | RW   | 0       | Turns off the 'bandgap-over-R' bias                                                                                |
| 7    | Reserved     | RW   | 0       | Reserved                                                                                                           |
| 6    | TSENSE_SLEEP | RW   | 0       | Turns off the temperature sensor                                                                                   |
| 5    | PLL_SLEEP    | RW   | 1       | Puts the PLL into sleep mode (FUSE Controlled)                                                                     |
| 4    | CLKRCV_SLEEP | RW   | 0       | When asserted the clock input receiver gets put into sleep mode. This also affects the FIFO_OSTR receiver as well. |
| 3    | DACA_SLEEP   | RW   | 0       | Puts the DACA into sleep mode                                                                                      |
| 2    | DACB_SLEEP   | RW   | 0       | Puts the DACB into sleep mode                                                                                      |
| 1    | CLK_TX_SLEEP | RW   | 1       | When asserted the PLL TX clock output is in low power mode.                                                        |
| 0    | Reserved     | RW   | 0       | Reserved                                                                                                           |

### 8.5.71 Divided Output Clock Configuration Register (address = 0x0C) [reset = 0x8000]

**Figure 131. Divided Output Clock Configuration Register (CLK\_OUT)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 113. CLK\_OUT Field Descriptions**

| Bit   | Field            | Type | Reset | Description                                                                                                                                                                                                                                                                          |
|-------|------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | CLK_TX_IDLE      | R/W  | 1     | When high puts the CLK_TX circuitry in idle mode during which the CLKTX+ and CLKTX- output pins are driven to the proper common-mode levels in order to charge the external AC coupling caps. When low allows the divided clock to be driven onto the CLKTX+ and CLKTX- output pins. |
| 14:13 | CLK_TX_DIVSELECT | R/W  | 01    | Selects either div2, div3 or div 4 output.<br>00 = divided by 3<br>01 = divided by 4<br>10 = divided by 2<br>11 = not valid                                                                                                                                                          |
| 12    | Reserved         | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                             |
| 11:8  | CLK_TX_SWING     | R/W  | 0x0   | Sets desired swing on CLKTX+ and CLKTX- outputs in mVpp-diff<br>0x0 125<br>0x1 232<br>0x2 337<br>0x3 440<br>0x4 540<br>0x5 639<br>0x6 736<br>0x7 831<br>0x8 924<br>0x9 1012<br>0xA 1097<br>0xB 1178<br>0xC 1255<br>0xD 1329<br>0xE 1398<br>0xF 1462                                  |
| 7:3   | Reserved         | R/W  | 00000 | Reserved                                                                                                                                                                                                                                                                             |
| 2     | CLK_TX_FLIP      | R/W  | 0     | Flips the polarity of CLKTX                                                                                                                                                                                                                                                          |
| 1     | TX_SYNC_ENA      | R/W  | 1     | Syncs the CLKTX with SYSREF when asserted                                                                                                                                                                                                                                            |
| 0     | EXTREF_ENA       | R/W  | 0     | Allows the chip to use an external reference(1) or the internal reference(0)                                                                                                                                                                                                         |

### 8.5.72 DAC Fullscale Current Register (address = 0x0D) [reset = 0xF000]

**Figure 132. DAC Fullscale Current Register (DACFS)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 114. DACFS Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                 |
|-------|----------|------|-------|-----------------------------------------------------------------------------|
| 15:12 | DACFS    | R/W  | 0xF   | Scales the output current is 16 equal steps from 10-40mA (10mA + 2mA*DACFS) |
| 10:0  | Reserved | R/W  | 0x000 | Reserved                                                                    |

### 8.5.73 Internal SYSREF Generator Register (address = 0x10) [reset = 0x0000]

**Figure 133. Internal SYSREF Register (LCMGEN)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 115. LCMGEN Field Descriptions**

| Bit  | Field                 | Type | Reset | Description                                  |
|------|-----------------------|------|-------|----------------------------------------------|
| 15:4 | Reserved              | R/W  | 0x00  | Reserved                                     |
| 3    | LCMGEN_ENA            | R/W  | 0     | Enables the LCM custom logic                 |
| 2    | LCMGEN_RESET          | R/W  | 0     | Reset the LCM custom logic                   |
| 1    | LCMGEN_SPI_SYSREF_ENA | R/W  | 0     | TBD                                          |
| 0    | LCM_SYSREF_OUTSEL     | R/W  | 0     | Chooses between internal and external SYSREF |

### 8.5.74 Counter for Internal SYSREF Generator Register (address = 0x11) [reset = 0x0000]

**Figure 134. Counter for Internal SYSREF Generator Register (LCMGEN\_DIV)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 116. LCMGEN\_DIV Field Descriptions**

| Bit  | Field      | Type | Reset | Description                          |
|------|------------|------|-------|--------------------------------------|
| 15:0 | LCMGEN_DIV | R/W  | 0x00  | Counter setting for the LCMGEN block |

### 8.5.75 SPI SYSREF for Internal SYSREF Generator Register (address = 0x12) [reset = 0x0000]

**Figure 135. SPI SYSREF for Internal SYSREF Generator Register (LCMGEN\_SPISYSREF)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 0   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 117. LCMGEN\_SPISYSREF Field Descriptions**

| Bit  | Field             | Type | Reset | Description                     |
|------|-------------------|------|-------|---------------------------------|
| 15:1 | Reserved          | R/W  | 0x00  | Reserved                        |
| 0    | LCMGEN_SPI_SYSREF | R/W  | 0     | SPI SYSREF for the LCMGEN block |

### 8.5.76 Digital Test Signals Register (address = 0x1B) [reset = 0x0000]

**Figure 136. Digital Test Signals Register (DTEST)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 0   | 1   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 118. DTEST Field Descriptions**

| Bit   | Field      | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------|------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | Reserved   | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 14:12 | DTEST_LANE | R/W  | 000   | Selects the lane to check for the signals selected by field DTEST                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 11:8  | DTEST      | R/W  | 0x0   | Allows digital test signals to come out the ALARM pin.<br>0000 : Test disabled; normal ALARM pin function<br>0001 : SERDES lanes 0 – 3 PLL clock/80<br>0010 : SERDES lanes 4 – 7 PLL clock/80<br>0011 : TESTFAIL (lane selected by field DTEST_LANE)<br>0100 : SYNC (lane selected by field DTEST_LANE)<br>0101 : OCIP (lane selected by field DTEST_LANE)<br>0110 : EQUNDER (lane selected by field DTEST_LANE)<br>0111 : EQOVER (lane selected by field DTEST_LANE)<br>1000 – 1111 : not used |
| 7:0   | Reserved   | R/W  | 0x00  | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

### 8.5.77 Sleep Pin Control Register (address = 0x23) [reset = 0xFFFF]

These fields control the routing of the SLEEP signal to different blocks. Assertion means that the SLEEP signal will be sent to the block. These bits do not override the SPI bits; just the SLEEP signal from the PAD.

**Figure 137. Sleep Pin Control Register (SLEEP\_CNTL)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 0   | 0   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 119. SLEEP\_CNTL Field Descriptions**

| Bit   | Field          | Type | Reset | Description                         |
|-------|----------------|------|-------|-------------------------------------|
| 15:10 | Reserved       | R/W  | 11111 | Reserved                            |
| 9     | CLKOUT_SLEEP   | R/W  | 1     | Allows the output clock to sleep    |
| 8     | BG_SLEEP       | R/W  | 1     | Allows the band gap to sleep        |
| 7     | TEMP_SLEEP     | R/W  | 1     | Allows the temp sensor to sleep     |
| 6     | PLL_CP_SLEEP   | R/W  | 1     | Allows the PLL charge pump to sleep |
| 5     | PLL_SLEEP      | R/W  | 1     | Allows the PLL to sleep             |
| 4     | CLK_RECV_SLEEP | R/W  | 1     | Allows the clock receiver to sleep  |
| 3:2   | Reserved       | R/W  | 11    | Reserved                            |
| 1     | DACB_SLEEP     | R/W  | 1     | Allows DACB to sleep                |
| 0     | DACA_SLEEP     | R/W  | 1     | Allows DACA to sleep                |

### 8.5.78 SYSREF Capture Circuit Control Register (address = 0x24) [reset = 0x1000]

**Figure 138. SYSREF Capture Circuit Control Register (SYSR\_CAPTURE)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 1   | 0   | 0   | 0   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 120. SYSR\_CAPTURE Field Descriptions**

| Bit   | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:14 | SYSR_PHASE_WDW  | R/W  | 00    | sysref phase alignment tolerance window Centers sysref capture window as follows:<br>00 = Centered on phase $\phi_{12}$ (**DEFAULT**)<br>01 = Centered on phase $\phi_{23}$<br>10 = Centered on phase $\phi_{34}$<br>11 = Centered on phase $\phi_{41}$                                                                                                                                                                                                                                                                                                       |
| 13:12 | SYSR_ALIGN_DLY  | R/W  | 01    | sysref alignment offset delay Optional alignment offset that allows system designer to work around hardware (e.g. PCB) alignment errors by letting him specify that the sysref pulse should be treated as occurring one device clock earlier or later than its observed position. Legal settings are as follows:<br>00 = Offset by -1 device clock cycles. Treat sysref as if it were captured 1 cycle earlier.<br>01 = No offset (**DEFAULT**)<br>10 = Offset by +1 device clock cycles. Treat sysref as if it were captured 1 cycle later.<br>11 = Reserved |
| 11    | SYSR_STATUS_ENA | R/W  | 0     | Enable alignment status monitoring Enable logic that generates sysref alignment status information and accumulates statistics that can be read by the user.<br>0 = Disable sysref alignment status outputs (**DEFAULT**). Used during normal operation.<br>1 = Enable sysref alignment status outputs. Used when characterizing sysref capture timing.                                                                                                                                                                                                        |
| 10:2  | Reserved        | R/W  | 0x000 | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 1     | SYSR_ALIGN_SYNC | R/W  | 0     | Write a '1' to this bit to clear accumulated sysref align statistics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 0     | SYSR_BYPS_ALIGN | R/W  | 0     | Bypass sysref alignment logic. Bypass the 4x oversampled sysref alignment logic and instead capture the sysref signal using the legacy implementation of a flip-flop clocked directly by the rising edge of the device clock.<br>0 = Capture sysref using full-featured alignment circuit (**DEFAULT**)<br>1 = Bypass sysref alignment logic<br>NOTE: When mem_sysref_bypass_align is enabled, the other sysref alignment controls have no effect.                                                                                                            |

## 8.5.79 Clock Input and PLL Configuration Register (address = 0x31) [reset = 0x0200]

**Figure 139. Clock Input and PLL Configuration Register (CLK\_PLL\_CFG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 121. Clock Input and PLL Configuration Register (CLK\_PLL\_CFG)**

| Bit   | Field             | Type | Reset | Description                                                                                                                                                                                                                       |
|-------|-------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:14 | Reserved          | R/W  | 00    | Reserved                                                                                                                                                                                                                          |
| 13    | SEL_EXTCLK_DIFFSE | R/W  | 0     | Selects the external differential or single ended clock for DACCLK.<br>0 = differential<br>1 = single ended                                                                                                                       |
| 12    | PLL_RESET         | R/W  | 0     | When set the M divider; N divider and PFD are held reset                                                                                                                                                                          |
| 11    | PLL_NDIVSYNC_ENA  | R/W  | 0     | When asserted; the SYSREF input is used to sync the N dividers of the PLL.                                                                                                                                                        |
| 10    | PLL_ENA           | R/W  | 0     | Enables the PLL output as the DAC clock when set; the clock provided at the DACCLKP/N is used as the PLL reference clock. When cleared; the PLL is bypassed and the clock provided at the DACCLKP/N pins is used as the DAC clock |
| 9     | PLL_CP_SLEEP      | R/W  | 1     | Must be set to '0' for proper PLL operation.<br>1 = Charge pump is put to sleep and can be driven by external source through the ATEST pins.                                                                                      |
| 8     | Reserved          | R/W  | 0     | Reserved                                                                                                                                                                                                                          |
| 7:3   | PLL_N_M1          | R/W  | 00000 | Reference clock divider; divide by is N+1                                                                                                                                                                                         |
| 2:0   | LOCKDET_ADJ       | R/W  | 000   | Adjusts the lock detector sensitivity. Upper bit isn't used:<br>x00 - highest sensitivity x11 - lowest sensitivity                                                                                                                |

### 8.5.80 PLL Configuration 1 Register (address = 0x32) [reset = 0x0308]

**Figure 140. PLL Configuration 1 Register (PLL\_CONFIG1)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 122. CONFIG1 Field Descriptions**

| Bit  | Field        | Type | Reset | Description                               |
|------|--------------|------|-------|-------------------------------------------|
| 15:8 | PLL_M_M1     | R/W  | 0x03  | VCO feedback divider; divide by is 4(M+1) |
| 7:4  | Reserved     | R/W  | 0x0   | Reserved                                  |
| 3:0  | PLL_VCO_RDAC | R/W  | 0x8   | Controls the VCO amplitude                |

### 8.5.81 PLL Configuration 2 Register (address = 0x33) [reset = 0x4018]

**Figure 141. PLL Configuration 2 Register (PLL\_CONFIG2)**

| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 123. PLL\_CONFIG2 Field Descriptions**

| Bit  | Field      | Type | Reset   | Description                                                                                                            |
|------|------------|------|---------|------------------------------------------------------------------------------------------------------------------------|
| 15   | PLL_VCOSEL | R/W  | 0       | Selects between two VCOs<br>0 = 5.9 GHz VCO(2 turn inductor in upper VCO)<br>1 = 8.9 GHz VCO (1 turn in the lower VCO) |
| 14:8 | PLL_VCO    | R/W  | 1000000 | VCO frequency range                                                                                                    |
| 7:6  | Reserved   | R/W  | 000     | Reserved                                                                                                               |
| 5:2  | PLL_CP_ADJ | R/W  | 0110    | Adjusts the charge pump current; 0 to 1.55 mA in 50 $\mu$ A steps.<br>Setting to 0000 will hold the LPF pin at 0 V     |
| 1    | Reserved   | R/W  | 0       | Reserved                                                                                                               |
| 0    | GSMPLL_ENA | R/W  | 0       | Enables the GSM PLL (coupled VCOs) if asserted                                                                         |

## 8.5.82 LVDS Output Configuration Register (address = 0x34) [reset = 0x0000]

**Figure 142. LVDS Output Configuration Register (LVDS\_CONFIG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 0   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 124. LVDS\_CONFIG Field Descriptions**

| Bit   | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                      |
|-------|----------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | LVDS_LOPW RB   | R/W  | 0     | LVDS Output current control LSB; allows output current to be scaled from ~2 mA to ~4 mA                                                                                                                                                                                                                                          |
| 14    | LVDS_LOPW RA   | R/W  | 0     | LVDS Output current control MSB; allows output current to be scaled from ~2 mA to ~4 mA                                                                                                                                                                                                                                          |
| 13    | LVDS_LPSEL     | R/W  | 0     | $\overline{\text{SYNC}}$ LVDS output on chip termination control; 100 $\Omega$ when cleared; 200 $\Omega$<br>Output current settings for the combination of bits 15:13<br>110 = 4.00 mA<br>010 = 3.50 mA<br>100 = 3.00 mA<br>000 = 2.50 mA – Default current<br>111 = 4.00 mA<br>011 = 3.33 mA<br>101 = 2.66 mA<br>001 = 2.00 mA |
| 12    | LVDS_EFUSE_SEL | R/W  | 0     | Enable LVDS bias bandgap reference voltage to the ATEST multiplexer.                                                                                                                                                                                                                                                             |
| 11:10 | LVDS_TRIM      | R/W  | 00    | Adjusts the LVDS 1.2 V reference. LVDS_TRIM_ENA must be set and LVDS_EFUSE_SEL must be cleared for these bits to have any effect.<br>10 +70 mV<br>00 -70 mV<br>01 default<br>11 -20 mV.                                                                                                                                          |
| 9     | LVDS_TRIM_ENA  | R/W  | 0     | When set and LVDS_EFUSE_SEL is cleared; the LVDS_TRIM adjustment is enabled. When cleared; the LVDS_TRIM has no effect.                                                                                                                                                                                                          |
| 8     | LVDS_SYNC0_PD  | R/W  | 0     | The $\overline{\text{SYNC0}}$ LVDS output is in power down.                                                                                                                                                                                                                                                                      |
| 7     | Reserved       | R/W  | 0     | Reserved                                                                                                                                                                                                                                                                                                                         |
| 6     | LVDS_SYNC0_CM  | R/W  | 0     | $\overline{\text{SYNC0}}$ LVDS output common mode is 1.2 V when cleared; 0.9 V when set.                                                                                                                                                                                                                                         |
| 5:0   | Reserved       | R/W  | 0x00  | Reserved                                                                                                                                                                                                                                                                                                                         |

### 8.5.83 Fuse Farm clock divider Register (address = 0x35) [reset = 0x0018]

**Figure 143. Fuse Farm clock divider Register (PLL\_FDIV)**

|     |     |      |     |     |     |     |     |
|-----|-----|------|-----|-----|-----|-----|-----|
| 15  | 14  | 13   | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0    | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W  | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5    | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1    | 1   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/1W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 125. PLL\_FDIV Field Descriptions**

| Bit  | Field    | Type | Reset | Description                     |
|------|----------|------|-------|---------------------------------|
| 15:8 | Reserved | R/W  | 0     | Reserved                        |
| 7:0  | PLL_FDIV | R/W  | 0x18  | Clock divider for the Fuse farm |

### 8.5.84 Serdes Clock Configuration Register (address = 0x3B) [reset = 0x0002]

**Figure 144. Serdes Clock Configuration Register (SRDS\_CLK\_CFG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 126. SRDS\_CLK\_CFG Field Descriptions**

| Bit   | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                      |
|-------|----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15    | SERDES_CLK_SEL       | R/W  | 0     | Select either the PLL output of the DACCLK from the pad.<br>0 = DACCLK pad<br>1 = PLL output                                                                                                                                                                                                                                                                                     |
| 14:11 | SERDES_REFCLK_DIV    | R/W  | 0x0   | The divide amount for the serdes REFCLK minus 1                                                                                                                                                                                                                                                                                                                                  |
| 10:2  | Reserved             | R/W  | 0x000 | Reserved                                                                                                                                                                                                                                                                                                                                                                         |
| 1:0   | SERDES_REFCLK_PREDIV | R/W  | 10    | These bits select the pre-divide on the DACCLK input clock before the DACCLK is used in the dividers used in the SERDES PLL REFCLK and the Fusefarm SYSCLK.<br>00 = if DACCLK input ≤ 2 GHz; prediv is set to div1<br>01 = if DACCLK input is ≤ 4 GHz and > 2 GHz, prediv is set to div2<br>10 = if DACCLK input is ≤ 9 GHz and > 4 GHz, prediv is set to div4<br>11 = Not valid |

### 8.5.85 Serdes PLL Configuration Register (address = 0x3C) [reset = 0x8228]

**Figure 145. Serdes PLL Configuration Register (SRDS\_PLL\_CFG)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 1   | 1   | 0   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 127. SRDS\_PLL\_CFG Field Descriptions**

| Bit   | Field    | Type | Reset    | Description                                                      |
|-------|----------|------|----------|------------------------------------------------------------------|
| 15    | ENDIVCLK | R/W  | 1        | Enable divided by 5 output clock                                 |
| 14:3  | CLKBYP   | R/W  | 00       | Serdes clock bypass                                              |
| 12:11 | LB       | R/W  | 00       | Serdes PLL loop bandwidth                                        |
| 10    | SLEEPPLL | R/W  | 0        | Serdes PLL Sleep                                                 |
| 9     | VRANGE   | R/W  | 1        | Serdes PLL loop filter range                                     |
| 8:1   | MPY      | R/W  | 00010100 | Serdes reference clock multiply factor                           |
| 0     | CORRECT  | R/W  | 0        | AND'ed with LANE_ENA so it must be set to 1 for correct behavior |

### 8.5.86 Serdes Configuration 1 Register (address = 0x3D) [reset = 0x0x0088]

**Figure 146. Serdes Configuration 1 Register (SRDS\_CFG1)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 1   | 1   | 0   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 128. RDS\_CFG1 Field Descriptions**

| Bit   | Field    | Type | Reset | Description                            |
|-------|----------|------|-------|----------------------------------------|
| 15    | Reserved | R/W  | 0     | Reserved                               |
| 14:12 | TESTPATT | R/W  | 000   | Test pattern                           |
| 11    | BSINRXN  | R/W  | 0     | Enable boundary scan - pins            |
| 10    | BSINRXP  | R/W  | 0     | Enable boundary scan + pins            |
| 9:8   | Reserved | R/W  | 00    | Reserved                               |
| 7     | ENOC     | R/W  | 1     | Enable Serdes offset compensation      |
| 6     | EQHLD    | R/W  | 0     | Equalizer hold                         |
| 5:3   | EQ       | R/W  | 001   | Serdes equalizer                       |
| 2:0   | CDR      | R/W  | 000   | Clock data recovery algorithm settings |

## 8.5.87 Serdes Configuration 2 Register (address = 0x3E) [reset = 0x0x0909]

**Figure 147. Serdes Configuration 2 Register (SRDS\_CFG2)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 1   | 1   | 1   | 0   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 129. SRDS\_CFG2 Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                        |
|-------|----------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:13 | LOS      | R/W  | 000   | Enables loss of signal detection.<br>000 - Enable detection<br>100 - Disable detection<br>other - reserved                                                                                                         |
| 12:11 | ALIGN    | R/W  | 01    | Enables external or internal symbol alignment<br>00 : Disabled<br>01 : Comma alignment<br>10: Align jog                                                                                                            |
| 10:8  | TERM     | R/W  | 001   | Valid programming:<br>001 – AC coupling with common mode = 0.7 V<br>100 – 0 V common mode.<br>101 – 0.25 V common mode<br>111 – DC coupling with common mode of 0.6 V.<br>(NOTE: This is not compatible with JESD) |
| 7     | Reserved | R/W  | 0     | Reserved                                                                                                                                                                                                           |
| 6:5   | RATE     | R/W  | 00    | Selects full (00), half (01), quarter (10) or eighth (11) rate operation.                                                                                                                                          |
| 4:2   | BUSWIDTH | R/W  | 010   | Selects the parallel interface width (16 or 20 bits).<br>0 : 20 bits<br>1: 16 bits                                                                                                                                 |
| 1     | SLEEPRX  | R/W  | 0     | Powers the receiver down into the sleep (fast power up) state when high.                                                                                                                                           |
| 0     | Reserved | R/W  | 1     | Reserved                                                                                                                                                                                                           |

### 8.5.88 Serdes Polarity Control Register (address = 0x3F) [reset = 0x0000]

**Figure 148. Serdes Polarity Control Register (SRDS\_POL)**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 15  | 14  | 13  | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0   | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1   | 1   | 1   | 1   | 1   | 1   |
| R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 130. SRDS\_POL Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                                                                                                        |
|------|----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15:8 | Reserved | R/W  | 0x00  | Reserved                                                                                                                                                                                           |
| 7:0  | INVPAIR  | R/W  | 0x00  | Allows the PN pairs of the different lanes to be inverted.<br>bit 7 = lane7<br>bit 6 = lane6<br>bit 5 = lane5<br>bit 4 = lane4<br>bit 3 = lane3<br>bit 2 = lane2<br>bit 1 = lane1<br>bit 0 = lane0 |

### 8.5.89 JESD204B SYNCB OUTPUT Register (address = 0x76) [reset = 0x0000]

**Figure 149. JESD204B SYNCB OUTPUT Register (SYNCBOUT)**

|     |     |      |     |     |     |     |     |
|-----|-----|------|-----|-----|-----|-----|-----|
| 15  | 14  | 13   | 12  | 11  | 10  | 9   | 8   |
| 0   | 0   | 0    | 0   | 0   | 0   | 0   | x   |
| R/W | R/W | R/W  | R/W | R/W | R/W | R/W | R/W |
| 7   | 6   | 5    | 4   | 3   | 2   | 1   | 0   |
| 0   | 0   | 1    | 1   | 1   | 0   | 1   | 1   |
| R/W | R/W | R/1W | R/W | R/W | R/W | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**Table 131. SYNCBOUT Field Descriptions**

| Bit  | Field     | Type | Reset | Description                                                                                     |
|------|-----------|------|-------|-------------------------------------------------------------------------------------------------|
| 15:2 | Reserved  | R/W  | 0x00  | Reserved                                                                                        |
| 1    | SYNCBOUT1 | R/W  | 0     | If the CMOS SYNC outputs are turned on, this bit will show the status of the JESD SYNCB1 signal |
| 0    | SYNCBOUT0 | R/W  | 0     | If the CMOS SYNC outputs are turned on, this bit will show the status of the JESD SYNCB0 signal |


## 9 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

#### 9.1.1 Start-up Sequence

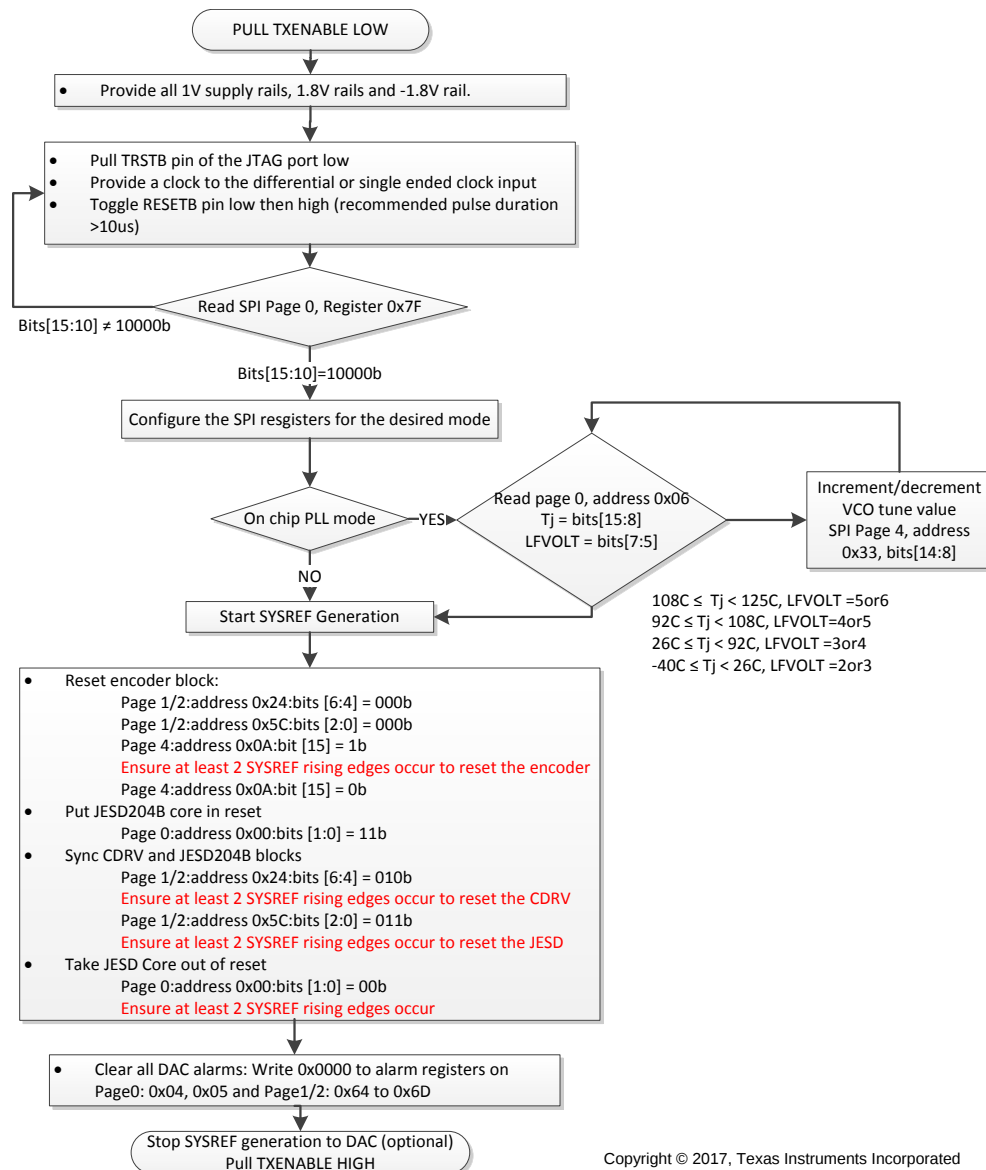


Copyright © 2017, Texas Instruments Incorporated

图 150. DAC38RF8xx Recommended Startup Sequence

## 9.2 Typical Application: Multi-band Radio Frequency Transmitter

The DAC38RF8xx device family can be used in RF transmitters designed to support multiple operating bands. The two transmit antennae system shown in 图 151 uses DAC38RF8xx to convert digital baseband signals from an FPGA directly to RF signals in LTE downlink band 1 (2110 MHz - 2170 MHz) and band 3 (1805 MHz - 1880 MHz).

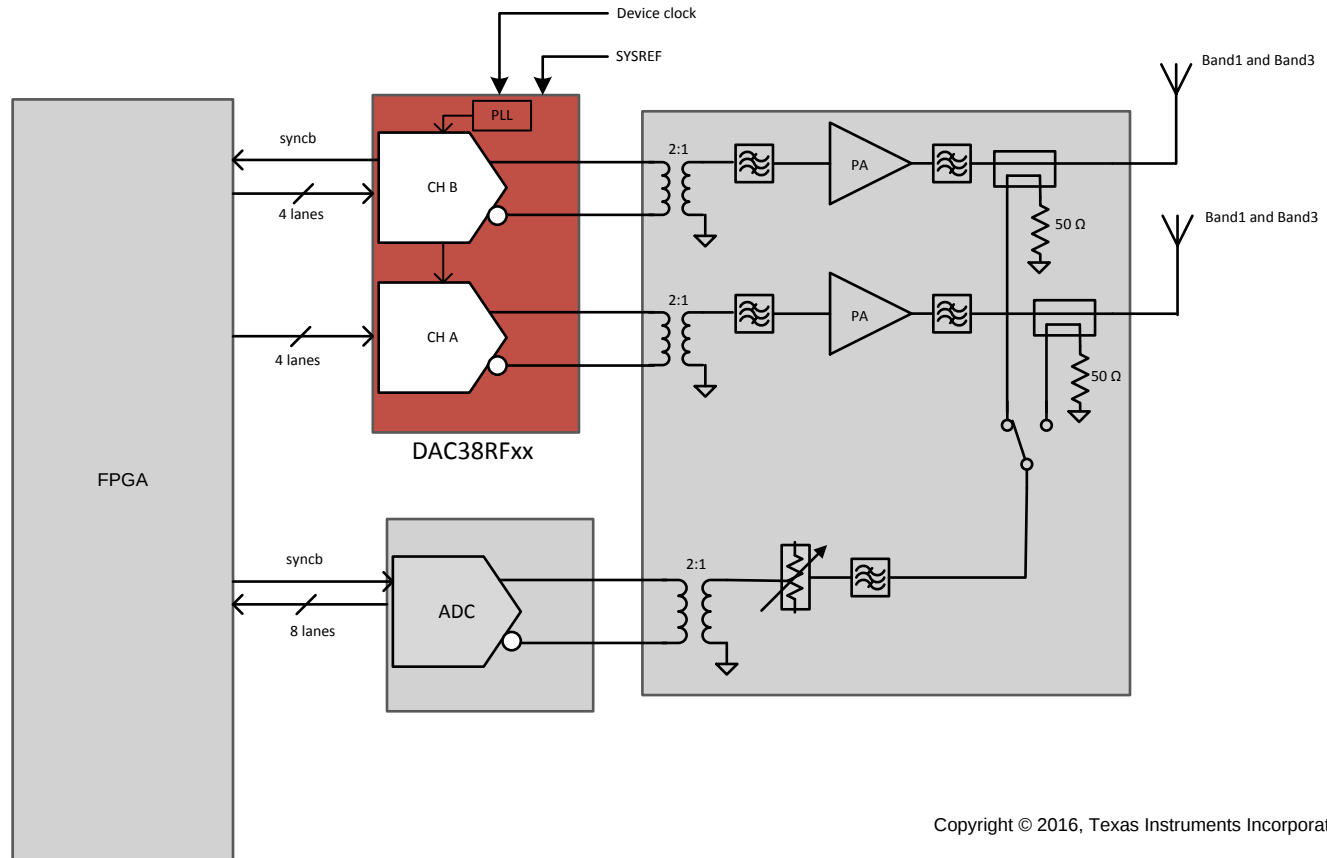

Copyright © 2016, Texas Instruments Incorporated

图 151. Two antennae multi-band Radio Frequency Transmitter

### 9.2.1 Design Requirements

表 132. Dual band LTE downlink transmitter

| Parameter                        | Value                                                          |
|----------------------------------|----------------------------------------------------------------|
| Operating bands                  | Band 1 (2110 MHz - 2170 MHz) and Band 3 (1805 MHz to 1880 MHz) |
| Data rate (baseband)             | 368.64 MHz                                                     |
| Sampling frequency               | 8847.36 MHz                                                    |
| Interpolation                    | 24                                                             |
| JESD204B Interface configuration | L-M-F-S-Hd = 8-8-2-1-0                                         |

## 9.2.2 Detailed Design Procedure

Two complex data streams of 20MHz LTE data generated in a baseband processor (FPGA/ASIC) is formatted based on [Table 18](#) and transmitted to DAC38RF8xx. Inside DAC38RF8xx, the complex input data at a rate of 368.64 MSPS is interpolated 24 times to the final output sampling rate of 8847.36 MSPS. This enables the final RF output to be positioned in the first Nyquist zone for minimal attenuation due to sinc(x) roll off. After interpolation, the output complex data stream is digitally mixed to the final RF frequencies. The digital mixing eliminates system imperfections such as local oscillator (LO) feed-through and sideband images that are inherent in analog mixers. Detailed block diagram is shown in [图 152](#)

To simplify the system clocking, a low frequency clock (or device clock) is provided as a reference to the on-chip PLL ([Internal PLL/VCO](#)) of DAC38RF8xx. The PLL generates a low phase noise, high frequency sampling clock from the low frequency reference.

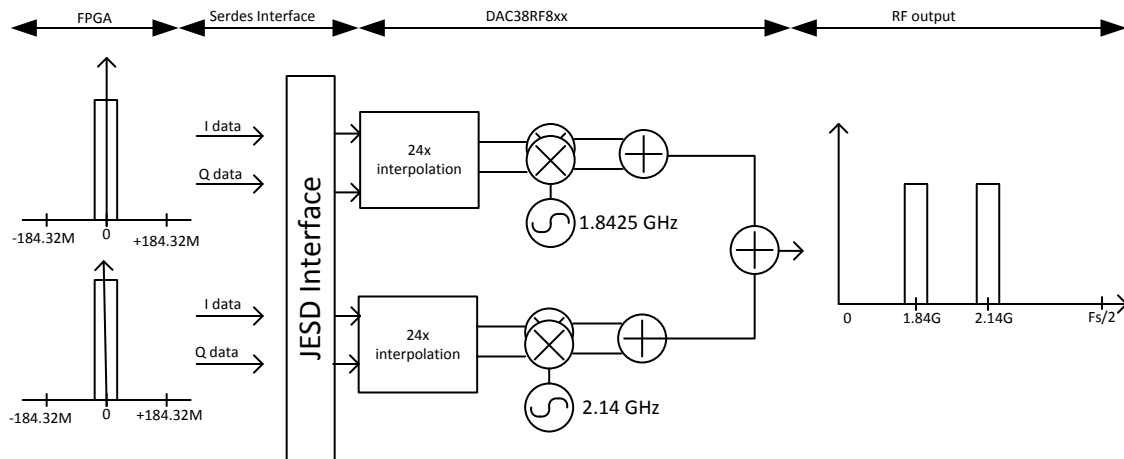


图 152. Dual band LTE Downlink Transmitter Block Diagram

### 9.2.2.1 Calculating the JESD204B SerDes Rate

SerDes rate =  $1.25 \times (M/L) \times \text{Baseband data rate} \times \text{Number of bits per sample} (16)$

M is a JESD204B interface parameter that refers to the number of data streams from FPGA to DAC

L is a JESD204B interface parameter that refers to the number of SerDes lanes used to transmit data

1.25 is a factor due to the 8B10B encoding of the baseband data

Example,

if the baseband data rate = 368.64 MSPS and L-M-F-S-Hd = 8-8-2-1-0

$$\text{SerDes rate} = 1.25 \times (8/8) \times 368.64 \times 16 = 7.3728 \text{ Gbps} \quad (15)$$

### 9.2.2.2 Calculating valid JESD204B SYSREF Frequency

Valid SYSREF frequencies depend on the following parameters:

1. Sample clock frequency
2. JESD204B internal clock divider value ([CLKJESD\\_DIV](#)). This depends on the DAC JESD204B L-M-F-S mode and interpolation
3. Number of octets in a frame (F)
4. Number of frames in a multi-frame (K)

Maximum SYSREF frequency = (Sample clock frequency/N),

where  $N = \text{LCM}(\text{CLKJESD\_DIV}, 4 \times K \times F)$ . N is the Least common multiple of  $4 \times K \times F$  and [CLKJESD\\_DIV](#).

All valid SYSREF frequencies are integer divisors of the maximum SYSREF frequency.

Example:

Given sampling clock frequency = 8.84736 GSPS, Interpolation = 24, DAC Mode=L-M-F-S=8-8-2-1 and K=20:

CLKJESD\_DIV = 24 (CLKJESD\_DIV)

Maximum SYSREF Frequency = 8847.36 MHz/240 = 36.864 MHz

Valid SYSREF Frequencies = 36.864 MHz/n, where n is any positive integer.

### 9.2.3 Application Curves



图 153. Dual band ACPR Performance in Downlink Band 3 with On-chip PLL

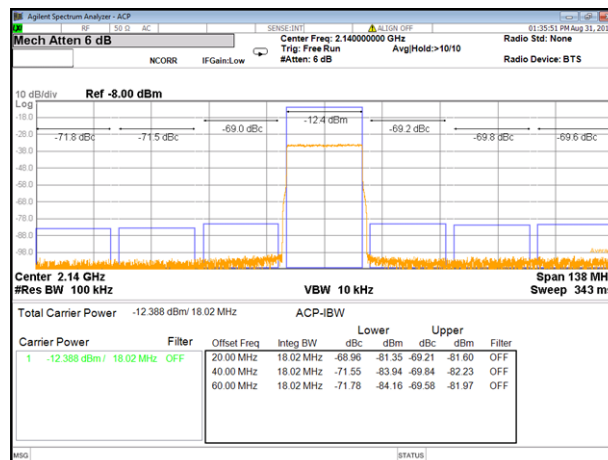


图 154. Dual band ACPR Performance in Downlink Band 1 with On-chip PLL


## 10 Power Supply Recommendations

Internally, DAC38RFxx comprises a digital subsystem, an analog subsystem, and a clock subsystem. Ideally, the power supply scheme should be partitioned according to these three relatively independent blocks to minimize interactions between them. Most importantly, sensitive analog and clock circuit power supply must be separated from digital switching noise to reduce direct coupling and mixing of switching spurs. 表 133 shows the power supply rails for DAC38RFxx grouped under their respective domains.

表 133. Power Supply Domains

| Supply rail | Nominal voltage (V) | Domain  |
|-------------|---------------------|---------|
| VDDIG1      | +1.0                | Digital |
| VDDIO18     | +1.8                |         |
| VDDR18      | +1.8                |         |
| VDDS18      | +1.8                |         |
| VDDT1       | +1.0                |         |
| VDDE1       | +1.0                |         |
| VDDL1_1     | +1.0                |         |
| VEE18N      | -1.8                | Analog  |
| VDDA1       | +1.0                |         |
| VDDA18      | +1.8                |         |
| VDDOUT18    | +1.8                |         |
| VDDPLL1     | +1.0                |         |
| VDDAPLL18   | +1.8                | Clock   |
| VDDAVCO18   | +1.8                |         |
| VDDCLK1     | +1.0                |         |
| VDDL2_1     | +1.0                |         |
| VDDTX1      | +1.0                |         |
| VDDTX18     | +1.8                |         |

An example power supply scheme suitable for most applications of DAC38RFxx is shown in 图 155. It is recommended to use ferrite beads (FB) to isolate the individual rails from each other.

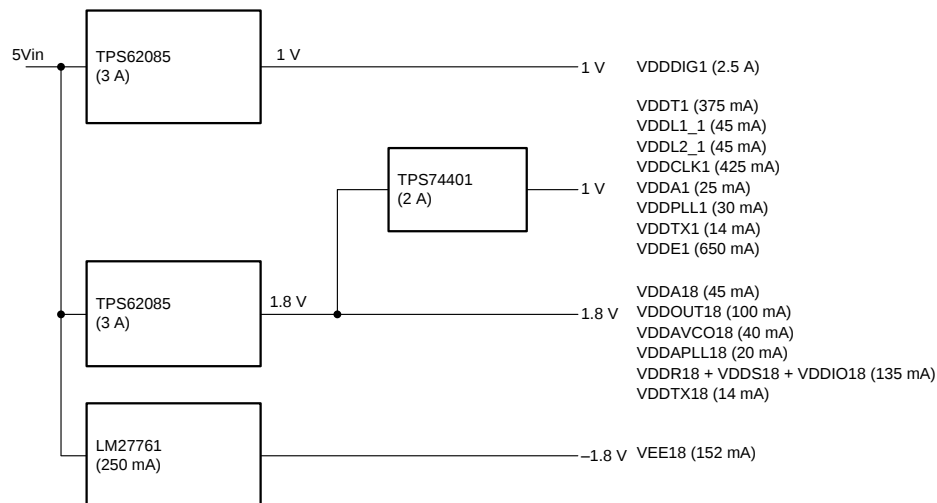

Copyright © 2017, Texas Instruments Incorporated

图 155. Power Supply Scheme for DAC38RFxx

## 10.1 Power Supply Sequencing

There are no power supply sequencing requirements for all the 1-V and 1.8-V power supplies. For the -1.8 V VEE18 rail, it is recommended that this supply is the last to be enabled. Enabling VEE18 (while other supply voltages are disabled) can cause a small negative voltage to be present at the other rails (that is, VDDA1 and VDDDIG1). This small negative voltage can interfere with the startup of some DC-DC converters or LDO's connected to the 1 V and 1.8 V input power rails.

## 11 Layout

### 11.1 Layout Guidelines

- DAC RF output traces
  - Single-ended 50  $\Omega$  co-planar wave guide for output traces is recommended.
  - Use short RF traces. Place DAC close to edge of PCB to shorten the length of output and clock traces. This helps to minimize PCB loss and coupling
  - Avoid width/spacing differences when entering a landing pad (eg. a balun) by tapering or by redefining width/space rules for the traces
- Power supply planes
  - Ensure sufficient lateral spacing between two power planes (about 3x the thickness of the plane is recommended)
  - Insert ground plane between adjacent power planes where possible

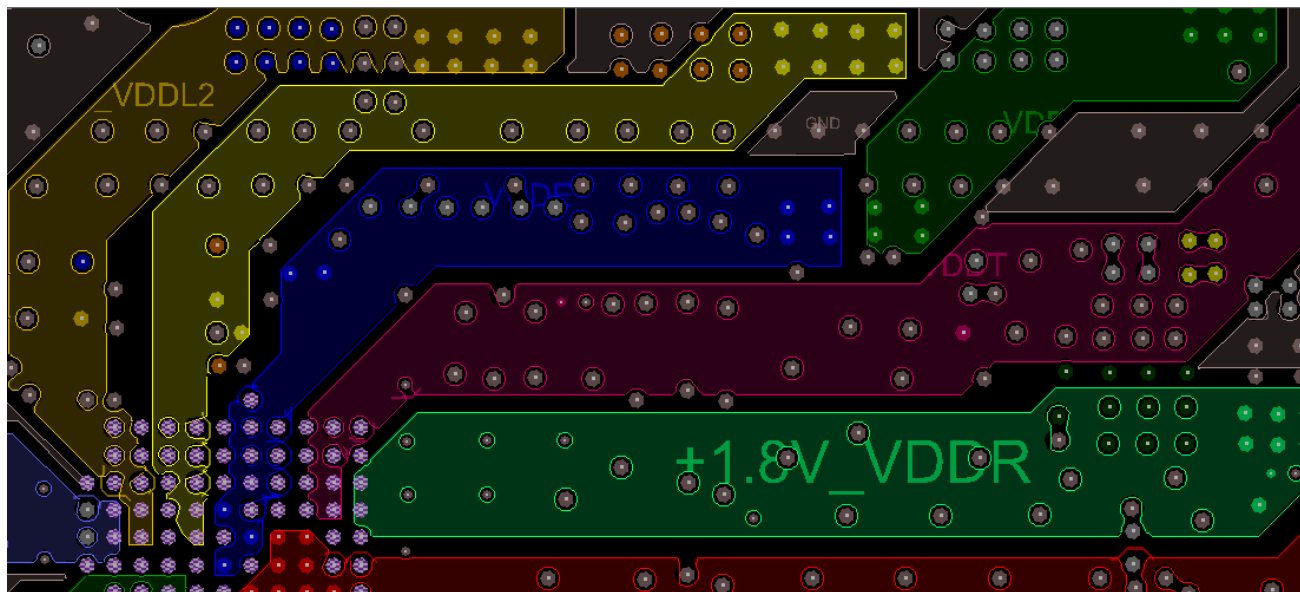


图 156. Example Power Plane Routing

- Bypass Capacitors
  - Use bypass capacitors with in-pad vias and place between the pin and the power plane. Avoid sharing ground vias or pads of bypass caps used for different power rails
  - Minimize stubs on bypass capacitors to avoid parasitic inductance

## Layout Guidelines (接下页)

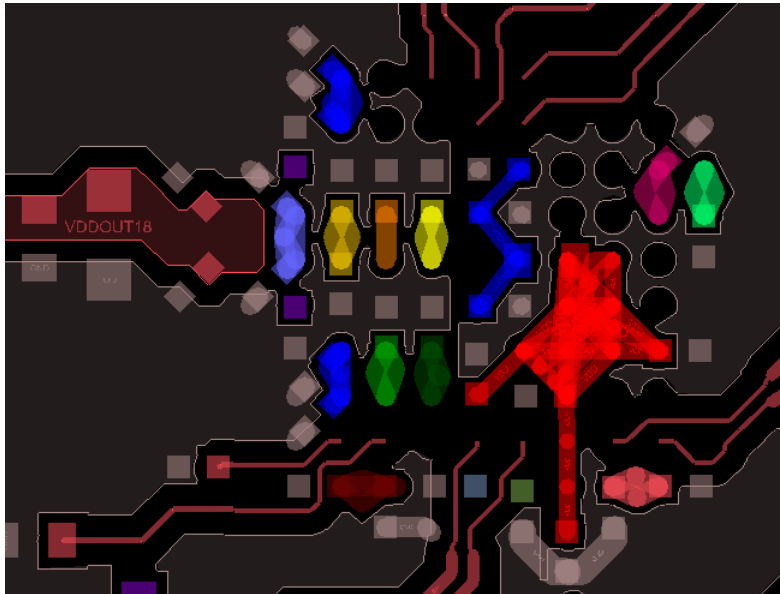


图 157. Bypass Capacitors Placed on the Power Supply Pin with In-pad Vias

- High speed SerDes traces
  - Route all SerDes traces straight and minimized sharp curves or serpentines. Route for best signal integrity
  - Some skew between SerDes traces can be tolerated. It is recommended to limit skew between traces to 320ps or less
  - Place ground planes between the SerDes traces for improved isolation

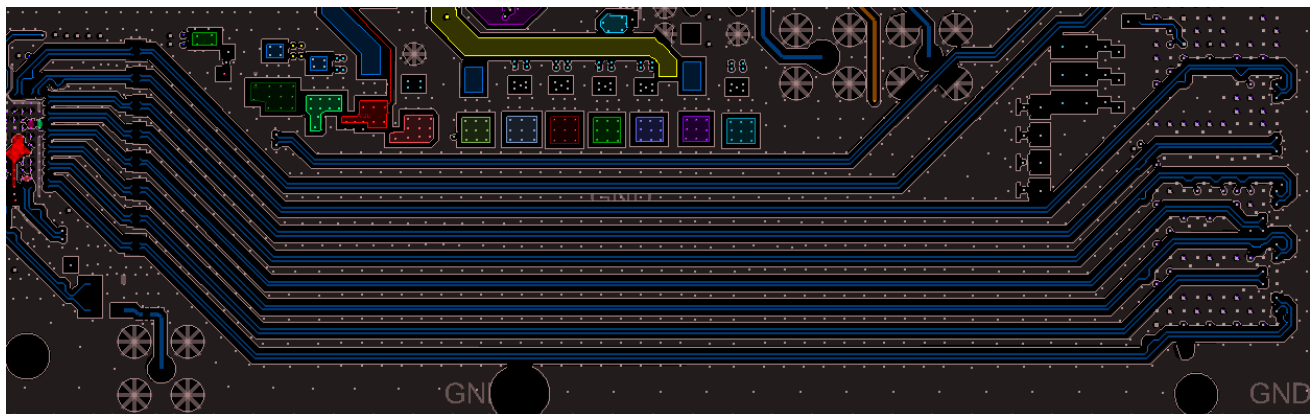


图 158. Layout Example of High Speed SerDes Traces

## 11.2 Layout Example

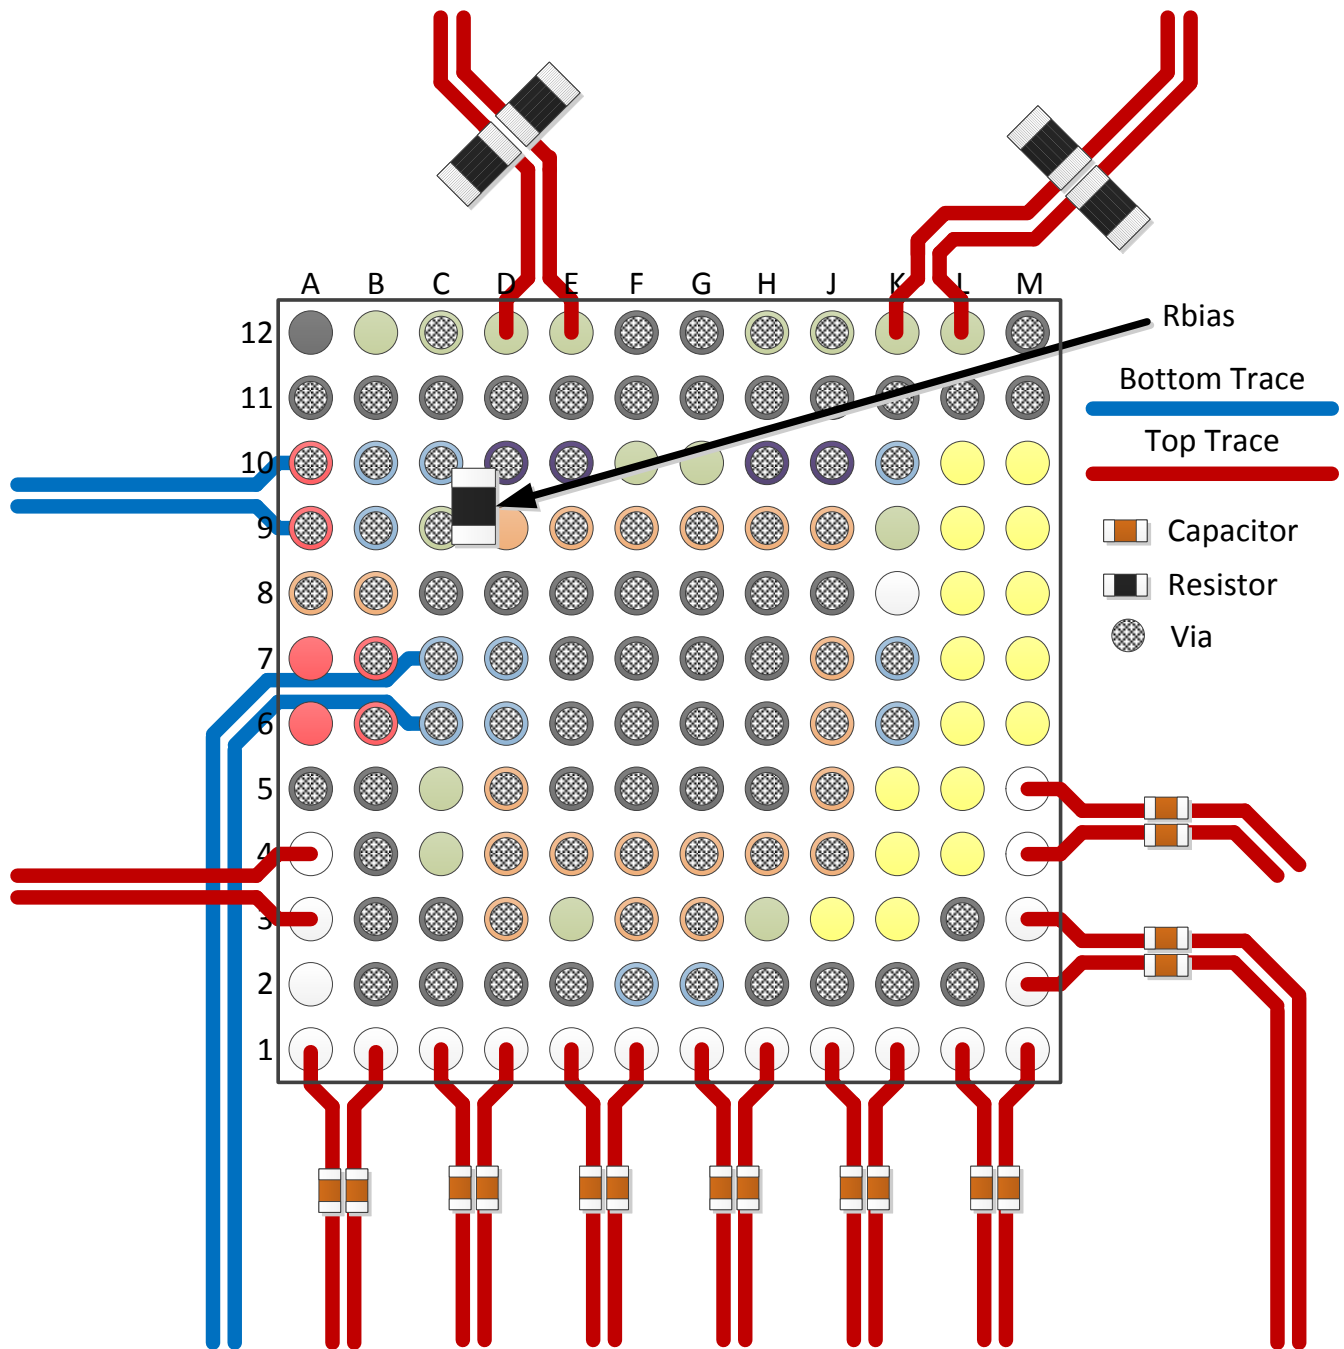


图 159. Layout Example of DAC38RFxx

## 12 器件和文档支持

### 12.1 相关链接

下面的表格列出了快速访问链接。类别包括技术文档、支持与社区资源、工具和软件，以及申请样片或购买产品的快速链接。

表 134. 相关链接

| 器件        | 产品文件夹                 | 立即订购                  | 技术文档                  | 工具和软件                 | 支持和社区                 |
|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| DAC38RF86 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| DAC38RF87 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| DAC38RF96 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| DAC38RF87 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |

### 12.2 接收文档更新通知

要接收文档更新通知，请导航至德州仪器 TI.com.cn 上的器件产品文件夹。请单击右上角的通知我 进行注册，即可收到任意产品信息更改每周摘要。有关更改的详细信息，请查看任意已修订文档中包含的修订历史记录。

### 12.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

**TI E2E™ 在线社区** TI 的工程师对工程师 (E2E) 社区。此社区的创建目的在于促进工程师之间的协作。在 e2e.ti.com 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** TI 参考设计支持 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.4 商标

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.5 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 12.6 Glossary

**SLYZ022** — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 13 机械、封装和可订购信息

以下页面包括机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据发生变化时，我们可能不会另行通知或修订此文档。如欲获取此产品说明书的浏览器版本，请参阅左侧的导航栏。

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| DAC38RF86IAAV    | ACTIVE        | FCBGA        | AAV                | 144  | 168            | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF86I              | <a href="#">Samples</a> |
| DAC38RF86IAAVR   | ACTIVE        | FCBGA        | AAV                | 144  | 1000           | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF86I              | <a href="#">Samples</a> |
| DAC38RF87IAAV    | ACTIVE        | FCBGA        | AAV                | 144  | 168            | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF87I              | <a href="#">Samples</a> |
| DAC38RF87IAAVR   | ACTIVE        | FCBGA        | AAV                | 144  | 1000           | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF87I              | <a href="#">Samples</a> |
| DAC38RF96IAAV    | ACTIVE        | FCBGA        | AAV                | 144  | 168            | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF96I              | <a href="#">Samples</a> |
| DAC38RF96IAAVR   | ACTIVE        | FCBGA        | AAV                | 144  | 1000           | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF96I              | <a href="#">Samples</a> |
| DAC38RF97IAAV    | ACTIVE        | FCBGA        | AAV                | 144  | 168            | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF97I              | <a href="#">Samples</a> |
| DAC38RF97IAAVR   | ACTIVE        | FCBGA        | AAV                | 144  | 1000           | RoHS & Green    | SNAGCU                               | Level-3-260C-168 HR  | -40 to 85    | DAC38RF97I              | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

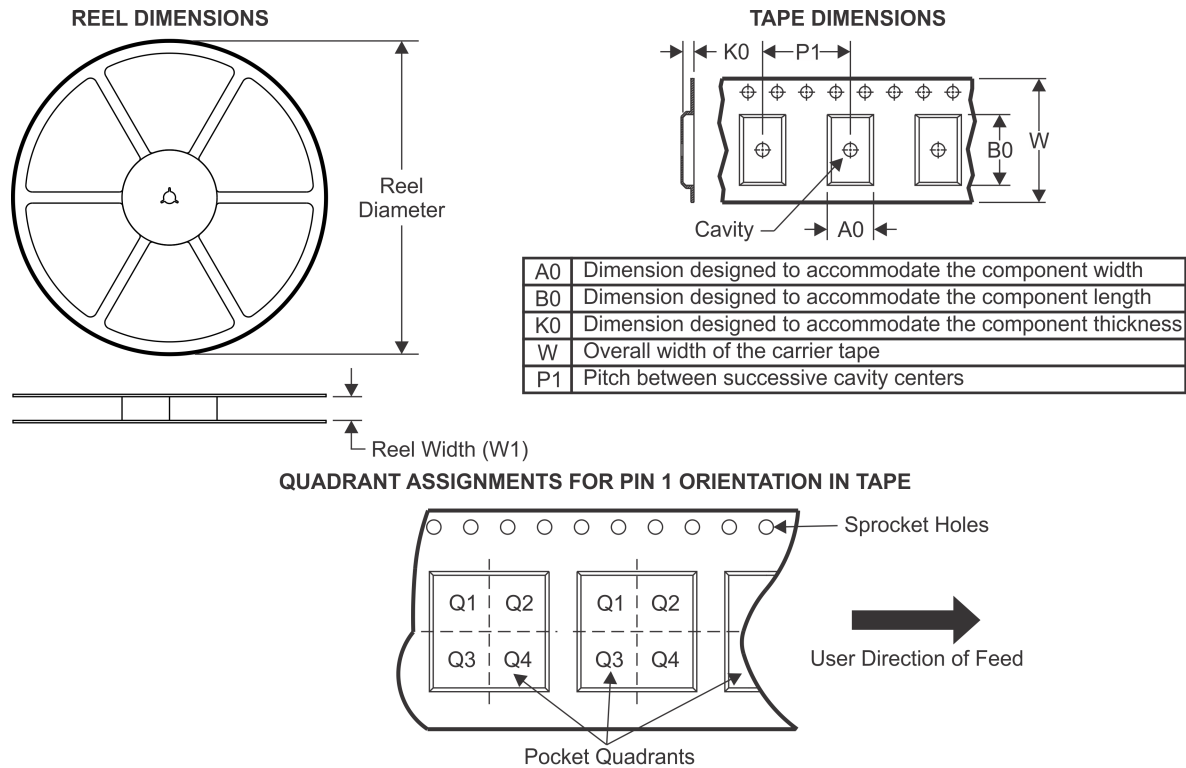

\*All dimensions are nominal


| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC38RF86IAAVR | FCBGA        | AAV             | 144  | 1000 | 330.0              | 24.4               | 10.3    | 10.3    | 2.5     | 16.0    | 24.0   | Q1            |
| DAC38RF87IAAVR | FCBGA        | AAV             | 144  | 1000 | 330.0              | 24.4               | 10.3    | 10.3    | 2.5     | 16.0    | 24.0   | Q1            |
| DAC38RF96IAAVR | FCBGA        | AAV             | 144  | 1000 | 330.0              | 24.4               | 10.3    | 10.3    | 2.5     | 16.0    | 24.0   | Q1            |
| DAC38RF97IAAVR | FCBGA        | AAV             | 144  | 1000 | 330.0              | 24.4               | 10.3    | 10.3    | 2.5     | 16.0    | 24.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

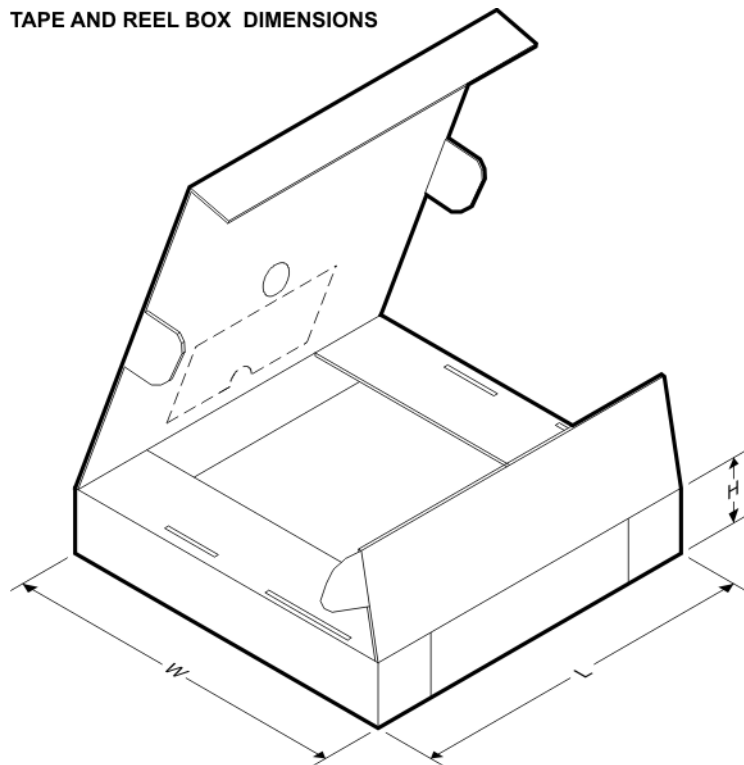

\*All dimensions are nominal



| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DAC38RF86IAAVR | FCBGA        | AAV             | 144  | 1000 | 350.0       | 350.0      | 43.0        |
| DAC38RF87IAAVR | FCBGA        | AAV             | 144  | 1000 | 350.0       | 350.0      | 43.0        |
| DAC38RF96IAAVR | FCBGA        | AAV             | 144  | 1000 | 350.0       | 350.0      | 43.0        |
| DAC38RF97IAAVR | FCBGA        | AAV             | 144  | 1000 | 350.0       | 350.0      | 43.0        |

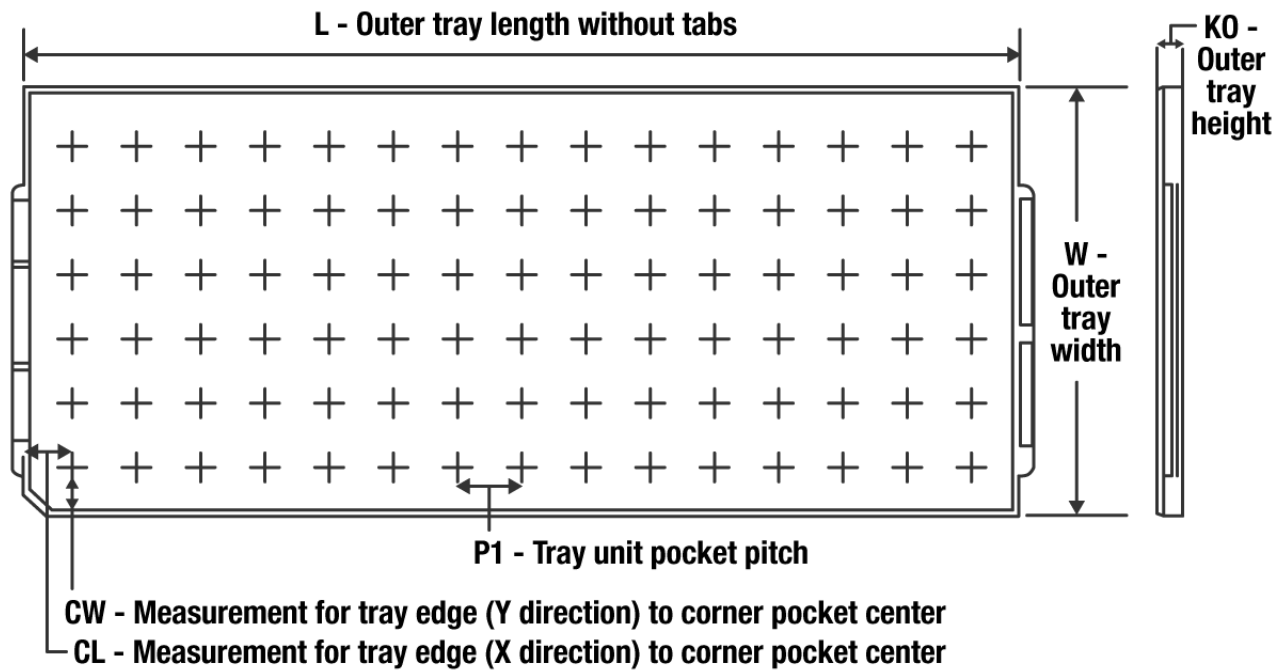**TRAY**


Chamfer on Tray corner indicates Pin 1 orientation of packed units.

\*All dimensions are nominal

| Device        | Package Name | Package Type | Pins | SPQ | Unit array matrix | Max temperature (°C) | L (mm) | W (mm) | K0 (μm) | P1 (mm) | CL (mm) | CW (mm) |
|---------------|--------------|--------------|------|-----|-------------------|----------------------|--------|--------|---------|---------|---------|---------|
| DAC38RF86IAAV | AAV          | FCBGA        | 144  | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| DAC38RF87IAAV | AAV          | FCBGA        | 144  | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| DAC38RF96IAAV | AAV          | FCBGA        | 144  | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| DAC38RF97IAAV | AAV          | FCBGA        | 144  | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |

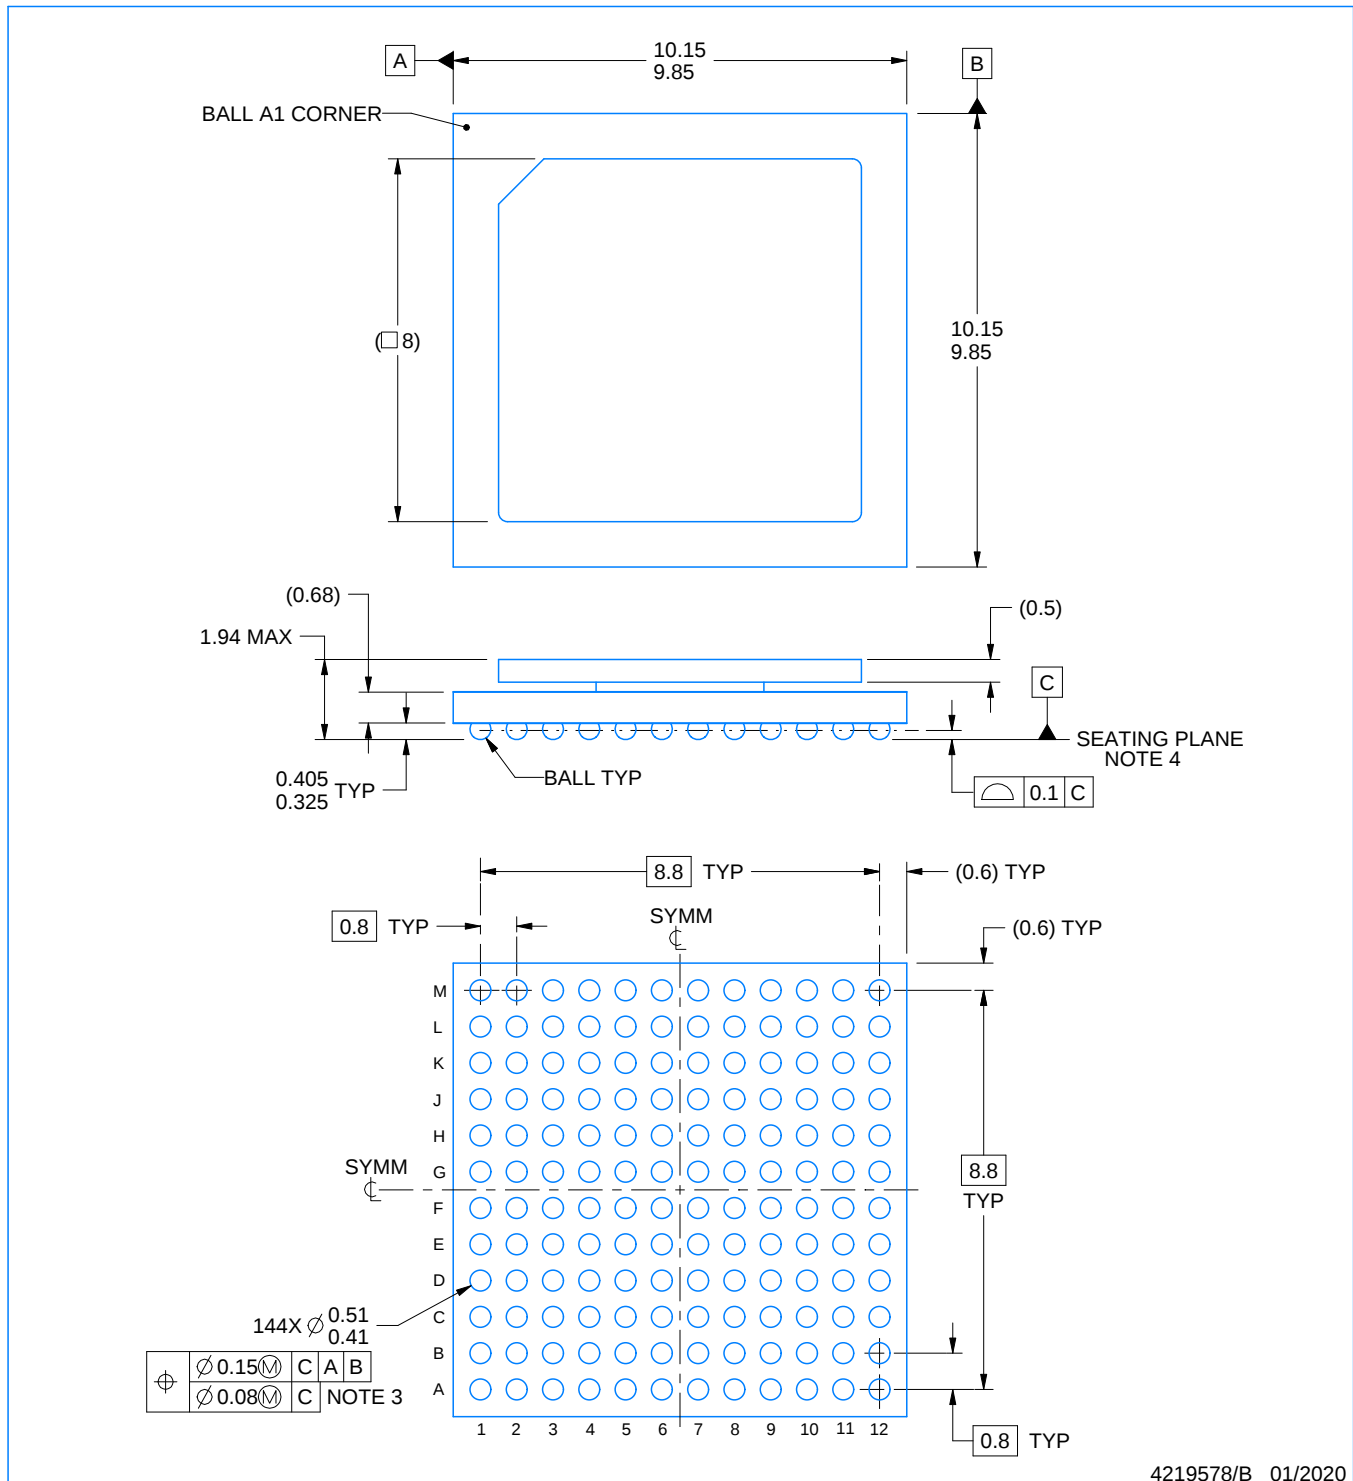

4219578/B 01/2020

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Dimension is measured at the maximum solder ball diameter, parallel to primary datum C.
4. Primary datum C and seating plane are defined by the spherical crowns of the solder balls.

# EXAMPLE BOARD LAYOUT


AAV0144A

FCBGA - 1.94 mm max height

BALL GRID ARRAY

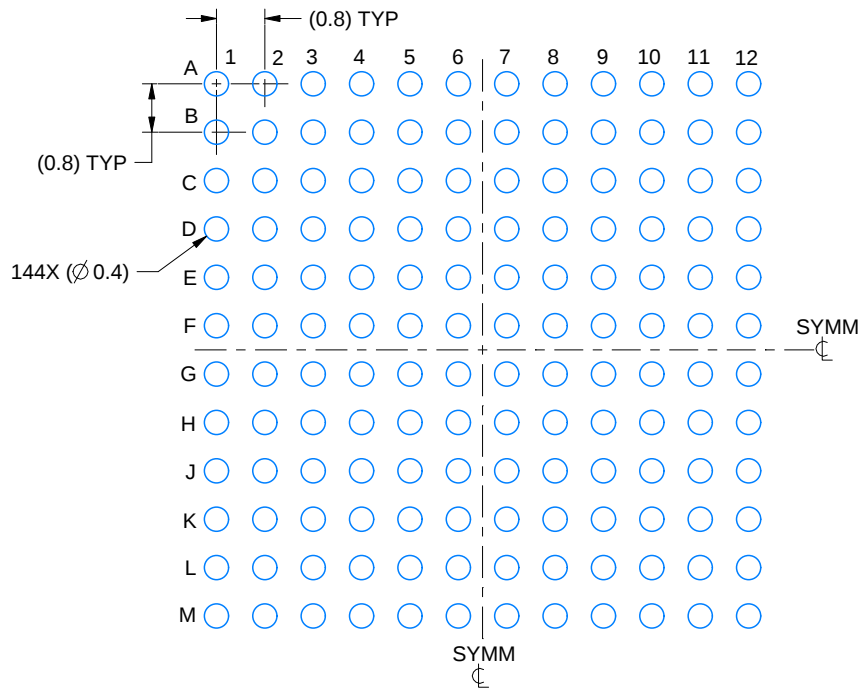

LAND PATTERN EXAMPLE  
SCALE:8X

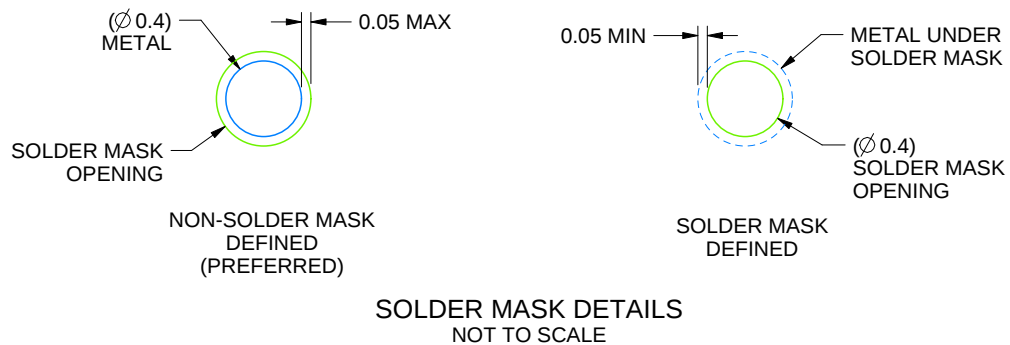

SOLDER MASK DETAILS  
NOT TO SCALE

4219578/B 01/2020

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SPRU811 ([www.ti.com/lit/spru811](http://www.ti.com/lit/spru811)).

# EXAMPLE STENCIL DESIGN

AAV0144A

FCBGA - 1.94 mm max height

BALL GRID ARRAY

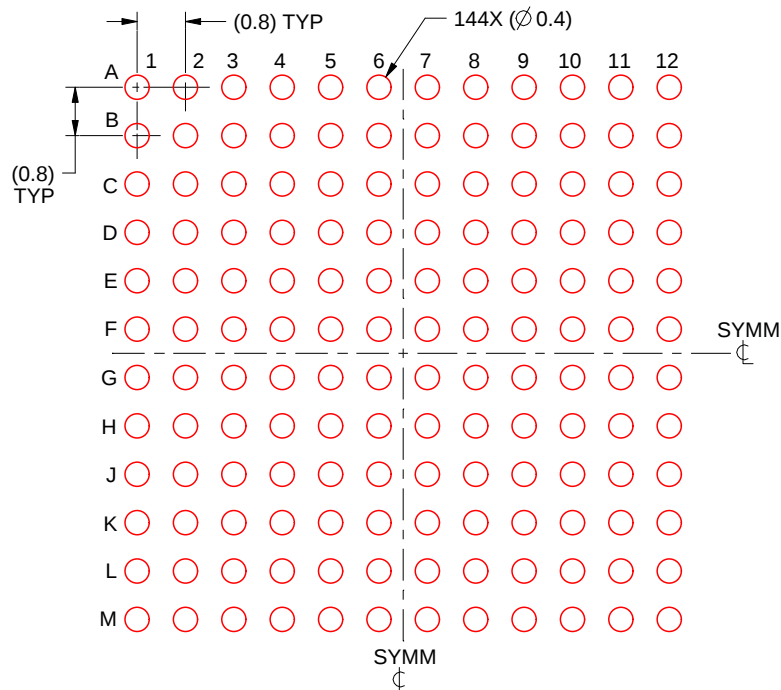

SOLDER PASTE EXAMPLE  
BASED ON 0.15 mm THICK STENCIL  
SCALE:8X

4219578/B 01/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2022，德州仪器 (TI) 公司