


## FEATURES

- 1.225-V Fixed and Adjustable (1.225-V to 10-V) Outputs
- Tight Output Tolerances and Low Temperature Coefficient
  - Max 0.1%, 50 ppm/°C – A Grade
  - Max 0.2%, 50 ppm/°C – B Grade
  - Max 0.5%, 50 ppm/°C – C Grade
- Low Output Noise...20  $\mu\text{V}_{\text{RMS}}$  (Typ)
- Wide Operating Current Range...  
60  $\mu\text{A}$  (Typ) to 12 mA
- Stable With All Capacitive Loads; No Output Capacitor Required
- Available in
  - Industrial Temperature: –40°C to 85°C
  - Extended Temperature: –40°C to 125°C

## APPLICATIONS


- Data-Acquisition Systems
- Power Supplies and Power-Supply Monitors
- Instrumentation and Test Equipment
- Process Control
- Precision Audio
- Automotive Electronics
- Energy Management/Metering
- Battery-Powered Equipment

1.2 V...DBZ (SOT-23-3) PACKAGE  
(TOP VIEW)



\* Pin 3 is attached to Substrate and must be connected to ANODE or left open.


1.2 V...DCK (SC-70) PACKAGE  
(TOP VIEW)




NC – No internal connection

\* Pin 2 is attached to Substrate and must be connected to ANODE or left open.

Adjustable...DBZ (SOT-23-3) PACKAGE  
(TOP VIEW)



Adjustable...DCK (SC-70) PACKAGE  
(TOP VIEW)



NC – No internal connection

## DESCRIPTION/ORDERING INFORMATION

The TL4051 series of shunt voltage references are versatile easy-to-use references suitable for a wide array of applications. The device is available in a fixed 1.225-V output or an adjustable output whose voltage is determined by an external resistor divider. The device requires no external capacitors for operation and is stable with all capacitive loads. Additionally, the reference offers low dynamic impedance, low noise, and low temperature coefficient to ensure a stable output voltage over a wide range of operating currents and temperatures.

The TL4051 is offered in three initial tolerances, ranging from 0.1% (max) for the A grade to 0.5% (max) for the C grade. Thus, a great deal of flexibility is offered to designers in choosing the best cost-to-performance ratio for their applications. Packaged in the space-saving SOT-23-3 and SC-70 packages and requiring a minimum current of 45  $\mu\text{A}$  (typ), the TL4051 also is ideal for portable applications.

The TL4051xl is characterized for operation over an ambient temperature range of –40°C to 85°C. The TL4051xQ is characterized for operation over an ambient temperature range of –40°C to 125°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

# TL4051

## PRECISION MICROPOWER SHUNT VOLTAGE REFERENCE

SLOS487 – JUNE 2007

### ORDERING INFORMATION<sup>(1)</sup>

| T <sub>A</sub> | DEVICE GRADE                                                               | V <sub>Z</sub> | PACKAGE <sup>(2)</sup> |              | ORDERABLE PART NUMBER | TOP-SIDE MARKING <sup>(3)</sup> |
|----------------|----------------------------------------------------------------------------|----------------|------------------------|--------------|-----------------------|---------------------------------|
| –40°C to 85°C  | A grade:<br>0.1% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051AIDBZR          | TN2_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051AIDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051AIDCKR          | 97_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051AIDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051A12IDBZR        | TN8_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051A12IDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051A12IDCKR        | 9D_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051A12IDCKT        |                                 |
|                | B grade:<br>0.2% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051BIDBZR          | TN3_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051BIDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051BIDCKR          | 98_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051BIDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051B12IDBZR        | TN9_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051B12IDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051B12IDCKR        | 9E_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051B12IDCKT        |                                 |
|                | C grade:<br>0.5% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051CIDBZR          | TN4_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051CIDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051CIDCKR          | 99_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051CIDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051C12IDBZR        | TNU_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051C12IDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051C12IDCKR        | 9F_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051C12IDCKT        |                                 |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).
- (3) The actual top-side marking has one additional character that designates the assembly/test site.

**ORDERING INFORMATION<sup>(1)</sup>**

| T <sub>A</sub> | DEVICE GRADE                                                               | V <sub>Z</sub> | PACKAGE <sup>(2)</sup> |              | ORDERABLE PART NUMBER | TOP-SIDE MARKING <sup>(3)</sup> |
|----------------|----------------------------------------------------------------------------|----------------|------------------------|--------------|-----------------------|---------------------------------|
| –40°C to 125°C | A grade:<br>0.1% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051AQDBZR          | TN5_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051AQDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051AQDCKR          | 9A_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051AQDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051A12QDBZR        | TNV_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051A12QDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051A12QDCKR        | 9G_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051A12QDCKT        |                                 |
|                | B grade:<br>0.2% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051BQDBZR          | TN6_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051BQDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051BQDCKR          | 9B_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051BQDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051B12QDBZR        | TNW_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051B12QDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051B12QDCKR        | 9H_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051B12QDCKT        |                                 |
|                | C grade:<br>0.5% initial accuracy and<br>50 ppm/°C temperature coefficient | ADJ            | SOT-23-3 – DBZ         | Reel of 3000 | TL4051CQDBZR          | TN7_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051CQDBZT          |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051CQDCKR          | 9C_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051CQDCKT          |                                 |
|                |                                                                            | 1.2 V          | SOT-23-3 – DBZ         | Reel of 3000 | TL4051C12QDBZR        | TNY_                            |
|                |                                                                            |                |                        | Reel of 250  | TL4051C12QDBZT        |                                 |
|                |                                                                            |                | SC-70 – DCK            | Reel of 3000 | TL4051C12QDCKR        | 9J_                             |
|                |                                                                            |                |                        | Reel of 250  | TL4051C12QDCKT        |                                 |


- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).
- (3) The actual top-side marking has one additional character that designates the assembly/test site.

# TL4051

## PRECISION MICROPOWER SHUNT VOLTAGE REFERENCE

SLOS487 – JUNE 2007

### FUNCTIONAL BLOCK DIAGRAM

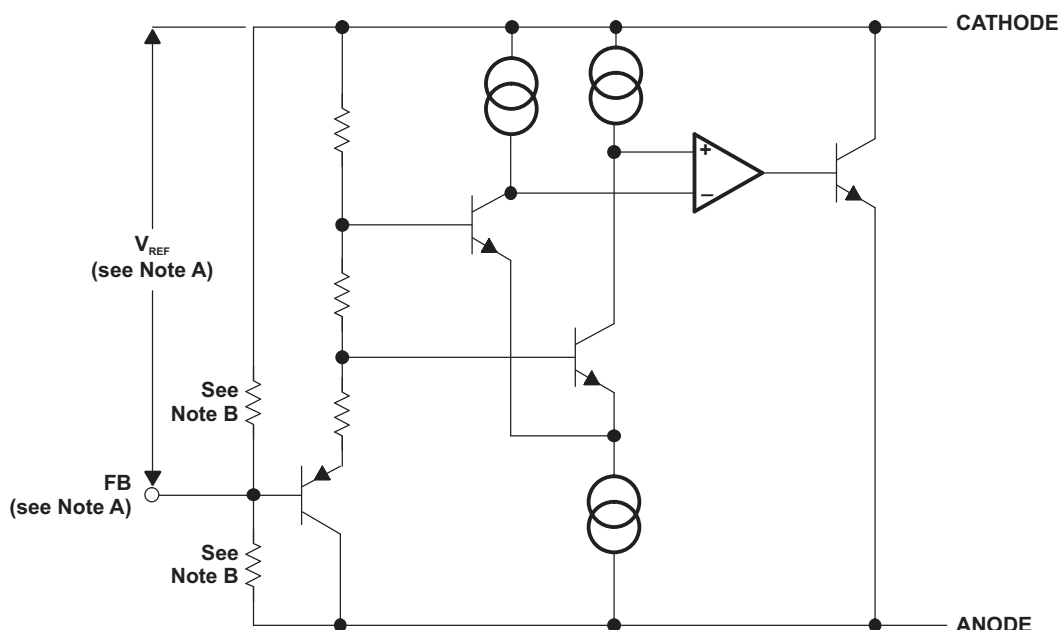

- A. TL4051x (Adjustable) only
- B. TL4051x12 only

### Absolute Maximum Ratings<sup>(1)</sup>

over free-air temperature range (unless otherwise noted)

|               |                                             | MIN         | MAX | UNIT |
|---------------|---------------------------------------------|-------------|-----|------|
| $V_Z$         | Continuous cathode voltage                  |             | 15  | V    |
| $I_Z$         | Continuous cathode current                  | -10         | 20  | mA   |
| $\theta_{JA}$ | Package thermal impedance <sup>(2)(3)</sup> | DBZ package |     | 206  |
|               |                                             | DCK package |     | 252  |
| $T_J$         | Operating virtual junction temperature      |             | 150 | °C   |
| $T_{stg}$     | Storage temperature range                   | -65         | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Maximum power dissipation is a function of  $T_J(\text{max})$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.
- (3) The package thermal impedance is calculated in accordance with JESD 51-7.

### Recommended Operating Conditions

|       |                                                | MIN            | MAX | UNIT |
|-------|------------------------------------------------|----------------|-----|------|
| $I_Z$ | Cathode current                                | <sup>(1)</sup> | 12  | mA   |
| $V_Z$ | Reverse breakdown voltage (adjustable version) |                | 10  | V    |
| $T_A$ | Free-air temperature                           | I temperature  |     | 85   |
|       |                                                | Q temperature  |     | 125  |

- (1) See parametric tables

## TL4051x12I Electrical Characteristics

full range  $T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                       |                                                              | TEST CONDITIONS                                                         | T <sub>A</sub> | TL4051A12I |     |     | TL4051B12I |     |     | TL4051C12I |     |     | UNIT              |
|---------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------|----------------|------------|-----|-----|------------|-----|-----|------------|-----|-----|-------------------|
|                                 |                                                              |                                                                         |                | MIN        | TYP | MAX | MIN        | TYP | MAX | MIN        | TYP | MAX |                   |
| V <sub>Z</sub>                  | Reverse breakdown voltage                                    | I <sub>Z</sub> = 100 μA                                                 | 25°C           | 1.225      |     |     | 1.225      |     |     | 1.225      |     |     | V                 |
|                                 | Reverse breakdown voltage tolerance                          | I <sub>Z</sub> = 100 μA                                                 | 25°C           | −1.2       |     |     | −2.4       |     |     | −6         |     |     | mV                |
|                                 |                                                              |                                                                         | Full range     | −5.2       |     |     | −6.4       |     |     | −10.1      |     |     |                   |
| I <sub>Z,min</sub>              | Minimum cathode current                                      |                                                                         | 25°C           | 39         |     |     | 39         |     |     | 39         |     |     | μA                |
|                                 |                                                              |                                                                         | Full range     | 60         |     |     | 60         |     |     | 60         |     |     |                   |
| α <sub>VZ</sub>                 | Average temperature coefficient of reverse breakdown voltage | I <sub>Z</sub> = 10 mA                                                  | 25°C           | ±20        |     |     | ±20        |     |     | ±20        |     |     | ppm/°C            |
|                                 |                                                              | I <sub>Z</sub> = 1 mA                                                   | 25°C           | ±15        |     |     | ±15        |     |     | ±15        |     |     |                   |
|                                 |                                                              | I <sub>Z</sub> = 100 μA                                                 | 25°C           | ±15        |     |     | ±15        |     |     | ±15        |     |     |                   |
|                                 |                                                              |                                                                         | Full range     | ±50        |     |     | ±50        |     |     | ±50        |     |     |                   |
| $\frac{\Delta V_Z}{\Delta I_Z}$ | Reverse breakdown voltage change with cathode current change | I <sub>Z,min</sub> < I <sub>Z</sub> < 1 mA                              | 25°C           | 0.3        |     |     | 0.3        |     |     | 0.3        |     |     | mV                |
|                                 |                                                              |                                                                         | Full range     | 1.1        |     |     | 1.5        |     |     | 1.5        |     |     |                   |
|                                 |                                                              | 1 mA < I <sub>Z</sub> < 12 mA                                           | 25°C           | 1.8        |     |     | 1.8        |     |     | 1.8        |     |     |                   |
|                                 |                                                              |                                                                         | Full range     | 6          |     |     | 6          |     |     | 6          |     |     |                   |
| Z <sub>Z</sub>                  | Reverse dynamic impedance                                    | I <sub>Z</sub> = 1 mA, f = 120 Hz, I <sub>AC</sub> = 0.1 I <sub>Z</sub> | 25°C           | 0.5        |     |     | 0.5        |     |     | 0.5        |     |     | Ω                 |
| e <sub>N</sub>                  | Wideband noise                                               | I <sub>Z</sub> = 100 μA, 10 Hz ≤ f ≤ 10 kHz                             | 25°C           | 20         |     |     | 20         |     |     | 20         |     |     | μV <sub>RMS</sub> |
|                                 | Long-term stability of reverse breakdown voltage             | t = 1000 h, T <sub>A</sub> = 25°C ± 0.1°C, I <sub>Z</sub> = 100 μA      | 25°C           | 120        |     |     | 120        |     |     | 120        |     |     | ppm               |
| V <sub>HYST</sub>               | Thermal hysteresis <sup>(1)</sup>                            | ΔT <sub>A</sub> = −40°C to 125°C                                        |                | 0.36       |     |     | 0.36       |     |     | 0.36       |     |     | mV/V              |

(1) Thermal hysteresis is defined as  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $-40^{\circ}\text{C}$ ) –  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $125^{\circ}\text{C}$ ).

# TL4051

## PRECISION MICROPOWER SHUNT VOLTAGE REFERENCE

SLOS487 – JUNE 2007



### TL4051x12Q Electrical Characteristics

full range  $T_A = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                       | TEST CONDITIONS                                              | T <sub>A</sub>                                                          | TL4051A12Q |       |     | TL4051B12Q |       |     | TL4051C12Q |       |     | UNIT |                   |
|---------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------|------------|-------|-----|------------|-------|-----|------------|-------|-----|------|-------------------|
|                                 |                                                              |                                                                         | MIN        | TYP   | MAX | MIN        | TYP   | MAX | MIN        | TYP   | MAX |      |                   |
| V <sub>Z</sub>                  | Reverse breakdown voltage                                    | I <sub>Z</sub> = 100 μA                                                 | 25°C       | 1.225 |     |            | 1.225 |     |            | 1.225 |     |      | V                 |
|                                 | Reverse breakdown voltage tolerance                          | I <sub>Z</sub> = 100 μA                                                 | 25°C       | −1.2  |     |            | −2.4  |     |            | −6    |     |      | mV                |
|                                 |                                                              |                                                                         | Full range | −7.4  |     |            | −8.6  |     |            | −12.2 |     |      |                   |
| I <sub>Z,min</sub>              | Minimum cathode current                                      |                                                                         | 25°C       | 39    |     |            | 39    |     |            | 39    |     |      | μA                |
|                                 |                                                              |                                                                         | Full range | 65    |     |            | 65    |     |            | 65    |     |      |                   |
| α <sub>VZ</sub>                 | Average temperature coefficient of reverse breakdown voltage | I <sub>Z</sub> = 10 mA                                                  | 25°C       | ±20   |     |            | ±20   |     |            | ±20   |     |      | ppm/°C            |
|                                 |                                                              | I <sub>Z</sub> = 1 mA                                                   | 25°C       | ±15   |     |            | ±15   |     |            | ±15   |     |      |                   |
|                                 |                                                              | I <sub>Z</sub> = 100 μA                                                 | 25°C       | ±15   |     |            | ±15   |     |            | ±15   |     |      |                   |
|                                 |                                                              |                                                                         | Full range | ±50   |     |            | ±50   |     |            | ±50   |     |      |                   |
| $\frac{\Delta V_Z}{\Delta I_Z}$ | Reverse breakdown voltage change with cathode current change | I <sub>Z,min</sub> < I <sub>Z</sub> < 1 mA                              | 25°C       | 0.3   |     |            | 0.3   |     |            | 0.3   |     |      | mV                |
|                                 |                                                              |                                                                         | Full range | 1.5   |     |            | 1.5   |     |            | 1.5   |     |      |                   |
|                                 |                                                              | 1 mA < I <sub>Z</sub> < 12 mA                                           | 25°C       | 1.8   |     |            | 1.8   |     |            | 1.8   |     |      |                   |
|                                 |                                                              |                                                                         | Full range | 8     |     |            | 8     |     |            | 8     |     |      |                   |
| Z <sub>Z</sub>                  | Reverse dynamic impedance                                    | I <sub>Z</sub> = 1 mA, f = 120 Hz, I <sub>AC</sub> = 0.1 I <sub>Z</sub> | 25°C       | 0.5   |     |            | 0.5   |     |            | 0.5   |     |      | Ω                 |
| e <sub>N</sub>                  | Wideband noise                                               | I <sub>Z</sub> = 100 μA, 10 Hz ≤ f ≤ 10 kHz                             | 25°C       | 20    |     |            | 20    |     |            | 20    |     |      | μV <sub>RMS</sub> |
|                                 | Long-term stability of reverse breakdown voltage             | t = 1000 h, T <sub>A</sub> = 25°C ± 0.1°C, I <sub>Z</sub> = 100 μA      | 25°C       | 120   |     |            | 120   |     |            | 120   |     |      | ppm               |
| V <sub>HYST</sub>               | Thermal hysteresis <sup>(1)</sup>                            | ΔT <sub>A</sub> = −40°C to 125°C                                        |            | 0.36  |     |            | 0.36  |     |            | 0.36  |     |      | mV/V              |

(1) Thermal hysteresis is defined as  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $-40^{\circ}\text{C}$ ) –  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $125^{\circ}\text{C}$ ).

## TL4051xl (Adjustable Version) Electrical Characteristics

full range  $T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                              |                                                                     | TEST CONDITIONS                                                                                                      | T <sub>A</sub> | TL4051AI |     |      | TL4051BI |     |      | TL4051CI |     |      | UNIT              |
|----------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|----------|-----|------|----------|-----|------|----------|-----|------|-------------------|
|                                        |                                                                     |                                                                                                                      |                | MIN      | TYP | MAX  | MIN      | TYP | MAX  | MIN      | TYP | MAX  |                   |
| V <sub>REF</sub>                       | Reference voltage                                                   | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 5 V                                                                     | 25°C           | 1.212    |     |      | 1.212    |     |      | 1.212    |     |      | V                 |
|                                        | Reference voltage tolerance <sup>(1)</sup>                          | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 5 V                                                                     | 25°C           | −1.2     |     | 1.2  | −2.4     |     | 2.4  | −6       |     | 6    | mV                |
|                                        |                                                                     |                                                                                                                      | Full range     | −5.2     |     | 5.2  | −6.4     |     | 6.4  | −10.1    |     | 10.1 |                   |
| I <sub>Z,min</sub>                     | Minimum cathode current                                             |                                                                                                                      | 25°C           | 36       |     | 60   | 36       |     | 60   | 36       |     | 65   | μA                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 65   |          |     | 65   |          |     | 70   |                   |
| $\frac{\Delta V_{REF}}{\Delta I_Z}$    | Reference voltage change with cathode current change                | I <sub>Z,min</sub> < I <sub>Z</sub> < 1 mA                                                                           | 25°C           | 0.3      |     | 1.1  | 0.3      |     | 1.1  | 0.3      |     | 1.1  | mV                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 1.5  |          |     | 1.5  |          |     | 1.5  |                   |
|                                        |                                                                     | 1 mA < I <sub>Z</sub> < 12 mA                                                                                        | 25°C           | 0.6      |     | 6    | 0.6      |     | 6    | 0.6      |     | 6    |                   |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 8    |          |     | 8    |          |     | 8    |                   |
| $\frac{\Delta V_{REF}}{\Delta V_{KA}}$ | Reference voltage change with output voltage change                 | I <sub>Z</sub> = 1 mA                                                                                                | 25°C           | −1.69    |     | −2.8 | −1.69    |     | −2.8 | −1.69    |     | −2.8 | mV/V              |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | −3.5 |          |     | −3.5 |          |     | −3.5 |                   |
| I <sub>FB</sub>                        | Feedback current                                                    |                                                                                                                      | 25°C           | 70       |     | 130  | 70       |     | 130  | 70       |     | 130  | nA                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 150  |          |     | 150  |          |     | 150  |                   |
| α <sub>VREF</sub>                      | Average temperature coefficient of reference voltage <sup>(1)</sup> | I <sub>Z</sub> = 10 mA,<br>V <sub>Z</sub> = 2.5 V                                                                    | 25°C           | ±20      |     |      | ±20      |     |      | ±20      |     |      | ppm/°C            |
|                                        |                                                                     | I <sub>Z</sub> = 1 mA,<br>V <sub>Z</sub> = 2.5 V                                                                     | 25°C           | ±15      |     |      | ±15      |     |      | ±15      |     |      |                   |
|                                        |                                                                     | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 2.5 V                                                                   | 25°C           | ±15      |     |      | ±15      |     |      | ±15      |     |      |                   |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     |      | ±50      |     |      |          | ±50 |      |                   |
| Z <sub>Z</sub>                         | Reverse dynamic impedance                                           | I <sub>Z</sub> = 1 mA,<br>f = 120 Hz,<br>I <sub>AC</sub> = 0.1 I <sub>Z</sub> ,<br>V <sub>Z</sub> = V <sub>REF</sub> | 25°C           | 0.3      |     |      | 0.3      |     |      | 0.3      |     |      | Ω                 |
|                                        |                                                                     | I <sub>Z</sub> = 1 mA,<br>f = 120 Hz,<br>I <sub>AC</sub> = 0.1 I <sub>Z</sub> ,<br>V <sub>Z</sub> = 10 V             | 25°C           | 2        |     |      | 2        |     |      | 2        |     |      |                   |
| e <sub>N</sub>                         | Wideband noise                                                      | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = V <sub>REF</sub> ,<br>10 Hz ≤ f ≤ 10 kHz                                | 25°C           | 20       |     |      | 20       |     |      | 20       |     |      | μV <sub>RMS</sub> |
|                                        | Long-term stability of reverse breakdown voltage                    | t = 1000 h,<br>T <sub>A</sub> = 25°C ± 0.1°C,<br>I <sub>Z</sub> = 100 μA                                             | 25°C           | 120      |     |      | 120      |     |      | 120      |     |      | ppm               |
| V <sub>HYST</sub>                      | Thermal hysteresis <sup>(2)</sup>                                   | ΔT <sub>A</sub> = −40°C to 125°C                                                                                     |                | 0.3      |     |      | 0.3      |     |      | 0.3      |     |      | mV/V              |

(1) Reference voltage tolerance and average temperature coefficient change with output voltage ( $V_Z$ ). See *Typical Characteristics*.

(2) Thermal hysteresis is defined as  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $-40^{\circ}\text{C}$ ) –  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $125^{\circ}\text{C}$ ).

# TL4051

## PRECISION MICROPOWER SHUNT VOLTAGE REFERENCE

SLOS487 – JUNE 2007

### TL4051xQ (Adjustable Version) Electrical Characteristics

full range  $T_A = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  (unless otherwise noted)


| PARAMETER                              |                                                                     | TEST CONDITIONS                                                                                                      | T <sub>A</sub> | TL4051AQ |     |      | TL4051BQ |     |      | TL4051CQ |     |      | UNIT              |
|----------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|----------|-----|------|----------|-----|------|----------|-----|------|-------------------|
|                                        |                                                                     |                                                                                                                      |                | MIN      | TYP | MAX  | MIN      | TYP | MAX  | MIN      | TYP | MAX  |                   |
| V <sub>REF</sub>                       | Reference voltage                                                   | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 5 V                                                                     | 25°C           | 1.212    |     |      | 1.212    |     |      | 1.212    |     |      | V                 |
|                                        | Reference voltage tolerance <sup>(1)</sup>                          | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 5 V                                                                     | 25°C           | −1.2     |     | 1.2  | −2.4     |     | 2.4  | −6       |     | 6    | mV                |
|                                        |                                                                     |                                                                                                                      | Full range     | −7.4     |     | 7.4  | −8.6     |     | 8.6  | −12.2    |     | 12.2 |                   |
| I <sub>Z,min</sub>                     | Minimum cathode current                                             |                                                                                                                      | 25°C           | 36       |     | 60   | 36       |     | 60   | 36       |     | 65   | μA                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 70   |          |     | 70   |          |     | 75   |                   |
| $\frac{\Delta V_{REF}}{\Delta I_Z}$    | Reference voltage change with cathode current change                | I <sub>Z,min</sub> < I <sub>Z</sub> < 1 mA                                                                           | 25°C           | 0.3      |     | 1.1  | 0.3      |     | 1.1  | 0.3      |     | 1.1  | mV                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 1.5  |          |     | 1.5  |          |     | 1.5  |                   |
|                                        |                                                                     | 1 mA < I <sub>Z</sub> < 12 mA                                                                                        | 25°C           | 0.6      |     | 6    | 0.6      |     | 6    | 0.6      |     | 6    |                   |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 8    |          |     | 8    |          |     | 8    |                   |
| $\frac{\Delta V_{REF}}{\Delta V_{KA}}$ | Reference voltage change with output voltage change                 | I <sub>Z</sub> = 1 mA                                                                                                | 25°C           | −1.69    |     | −2.8 | −1.69    |     | −2.8 | −1.69    |     | −2.8 | mV/V              |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | −3.5 |          |     | −3.5 |          |     | −3.5 |                   |
| I <sub>FB</sub>                        | Feedback current                                                    |                                                                                                                      | 25°C           | 70       |     | 130  | 70       |     | 130  | 70       |     | 130  | nA                |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     | 150  |          |     | 150  |          |     | 150  |                   |
| αV <sub>REF</sub>                      | Average temperature coefficient of reference voltage <sup>(1)</sup> | I <sub>Z</sub> = 10 mA,<br>V <sub>Z</sub> = 2.5 V                                                                    | 25°C           | ±20      |     |      | ±20      |     |      | ±20      |     |      | ppm/°C            |
|                                        |                                                                     | I <sub>Z</sub> = 1 mA,<br>V <sub>Z</sub> = 2.5 V                                                                     | 25°C           | ±15      |     |      | ±15      |     |      | ±15      |     |      |                   |
|                                        |                                                                     | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = 2.5 V                                                                   | 25°C           | ±15      |     |      | ±15      |     |      | ±15      |     |      |                   |
|                                        |                                                                     |                                                                                                                      | Full range     |          |     |      | ±50      |     |      | ±50      |     |      |                   |
| Z <sub>Z</sub>                         | Reverse dynamic impedance                                           | I <sub>Z</sub> = 1 mA,<br>f = 120 Hz,<br>I <sub>AC</sub> = 0.1 I <sub>Z</sub> ,<br>V <sub>Z</sub> = V <sub>REF</sub> | 25°C           | 0.3      |     |      | 0.3      |     |      | 0.3      |     |      | Ω                 |
|                                        |                                                                     | I <sub>Z</sub> = 1 mA,<br>f = 120 Hz,<br>I <sub>AC</sub> = 0.1 I <sub>Z</sub> ,<br>V <sub>Z</sub> = 10 V             | 25°C           | 2        |     |      | 2        |     |      | 2        |     |      |                   |
| e <sub>N</sub>                         | Wideband noise                                                      | I <sub>Z</sub> = 100 μA,<br>V <sub>Z</sub> = V <sub>REF</sub> ,<br>10 Hz ≤ f ≤ 10 kHz                                | 25°C           | 20       |     |      | 20       |     |      | 20       |     |      | μV <sub>RMS</sub> |
|                                        | Long-term stability of reverse breakdown voltage                    | t = 1000 h,<br>T <sub>A</sub> = 25°C ± 0.1°C,<br>I <sub>Z</sub> = 100 μA                                             | 25°C           | 120      |     |      | 120      |     |      | 120      |     |      | ppm               |
| V <sub>HYST</sub>                      | Thermal hysteresis <sup>(2)</sup>                                   | ΔT <sub>A</sub> = −40°C to 125°C                                                                                     |                | 0.3      |     |      | 0.3      |     |      | 0.3      |     |      | mV/V              |

(1) Reference voltage tolerance and average temperature coefficient change with output voltage ( $V_Z$ ). See *Typical Characteristics*.


(2) Thermal hysteresis is defined as  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $-40^{\circ}\text{C}$ ) –  $V_{Z,25^{\circ}\text{C}}$  (after cycling to  $125^{\circ}\text{C}$ ).

## TYPICAL CHARACTERISTICS


TEMPERATURE DRIFT FOR DIFFERENT AVERAGE  
TEMPERATURE COEFFICIENTS

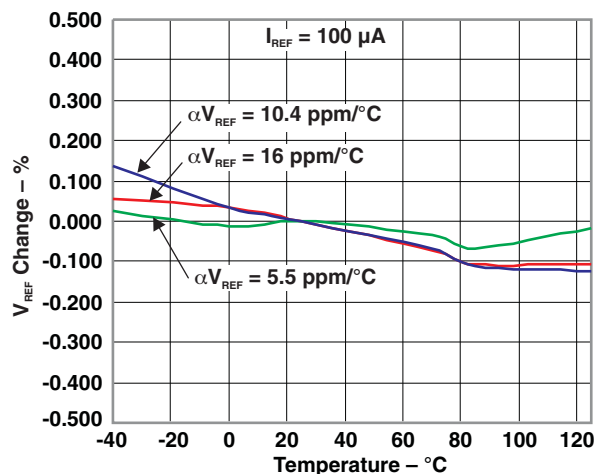


OUTPUT IMPEDANCE  
vs  
FREQUENCY

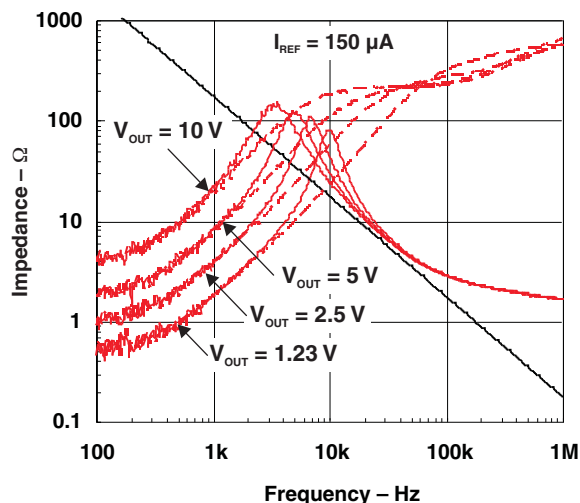

OUTPUT IMPEDANCE  
vs  
FREQUENCY

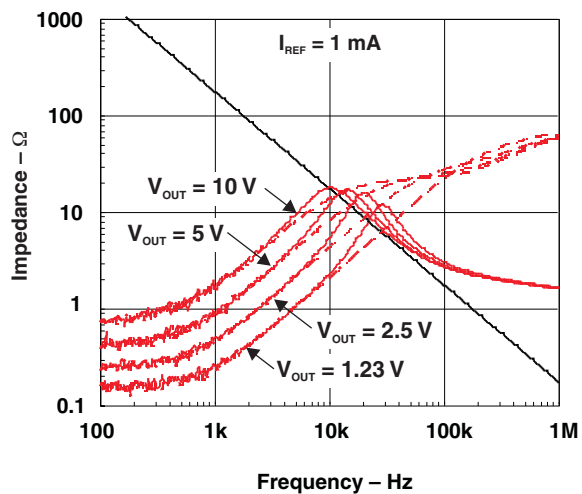


NOISE VOLTAGE  
vs  
FREQUENCY

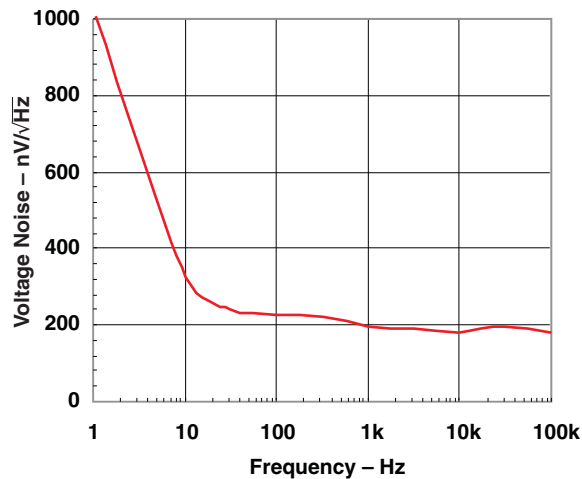


## TYPICAL CHARACTERISTICS (continued)


REVERSE CHARACTERISTICS

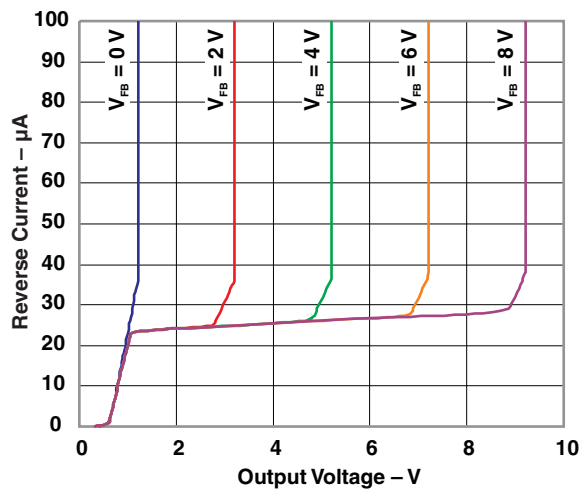


LARGE SIGNAL PULSE RESPONSE

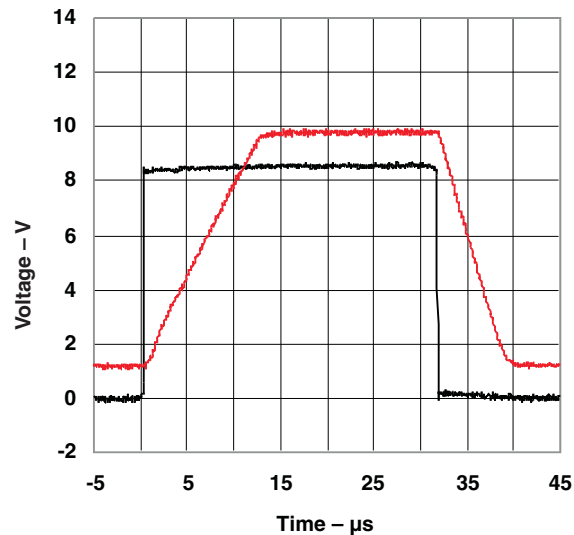




OUTPUT SATURATION  
vs  
OUTPUT CURRENT

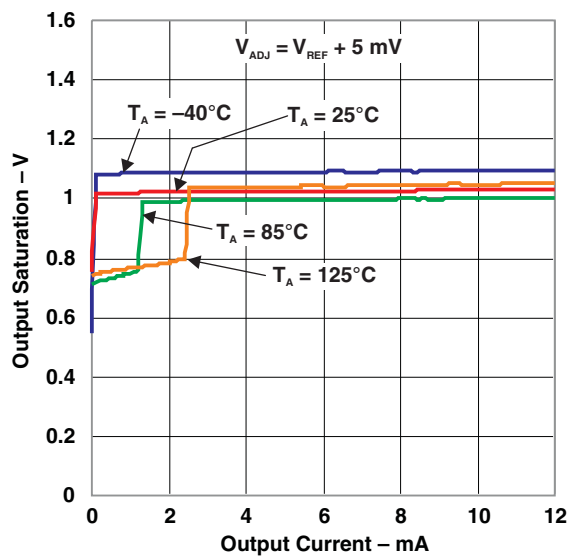


REVERSE CURRENT  
vs  
REVERSE VOLTAGE

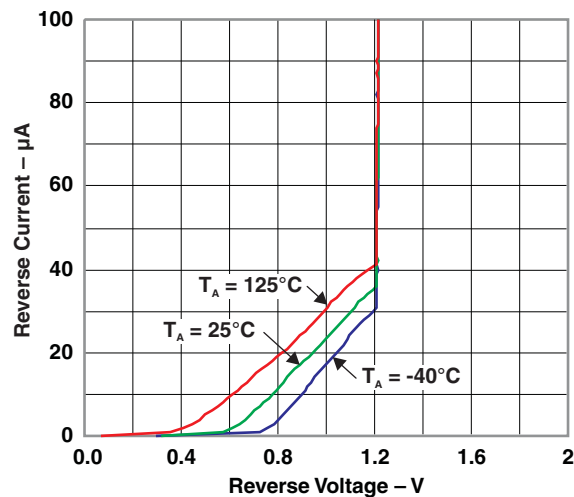


# TYPICAL CHARACTERISTICS (continued)

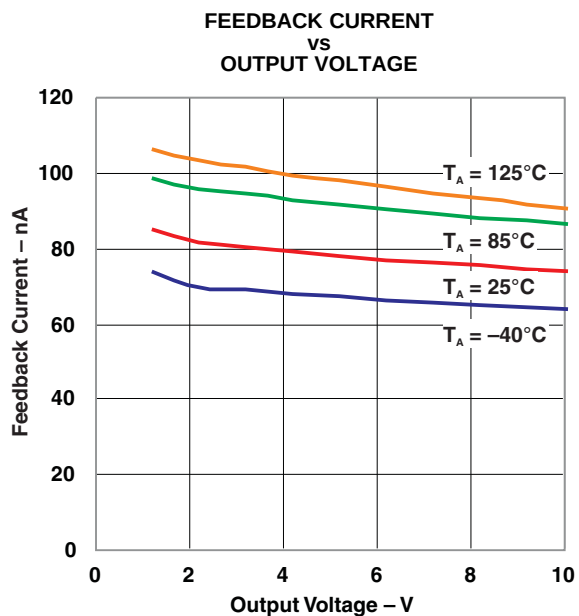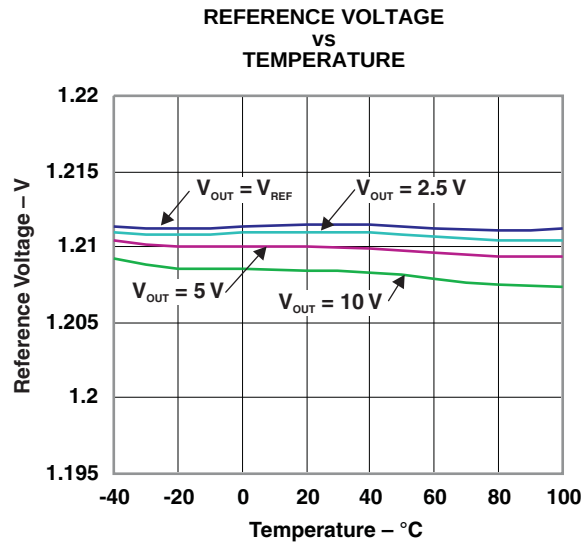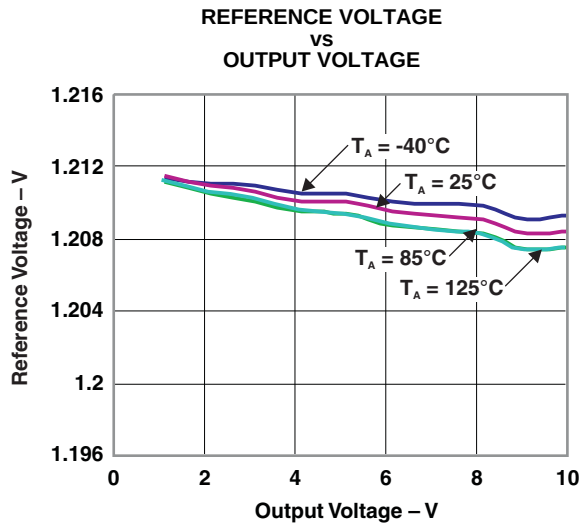

## APPLICATION INFORMATION

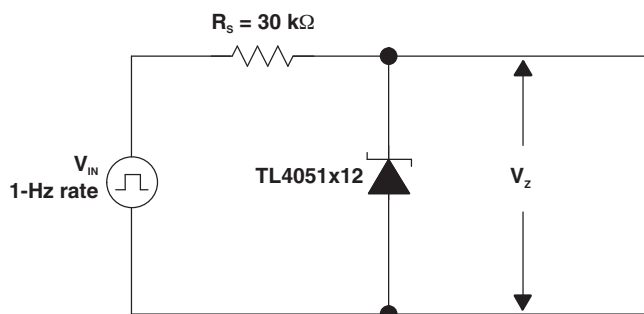

**Figure 1. Start-Up Characteristics Test Circuit**

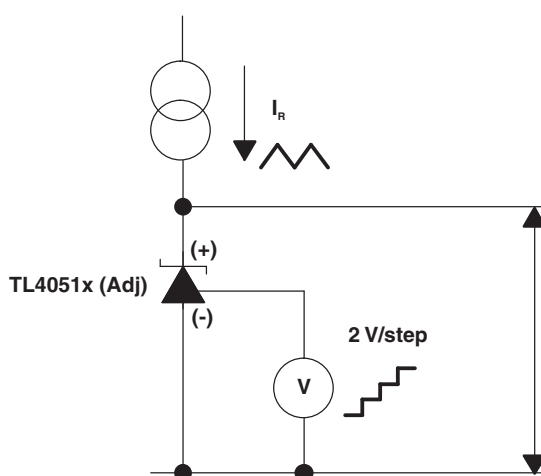

**Figure 2. Reverse Characteristics Test Circuit**

### Output Capacitor

The TL4051 does not require an output capacitor across CATHODE and ANODE for stability. However, if an output bypass capacitor is desired, the TL4051 is designed to be stable with all capacitive loads.

### SOT-23 Pin Connections

There is a parasitic Schottky diode connected between pins 2 and 3 of the SOT-23 packaged device. Thus, pin 3 of the SOT-23 package must be left floating or connected to pin 2.

## APPLICATION INFORMATION (continued)

### Adjustable Version

The adjustable version allows  $V_Z$  to be set by a user-defined resistor divider. The output voltage,  $V_Z$ , is set according to the equation shown in [Figure 3](#).

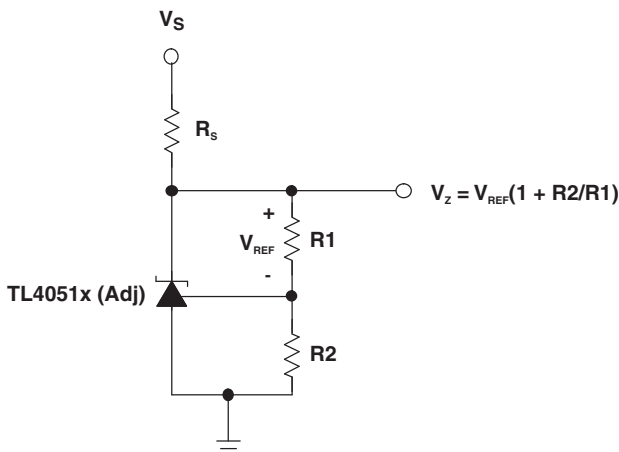


Figure 3. Adjustable Shunt Regulator

### Cathode and Load Currents

In a typical shunt regulator configuration (see [Figure 4](#)), an external resistor,  $R_S$ , is connected between the supply and the cathode of the TL4051.  $R_S$  must be set properly, as it sets the total current available to supply the load ( $I_L$ ) and bias the TL4051 ( $I_Z$ ). In all cases,  $I_Z$  must stay within a specified range for proper operation of the reference. Taking into consideration one extreme in the variation of the load and supply voltage (maximum  $I_L$  and minimum  $V_S$ ),  $R_S$  must be small enough to supply the minimum  $I_Z$  required for operation of the regulator, as given by data sheet parameters. At the other extreme, maximum  $V_S$  and minimum  $I_L$ ,  $R_S$  must be large enough to limit  $I_Z$  to less than its maximum recommended rating of 12 mA.

$R_S$  is calculated as shown in [Equation 1](#).

$$R_S = \frac{(V_S - V_Z)}{(I_L + I_Z)} \quad (1)$$

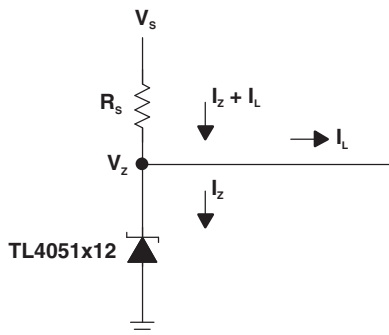


Figure 4. Shunt Regulator

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TL4051A12IDBZR   | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN8U                    | <a href="#">Samples</a> |
| TL4051A12IDBZRG4 | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN8U                    | <a href="#">Samples</a> |
| TL4051A12IDBZT   | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN8U                    | <a href="#">Samples</a> |
| TL4051A12IDBZTG4 | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN8U                    | <a href="#">Samples</a> |
| TL4051A12QDBZR   | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TNVU                    | <a href="#">Samples</a> |
| TL4051A12QDBZT   | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TNVU                    | <a href="#">Samples</a> |
| TL4051A12QDBZTG4 | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TNVU                    | <a href="#">Samples</a> |
| TL4051A12QDCKR   | ACTIVE        | SC70         | DCK                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9GU                     | <a href="#">Samples</a> |
| TL4051AIDBZR     | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN2U                    | <a href="#">Samples</a> |
| TL4051AIDBZT     | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN2U                    | <a href="#">Samples</a> |
| TL4051AIDBZTG4   | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN2U                    | <a href="#">Samples</a> |
| TL4051AIDCKR     | ACTIVE        | SC70         | DCK                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 97U                     | <a href="#">Samples</a> |
| TL4051AQDBZR     | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TN5U                    | <a href="#">Samples</a> |
| TL4051AQDCKR     | ACTIVE        | SC70         | DCK                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9AU                     | <a href="#">Samples</a> |
| TL4051B12IDBZR   | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | (TN93, TN9U)            | <a href="#">Samples</a> |
| TL4051B12IDBZT   | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | (TN93, TN9U)            | <a href="#">Samples</a> |
| TL4051B12QDBZR   | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | (TNW3, TNWU)            | <a href="#">Samples</a> |
| TL4051B12QDCKR   | ACTIVE        | SC70         | DCK                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9HU                     | <a href="#">Samples</a> |
| TL4051BIDBZR     | ACTIVE        | SOT-23       | DBZ                | 3    | 3000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN3U                    | <a href="#">Samples</a> |
| TL4051BIDBZT     | ACTIVE        | SOT-23       | DBZ                | 3    | 250            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN3U                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TL4051BIDCKR     | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 98U                     | <a href="#">Samples</a> |
| TL4051BQDBZR     | ACTIVE        | SOT-23       | DBZ             | 3    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TN6U                    | <a href="#">Samples</a> |
| TL4051BQDCKR     | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9BU                     | <a href="#">Samples</a> |
| TL4051C12IDBZR   | ACTIVE        | SOT-23       | DBZ             | 3    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TNUU                    | <a href="#">Samples</a> |
| TL4051C12IDBZT   | ACTIVE        | SOT-23       | DBZ             | 3    | 250         | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TNUU                    | <a href="#">Samples</a> |
| TL4051C12IDCKR   | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 9FU                     | <a href="#">Samples</a> |
| TL4051C12QDBZR   | ACTIVE        | SOT-23       | DBZ             | 3    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TNYU                    | <a href="#">Samples</a> |
| TL4051C12QDBZT   | ACTIVE        | SOT-23       | DBZ             | 3    | 250         | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TNYU                    | <a href="#">Samples</a> |
| TL4051C12QDCKR   | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9JU                     | <a href="#">Samples</a> |
| TL4051CIDBZR     | ACTIVE        | SOT-23       | DBZ             | 3    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN4U                    | <a href="#">Samples</a> |
| TL4051CIDBZT     | ACTIVE        | SOT-23       | DBZ             | 3    | 250         | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TN4U                    | <a href="#">Samples</a> |
| TL4051CIDCKR     | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 99U                     | <a href="#">Samples</a> |
| TL4051CQDBZR     | ACTIVE        | SOT-23       | DBZ             | 3    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | TN7U                    | <a href="#">Samples</a> |
| TL4051CQDCKR     | ACTIVE        | SC70         | DCK             | 5    | 3000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 9CU                     | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".


**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

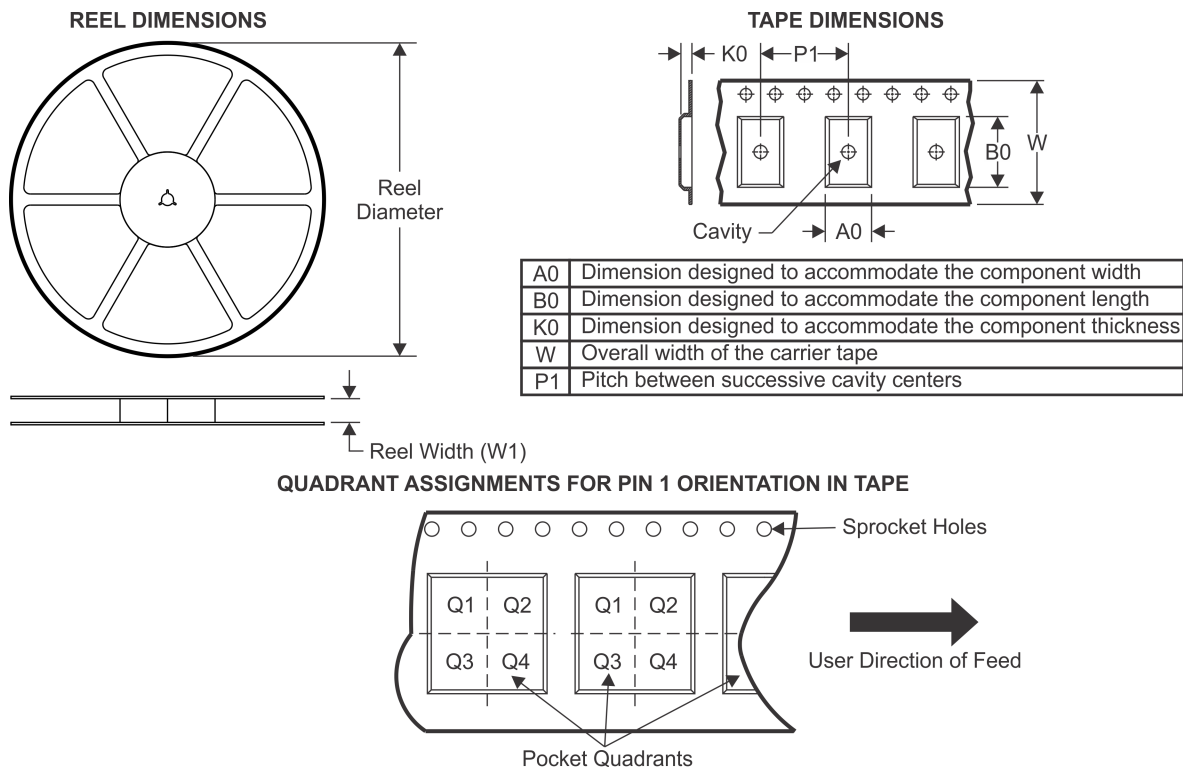
**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TL4051A12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051A12IDBZT | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051A12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051A12QDBZT | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051A12QDCKR | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051AIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051AIDBZT   | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051AIDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051AQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051AQDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051B12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12IDBZT | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 9.2                | 3.15    | 2.77    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12IDBZT | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12IDBZT | SOT-23       | DBZ             | 3    | 250  | 178.0              | 9.2                | 3.15    | 2.77    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 178.0              | 9.2                | 3.15    | 2.77    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12QDBZT | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051B12QDCKR | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051BIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TL4051BIDBZT   | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051BIDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051BQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051BQDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051C12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051C12IDBZT | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051C12IDCKR | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051C12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051C12QDBZT | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051C12QDCKR | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051CIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051CIDBZT   | SOT-23       | DBZ             | 3    | 250  | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051CIDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TL4051CQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 179.0              | 8.4                | 3.15    | 2.95    | 1.22    | 4.0     | 8.0    | Q3            |
| TL4051CQDCKR   | SC70         | DCK             | 5    | 3000 | 179.0              | 8.4                | 2.2     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS

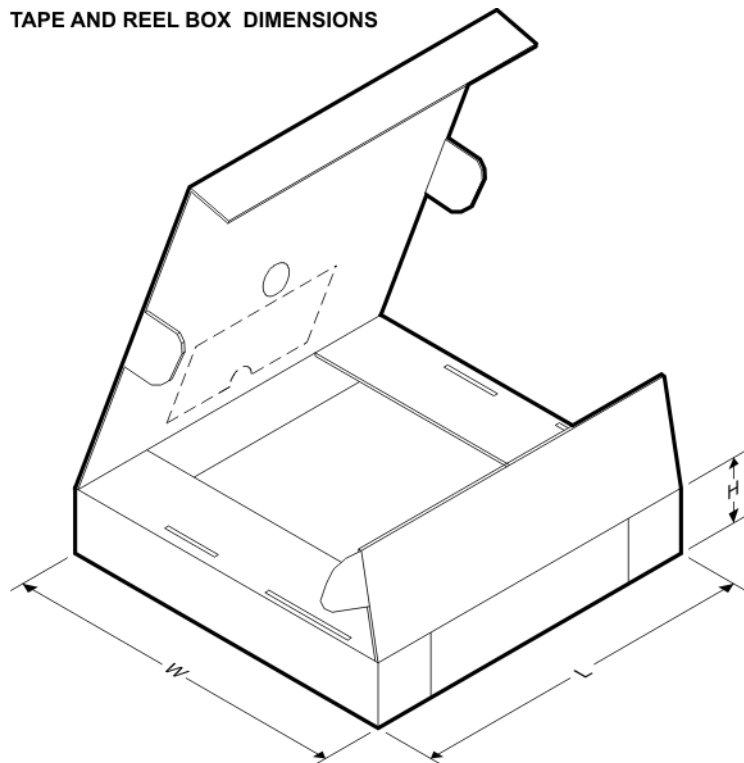


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TL4051A12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051A12IDBZT | SOT-23       | DBZ             | 3    | 250  | 200.0       | 183.0      | 25.0        |

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TL4051A12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051A12QDBZT | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051A12QDCKR | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051AIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051AIDBZT   | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051AIDCKR   | SC70         | DCK             | 5    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051AQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051AQDCKR   | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051B12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051B12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 180.0       | 180.0      | 18.0        |
| TL4051B12IDBZT | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051B12IDBZT | SOT-23       | DBZ             | 3    | 250  | 180.0       | 180.0      | 18.0        |
| TL4051B12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 180.0       | 180.0      | 18.0        |
| TL4051B12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051B12QDCKR | SC70         | DCK             | 5    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051BIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051BIDBZT   | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051BIDCKR   | SC70         | DCK             | 5    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051BQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 203.0       | 203.0      | 35.0        |
| TL4051BQDCKR   | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051C12IDBZR | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051C12IDBZT | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051C12IDCKR | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051C12QDBZR | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051C12QDBZT | SOT-23       | DBZ             | 3    | 250  | 203.0       | 203.0      | 35.0        |
| TL4051C12QDCKR | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051CIDBZR   | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051CIDBZT   | SOT-23       | DBZ             | 3    | 250  | 200.0       | 183.0      | 25.0        |
| TL4051CIDCKR   | SC70         | DCK             | 5    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051CQDBZR   | SOT-23       | DBZ             | 3    | 3000 | 200.0       | 183.0      | 25.0        |
| TL4051CQDCKR   | SC70         | DCK             | 5    | 3000 | 203.0       | 203.0      | 35.0        |

## DCK (R-PDSO-G5)

## PLASTIC SMALL-OUTLINE PACKAGE

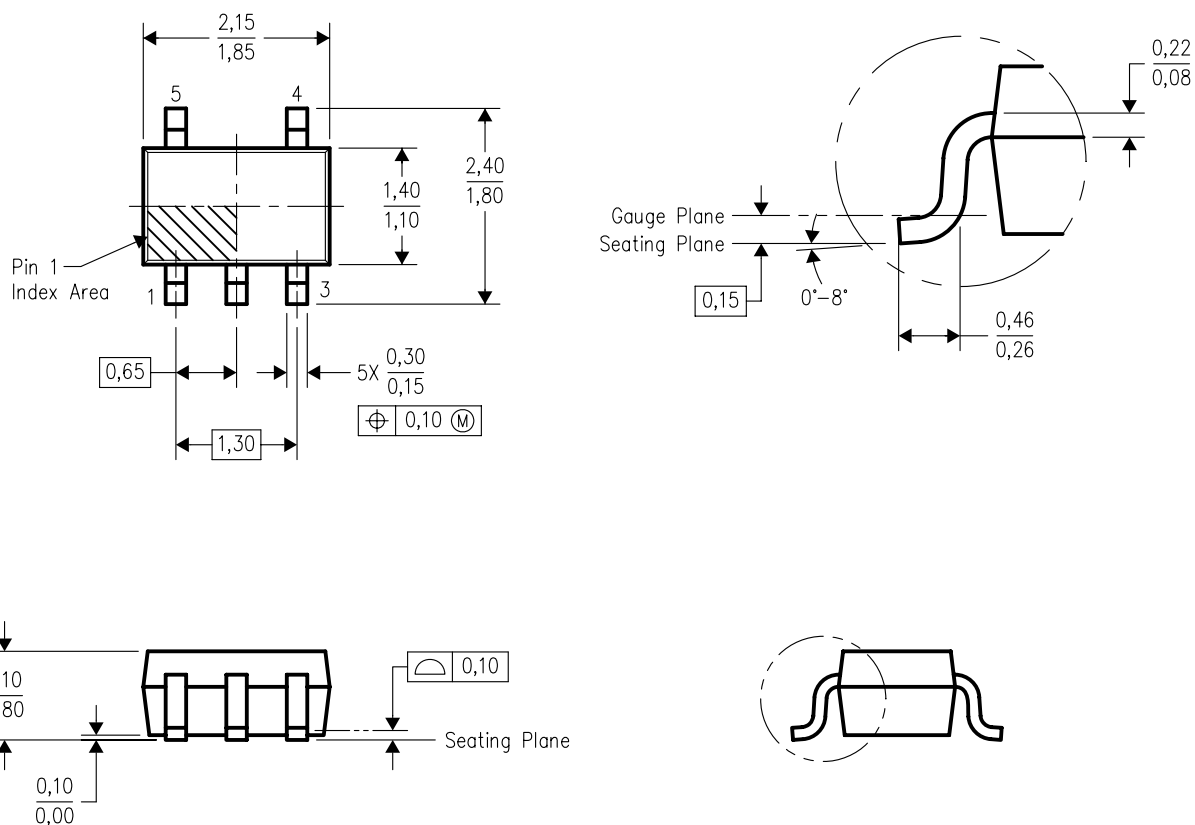


4093553-3/G 01/2007

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - Falls within JEDEC MO-203 variation AA.

DCK (R-PDSO-G5)

PLASTIC SMALL OUTLINE

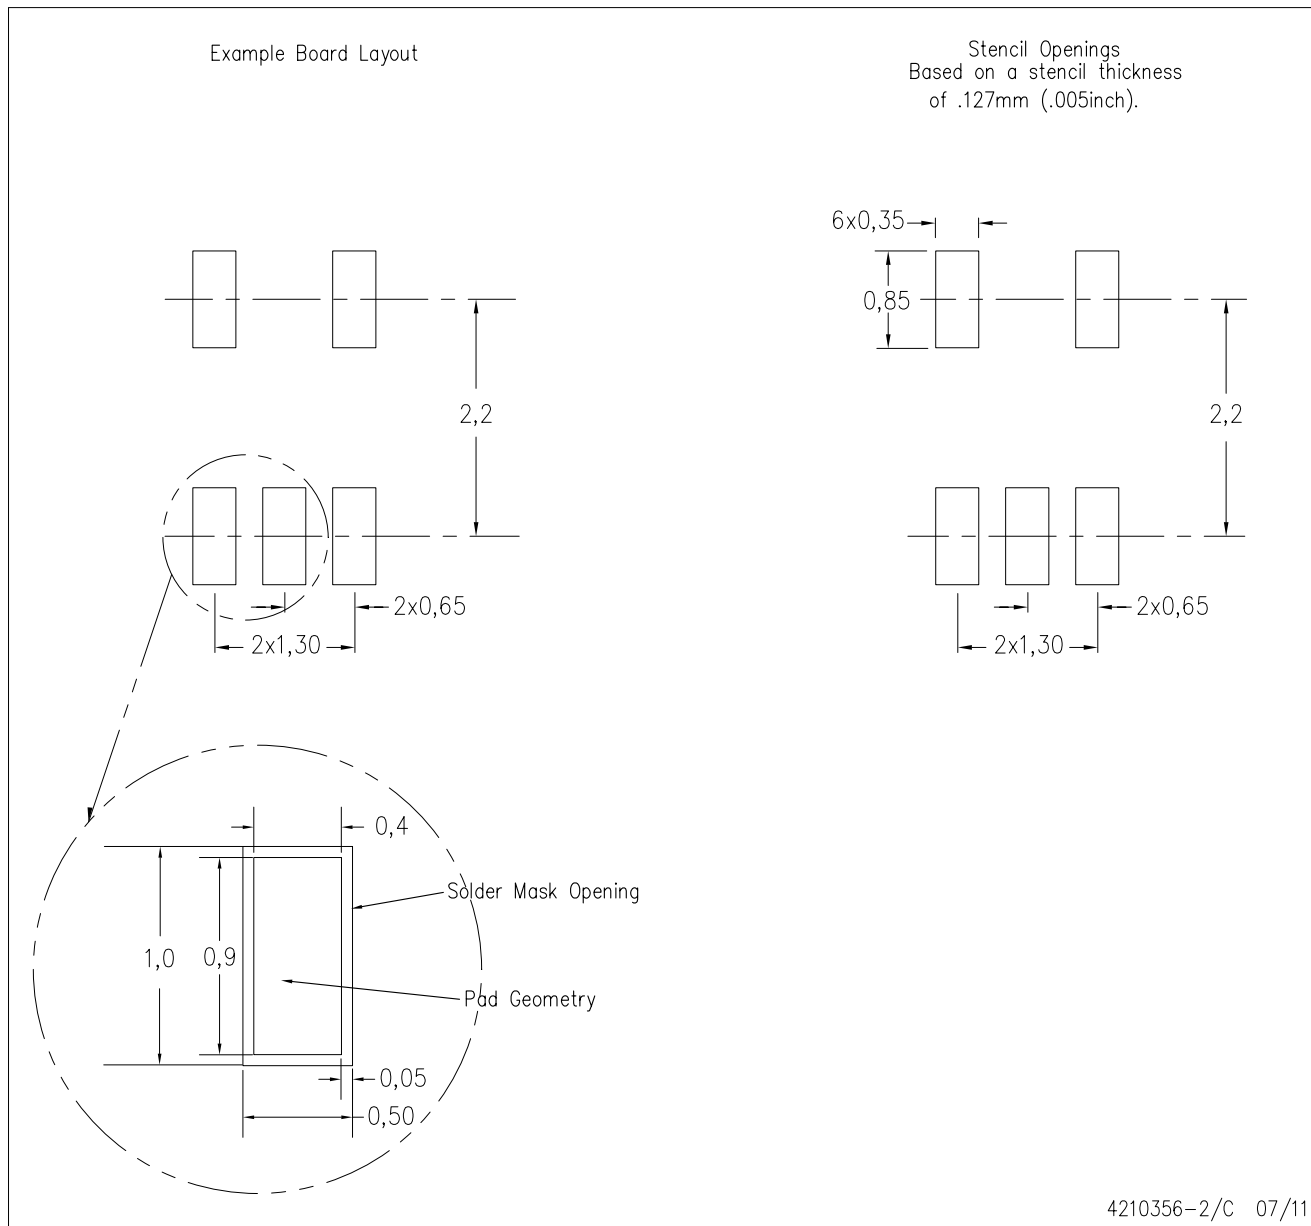


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
  - D. Publication IPC-7351 is recommended for alternate designs.
  - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

## GENERIC PACKAGE VIEW

**DBZ 3**

**SOT-23 - 1.12 mm max height**

SMALL OUTLINE TRANSISTOR

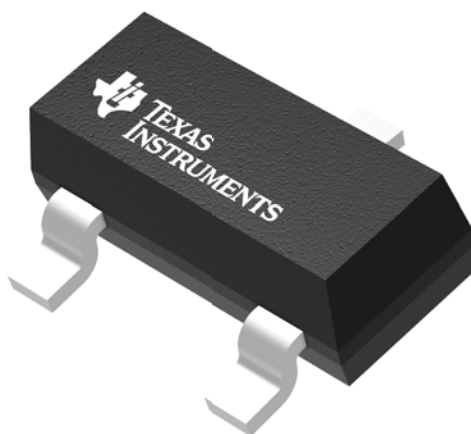

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4203227/C


DBZ0003A



## PACKAGE OUTLINE

SOT-23 - 1.12 mm max height

SMALL OUTLINE TRANSISTOR

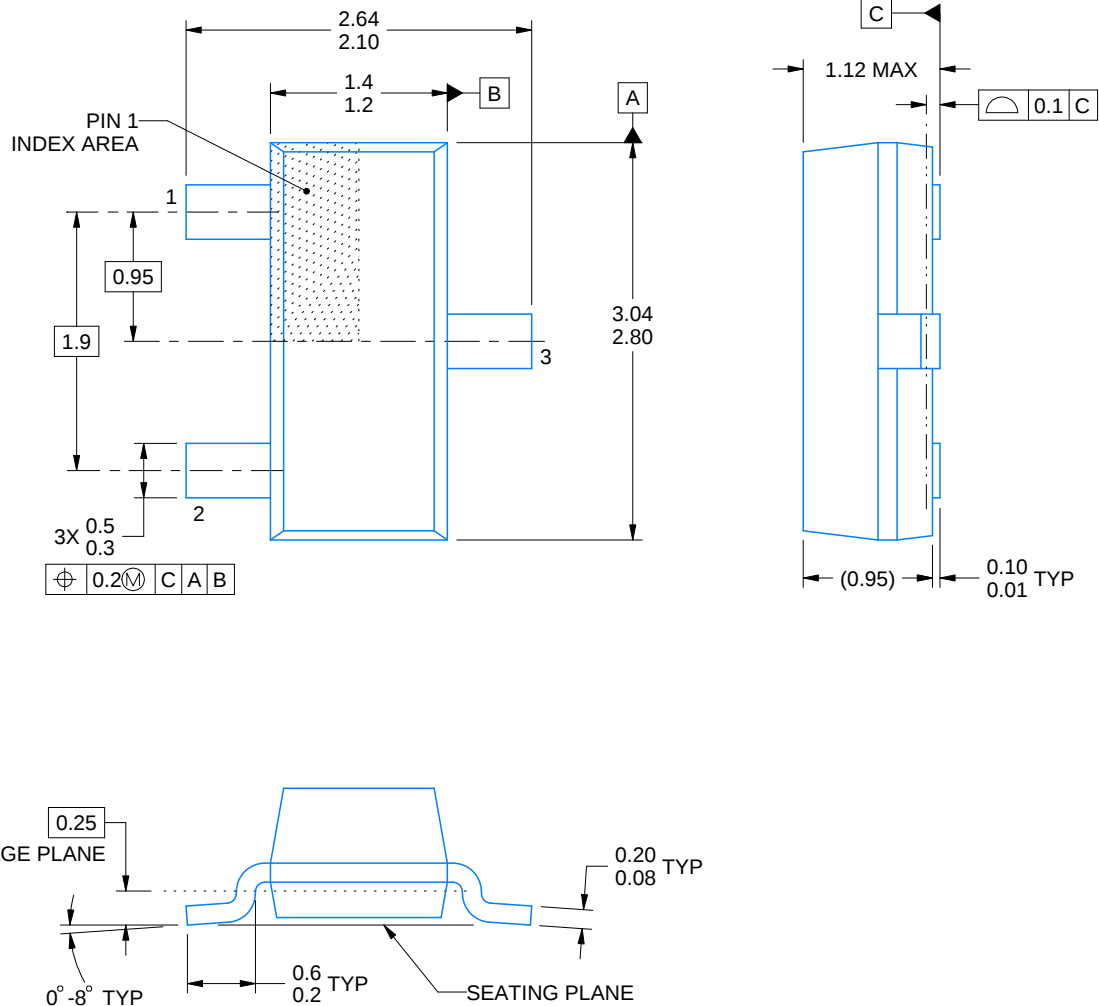

4214838/C 04/2017

### NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC registration TO-236, except minimum foot length.

# EXAMPLE BOARD LAYOUT



DBZ0003A

SOT-23 - 1.12 mm max height

SMALL OUTLINE TRANSISTOR

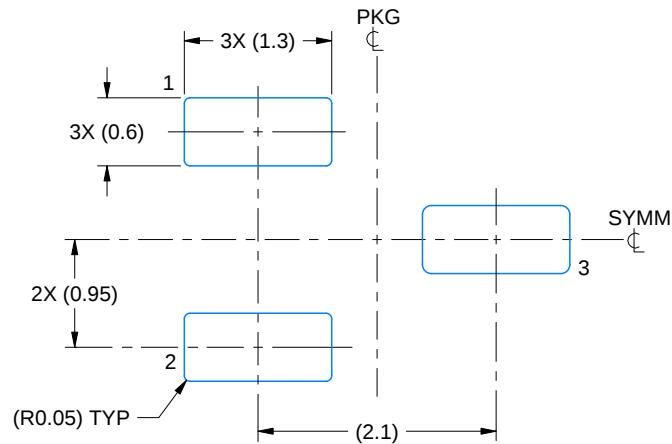

LAND PATTERN EXAMPLE  
SCALE:15X

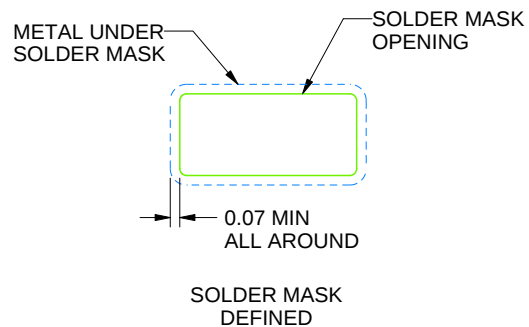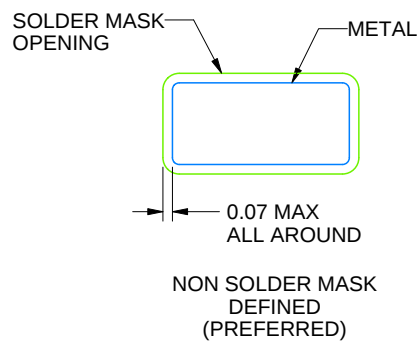

SOLDER MASK DETAILS

4214838/C 04/2017

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBZ0003A

SOT-23 - 1.12 mm max height

SMALL OUTLINE TRANSISTOR

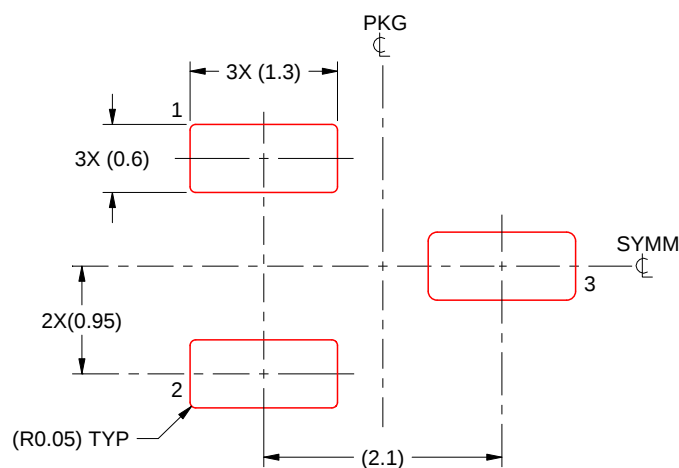

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:15X

4214838/C 04/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2021, Texas Instruments Incorporated