TPS22969 5.5V，6A，4.4mΩ 导通电阻负载开关

1 特性

- 集成单通道负载开关
- VBIAS 电压范围：2.5V 至 5.5V
- VIN 电压范围：0.8V 至 5.5V
- 超低 R_{ON} 电阻
  - V_{IN} = 1.05V (V_{BIAS} = 5V) 时，R_{ON} = 4.4mΩ
- 6A 最大持续开关电流
- 低静态电流（V_{BIAS} = 5V 时为 20μA（典型值））
- 低关断电流（V_{BIAS} = 5V 时为 1μA（典型值））
- 低控制输入阈值允许使用 1.2V 或更高通用输入输出 (GPIO) 接口
- V_{BIAS} 和 V_{IN} 范围内的受控和固定转换率
  - V_{IN} = 1.05V (V_{BIAS} = 5V) 时，t_R = 599μs
- 快速输出放电 (QOD)
- 带有散热焊盘的小外形尺寸无引线 (SON) 8 端子封装
- 静电放电 (ESD) 性能经测试符合 JESD 22 规范
  - 2kV 人体模型 (HBM)
  - 1kV 充电器件模型 (CDM)

2 应用范围

- Ultrabook™/笔记本电脑
- 台式个人电脑
- 工业用个人电脑
- Chromebook
- 服务器
- 机顶盒
- 电信系统
- 平板电脑

3 说明

TPS22969 是一款小型，超低 R_{ON}，单通道负载开关，此开关具有受控开启功能。 此器件包含一个可在 0.8V 至 5.5V 的输入电压范围内运行的 N 通道金属氧化物半导体场效应晶体管 (MOSFET)，并且支持 6A 的最大持续
电流。


器件的超低 R_{ON} 和高电流处理能力的组合使得此器件非常适合于驱动具有非常严格压降耐受的处理器电源轨。 器件的受控上升时间大大减少了由大容量负载电容导致的涌入电流，从而减少或消除了电源损耗。 此开关可由 ON 端子单独控制，此端子能够与微控制器或低压离散逻辑电路生成的低压控制信号直接对接。 通过集成一个 224Ω 下拉电阻器，在开关关闭时实现快速输出放电 (QOD)，此器件进一步减少总体解决方案尺寸。

TPS22969 采用小型 3mm x 3mm SON-8 封装 (DNY)。 DNY 封装集成有一个散热焊盘，此散热焊盘可在高电流和高温应用中实现高功率耗散。 器件在自然通风环境下的额定运行温度范围为 -40°C 至 85°C。

器件信息


订货编号	封装	封装尺寸
TPS22969DNY	超薄小外形尺寸封装 (WSON) (8)	3mm x 3mm

4 简化电路原理图

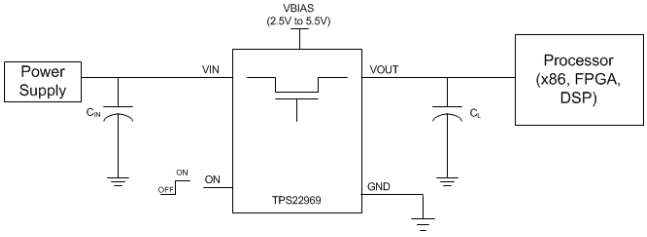

典型应用：驱动用于处理器的高电流内核电源轨

R_{ON} 与 V_{IN} 之间的关系（此时，V_{BIAS} = 5V，I_{OUT} = -200mA）

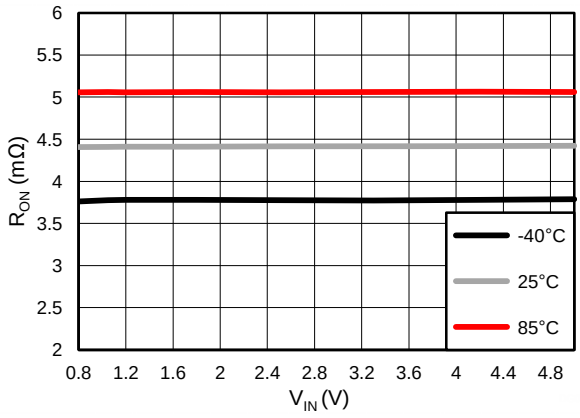

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

目录

1 特性 1
2 应用范围 1
3 说明 1
4 简化电路原理图 1
5 修订历史记录 2
6 **Terminal Configuration and Functions** 3
7 **Specifications** 3
7.1 Absolute Maximum Ratings 3
7.2 Handling Ratings 4
7.3 Recommended Operating Conditions 4
7.4 Thermal Information 4
7.5 Electrical Characteristics 5
7.6 Electrical Characteristics 6
7.7 Switching Characteristics 7
7.8 Typical Characteristics 9
8 **Detailed Description** 14
8.1 Overview 14
8.2 Functional Block Diagram 14
8.3 Feature Description 15
9 **Applications and Implementation** 16
9.1 Application Information 16
9.2 Typical Application 16
10 **Power Supply Recommendations** 19
11 **Layout** 19
11.1 Layout Guidelines 19
11.2 Layout Example 20
12 器件和文档支持 21
12.1 Trademarks 21
12.2 Electrostatic Discharge Caution 21
12.3 Glossary 21
13 机械封装和可订购信息 21


5 修订历史记录

Changes from Original (February 2014) to Revision A **Page**

- 完整版的最初发布版本。 1

Copyright © 2014, Texas Instruments Incorporated

6 Terminal Configuration and Functions

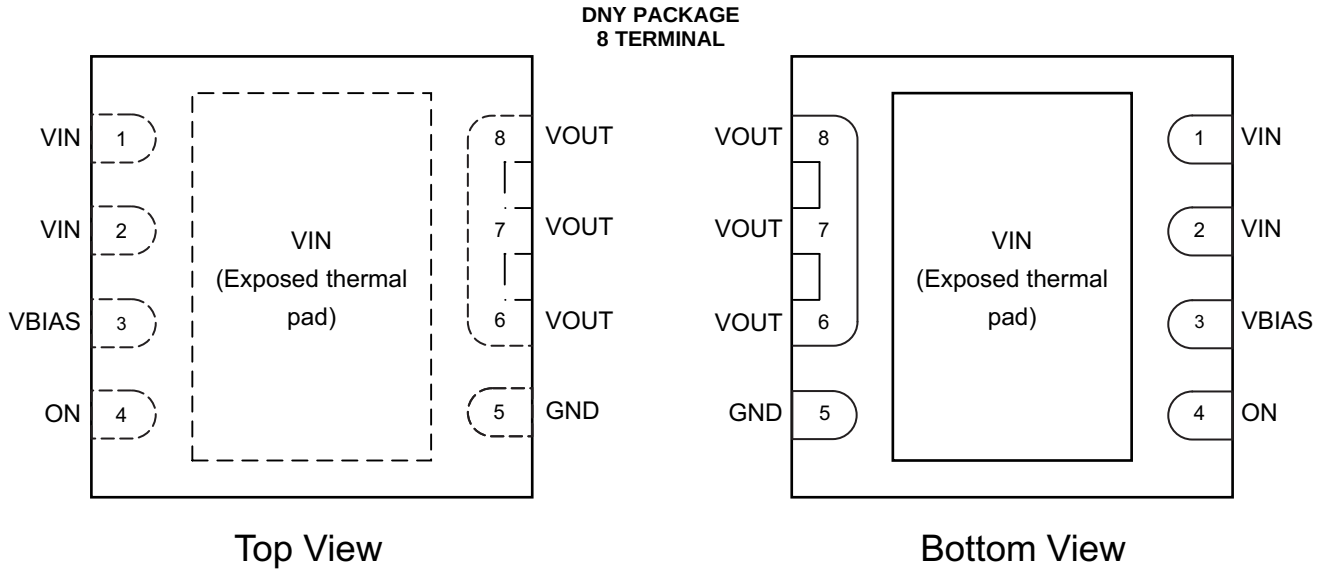

Terminal Functions

TERMINAL		I/O	DESCRIPTION
NAME	NO.		
VIN	1, 2	I	Switch input. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.
VIN	Exposed thermal Pad	I	Switch input. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.
VBIAS	3	I	Bias voltage. Power supply to the device.
ON	4	I	Active high switch control input. Do not leave floating.
GND	5	–	Ground.
VOUT	6, 7, 8	O	Switch output. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.

7 Specifications

7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
V_{IN}	Input voltage range	–0.3	6	V
V_{BIAS}	Bias voltage range	–0.3	6	V
V_{OUT}	Output voltage range	–0.3	6	V
V_{ON}	ON terminal voltage range	–0.3	6	V
I_{MAX}	Maximum Continuous Switch Current		6	A
I_{PLS}	Maximum Pulsed Switch Current, pulse < 300-µs, 2% duty cycle		8	A
T_A	Operating free-air temperature range	–40	85	°C
T_J	Maximum junction temperature		125	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Copyright © 2014, Texas Instruments Incorporated

7.2 Handling Ratings

		MIN	MAX	UNIT
T_{STG}	Storage temperature range	–65	150	°C
T_{LEAD}	Maximum lead temperature (10-s soldering time)		300	°C
V_{ESD} (1)	Human-Body Model (HBM) (2)		2	kV
	Charged-Device Model (CDM) (3)		1	kV

(1) Electrostatic discharge (ESD) to measure device sensitivity and immunity to damage caused by assembly line electrostatic discharges in to the device.
(2) Level listed above is the passing level per ANSI, ESDA, and JEDEC JS-001. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(3) Level listed above is the passing level per EIA-JEDEC JESD22-C101. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{IN}	Input voltage range		0.8	V_{BIAS}	V
V_{BIAS}	Bias voltage range		2.5	5.5	V
V_{ON}	ON voltage range		0	5.5	V
V_{OUT}	Output voltage range			V_{IN}	V
$V_{IH, ON}$	High-level voltage, ON	V_{BIAS} = 2.5V to 5.5V	1.2	5.5	V
$V_{IL, ON}$	Low-level voltage, ON	V_{BIAS} = 2.5V to 5.5V	0	0.5	V
C_{IN}	Input Capacitor		1 (1)		µF

(1) Refer to Detailed Description section.

7.4 Thermal Information

THERMAL METRIC (1)		TPS22969 DNY 8 TERMINALS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	44.6	°C/W
$R_{\theta JCtop}$	Junction-to-case (top) thermal resistance	44.4	
$R_{\theta JB}$	Junction-to-board thermal resistance	17.6	
ψ_{JT}	Junction-to-top characterization parameter	0.4	
ψ_{JB}	Junction-to-board characterization parameter	17.4	
$R_{\theta JCbot}$	Junction-to-case (bottom) thermal resistance	1.1	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, SPRA953.

Copyright © 2014, Texas Instruments Incorporated

7.5 Electrical Characteristics

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature **–40°C ≤ T_A ≤ 85°C (Full) and V_{BIAS} = 5.0V.** Typical values are for T_A = 25°C (unless otherwise noted).

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
CURRENTS AND THRESHOLDS								
$I_{Q, VBIAS}$	V_{BIAS} quiescent current	I_{OUT} = 0, V_{IN} = V_{BIAS}, V_{ON} = 5.0V		Full		20.4	26.0	µA
$I_{SD, VBIAS}$	V_{BIAS} shutdown current	V_{ON} = 0V, V_{OUT} = 0V		Full		1.1	1.5	µA
$I_{SD, VIN}$	V_{IN} shutdown current	V_{ON} = 0V, V_{OUT} = 0V	V_{IN} = 5.0V	Full			0.1	µA
			V_{IN} = 3.3V				0.1	
			V_{IN} = 1.8V				0.1	
			V_{IN} = 1.05V				0.1	
			V_{IN} = 0.8V				0.1	
I_{ON}	ON terminal leakage current	V_{ON} = 5.5V		Full			0.1	µA
$V_{HYS, ON}$	ON terminal hysteresis	V_{BIAS} = V_{IN}		25°C		113		mV
RESISTANCE CHARACTERISTICS								
R_{ON}	On-state resistance	I_{OUT} = –200mA, V_{BIAS} = 5.0V	V_{IN} = 5.0V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V_{IN} = 3.3V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V_{IN} = 2.5V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V_{IN} = 1.8V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V_{IN} = 1.05V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V_{IN} = 0.8V	25°C		4.4	5.0	mΩ
				Full			5.6	
		I_{OUT} = –6A, V_{BIAS} = 5.0V	V_{IN} = 1.05V	Full		4.6	5.8(1)	mΩ
R_{PD}	Output pulldown resistance	V_{IN} = 5.0V, V_{ON} = 0V, V_{OUT} = 1V		Full		224	233	Ω

(1) Parameter verified by design and characterization, but not tested in production.

Copyright © 2014, Texas Instruments Incorporated

7.6 Electrical Characteristics

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature **–40°C ≤ T_A ≤ 85°C (Full) and V_{BIAS} = 2.5V**. Typical values are for T_A = 25°C unless otherwise noted.

PARAMETER		TEST CONDITIONS		T_A	MIN	TYP	MAX	UNIT
CURRENTS AND THRESHOLDS								
$I_{Q, VBIAS}$	V_{BIAS} quiescent current	I_{OUT} = 0, V_{IN} = V_{BIAS}, V_{ON} = 5.0V		Full		9.9	12.5	µA
$I_{SD, VBIAS}$	V_{BIAS} shutdown current	V_{ON} = 0V, V_{OUT} = 0V		Full		0.5	0.65	µA
$I_{SD, VIN}$	V_{IN} shutdown current	V_{ON} = 0V, V_{OUT} = 0V	V_{IN} = 2.5V	Full			0.1	µA
			V_{IN} = 1.8V				0.1	
			V_{IN} = 1.05V				0.1	
			V_{IN} = 0.8V				0.1	
I_{ON}	ON terminal input leakage current	V_{ON} = 5.5V		Full			0.1	µA
$V_{HYS, ON}$	ON terminal hysteresis	V_{BIAS} = V_{IN}		25°C		83		mV
RESISTANCE CHARACTERISTICS								
R_{ON}	On-state resistance	I_{OUT} = –200mA, V_{BIAS} = 2.5V	V_{IN} =2.5V	25°C		4.7	5.3	mΩ
				Full			6.0	
			V_{IN} =1.8V	25°C		4.6	5.2	mΩ
				Full			5.8	
			V_{IN} =1.05V	25°C		4.5	5.1	mΩ
				Full			5.7	
			V_{IN} = 0.8V	25°C		4.5	5.1	mΩ
				Full			5.7	
R_{PD}	Output pulldown resistance	V_{IN} = 2.5V, V_{ON} = 0V, V_{OUT} = 1V		Full		224	233	Ω


Copyright © 2014, Texas Instruments Incorporated

7.7 Switching Characteristics


Refer to the timing test circuit in Figure 1 (unless otherwise noted) for references to external components used for the test condition in the switching characteristics table. Switching characteristics shown below are only valid for the power-up sequence where VIN and VBIAS are already in steady state condition before the ON terminal is asserted high.

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
V_{IN} = 5V, V_{ON} = V_{BIAS} = 5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		2397		µs
t_{OFF}	Turn-off time			4		
t_R	V_{OUT} rise time			2663		
t_F	V_{OUT} fall time			2		
t_D	Delay time			1009		
V_{IN} = 1.05V, V_{ON} = V_{BIAS} = 5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		1064		µs
t_{OFF}	Turn-off time			4		
t_R	V_{OUT} rise time			599		
t_F	V_{OUT} fall time			2		
t_D	Delay time			727		
V_{IN} = 0.8V, V_{ON} = V_{BIAS} = 5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		981		µs
t_{OFF}	Turn-off time			4		
t_R	V_{OUT} rise time			500		
t_F	V_{OUT} fall time			2		
t_D	Delay time			714		
V_{IN} = 2.5V, V_{ON} = 5V, V_{BIAS} = 2.5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		1576		µs
t_{OFF}	Turn-off time			8		
t_R	V_{OUT} rise time			1372		
t_F	V_{OUT} fall time			2		
t_D	Delay time			865		
V_{IN} = 1.05V, V_{ON} = 5V, V_{BIAS} = 2.5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		1080		µs
t_{OFF}	Turn-off time			8		
t_R	V_{OUT} rise time			604		
t_F	V_{OUT} fall time			2		
t_D	Delay time			738		
V_{IN} = 0.8V, V_{ON} = 5V, V_{BIAS} = 2.5V, T_A = 25ºC (unless otherwise noted)						
t_{ON}	Turn-on time	R_L = 10Ω, C_L = 0.1µF		994		µs
t_{OFF}	Turn-off time			8		
t_R	V_{OUT} rise time			502		
t_F	V_{OUT} fall time			2		
t_D	Delay time			723		

Copyright © 2014, Texas Instruments Incorporated

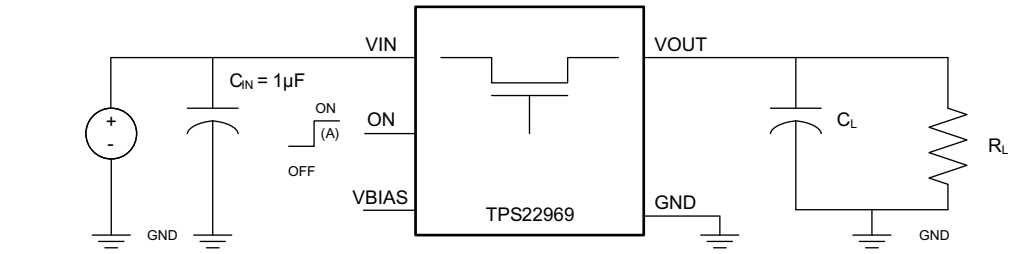

Timing Test Circuit

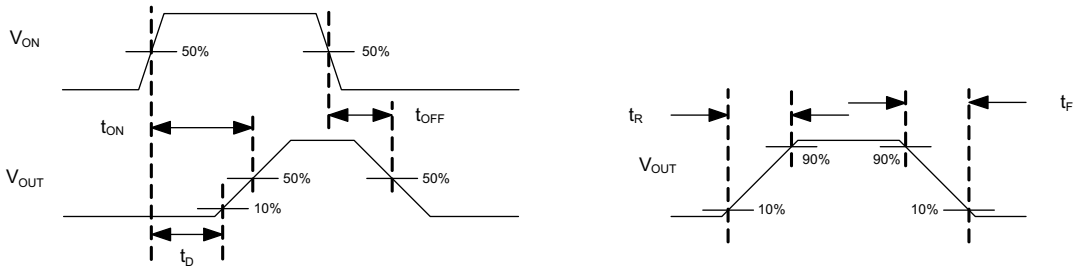


Timing Waveforms

(A) Rise and fall times of the control signal is 100ns.

Figure 1. Switching Characteristics Measurement Setup and Definitions


Copyright © 2014, Texas Instruments Incorporated

7.8 Typical Characteristics

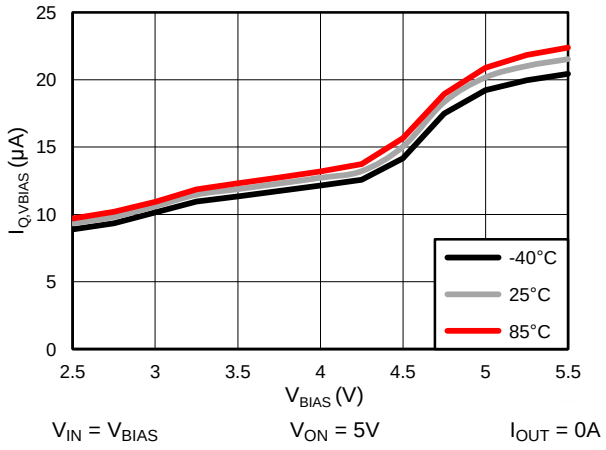


$V_{IN} = V_{BIAS}$ $V_{ON} = 5V$ $I_{OUT} = 0A$

Figure 2. $I_{Q,VBIAS}$ vs V_{BIAS}

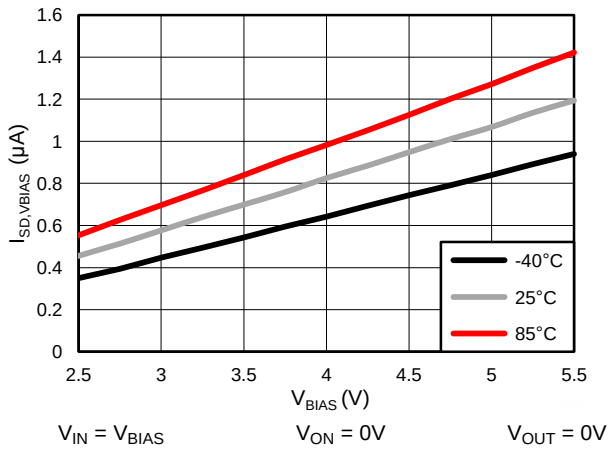


$V_{IN} = V_{BIAS}$ $V_{ON} = 0V$ $V_{OUT} = 0V$

Figure 3. $I_{SD,VBIAS}$ vs V_{BIAS}

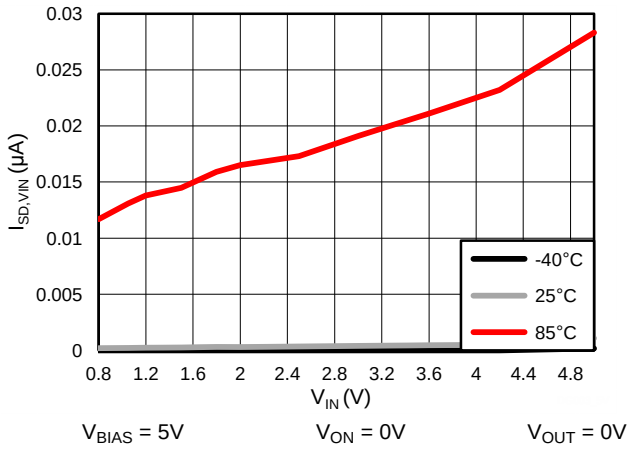


$V_{BIAS} = 5V$ $V_{ON} = 0V$ $V_{OUT} = 0V$

Figure 4. $I_{SD,VIN}$ vs V_{IN}

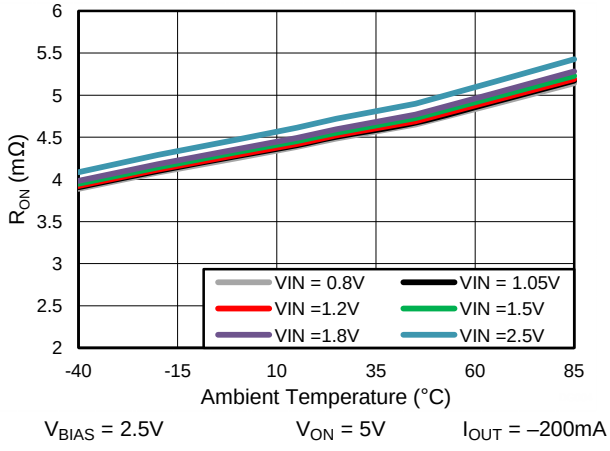


$V_{BIAS} = 2.5V$ $V_{ON} = 5V$ $I_{OUT} = –200mA$

Figure 5. R_{ON} vs Ambient Temperature

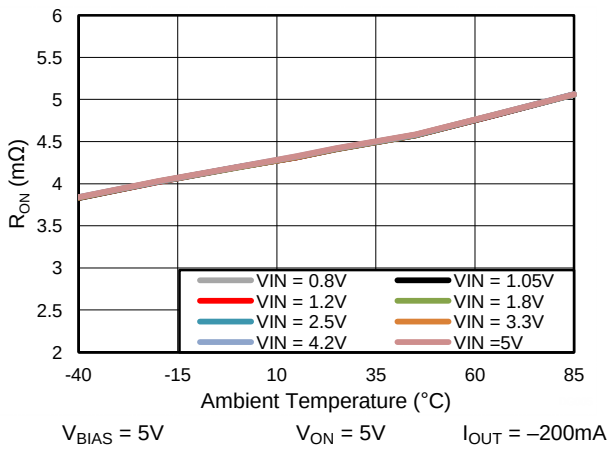

$V_{BIAS} = 5V$ $V_{ON} = 5V$ $I_{OUT} = –200mA$


Figure 6. R_{ON} vs Ambient Temperature

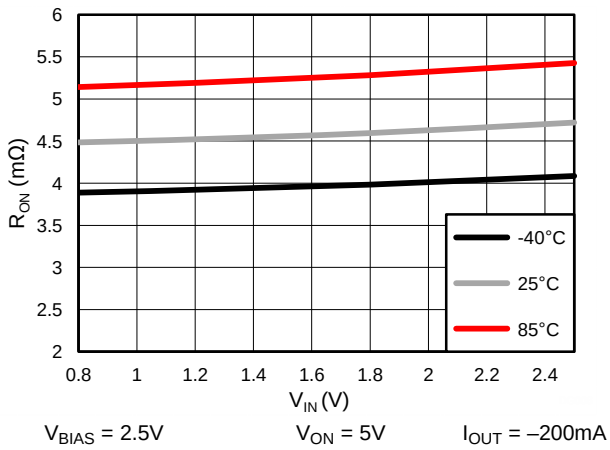

$V_{BIAS} = 2.5V$ $V_{ON} = 5V$ $I_{OUT} = –200mA$


Figure 7. R_{ON} vs V_{IN}

Typical Characteristics (continued)

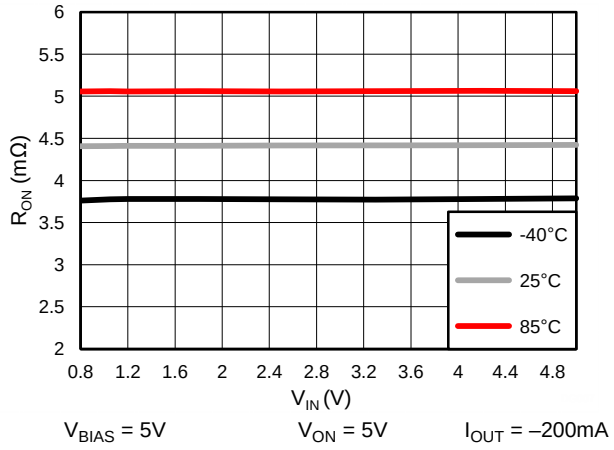


V_{BIAS} = 5V V_{ON} = 5V I_{OUT} = –200mA

Figure 8. R_{ON} vs V_{IN}

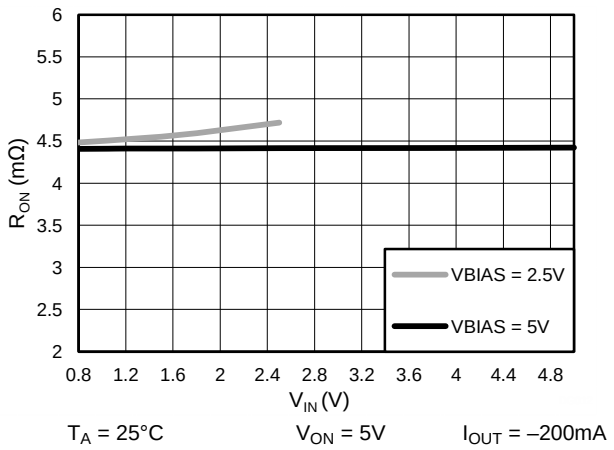


T_A = 25°C V_{ON} = 5V I_{OUT} = –200mA

Figure 9. R_{ON} vs V_{IN}

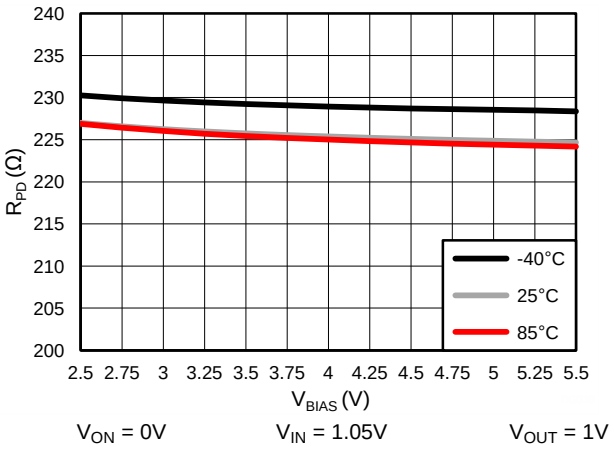


V_{ON} = 0V V_{IN} = 1.05V V_{OUT} = 1V

Figure 10. R_{PD} vs V_{BIAS}

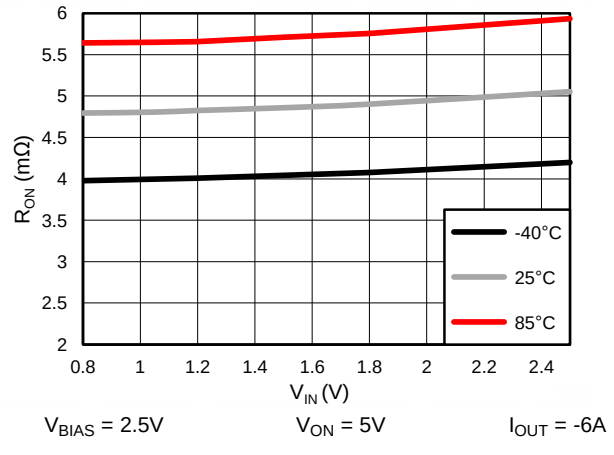


V_{BIAS} = 2.5V V_{ON} = 5V I_{OUT} = -6A

Figure 11. R_{ON} vs V_{IN} at 6A load

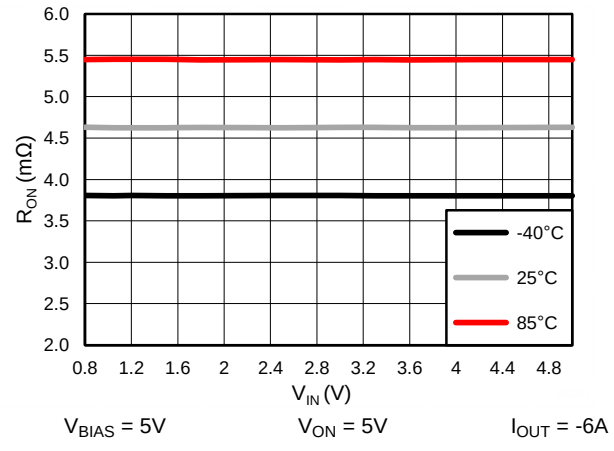

V_{BIAS} = 5V V_{ON} = 5V I_{OUT} = -6A

Figure 12. R_{ON} vs V_{IN} at 6A load

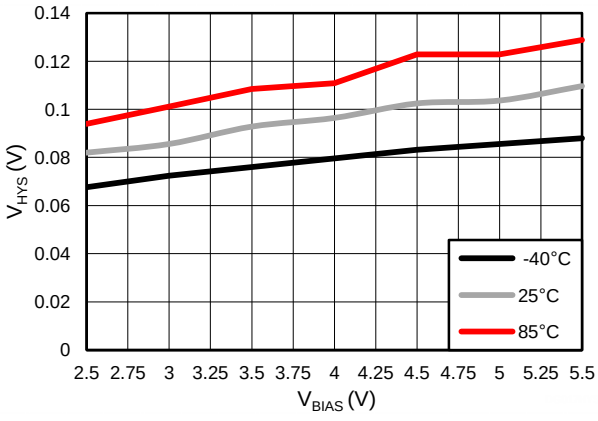


V_{IN} = V_{BIAS}

Figure 13. V_{HYS} vs V_{BIAS}


Copyright © 2014, Texas Instruments Incorporated

Typical Characteristics (continued)

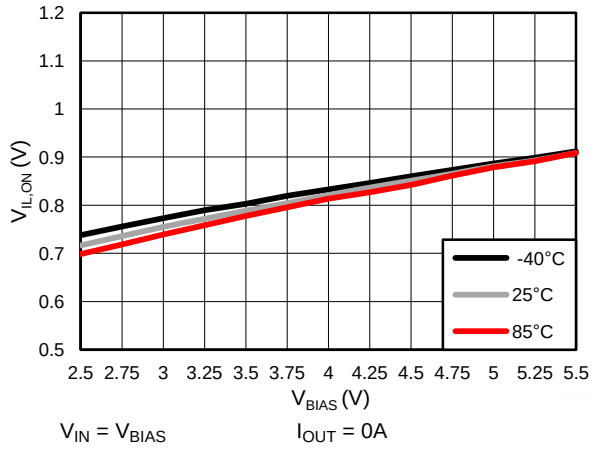


V_{IN} = V_{BIAS} I_{OUT} = 0A

Figure 14. $V_{IL,ON}$ vs V_{BIAS}

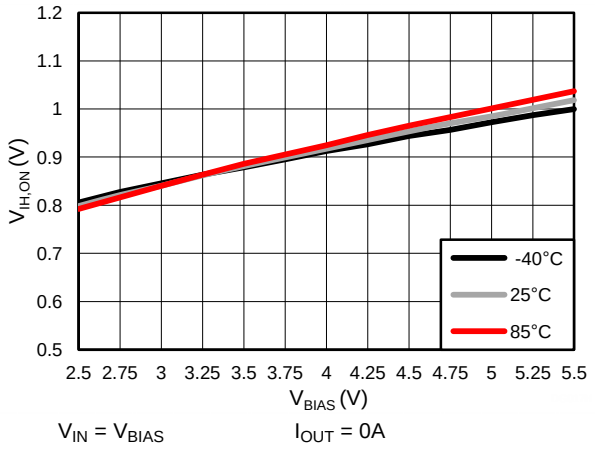


V_{IN} = V_{BIAS} I_{OUT} = 0A

Figure 15. $V_{IH,ON}$ vs V_{BIAS}

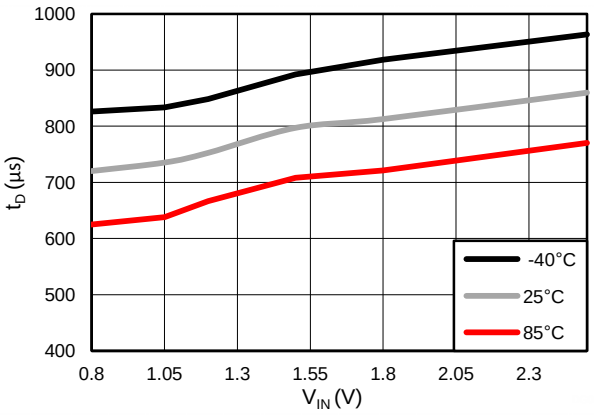


V_{BIAS} = 2.5V R_L = 10Ω C_L = 0.1µF

Figure 16. t_D vs V_{IN}

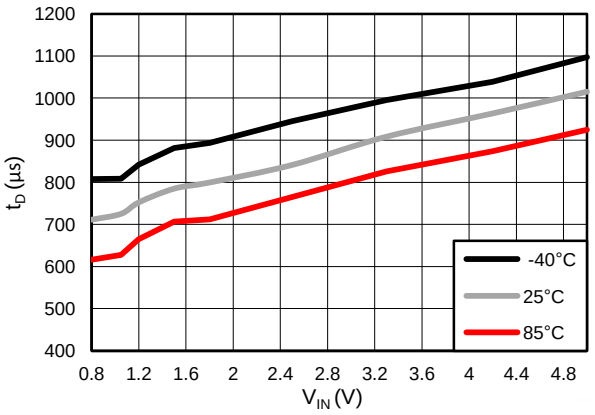


V_{BIAS} = 5V R_L = 10Ω C_L = 0.1µF

Figure 17. t_D vs V_{IN}

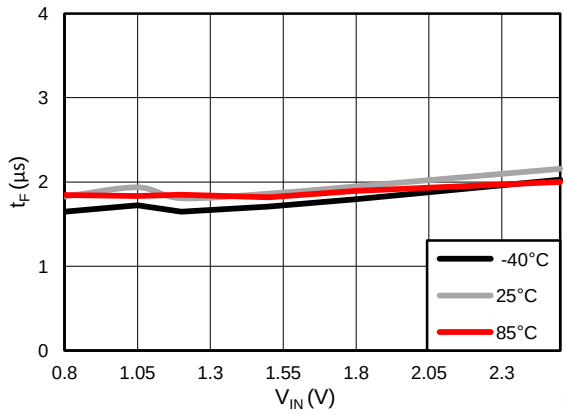

V_{BIAS} = 2.5V R_L = 10Ω C_L = 0.1µF

Figure 18. t_F vs V_{IN}

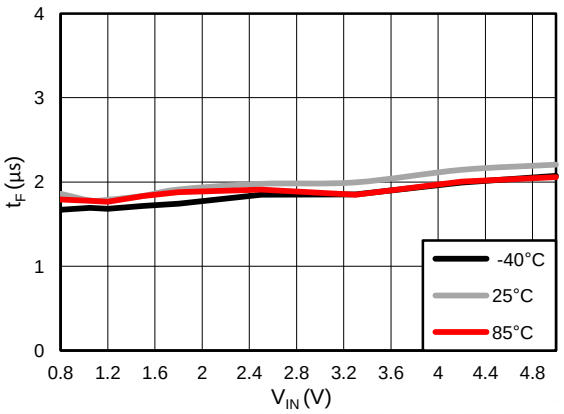


V_{BIAS} = 5V R_L = 10Ω C_L = 0.1µF

Figure 19. t_F vs V_{IN}


Copyright © 2014, Texas Instruments Incorporated

Typical Characteristics (continued)

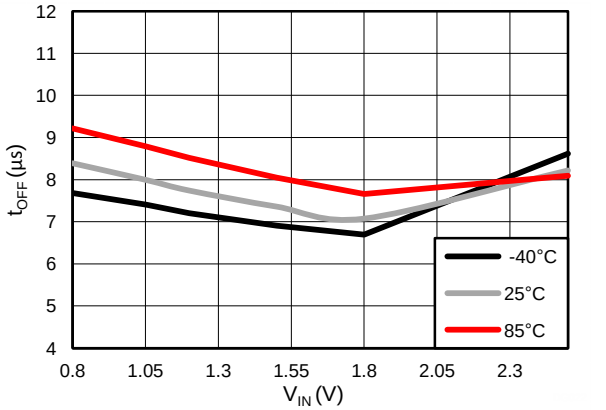


V_{BIAS} = 2.5V R_L = 10Ω C_L = 0.1µF

Figure 20. t_{OFF} vs V_{IN}

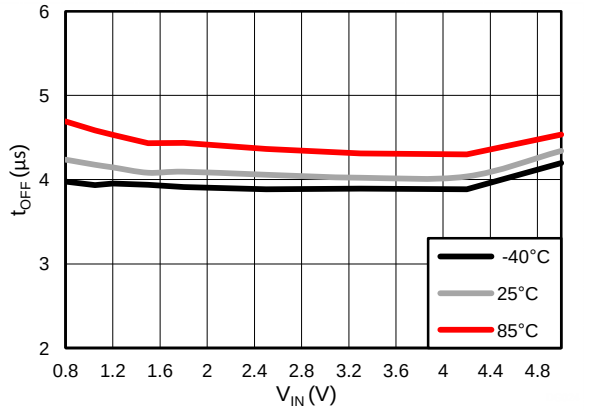


V_{BIAS} = 5V R_L = 10Ω C_L = 0.1µF

Figure 21. t_{OFF} vs V_{IN}

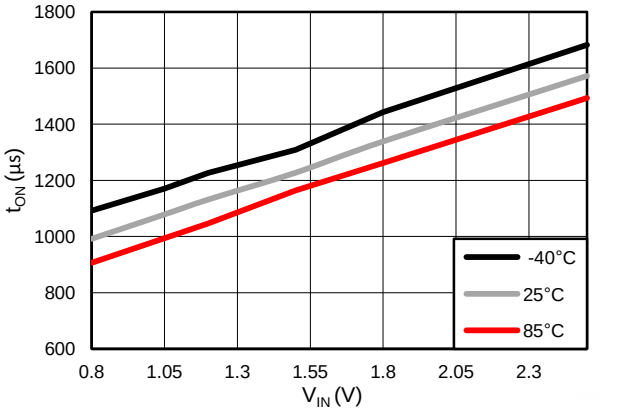


V_{BIAS} = 2.5V R_L = 10Ω C_L = 0.1µF

Figure 22. t_{ON} vs V_{IN}

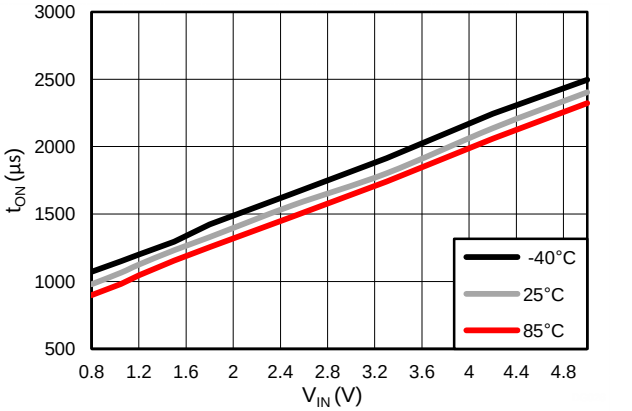


V_{BIAS} = 5V R_L = 10Ω C_L = 0.1µF

Figure 23. t_{ON} vs V_{IN}

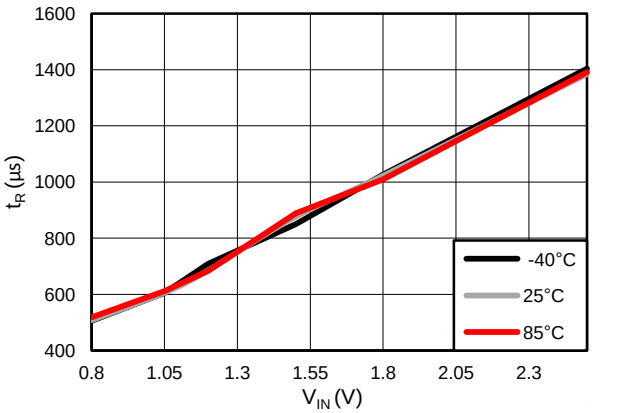

V_{BIAS} = 2.5V R_L = 10Ω C_L = 0.1µF

Figure 24. t_R vs V_{IN}

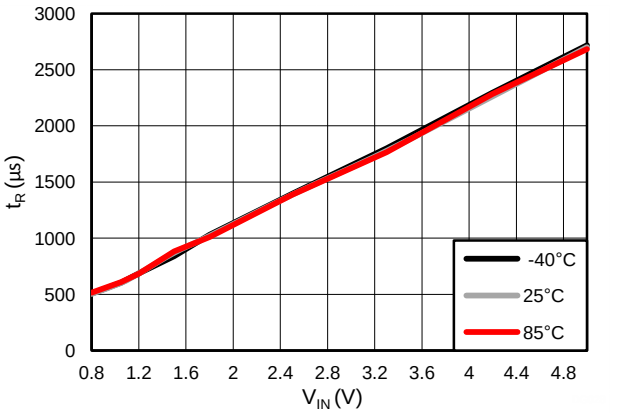


V_{BIAS} = 5V R_L = 10Ω C_L = 0.1µF

Figure 25. t_R vs V_{IN}


Copyright © 2014, Texas Instruments Incorporated

Typical Characteristics (continued)

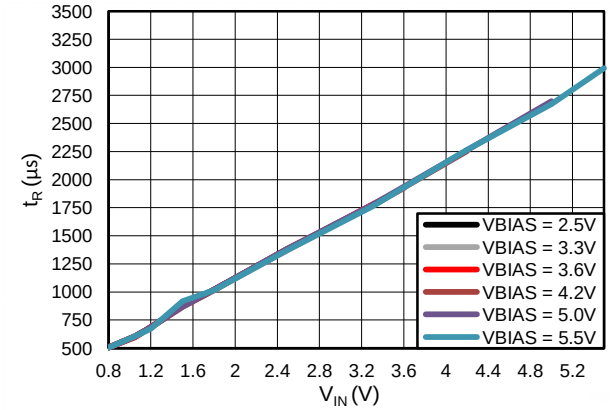

T_A = 25°C R_L = 10Ω C_L = 0.1µF

Figure 26. t_R vs V_{IN} for Various V_{BIAS}

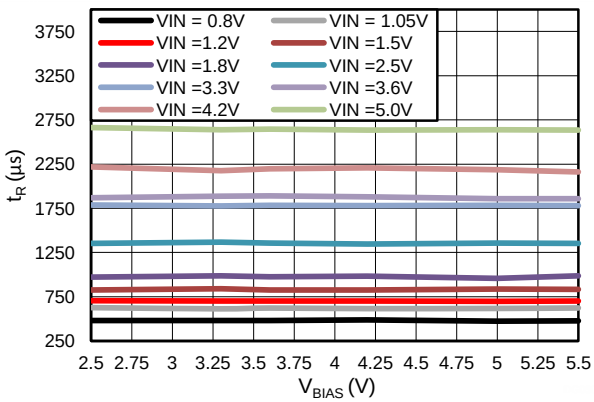

T_A = 25°C R_L = 10Ω C_L = 0.1µF

Figure 27. t_R vs V_{BIAS} for Various V_{IN}


8 Detailed Description

8.1 Overview

The device is a 5.5V, 6A load switch in a 8-terminal SON package. To reduce voltage drop for low voltage and high current rails, the device implements an ultra-low resistance N-channel MOSFET which reduces the drop out voltage through the device.

The device has a controlled and fixed slew rate which helps reduce or eliminate power supply droop due to large inrush currents. During shutdown, the device has very low leakage currents, thereby reducing unneccessary leakages for downstream modules during standby. Integrated control logic, driver, charge pump, and output discharge FET eliminates the need for any external components, which reduces solution size and BOM count.

8.2 Functional Block Diagram

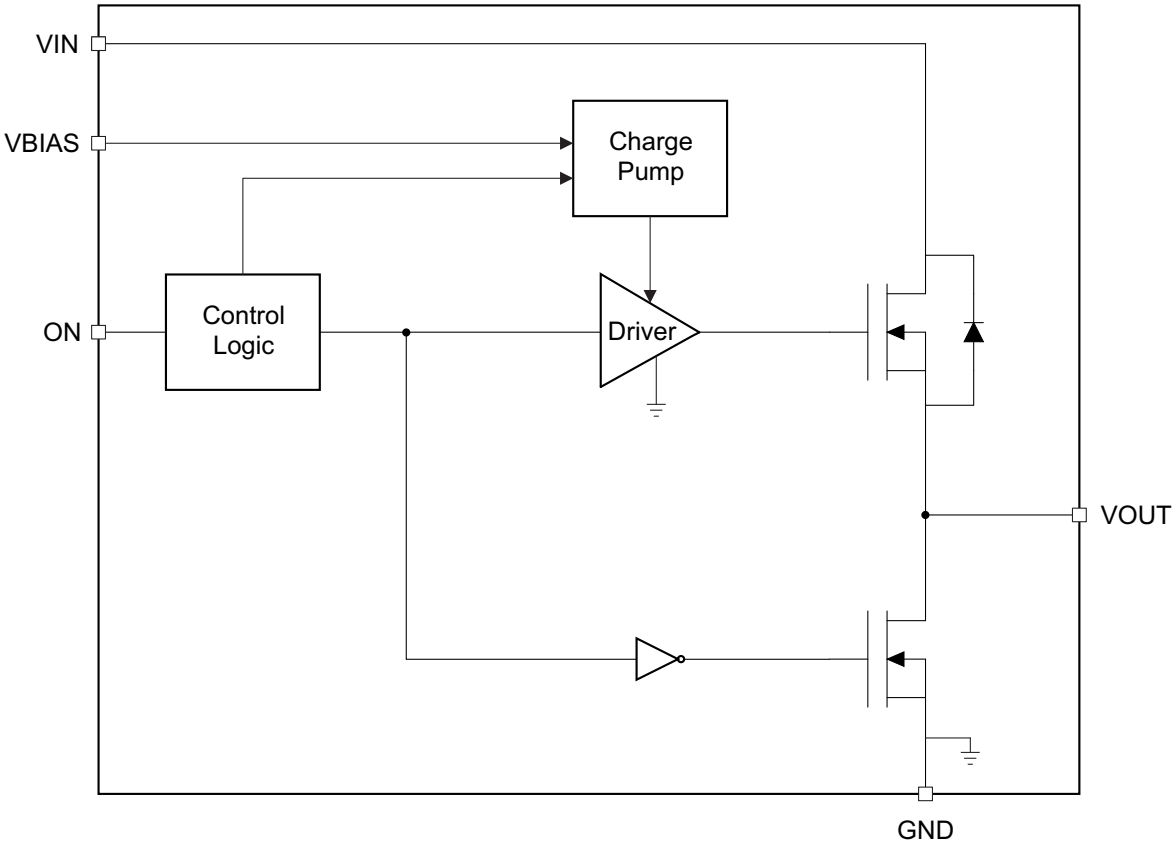

Copyright © 2014, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 On/off Control

The ON terminal controls the state of the load switch, and asserting the terminal high (active high) enables the switch. The ON terminal is compatible with standard GPIO logic threshold and can be used with any microcontroller or discrete logic with 1.2-V or higher GPIO voltage. This terminal cannot be left floating and must be tied either high or low for proper functionality.

8.3.2 Input Capacitor (C_{IN})

To limit the voltage drop on the input supply caused by transient in-rush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between VIN and GND. A 1-µF ceramic capacitor, C_{IN}, placed close to the terminals, is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop in high-current application. When switching heavy loads, it is recommended to have an input capacitor 10 times higher than the output capacitor to avoid excessive voltage drop; however, a 10 to 1 ratio for capacitance is not required for proper functionality of the device, but a ratio smaller than 10 to 1 (such as 1 to 1) could cause a V_{IN} dip upon turn-on due to inrush currents based on external factor such as board parasitics and output bulk capacitance.

8.3.3 Output Capacitor (C_L)

Due to the integrated body diode in the N-channel MOSFET, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from VOUT to VIN. A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup, however a 10 to 1 ratio for capacitance is not required for proper functionality of the device. A ratio smaller than 10 to 1 (such as 1 to 1) could cause a V_{IN} dip upon turn-on due to inrush currents based on external factor such as board parasitics and output bulk capacitance.

8.3.4 V_{IN} and V_{BIAS} Voltage Range

For optimal R_{ON} performance, make sure $V_{IN} \leq V_{BIAS}$. The device may still be functional if $V_{IN} > V_{BIAS}$ but it will exhibit R_{ON} greater than what is listed in the Electrical Characteristics table. See Figure 28 for an example of a typical device. Notice the increasing R_{ON} as V_{IN} increases. Be sure to never exceed the maximum voltage rating for V_{IN} and V_{BIAS}. Performance of the device is not guaranteed for $V_{IN} > V_{BIAS}$.

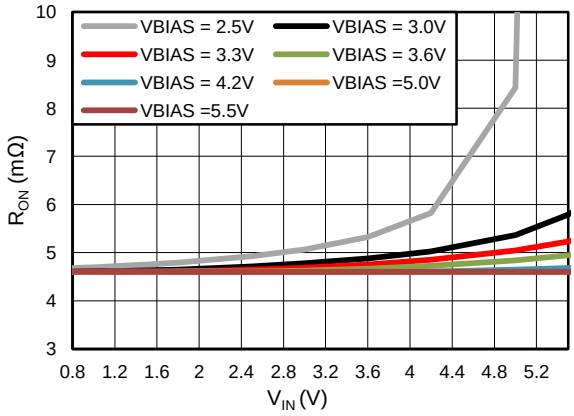


Figure 28. R_{ON} vs V_{IN} ($V_{IN} > V_{BIAS}$)

Copyright © 2014, Texas Instruments Incorporated

9 Applications and Implementation

9.1 Application Information

This section will highlight some of the design considerations when implementing this device in various applications. A PSPICE model for this device is also available in the product page of this device on www.ti.com for further aid.

9.2 Typical Application

This application demonstrates how the TPS22969 can be used to power downstream modules with large capacitances. The example below is powering a 100-µF capacitive output load.

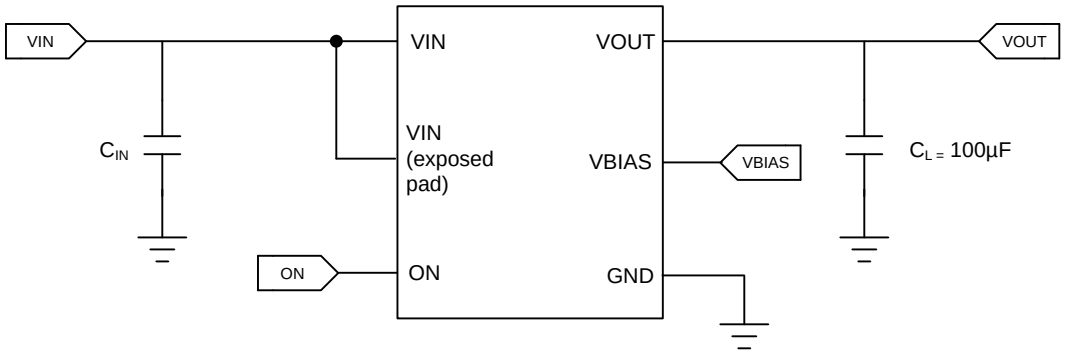


Figure 29. Typical Application Schematic for Powering a Downstream Module

9.2.1 Design Requirements

For this design example, use the following as the input parameters.

Table 1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	1.05V
V_{BIAS}	5.0V
Load current	6A

9.2.2 Detailed Design Procedure

To begin the design process, the designer needs to know the following:

- VIN voltage
- VBIAS voltage
- Load current

9.2.2.1 VIN to VOUT Voltage Drop

The VIN to VOUT voltage drop in the device is determined by the R_{ON} of the device and the load current. The R_{ON} of the device depends upon the V_{IN} and V_{BIAS} conditions of the device. Refer to the R_{ON} specification of the device in the Electrical Characteristics table of this datasheet. Once the R_{ON} of the device is determined based upon the V_{IN} and V_{BIAS} conditions, use Equation 1 to calculate the VIN to VOUT voltage drop:

$$\Delta V = I_{LOAD} \times R_{ON} \quad (1)$$

where

- ΔV = voltage drop from VIN to VOUT
- I_{LOAD} = load current
- R_{ON} = On-resistance of the device for a specific V_{IN} and V_{BIAS} combination

An appropriate I_{LOAD} must be chosen such that the I_{MAX} specification of the device is not violated.

Copyright © 2014, Texas Instruments Incorporated

9.2.2.2 Inrush Current

To determine how much inrush current will be caused by the C_L capacitor, use Equation 2:

$$I_{INRUSH} = C_L \times \frac{dV_{OUT}}{dt} \quad (2)$$

where

- I_{INRUSH} = amount of inrush caused by C_L
- C_L = capacitance on VOUT
- dt = time it takes for change in V_{OUT} during the ramp up of VOUT when the device is enabled
- dV_{OUT} = change in V_{OUT} during the ramp up of VOUT when the device is enabled

An appropriate C_L value should be placed on VOUT such that the I_{MAX} and I_{PLS} specficiations of the device are not violated.

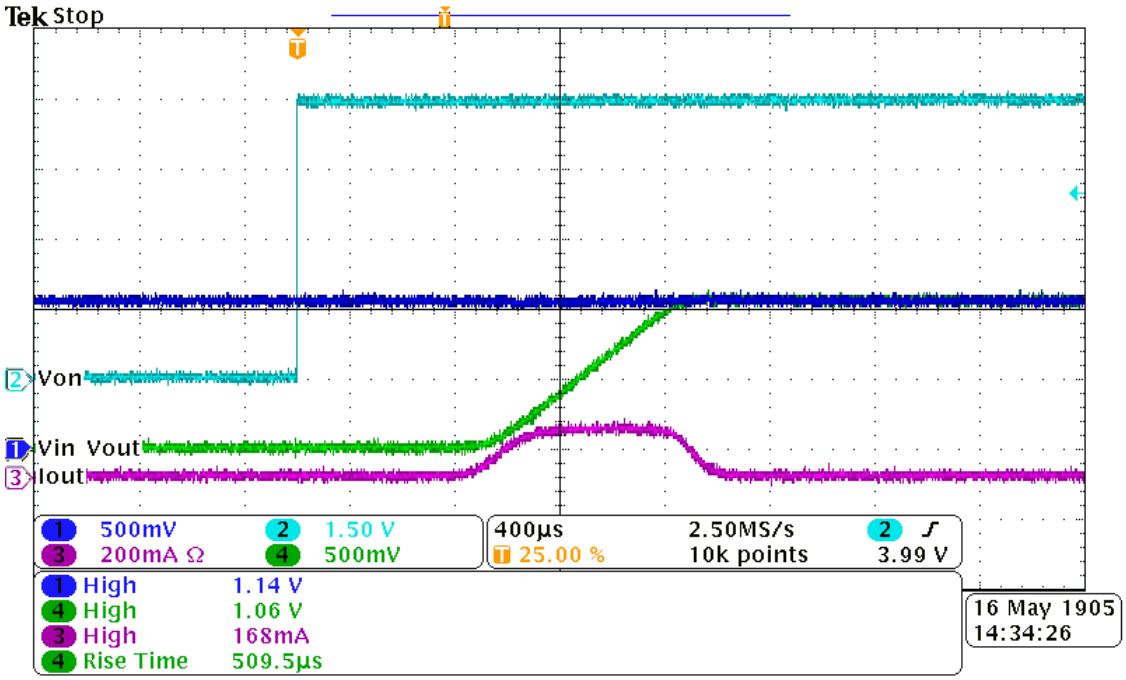


Figure 30. Inrush current (V_{BIAS} = 5V, V_{IN} = 1.05V, C_L = 100µF)

9.2.2.3 Thermal Considerations

The maximum IC junction temperature should be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation, $P_{D(max)}$ for a given output current and ambient temperature, use Equation 3.


$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{\theta_{JA}} \quad (3)$$

where

- $P_{D(max)}$ = maximum allowable power dissipation
- $T_{J(max)}$ = maximum allowable junction temperature (125°C for the TPS22969)
- T_A = ambient temperature of the device
- Θ_{JA} = junction to air thermal impedance. See Thermal Information section. This parameter is highly dependent upon board layout.


Copyright © 2014, Texas Instruments Incorporated

9.2.3 Application Curves

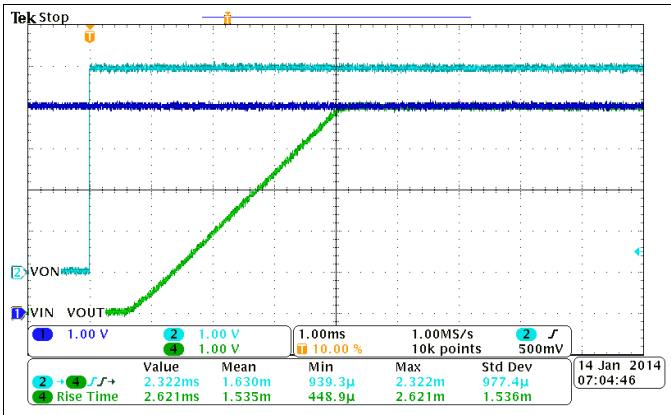


V_{BIAS} = 5V V_{IN} = 5V C_{IN} = 1µF
C_L = 0.1µF

Figure 31. t_R at V_{BIAS} = 5V

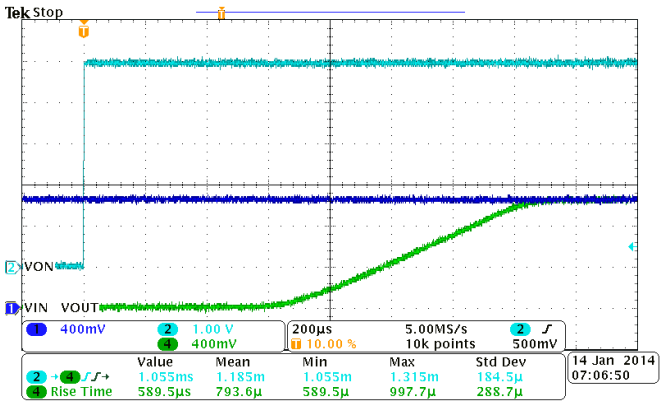


V_{BIAS} = 5V V_{IN} = 1.05V C_{IN} = 1µF
C_L = 0.1µF

Figure 32. t_R at V_{BIAS} = 5V

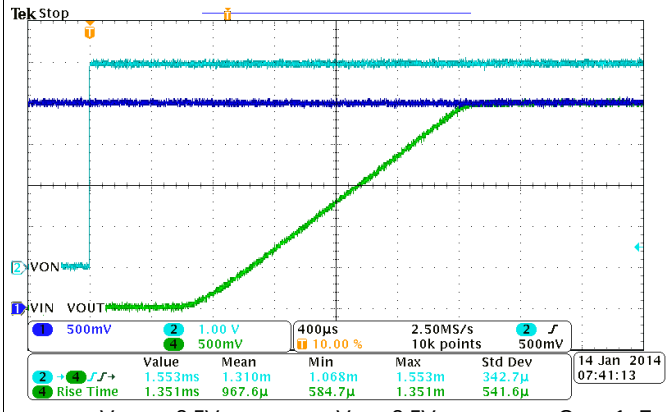


V_{BIAS} = 2.5V V_{IN} = 2.5V C_{IN} = 1µF
C_L = 0.1µF

Figure 33. t_R at V_{BIAS} = 2.5V

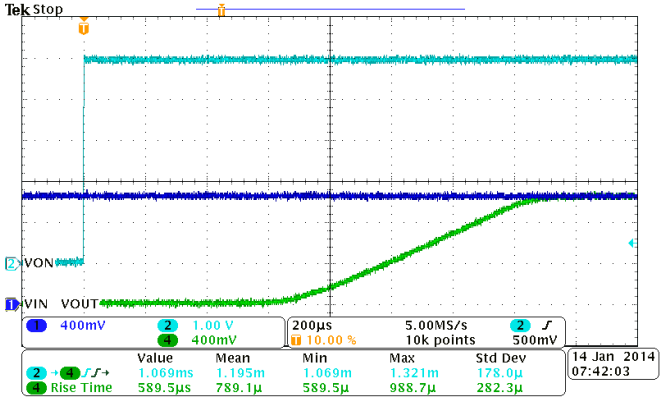


V_{BIAS} = 2.5V V_{IN} = 1.05V C_{IN} = 1µF
C_L = 0.1µF

Figure 34. t_R at V_{BIAS} = 2.5V

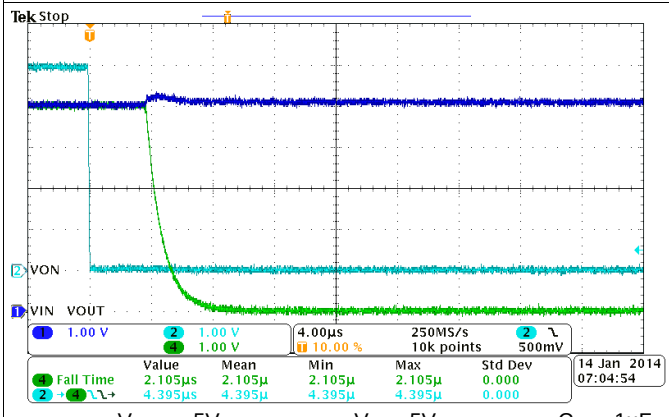

V_{BIAS} = 5V V_{IN} = 5V C_{IN} = 1µF
C_L = 0.1µF

Figure 35. t_F at V_{BIAS} = 5V

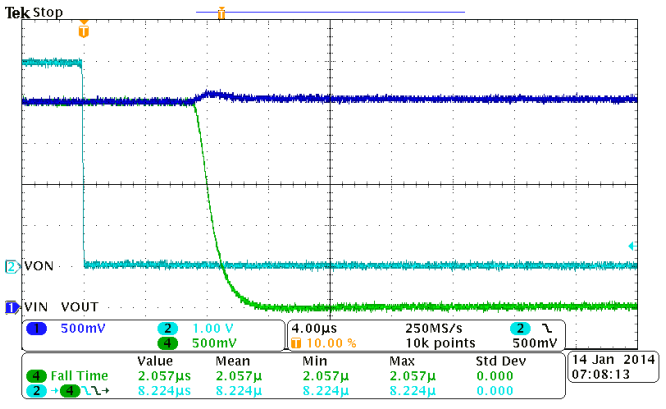

V_{BIAS} = 5V V_{IN} = 2.5V C_{IN} = 1µF
C_L = 0.1µF

Figure 36. t_F at V_{BIAS} = 5V

Copyright © 2014, Texas Instruments Incorporated

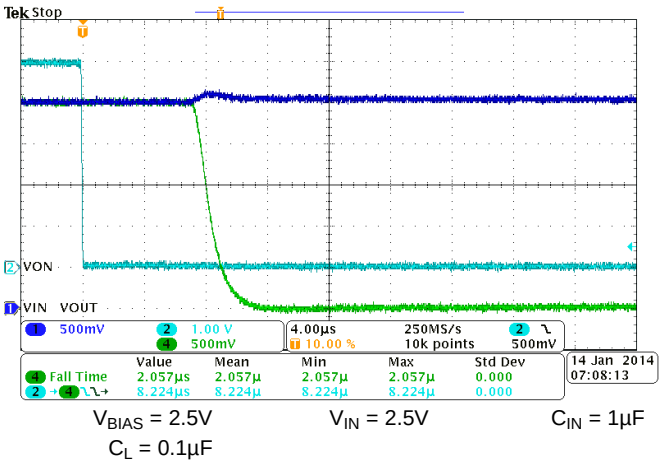


Figure 37. t_F at V_{BIAS} = 2.5V

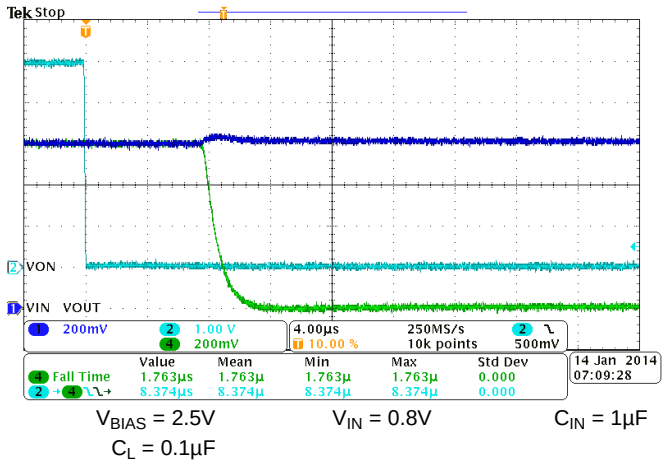


Figure 38. t_F at V_{BIAS} = 2.5V

10 Power Supply Recommendations

The device is designed to operate from a V_{BIAS} range of 2.5-V to 5.5-V and V_{IN} range of 0.8-V to 5.5-V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10-µF may be sufficient.

11 Layout

11.1 Layout Guidelines

- VIN and VOUT traces should be as short and wide as possible to accommodate for high current.
- Use vias under the exposed thermal pad for thermal relief for high current operation.
- The VIN terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 1-µF ceramic with X5R or X7R dielectric. This capacitor should be placed as close to the device terminals as possible.
- The VOUT terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is one-tenth of the VIN bypass capacitor of X5R or X7R dielectric rating. This capacitor should be placed as close to the device terminals as possible.
- The VBIAS terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 0.1-µF ceramic with X5R or X7R dielectric.

Copyright © 2014, Texas Instruments Incorporated

11.2 Layout Example

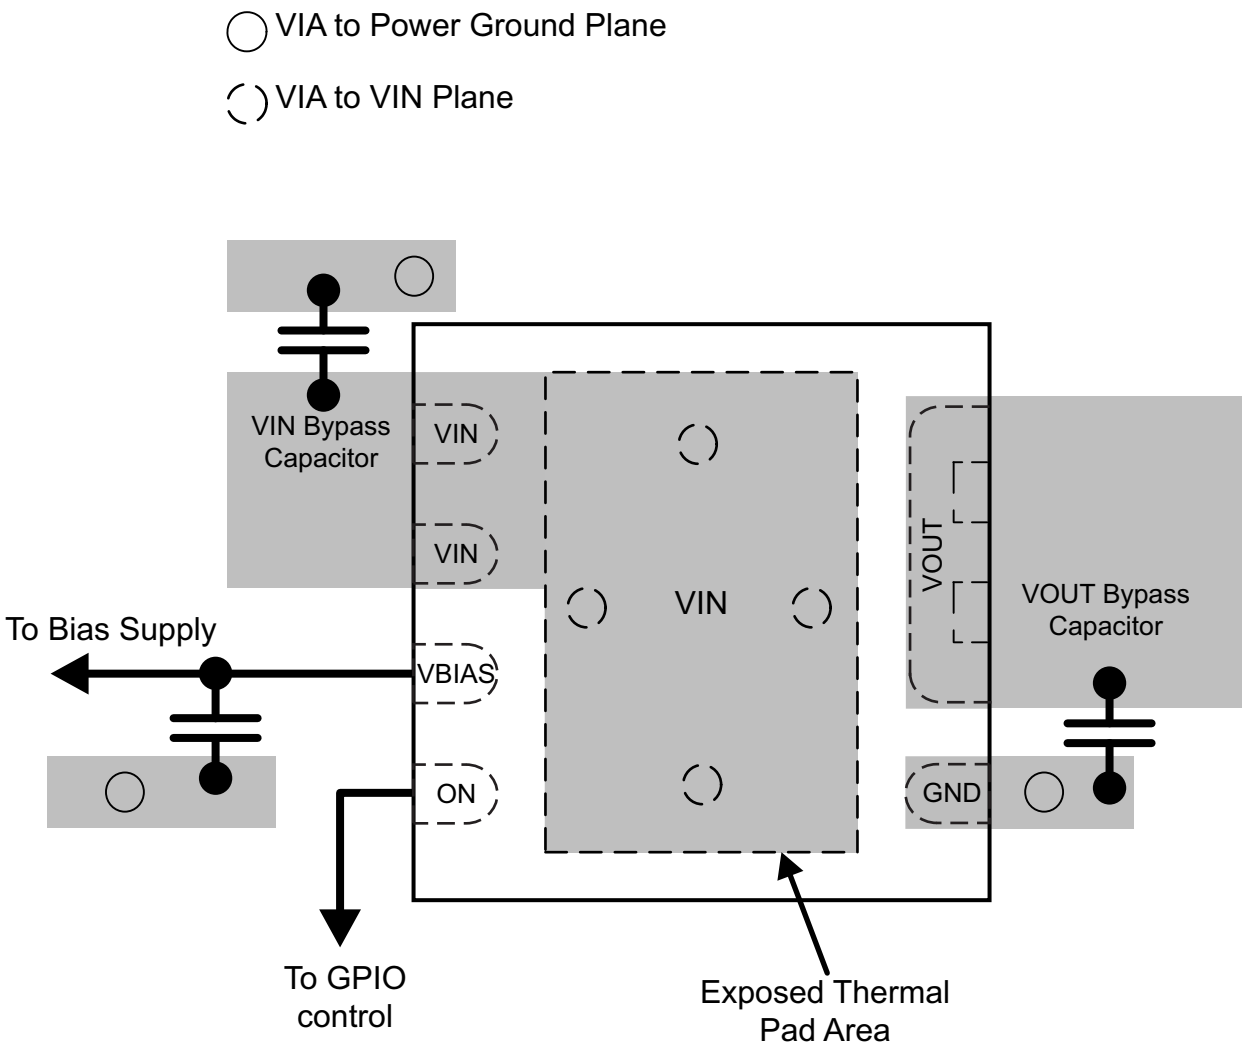


Figure 39. Recommended Board Layout

Copyright © 2014, Texas Instruments Incorporated

12 器件和文档支持

12.1 Trademarks

Ultrabook is a trademark of Intel.

12.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.3 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms and definitions.

13 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

Copyright © 2014, Texas Instruments Incorporated

重要声明

德州仪器(TI) 及其下属子公司有权根据 JESD46 最新标准, 对所提供的产品和服务进行更正、修改、增强、改进或其它更改， 并有权根据 JESD48 最新标准中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的组件的性能符合产品销售时 TI 半导体产品销售条件与条款的适用规范。仅在 TI 保证的范围内，且 TI 认为 有必要时才会使用测试或其它质量控制技术。除非适用法律做出了硬性规定，否则没有必要对每种组件的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应 用相关的风险，客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 组件或服务的组合设备、机器或流程相关的 TI 知识产权中授予 的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息，不能构成从 TI 获得使用这些产品或服 务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可，或是 TI 的专利权或其它 知识产权方面的许可。

对于 TI 的产品手册或数据表中 TI 信息的重要部分，仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况 下才允许进行复制。TI 对此类篡改过的文件不承担任何责任或义务。复制第三方的信息可能需要服从额外的限制条件。

在转售 TI 组件或服务时，如果对该组件或服务参数的陈述与 TI 标明的参数相比存在差异或虚假成分，则会失去相关 TI 组件 或服务的所有明示或暗示授权，且这是不正当的、欺诈性商业行为。TI 对任何此类虚假陈述均不承担任何责任或义务。

客户认可并同意，尽管任何应用相关信息或支持仍可能由 TI 提供，但他们将独力负责满足与其产品及在其应用中使用 TI 产品 相关的所有法律、法规和安全相关要求。客户声明并同意，他们具备制定与实施安全措施所需的全部专业技术和知识，可预见 故障的危险后果、监测故障及其后果、降低有可能造成人身伤害的故障的发生机率并采取适当的补救措施。客户将全额赔偿因 在此类安全关键应用中使用任何 TI 组件而对 TI 及其代理造成的任何损失。

在某些场合中，为了推进安全相关应用有可能对 TI 组件进行特别的促销。TI 的目标是利用此类组件帮助客户设计和创立其特 有的可满足适用的功能安全性标准和要求的终端产品解决方案。尽管如此，此类组件仍然服从这些条款。

TI 组件未获得用于 FDA Class III（或类似的生命攸关医疗设备）的授权许可，除非各方授权官员已经达成了专门管控此类使 用的特别协议。

只有那些 TI 特别注明属于军用等级或"增强型塑料"的 TI 组件才是设计或专门用于军事/航空应用或环境的。购买者认可并同 意，对并非指定面向军事或航空航天用途的 TI 组件进行军事或航空航天方面的应用，其风险由客户单独承担，并且由客户独 力负责满足与此类使用相关的所有法律和法规要求。

TI 已明确指定符合 ISO/TS16949 要求的产品，这些产品主要用于汽车。在任何情况下，因使用非指定产品而无法达到 ISO/TS16949 要求，TI不承担任何责任。

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP应用处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity	德州仪器在线技术支持社区	www.deyisupport.com

邮寄地址： 上海市浦东新区世纪大道1568 号，中建大厦32 楼邮政编码： 200122
Copyright © 2014, 德州仪器半导体技术（上海）有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPS22969DNYR	ACTIVE	WSON	DNY	8	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	969A0	Samples
TPS22969DNYT	ACTIVE	WSON	DNY	8	250	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	969A0	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

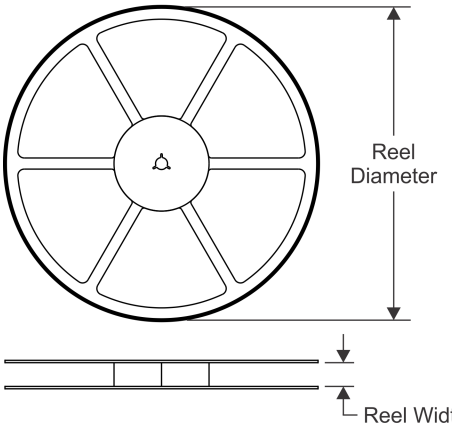


TAPE DIMENSIONS

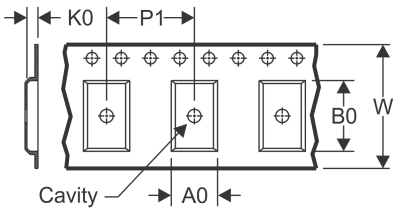

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

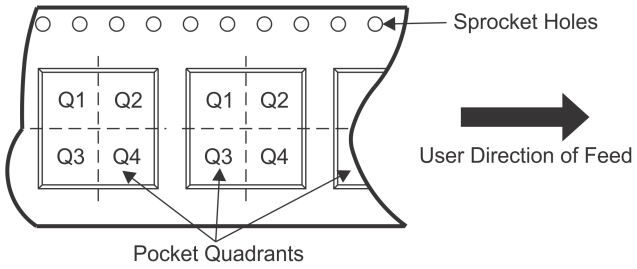

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22969DNYR	WSON	DNY	8	3000	330.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
TPS22969DNYT	WSON	DNY	8	250	180.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

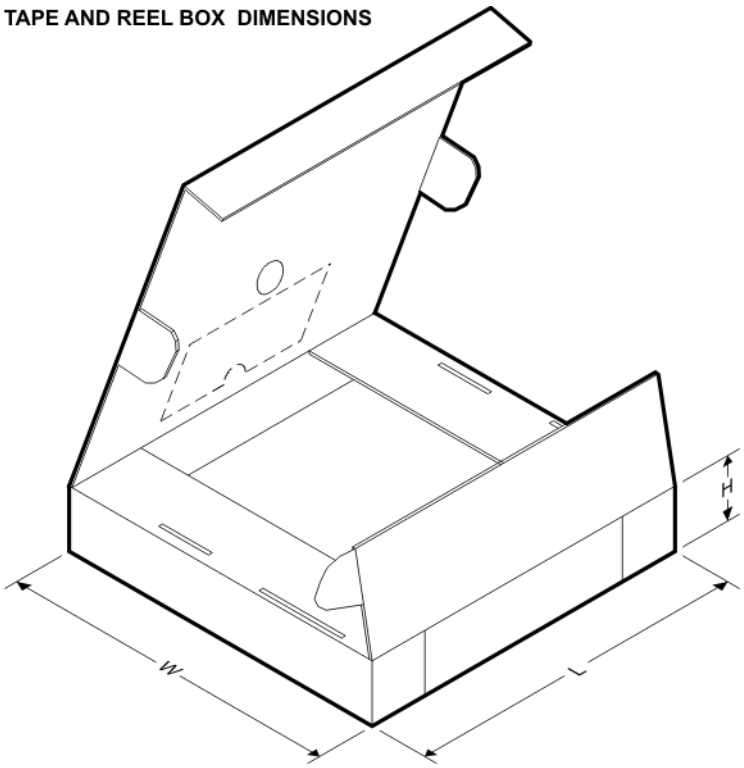

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22969DNYR	WSON	DNY	8	3000	367.0	367.0	38.0
TPS22969DNYT	WSON	DNY	8	250	213.0	191.0	35.0

PACKAGE OUTLINE

DNY0008A


WSON - 0.8 mm max height

PLASTIC QUAD FLATPACK- NO LEAD

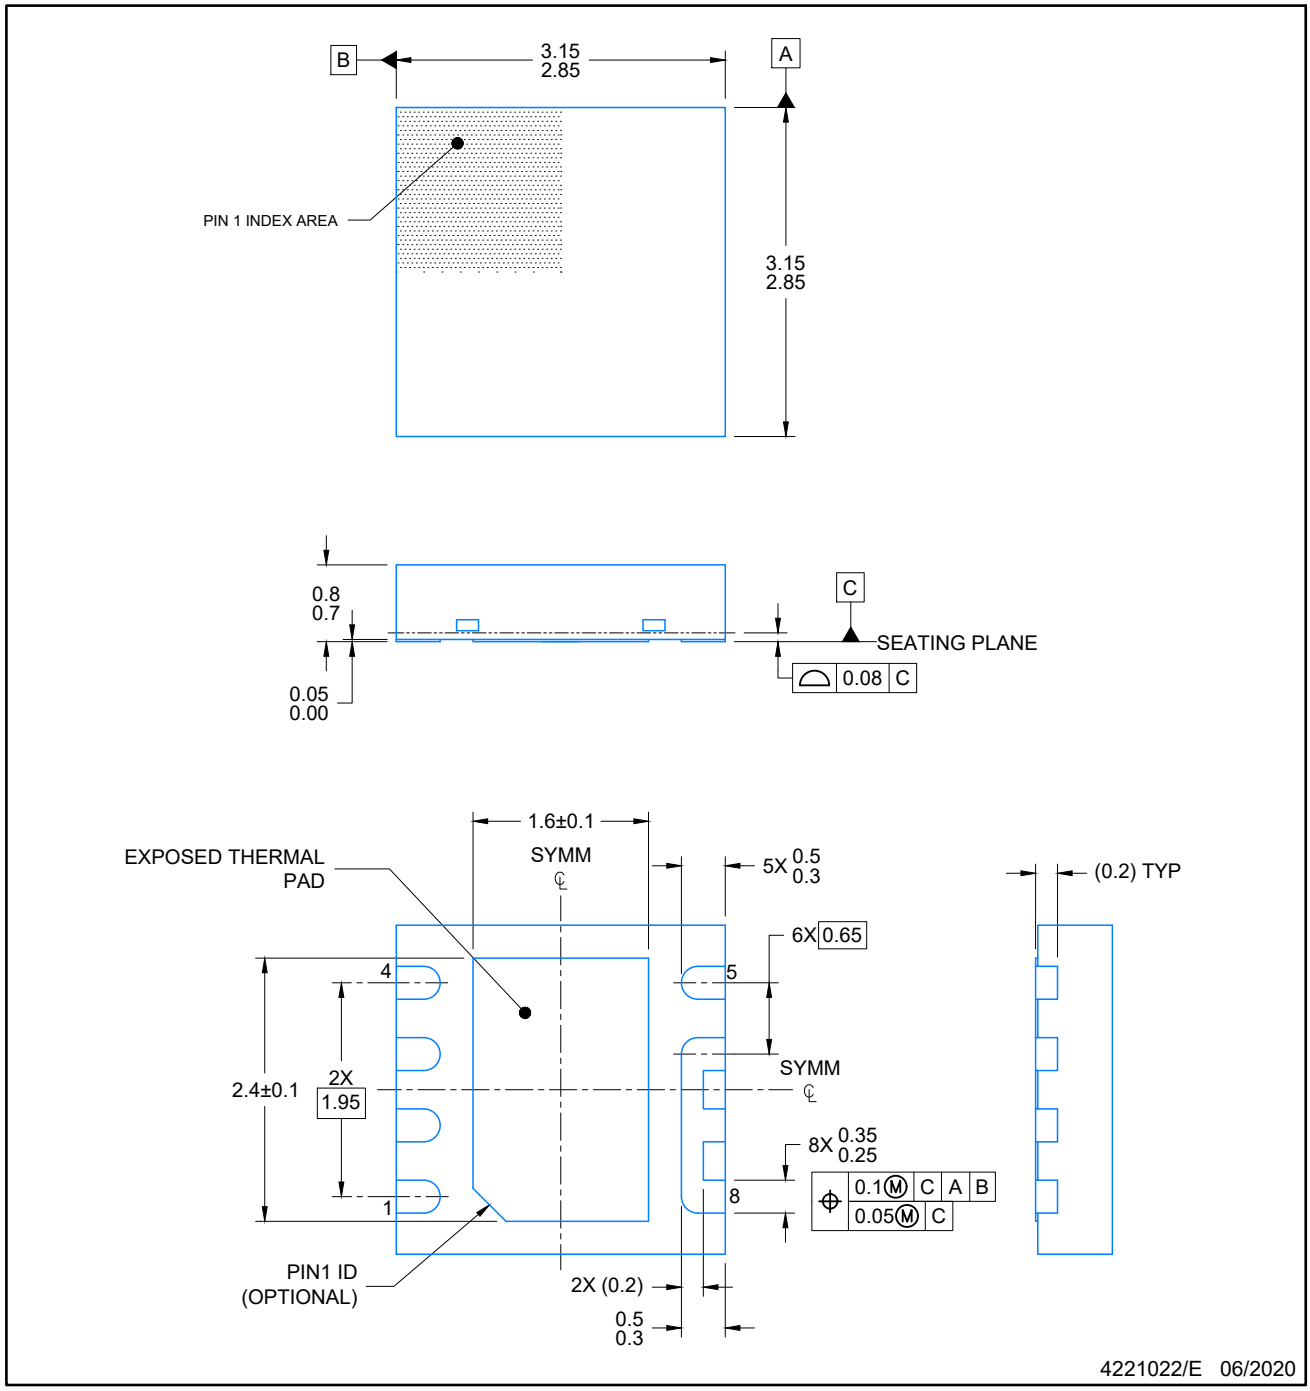


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

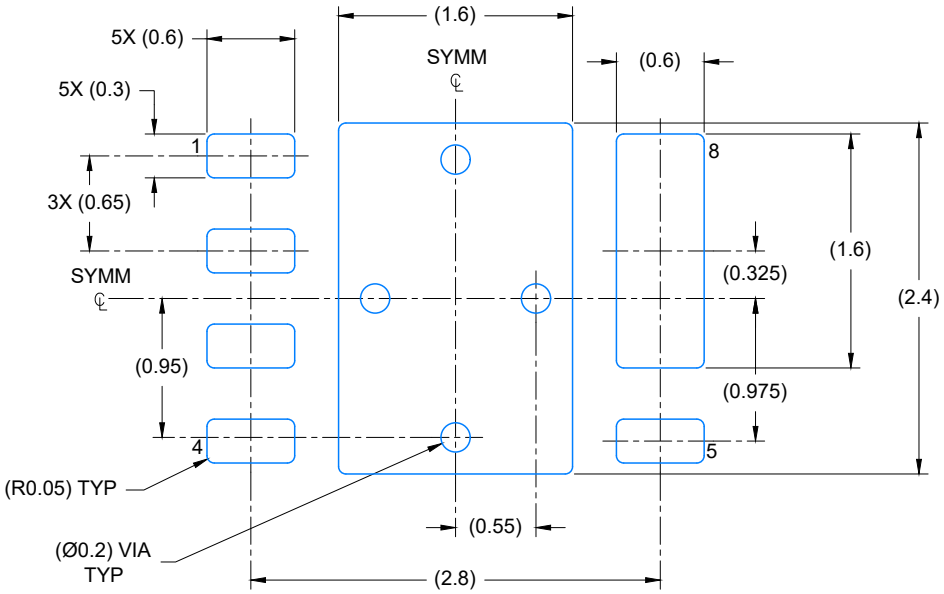

LAND PATTERN EXAMPLE

SCALE: 20X

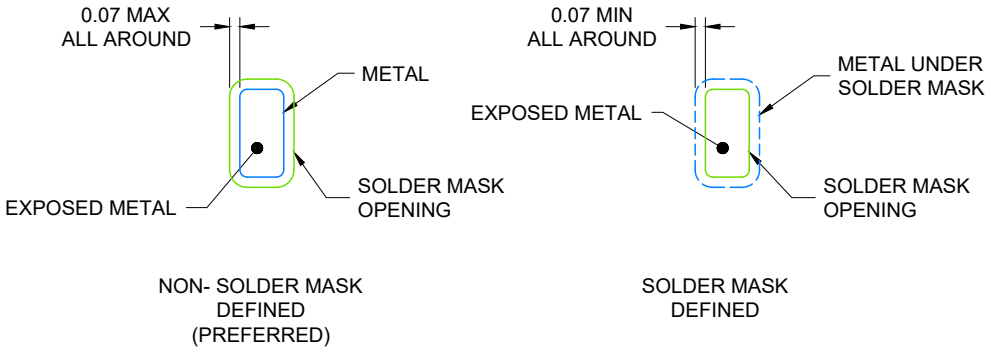


SOLDER MASK DETAILS

4221022/E 06/2020

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

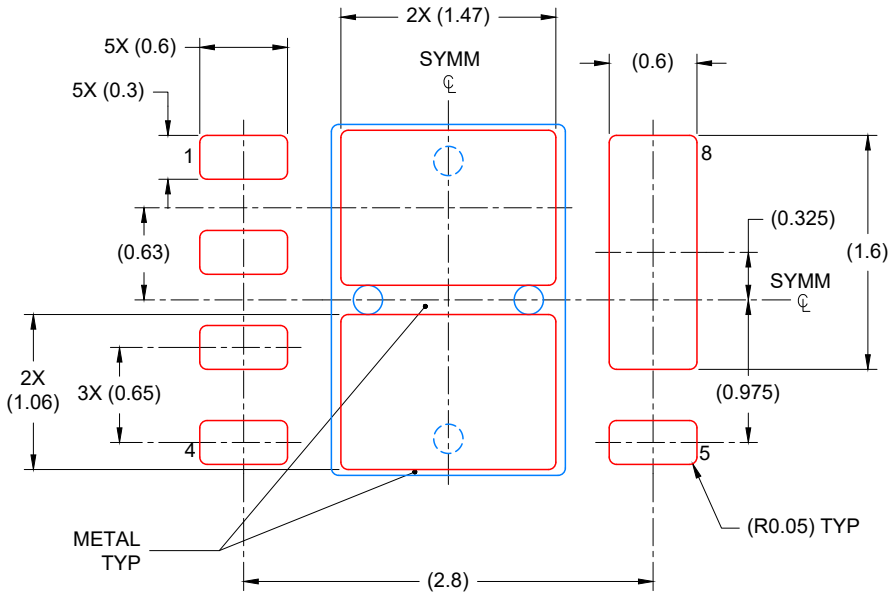

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
81% PRINTED COVERAGE BY AREA
SCALE: 20X

4221022/E 06/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (https:www.ti.com.cn/zh-cn/legal/termsofsale.html) 或 ti.com.cn 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2021 德州仪器半导体技术（上海）有限公司