

# TLV2442, TLV2442A, TLV2444, TLV2444A Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

- Output Swing Includes Both Supply Rails
- Extended Common-Mode Input Voltage Range . . . 0 V to 4.25 V (Min) at 5-V Single Supply
- No Phase Inversion
- Low Noise . . . 16 nV/√Hz Typ at f = 1 kHz
- Low Input Offset Voltage  
950 μV Max at T<sub>A</sub> = 25°C (TLV244xA)
- Low Input Bias Current . . . 1 pA Typ
- 600-Ω Output Drive
- High-Gain Bandwidth . . . 1.8 MHz Typ
- Low Supply Current . . . 750 μA Per Channel Typ
- Macromodel Included
- Available in Q-Temp Automotive  
HighRel Automotive Applications  
Configuration Control/Print Support  
Qualification to Automotive Standards

## description

The TLV244x and TLV244xA are low-voltage operational amplifiers from Texas Instruments. The common-mode input voltage range of these devices has been extended over typical standard CMOS amplifiers, making them suitable for a wide range of applications. In addition, these devices do not phase invert when the common-mode input is driven to the supply rails. This satisfies most design requirements without paying a premium for rail-to-rail input performance. They also exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. This family is fully characterized at 3-V and 5-V supplies and is optimized for low-voltage operation. Both devices offer comparable ac performance while having lower noise, input offset voltage, and power dissipation than existing CMOS operational amplifiers. The TLV244x has increased output drive over previous rail-to-rail operational amplifiers and can drive 600-Ω loads for telecommunications applications.

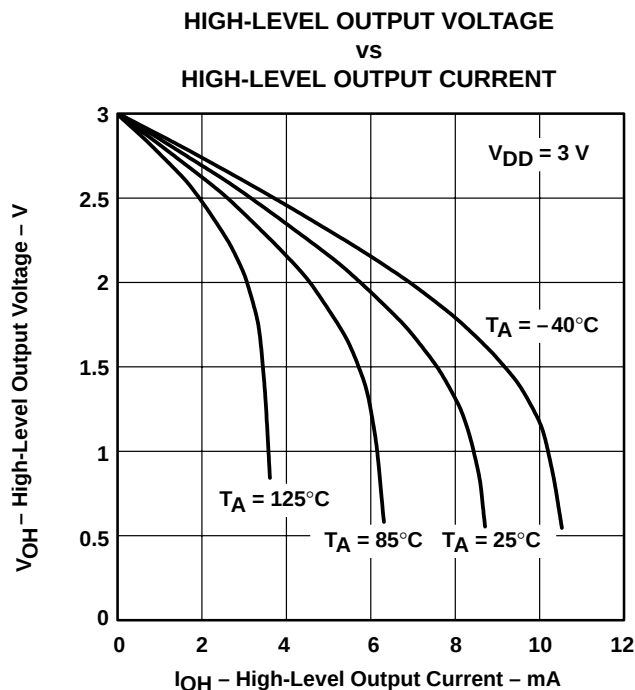


Figure 1

The other members in the TLV244x family are the low-power, TLV243x, and micro-power, TLV2422, versions.

The TLV244x, exhibiting high input impedance and low noise, is excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels and low-voltage operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV244xA is available with a maximum input offset voltage of 950 μV.

If the design requires single operational amplifiers, see the TI TLV2211/21/31. This is a family of rail-to-rail output operational amplifiers in the SOT-23 package. Their small size and low power consumption make them ideal for high density, battery-powered equipment.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

TLV2442 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                           |                           |                             |
|----------------|--------------------------------|-------------------------|---------------------------|---------------------------|---------------------------|-----------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP CARRIER<br>(FK)      | CERAMIC DIP<br>(JG)       | TSSOP<br>(PW)             | CERAMIC FLAT<br>PACK<br>(U) |
| 0°C to 70°C    | 2.5 mV                         | TLV2442CD               | —                         | —                         | TLV2442CPW                | —                           |
| –40°C to 85°C  | 950 µV<br>2.5 mV               | TLV2442AID<br>TLV2442ID | —<br>—                    | —<br>—                    | TLV2442AIPW<br>—          | —<br>—                      |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLV2442AQD<br>TLV2442QD | —<br>—                    | —<br>—                    | TLV2442AQPW<br>TLV2442QPW | —<br>—                      |
| –55°C to 125°C | 950 µV<br>2.5 mV               | —<br>—                  | TLV2442AMFK<br>TLV2442MFK | TLV2442AMJG<br>TLV2442MJG | —<br>—                    | TLV2442AMU<br>TLV2442MU     |


The D and PW packages are available taped and reeled. Add R suffix to device type (e.g., TLV2442CDR).

TLV2444 AVAILABLE OPTIONS


| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |
|----------------|--------------------------------|-------------------------|---------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | TSSOP<br>(PW)             |
| 0°C to 70°C    | 2.5 mV                         | TLV2444CD               | TLV2444CPW                |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLV2444AID<br>TLV2444ID | TLV2444AIPW<br>TLV2444IPW |

The D and PW packages are available taped and reeled. Add R suffix to device type (e.g., TLV2444CDR).


TLV2442  
D OR JG PACKAGE  
(TOP VIEW)

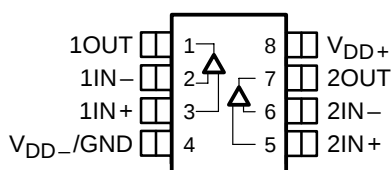


TLV2442  
PW PACKAGE  
(TOP VIEW)

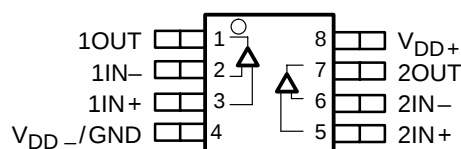


TLV2442  
FK PACKAGE  
(TOP VIEW)

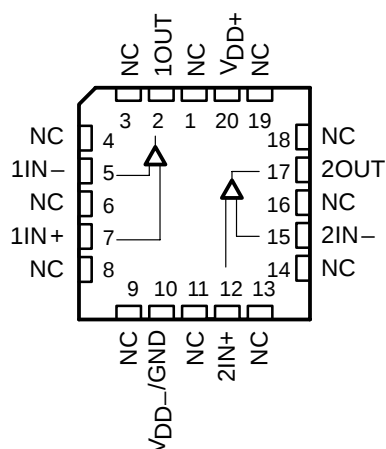

TLV2442  
U PACKAGE  
(TOP VIEW)

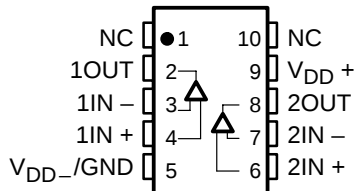


TLV2444  
D OR PW PACKAGE  
(TOP VIEW)

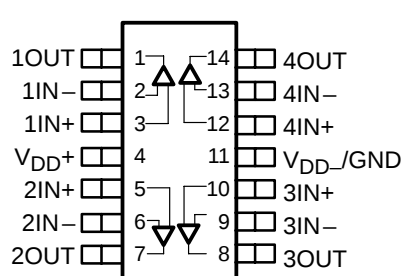

NC – No internal connection

equivalent schematic (each amplifier)

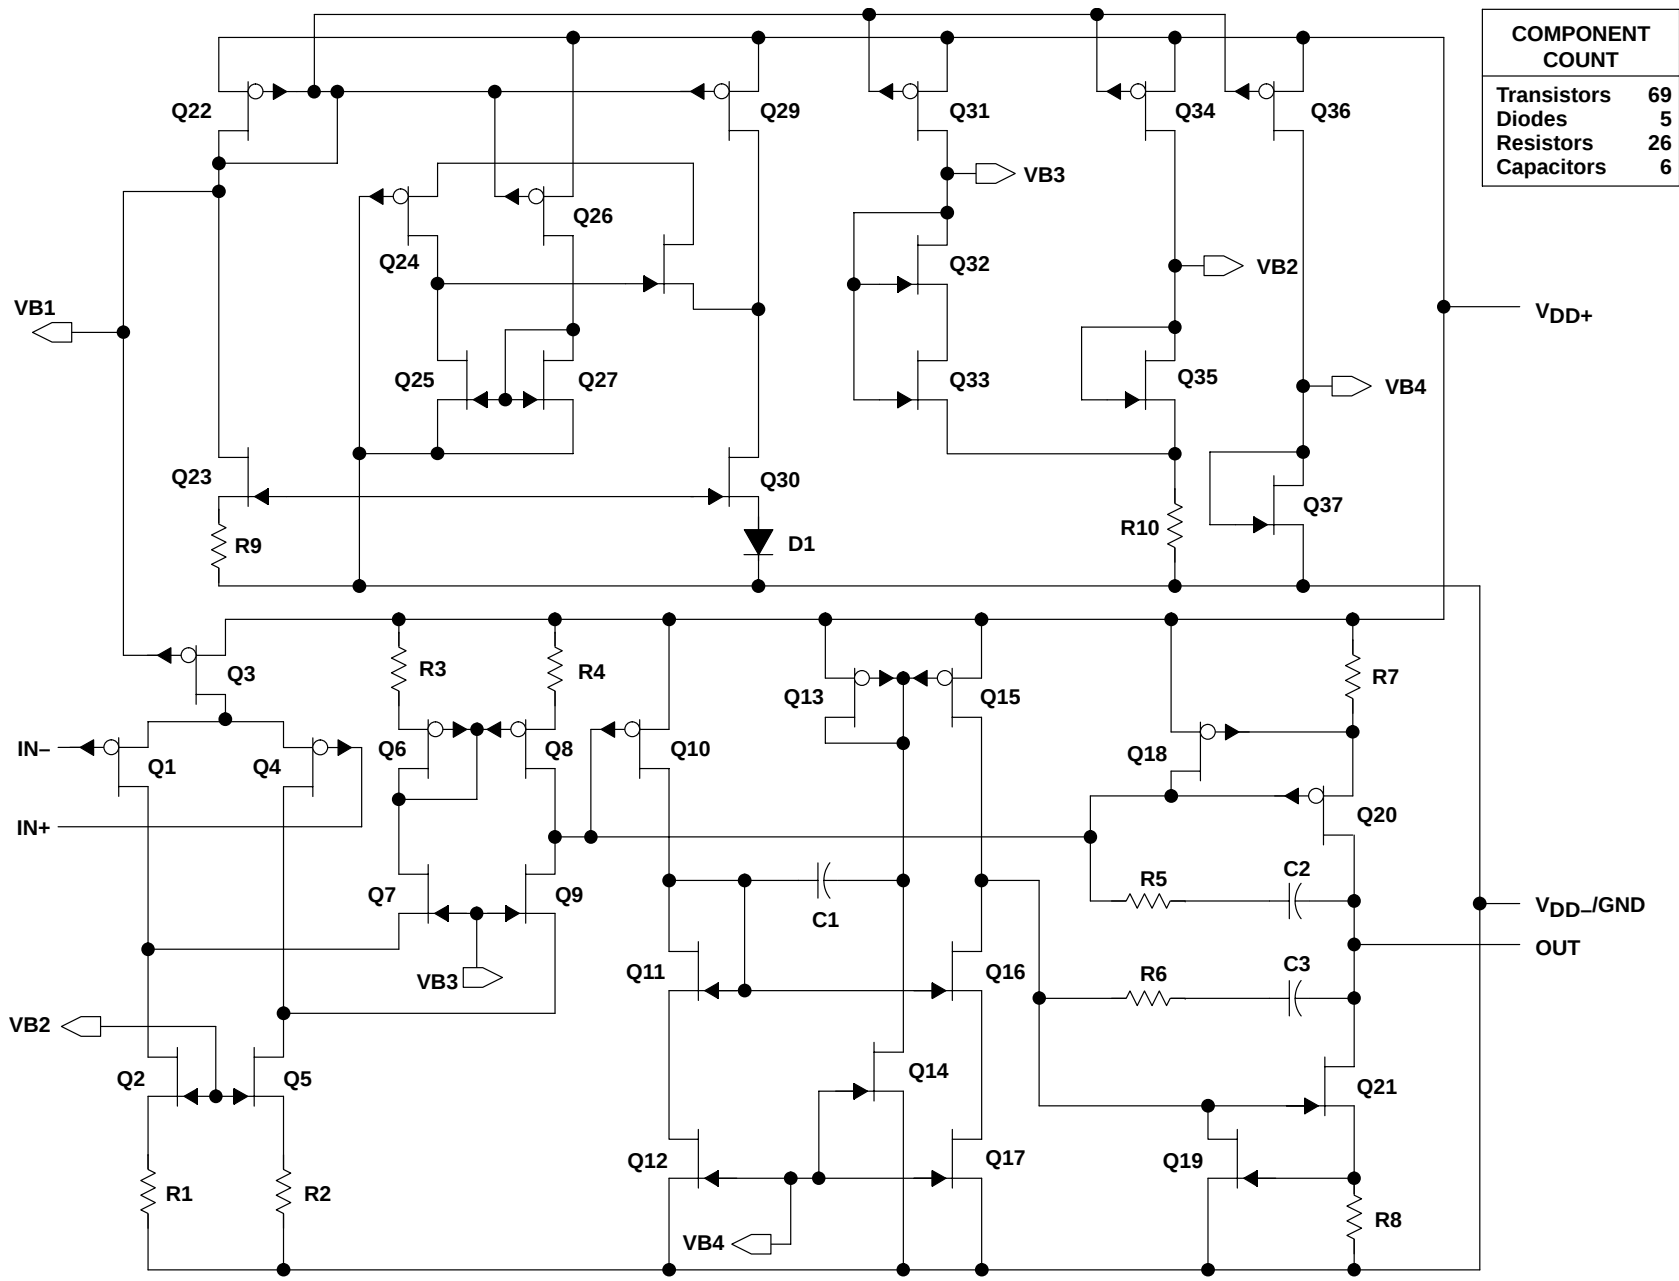

| COMPONENT COUNT |    |
|-----------------|----|
| Transistors     | 69 |
| Diodes          | 5  |
| Resistors       | 26 |
| Capacitors      | 6  |

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                   |                              |
|-------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                             | 12 V                         |
| Differential input voltage, $V_{ID}$ (see Note 2)                 | $\pm V_{DD}$                 |
| Input voltage, $V_I$ (any input, see Note 1)                      | -0.3 V to $V_{DD}$           |
| Input current, $I_I$ (any input)                                  | $\pm 5$ mA                   |
| Output current, $I_O$                                             | $\pm 50$ mA                  |
| Total current into $V_{DD+}$                                      | $\pm 50$ mA                  |
| Total current out of $V_{DD-}$                                    | $\pm 50$ mA                  |
| Duration of short-circuit current at (or below) 25°C (see Note 3) | unlimited                    |
| Continuous total dissipation                                      | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : C suffix            | 0°C to 70°C                  |
| I suffix (dual)                                                   | -40°C to 85°C                |
| I suffix (quad)                                                   | -40°C to 125°C               |
| Q suffix                                                          | -40°C to 125°C               |
| M suffix                                                          | -55°C to 125°C               |
| Storage temperature range, $T_{stg}$                              | -65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds      | 260°C                        |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{DD+}$  and  $V_{DD-}$ .  
2. Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current will flow if input is brought below  $V_{DD-} - 0.3$  V.  
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D (8)   | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| D (14)  | 1022 mW                                     | 7.6 mW/°C                                         | 900 mW                                   | 777 mW                                   | 450 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| PW (8)  | 525 mW                                      | 4.2 mW/°C                                         | 336 mW                                   | 273 mW                                   | 105 mW                                    |
| PW (14) | 720 mW                                      | 5.6 mW/°C                                         | 634 mW                                   | 547 mW                                   | 317 mW                                    |
| U       | 675 mW                                      | 5.4 mW/°C                                         | 432 mW                                   | 350 mW                                   | 135 mW                                    |

#### recommended operating conditions

|                                       | C SUFFIX  |               | I SUFFIX  |               | Q SUFFIX      |                 | M SUFFIX      |                 | UNIT |
|---------------------------------------|-----------|---------------|-----------|---------------|---------------|-----------------|---------------|-----------------|------|
|                                       | MIN       | MAX           | MIN       | MAX           | MIN           | MAX             | MIN           | MAX             |      |
| Supply voltage, $V_{DD}$              | 2.7       | 10            | 2.7       | 10            | 2.7           | 10              | 2.7           | 10              | V    |
| Input voltage range, $V_I$            | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$     | $V_{DD+} - 1.3$ | $V_{DD-}$     | $V_{DD+} - 1.3$ | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-} + 2$ | $V_{DD+} - 1.3$ | $V_{DD-} + 2$ | $V_{DD+} - 1.3$ | V    |
| Operating free-air temperature, $T_A$ | 0         | 70            | -40       | 125           | -40           | 125             | -55           | 125             | °C   |



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                   | TEST CONDITIONS                                                              |                        | T <sub>A</sub> <sup>†</sup> | TLV2442  |     |       | UNIT |
|------------------|---------------------------------------------------|------------------------------------------------------------------------------|------------------------|-----------------------------|----------|-----|-------|------|
|                  |                                                   |                                                                              |                        |                             | MIN      | TYP | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                              | V <sub>IC</sub> = 1.5 V,<br>V <sub>O</sub> = 1.5 V,<br>R <sub>S</sub> = 50 Ω | TLV244xC<br>TLV244xI   | 25°C                        | 300 2000 |     | μV    |      |
|                  |                                                   |                                                                              |                        | Full range                  | 2500     |     |       |      |
|                  |                                                   |                                                                              | TLV244xAI              | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                              |                        | Full range                  | 1500     |     |       |      |
|                  |                                                   |                                                                              | TLV2442AQ<br>TLV2442AM | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                              |                        | Full range                  | 1600     |     |       |      |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage   |                                                                              |                        | 25°C to 85°C                | 2        |     | μV/°C |      |
|                  | Input offset voltage long-term drift (see Note 4) |                                                                              |                        | 25°C                        | 0.002    |     | μV/mo |      |
| I <sub>IO</sub>  | Input offset current                              |                                                                              |                        | 25°C                        | 0.5      | 60  | pA    |      |
|                  |                                                   |                                                                              |                        | Full range                  | 150      |     |       |      |
| I <sub>IB</sub>  | Input bias current                                |                                                                              |                        | 25°C                        | 1        | 60  | pA    |      |
|                  |                                                   |                                                                              |                        | –40°C to 85°C               | 150      |     |       |      |
|                  |                                                   |                                                                              | 125°C                  | 350                         |          |     |       |      |
|                  |                                                   | TLV2442Q/AQ<br>TLV2442M/AM                                                   | Full range             | 260                         |          |     |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range                   | V <sub>IO</sub>   ≤ 5 mV, R <sub>S</sub> = 50 Ω                              | 25°C                   | 0 to 2.25 –0.25 to 2.5      |          | V   |       |      |
|                  |                                                   |                                                                              | Full range             | 0 to 2                      |          |     |       |      |
|                  |                                                   |                                                                              | 25°C to –55°C          | 0 to 2.25 –0.25 to 2.5      |          |     |       |      |
|                  |                                                   |                                                                              | 125°C                  | 0 to 2                      |          |     |       |      |
| V <sub>OH</sub>  | High-level output voltage                         | I <sub>O</sub> = –100 μA                                                     | 25°C                   | 2.98                        |          | V   |       |      |
|                  |                                                   | I <sub>O</sub> = –3 mA                                                       | 25°C                   | 2.5                         |          |     |       |      |
|                  |                                                   |                                                                              | Full range             | 2.25                        |          |     |       |      |
| V <sub>OL</sub>  | Low-level output voltage                          | V <sub>IC</sub> = 1.5 V, I <sub>O</sub> = 100 μA                             | 25°C                   | 0.02                        |          | V   |       |      |
|                  |                                                   | V <sub>IC</sub> = 1.5 V, I <sub>O</sub> = 3 mA                               | 25°C                   | 0.63                        |          |     |       |      |
|                  |                                                   |                                                                              | Full range             | 1                           |          |     |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification   | V <sub>O</sub> = 1 V to 2 V                                                  | R <sub>L</sub> = 600 Ω | 25°C                        | 0.7 1    |     | V/mV  |      |
|                  |                                                   |                                                                              |                        | Full range                  | 0.4      |     |       |      |
|                  |                                                   |                                                                              | R <sub>L</sub> = 1 MΩ  | 25°C                        | 750      |     |       |      |
| r <sub>id</sub>  | Differential input resistance                     |                                                                              | 25°C                   | 1000                        |          | GΩ  |       |      |
| r <sub>i</sub>   | Common-mode input resistance                      |                                                                              | 25°C                   | 1000                        |          | GΩ  |       |      |
| c <sub>i</sub>   | Common-mode input capacitance                     | f = 10 kHz                                                                   | 25°C                   | 8                           |          | pF  |       |      |
| z <sub>o</sub>   | Closed-loop output impedance                      | f = 1 MHz, A <sub>V</sub> = 10                                               | 25°C                   | 130                         |          | Ω   |       |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**  
**(continued)**

| PARAMETER                                                                           | TEST CONDITIONS                                                                        | $T_A^\dagger$ | TLV2442 |     |      | UNIT          |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------|---------|-----|------|---------------|
|                                                                                     |                                                                                        |               | MIN     | TYP | MAX  |               |
| CMRR Common-mode rejection ratio                                                    | $V_{IC} = 0\text{ to }2.25\text{ V}$ ,<br>$V_O = 1.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C          | 65      | 75  |      | dB            |
|                                                                                     |                                                                                        | Full range    | 55      |     |      |               |
|                                                                                     |                                                                                        | Full range    | 50      |     |      |               |
| $k_{SVR}$ Supply-voltage rejection ratio<br>( $\Delta V_{DD} \pm / \Delta V_{IO}$ ) | $V_{DD} = 2.7\text{ V to }8\text{ V}$ ,<br>No load<br>$V_{IC} = V_{DD}/2$              | 25°C          | 80      | 95  |      | dB            |
|                                                                                     |                                                                                        | Full range    | 80      |     |      |               |
| $I_{DD}$ Supply current (per channel)                                               | $V_O = 1.5\text{ V}$ ,<br>No load                                                      | 25°C          |         | 725 | 1100 | $\mu\text{A}$ |
|                                                                                     |                                                                                        | Full range    |         |     | 1100 |               |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

**operating characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                       |  | T <sub>A</sub> <sup>†</sup> | TLV244x    |       |        | UNIT |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|--|-----------------------------|------------|-------|--------|------|
|                        |                                             |                                                                                                       |  |                             | MIN        | TYP   | MAX    |      |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = 1 V to 2 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                    |  | TLV2442Q/AQ                 | Full range | 0.65  |        | V/μs |
|                        |                                             |                                                                                                       |  | TLV2442M/AM                 |            | 1.3   |        |      |
|                        |                                             |                                                                                                       |  | 0.4                         |            |       |        |      |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                             |  | 25°C                        | 170        |       | nV/√Hz |      |
|                        |                                             | f = 1 kHz                                                                                             |  | 25°C                        | 18         |       |        |      |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |  | 25°C                        | 2.6        |       | μV     |      |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                   |  | 25°C                        | 5.1        |       |        |      |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                       |  | 25°C                        | 0.6        |       | fA/√Hz |      |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                              |  | A <sub>V</sub> = 1          | 25°C       | 0.08% |        |      |
|                        |                                             |                                                                                                       |  | A <sub>V</sub> = 10         |            | 0.3%  |        |      |
|                        |                                             |                                                                                                       |  | A <sub>V</sub> = 100        |            | 2%    |        |      |
| Gain-bandwidth product |                                             | f =10 kHz, R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                                         |  | 25°C                        | 1.75       |       | MHz    |      |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 1 V, R <sub>L</sub> = 600 Ω,<br>A <sub>V</sub> = 1, C <sub>L</sub> = 100 pF      |  | 25°C                        | 0.9        |       | MHz    |      |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF |  | To 0.1%                     | 25°C       | 1.5   |        | μs   |
|                        |                                             |                                                                                                       |  | To 0.01%                    |            | 3.2   |        |      |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                                       |  | 25°C                        | 65°        |       |        |      |
|                        | Gain margin                                 |                                                                                                       |  | 25°C                        | 9          |       | dB     |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                   | TEST CONDITIONS                                                                                         |                                     | T <sub>A</sub> <sup>†</sup> | TLV244x  |     |       | UNIT |
|------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|----------|-----|-------|------|
|                  |                                                   |                                                                                                         |                                     |                             | MIN      | TYP | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                              | V <sub>DD</sub> ± = ±2.5 V,<br>V <sub>O</sub> = 0,<br><br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω | TLV244xC<br>TLV244xI                | 25°C                        | 300 2000 |     | μV    |      |
|                  |                                                   |                                                                                                         |                                     | Full range                  | 2500     |     |       |      |
|                  |                                                   |                                                                                                         | TLV244xA                            | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                                                         |                                     | Full range                  | 1500     |     |       |      |
|                  |                                                   |                                                                                                         | TLV2442AQ<br>TLV2442AM              | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                                                         |                                     | Full range                  | 1600     |     |       |      |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage   |                                                                                                         |                                     | 25°C to 85°C                | 2        |     | μV/°C |      |
|                  | Input offset voltage long-term drift (see Note 4) |                                                                                                         |                                     | 25°C                        | 0.002    |     | μV/mo |      |
| I <sub>IO</sub>  | Input offset current                              |                                                                                                         |                                     | 25°C                        | 0.5 60   |     | pA    |      |
|                  |                                                   |                                                                                                         |                                     | Full range                  | 150      |     |       |      |
| I <sub>IB</sub>  | Input bias current                                |                                                                                                         |                                     | 25°C                        | 1 60     |     | pA    |      |
|                  |                                                   |                                                                                                         |                                     | –40°C to 85°C               | 150      |     |       |      |
|                  |                                                   |                                                                                                         | 125°C                               | 350                         |          |     |       |      |
|                  |                                                   | TLV2442Q/AQ<br>TLV2442M/AM                                                                              | Full range                          | 260                         |          |     |       |      |
|                  |                                                   |                                                                                                         |                                     |                             |          |     |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range                   | V <sub>IO</sub>   ≤ 5 mV,<br><br>R <sub>S</sub> = 50 Ω                                                  | 25°C                                | 0 to 4.25 –0.25 to 4.5      |          | V   |       |      |
|                  |                                                   |                                                                                                         | Full range                          | 0 to 4                      |          |     |       |      |
| V <sub>OH</sub>  | High-level output voltage                         | I <sub>OH</sub> = –100 μA                                                                               | 25°C                                | 4.97                        |          | V   |       |      |
|                  |                                                   | I <sub>OH</sub> = –5 mA                                                                                 | 25°C                                | 4 4.35                      |          |     |       |      |
|                  |                                                   |                                                                                                         | Full range                          | 4                           |          |     |       |      |
| V <sub>OL</sub>  | Low-level output voltage                          | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 100 μA                                                       | 25°C                                | 0.01                        |          | V   |       |      |
|                  |                                                   | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 5 mA                                                         | 25°C                                | 0.8                         |          |     |       |      |
|                  |                                                   |                                                                                                         | Full range                          | 1.25                        |          |     |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification   | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 4 V                                                 | R <sub>L</sub> = 600 Ω <sup>‡</sup> | 25°C                        | 0.9 1.3  |     | V/mV  |      |
|                  |                                                   |                                                                                                         |                                     | Full range                  | 0.5      |     |       |      |
|                  |                                                   |                                                                                                         | R <sub>L</sub> = 1 MΩ <sup>‡</sup>  | 25°C                        | 950      |     |       |      |
| r <sub>id</sub>  | Differential input resistance                     |                                                                                                         | 25°C                                | 1000                        |          | GΩ  |       |      |
| r <sub>i</sub>   | Common-mode input resistance                      |                                                                                                         | 25°C                                | 1000                        |          | GΩ  |       |      |
| c <sub>i</sub>   | Common-mode input capacitance                     | f = 10 kHz                                                                                              | 25°C                                | 8                           |          | pF  |       |      |
| z <sub>0</sub>   | Closed-loop output impedance                      | f = 1 MHz, A <sub>V</sub> = 10                                                                          | 25°C                                | 140                         |          | Ω   |       |      |
| CMRR             | Common-mode rejection ratio                       | V <sub>IC</sub> = 0 to 4.25 V, V <sub>O</sub> = 2.5 V,<br>R <sub>S</sub> = 50 Ω                         | 25°C                                | 70 75                       |          | dB  |       |      |
|                  |                                                   |                                                                                                         | Full range                          | 70                          |          |     |       |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.

**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**  
**(continued)**

| PARAMETER                                                                  | TEST CONDITIONS                                                          | $T_A^\dagger$ | TLV244x |     |      | UNIT          |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------|---------|-----|------|---------------|
|                                                                            |                                                                          |               | MIN     | TYP | MAX  |               |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to }8\text{ V}$ ,<br>$V_{IC} = V_{DD}/2$ , No load | 25°C          | 80      | 95  |      | dB            |
|                                                                            |                                                                          | Full range    | 80      |     |      |               |
| $I_{DD}$ Supply current (per channel)                                      | $V_O = 2.5\text{ V}$ , No load                                           | 25°C          |         | 750 | 1100 | $\mu\text{A}$ |
|                                                                            |                                                                          | Full range    |         |     | 1100 |               |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                                                 |                                                             | T <sub>A</sub> <sup>†</sup> | TLV244x    |      |     | UNIT   |
|------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------|------------|------|-----|--------|
|                        |                                             |                                                                                                                                 |                                                             |                             | MIN        | TYP  | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>               |                                                             | TLV2442Q/AQ<br>TLV2442M/AM  | 25°C       | 0.75 | 1.4 | V/μs   |
|                        |                                             |                                                                                                                                 |                                                             |                             | Full range | 0.75 |     |        |
|                        |                                             |                                                                                                                                 |                                                             |                             | Full range | 0.5  |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                                                       |                                                             | 25°C                        | 130        |      |     | nV/√Hz |
|                        |                                             | f = 1 kHz                                                                                                                       |                                                             | 25°C                        | 16         |      |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                              |                                                             | 25°C                        | 1.8        |      |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                                             |                                                             | 25°C                        | 3.6        |      |     |        |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                                                 |                                                             | 25°C                        | 0.6        |      |     | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = 1.5 V to 3.5 V,<br>f = 1 kHz,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup>                                           | A <sub>V</sub> = 1                                          | 25°C                        | 0.017%     |      |     |        |
|                        |                                             |                                                                                                                                 | A <sub>V</sub> = 10                                         |                             | 0.17%      |      |     |        |
|                        |                                             |                                                                                                                                 | A <sub>V</sub> = 100                                        |                             | 1.5%       |      |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                                             | R <sub>L</sub> = 600 Ω <sup>‡</sup>                         | 25°C                        | 1.81       |      |     | MHz    |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> ,                                                              | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | 25°C                        | 0.5        |      |     | MHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | To 0.1%                                                     | 25°C                        | 1.5        |      |     | μs     |
|                        |                                             |                                                                                                                                 | To 0.01%                                                    |                             | 2.6        |      |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                   |                                                             | 25°C                        | 68°        |      |     |        |
| Gain margin            |                                             |                                                                                                                                 |                                                             | 25°C                        | 8          |      |     | dB     |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

$^\ddagger$  Referenced to 2.5 V



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS**

**Table of Graphs†**

|                 |                                                                  |                                              | <b>FIGURE</b> |
|-----------------|------------------------------------------------------------------|----------------------------------------------|---------------|
| $V_{IO}$        | Input offset voltage                                             | Distribution<br>vs Common-mode input voltage | 2, 3<br>4, 5  |
| $\alpha_{VIO}$  | Input offset voltage temperature coefficient                     | Distribution                                 | 6, 7          |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents                             | vs Free-air temperature                      | 8             |
| $V_{OH}$        | High-level output voltage                                        | vs High-level output current                 | 9, 10         |
| $V_{OL}$        | Low-level output voltage                                         | vs Low-level output current                  | 11, 12        |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage                              | vs Frequency                                 | 13            |
| $I_{OS}$        | Short-circuit output current                                     | vs Supply voltage<br>vs Free-air temperature | 14<br>15      |
| $V_O$           | Output voltage                                                   | vs Differential Input voltage                | 16, 17        |
| $A_{VD}$        | Differential voltage amplification                               | vs Load resistance                           | 18            |
| $A_{VD}$        | Large-signal differential voltage amplification and phase margin | vs Frequency                                 | 19, 20        |
|                 | Large-signal differential voltage amplification                  | vs Free-air temperature                      | 21, 22        |
| $z_o$           | Output impedance                                                 | vs Frequency                                 | 23, 24        |
| CMRR            | Common-mode rejection ratio                                      | vs Frequency                                 | 25            |
|                 |                                                                  | vs Free-air temperature                      | 26            |
| $k_{SVR}$       | Supply-voltage rejection ratio                                   | vs Frequency                                 | 27, 28        |
|                 |                                                                  | vs Free-air temperature                      | 29            |
| $I_{DD}$        | Supply current                                                   | vs Supply voltage                            | 30            |
| SR              | Slew rate                                                        | vs Load capacitance                          | 31            |
|                 |                                                                  | vs Free-air temperature                      | 32            |
| $V_O$           | Inverting large-signal pulse response                            |                                              | 33, 34        |
|                 | Voltage-follower large-signal pulse response                     |                                              | 35, 36        |
|                 | Inverting small-signal pulse response                            |                                              | 37, 38        |
|                 | Voltage-follower small-signal pulse response                     |                                              | 39, 40        |
| $V_n$           | Equivalent input noise voltage                                   | vs Frequency                                 | 41, 42        |
|                 | Noise voltage                                                    | Over a 10-second period                      | 43            |
| THD + N         | Total harmonic distortion plus noise                             | vs Frequency                                 | 44, 45        |
|                 | Gain-bandwidth product                                           | vs Free-air temperature                      | 46            |
|                 |                                                                  | vs Supply voltage                            | 47            |
| $\phi_m$        | Phase margin                                                     | vs Frequency<br>vs Load capacitance          | 19, 20<br>48  |
|                 | Gain margin                                                      | vs Load capacitance                          | 49            |
| $B_1$           | Unity-gain bandwidth                                             | vs Load capacitance                          | 50            |

† For all graphs where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V.

# TLV2442, TLV2442A, TLV2444, TLV2444A


## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


#### TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TLV2442  
INPUT OFFSET VOLTAGE**

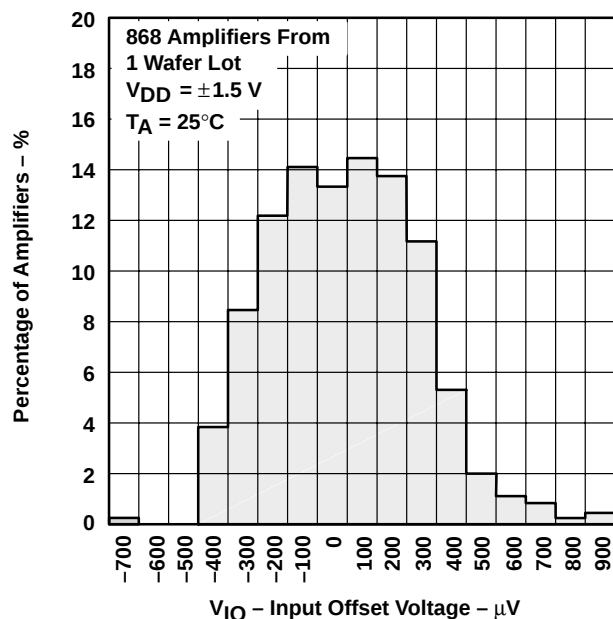


**Figure 2**

**DISTRIBUTION OF TLV2442  
INPUT OFFSET VOLTAGE**

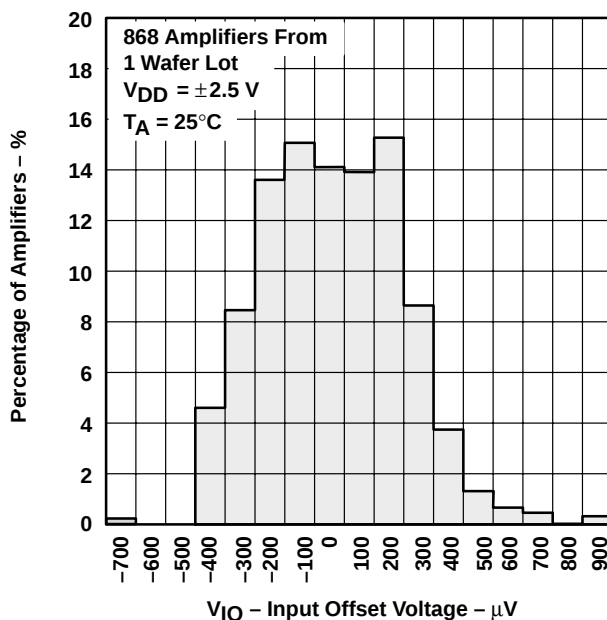


**Figure 3**

**INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE**

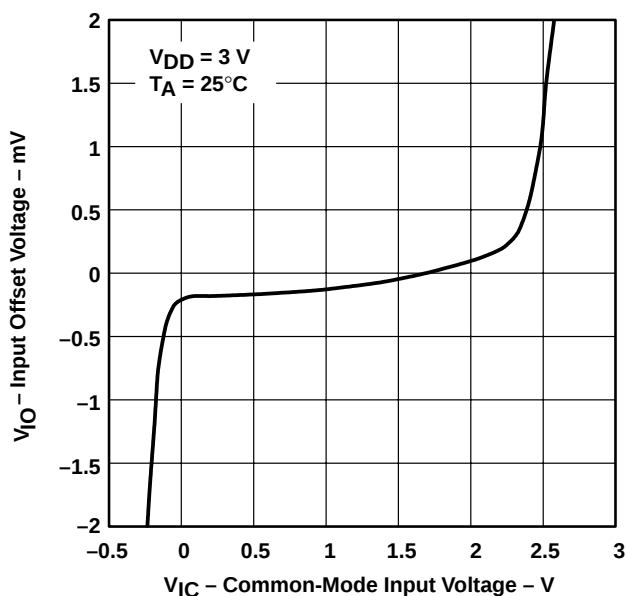

**Figure 4**

**INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE**

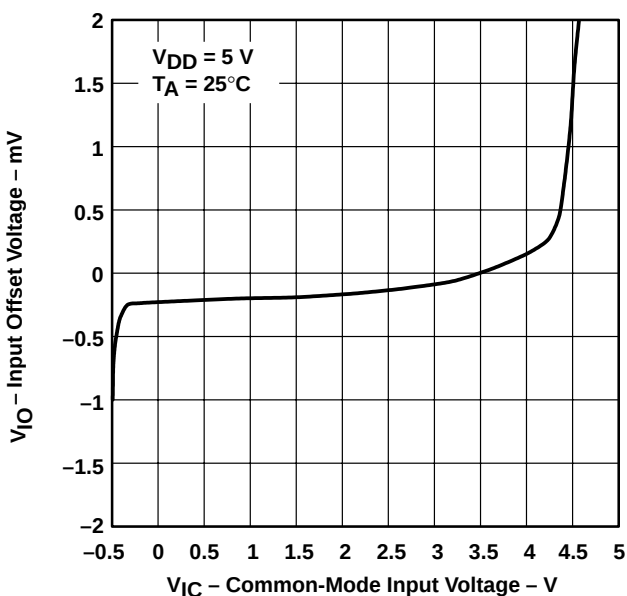

**Figure 5**

## TYPICAL CHARACTERISTICS

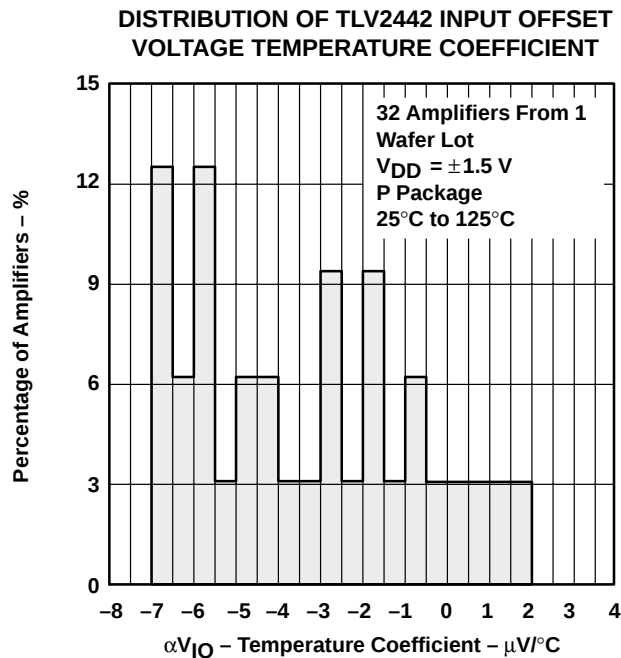


Figure 6

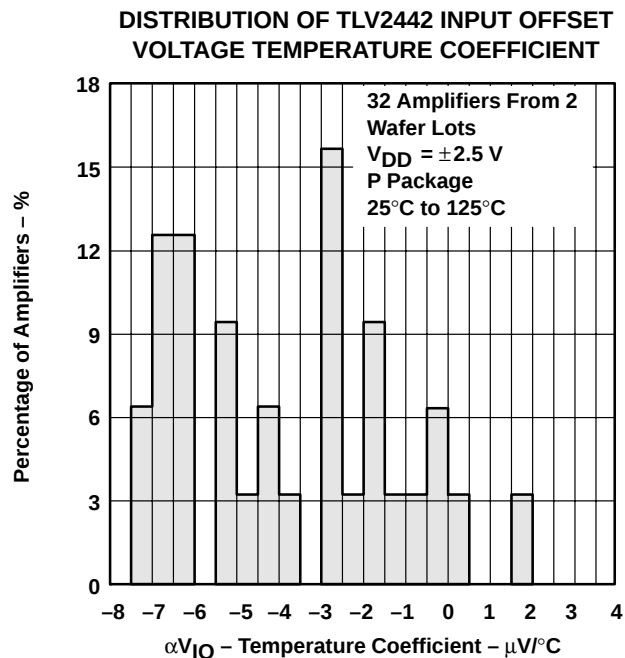


Figure 7

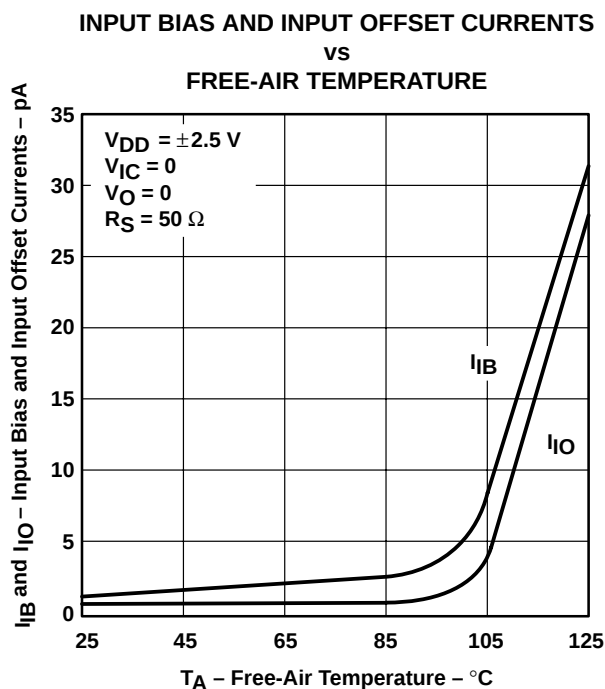


Figure 8

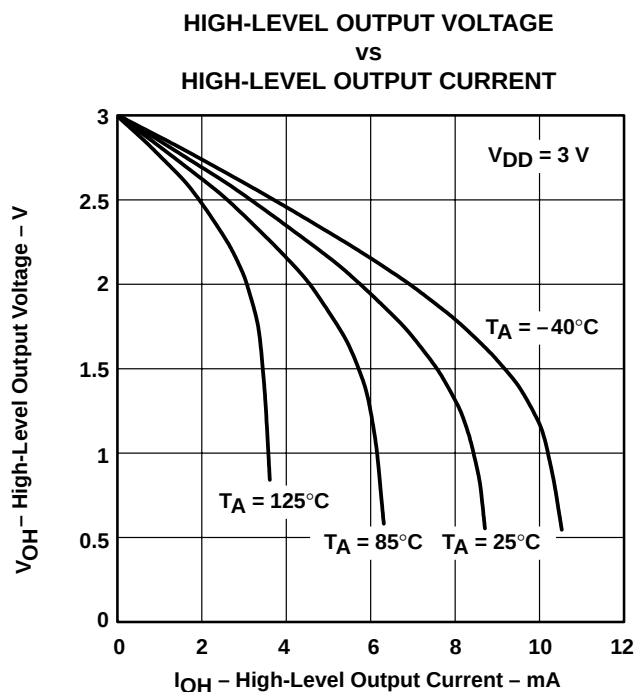


Figure 9

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

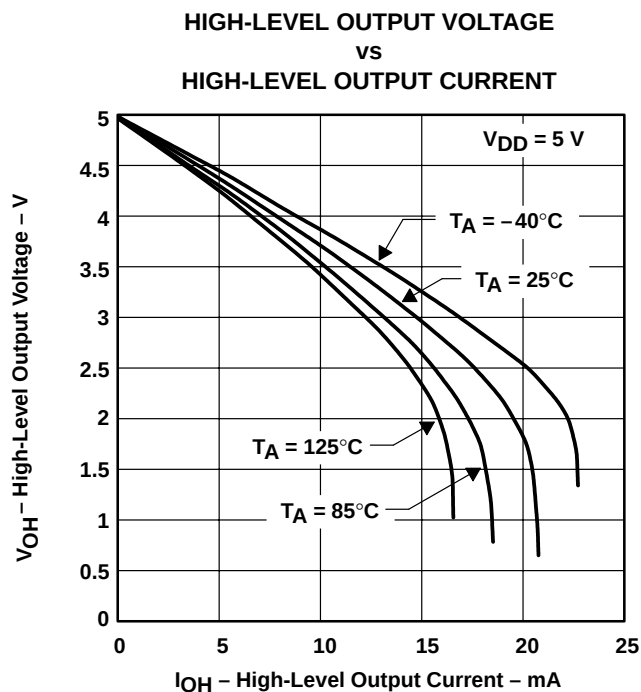


Figure 10

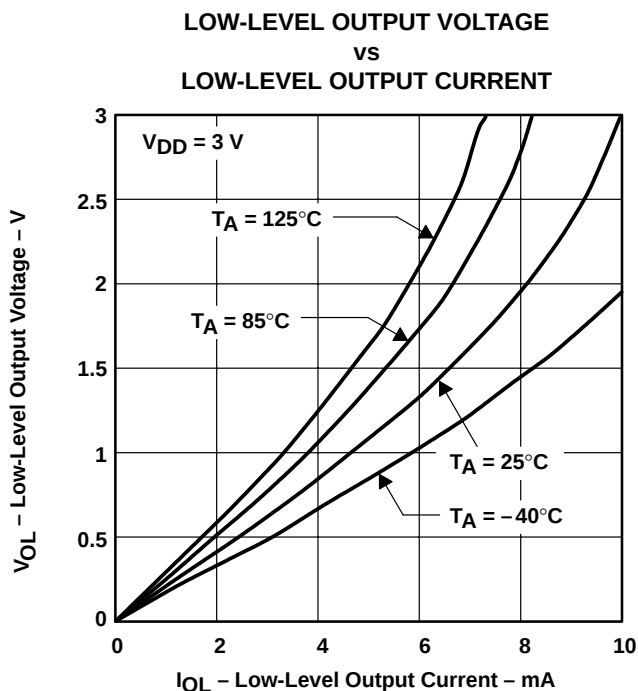


Figure 11

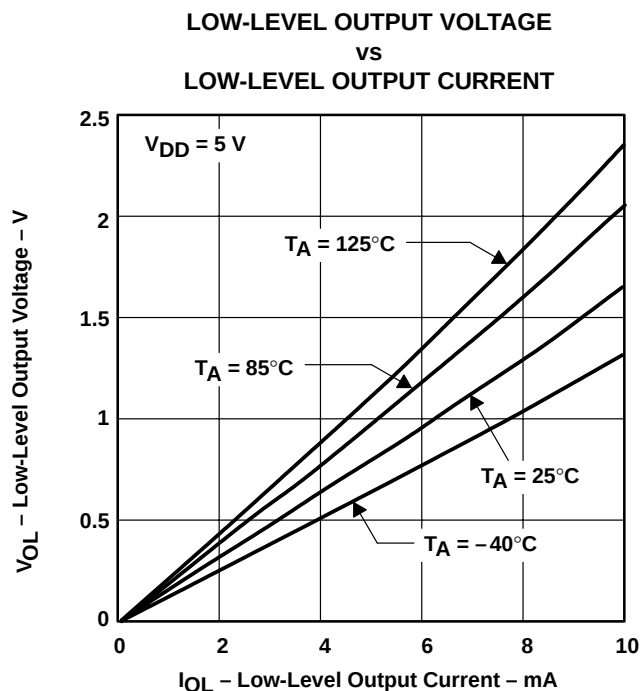


Figure 12





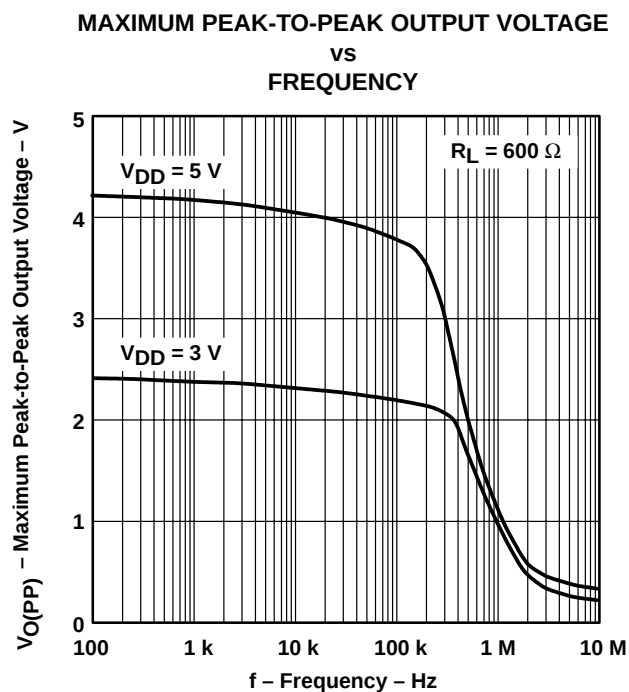


Figure 13

## TYPICAL CHARACTERISTICS

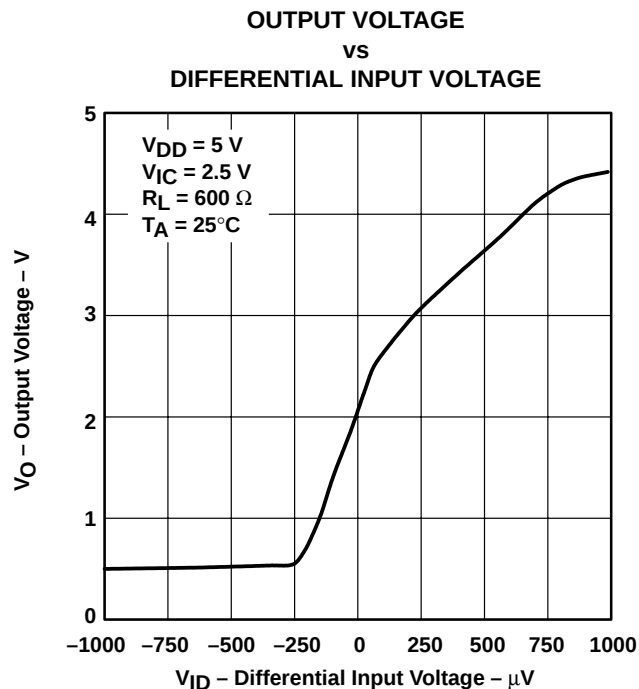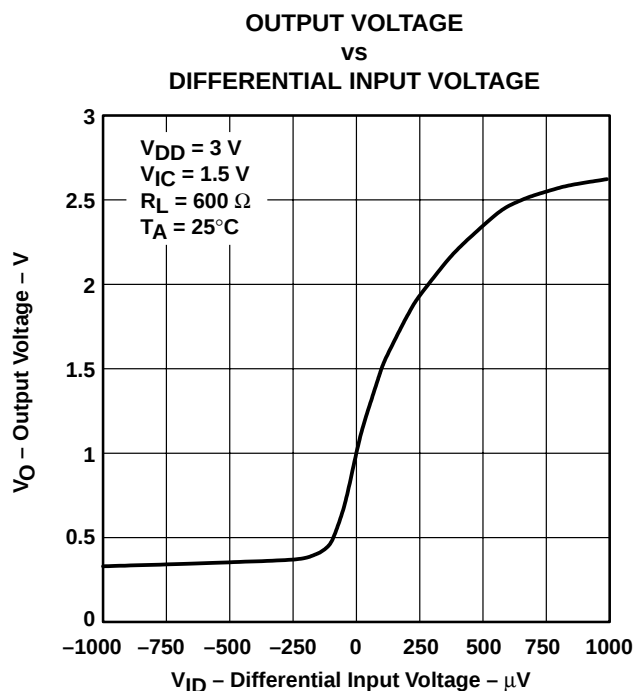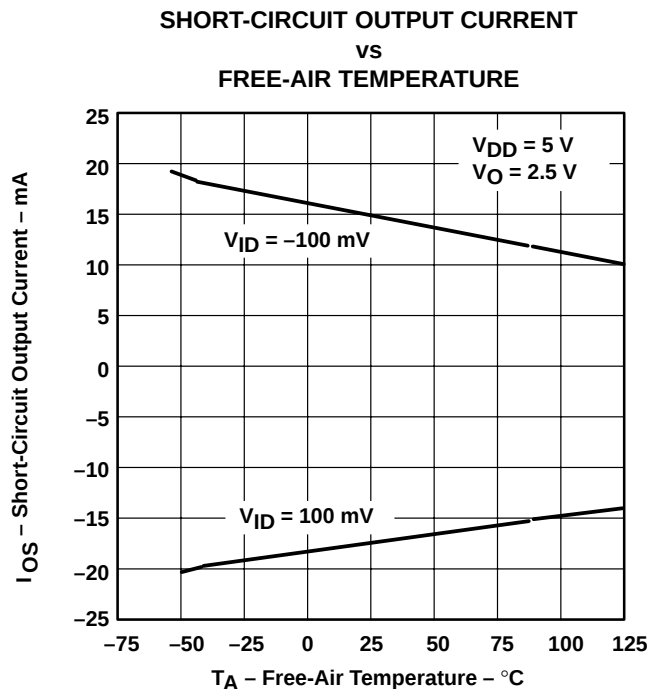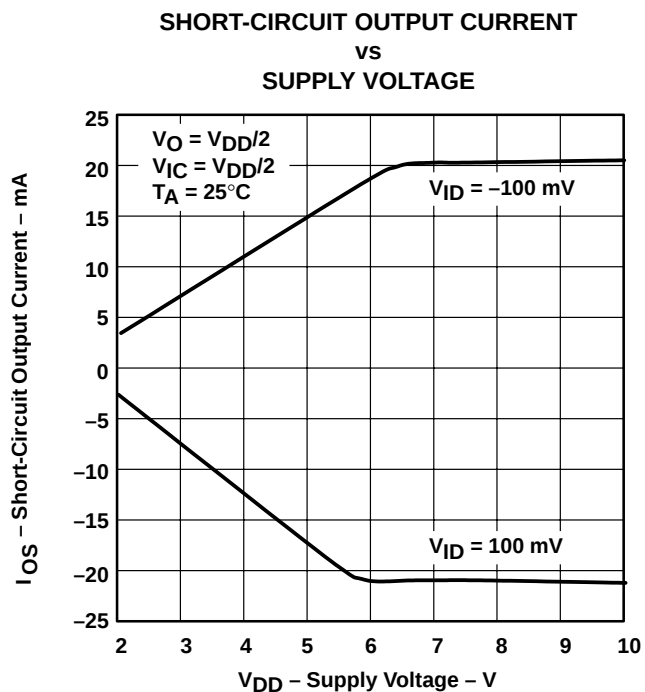


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

**DIFFERENTIAL VOLTAGE AMPLIFICATION**  
**VS**  
**LOAD RESISTANCE**

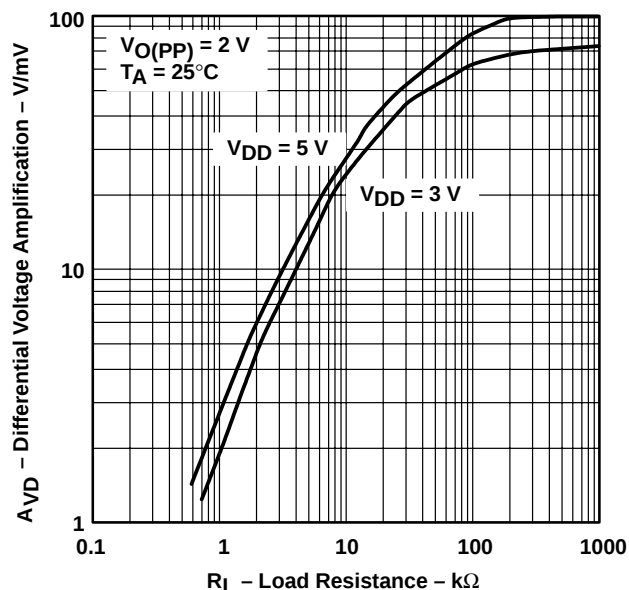

**Figure 18**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE**  
**AMPLIFICATION AND PHASE MARGIN**  
**VS**  
**FREQUENCY**

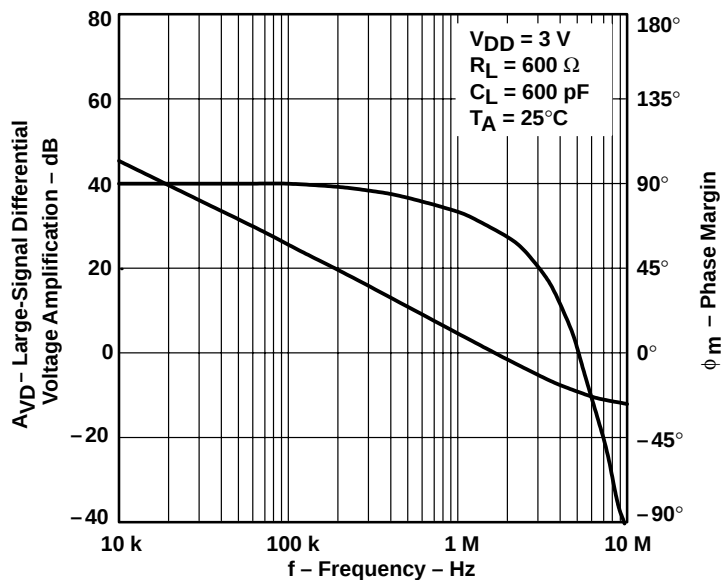

**Figure 19**

## TYPICAL CHARACTERISTICS

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE MARGIN

VS  
FREQUENCY

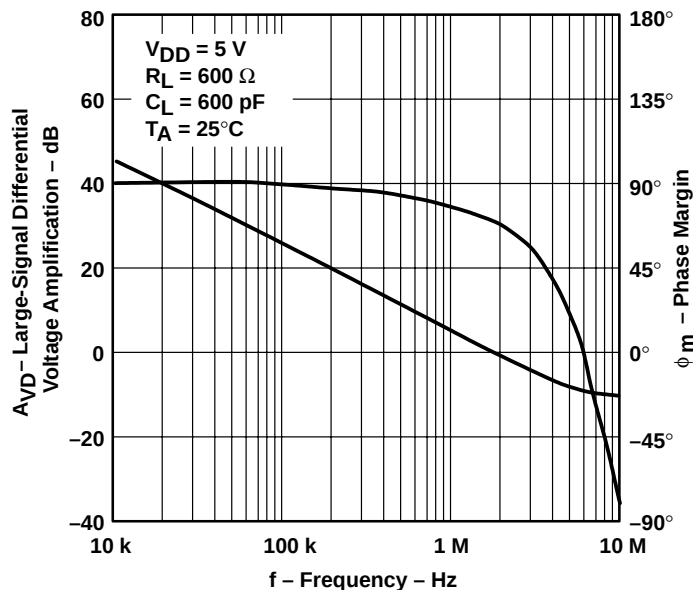


Figure 20

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION

VS

FREE-AIR TEMPERATURE

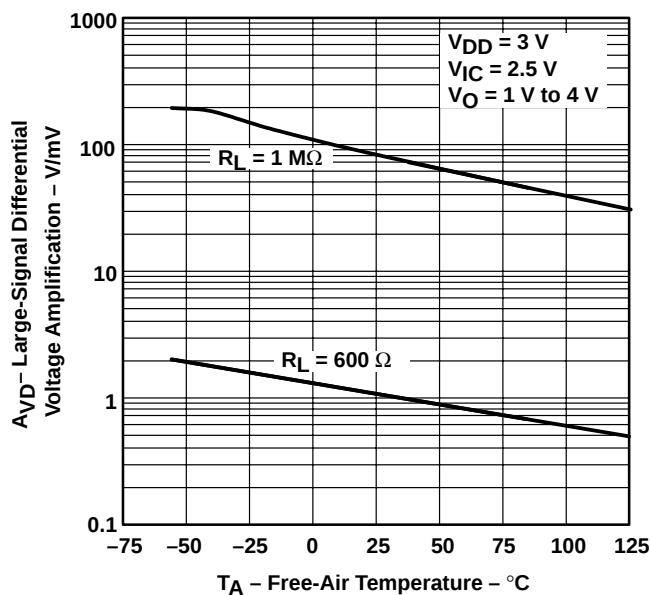


Figure 21

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION

VS

FREE-AIR TEMPERATURE

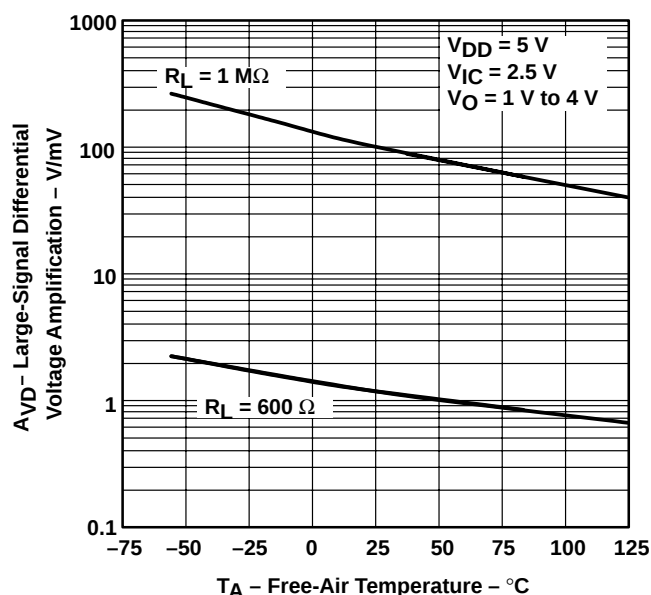



Figure 22

**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

**OUTPUT IMPEDANCE  
VS  
FREQUENCY**

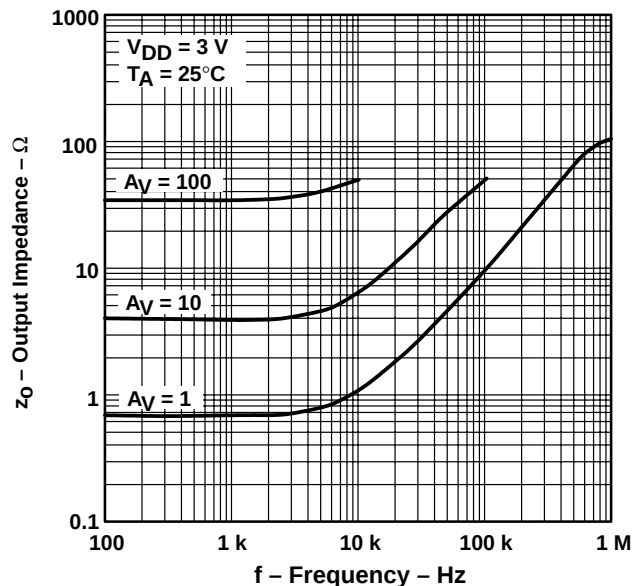


**Figure 23**

**OUTPUT IMPEDANCE  
VS  
FREQUENCY**

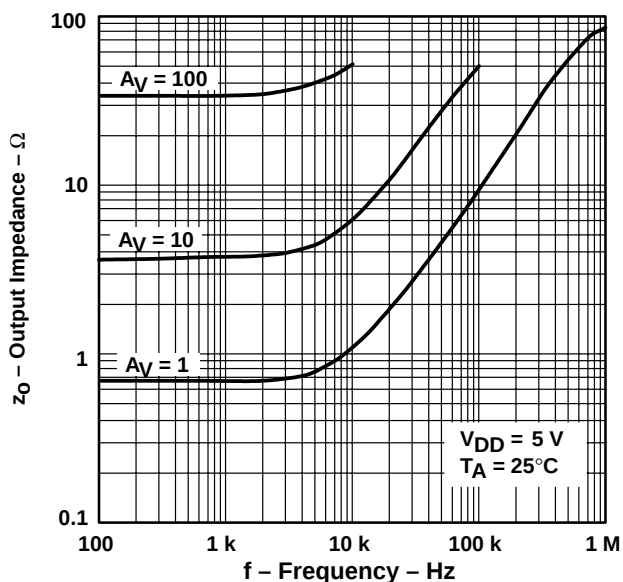


**Figure 24**

**COMMON-MODE REJECTION RATIO  
VS  
FREQUENCY**

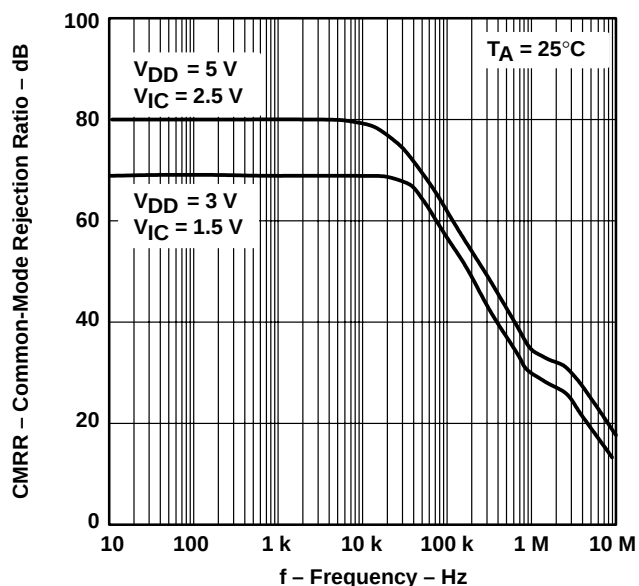

**Figure 25**

**COMMON-MODE REJECTION RATIO  
VS  
FREE-AIR TEMPERATURE**

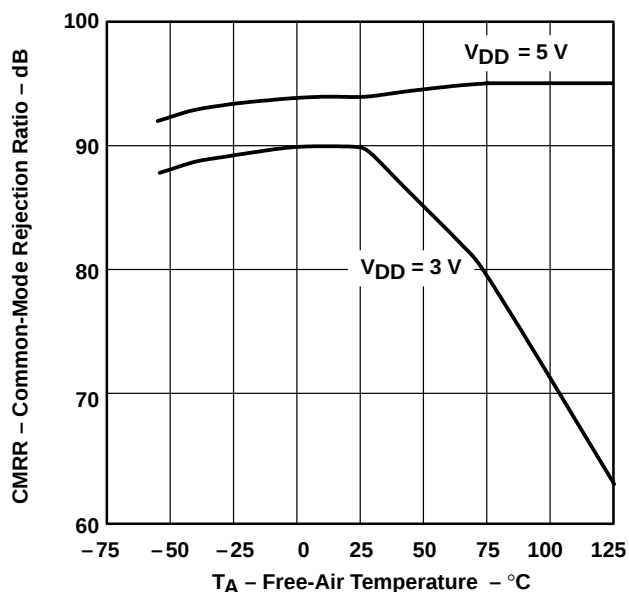

**Figure 26**

## TYPICAL CHARACTERISTICS

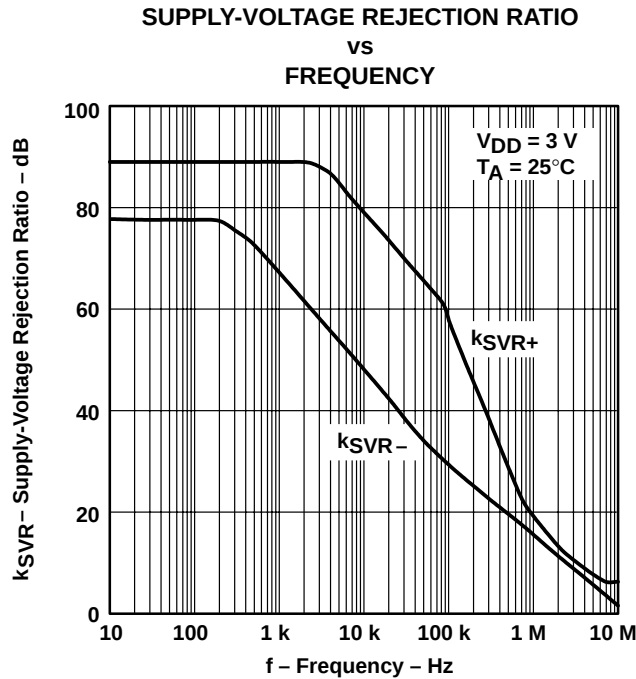


Figure 27

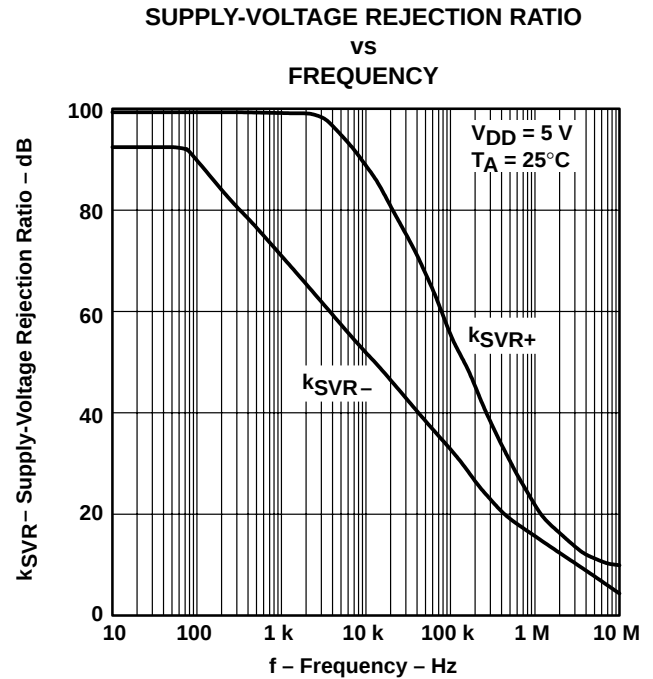


Figure 28

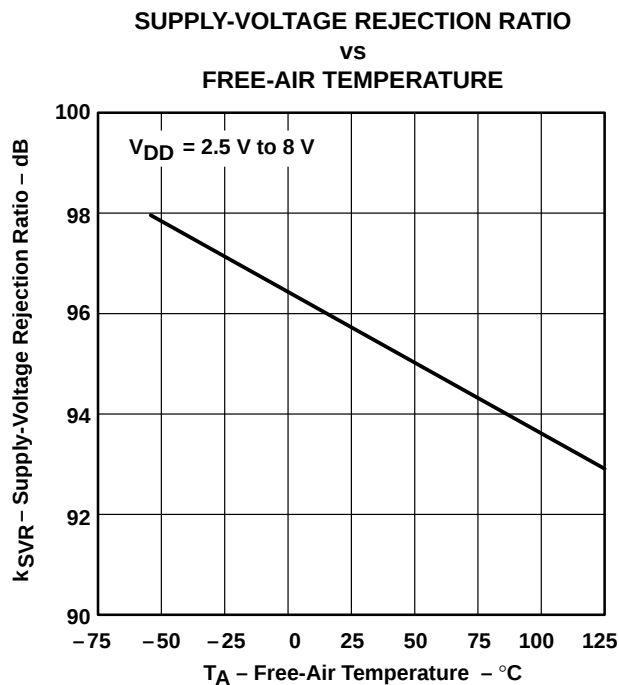


Figure 29


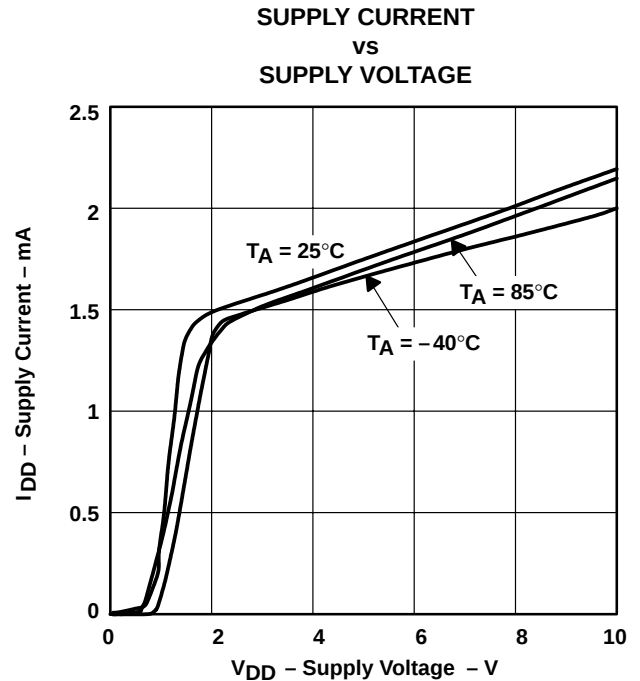


Figure 30


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

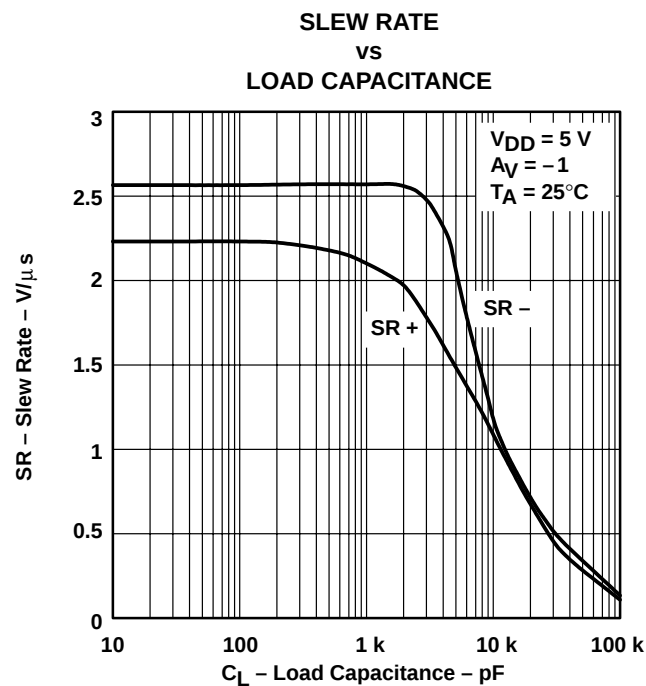


**Figure 31**

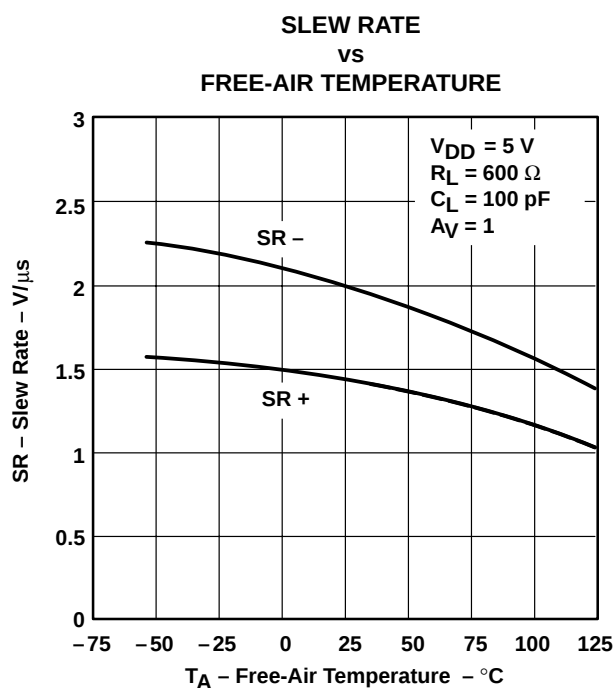

**Figure 32**

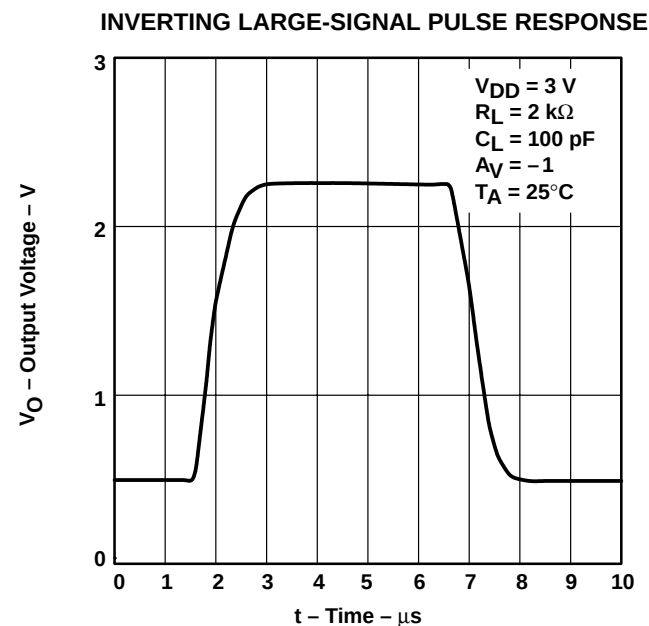

**Figure 33**

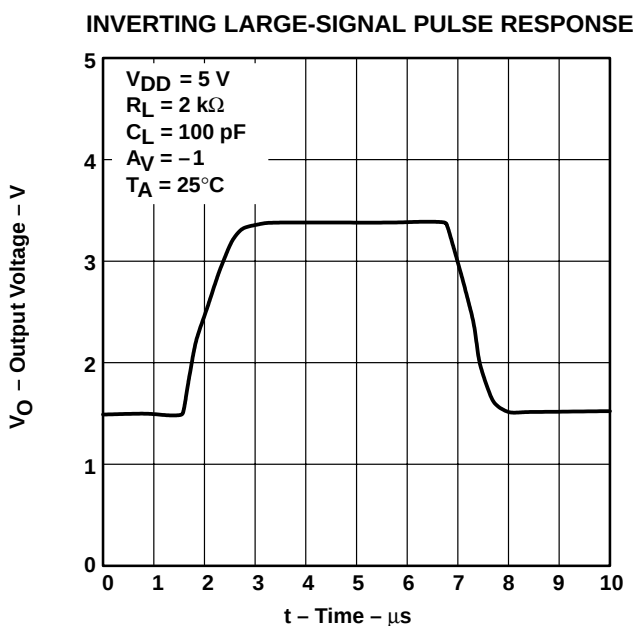

**Figure 34**

# TYPICAL CHARACTERISTICS

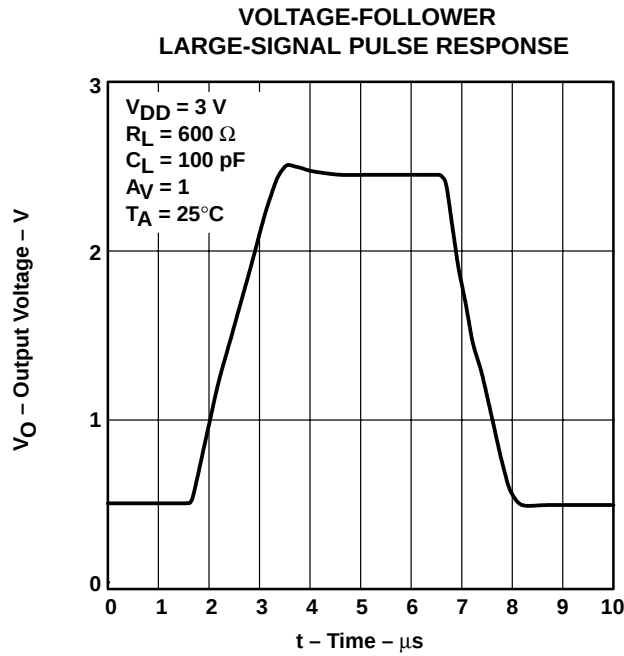


Figure 35

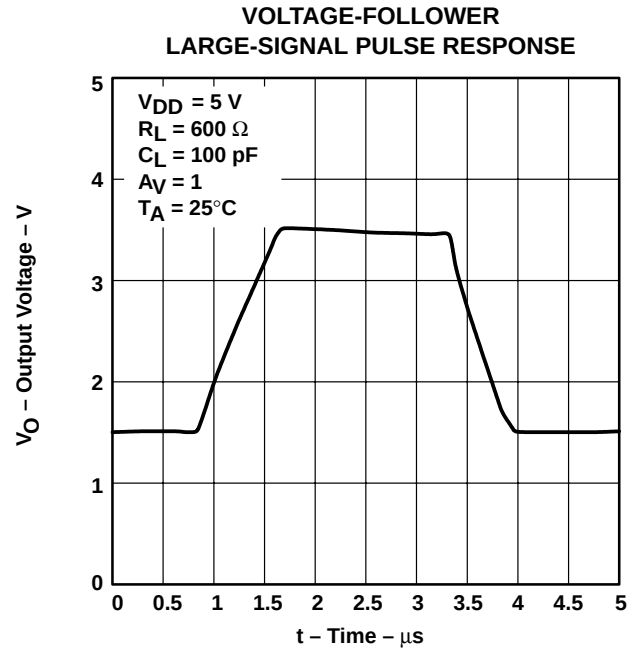


Figure 36

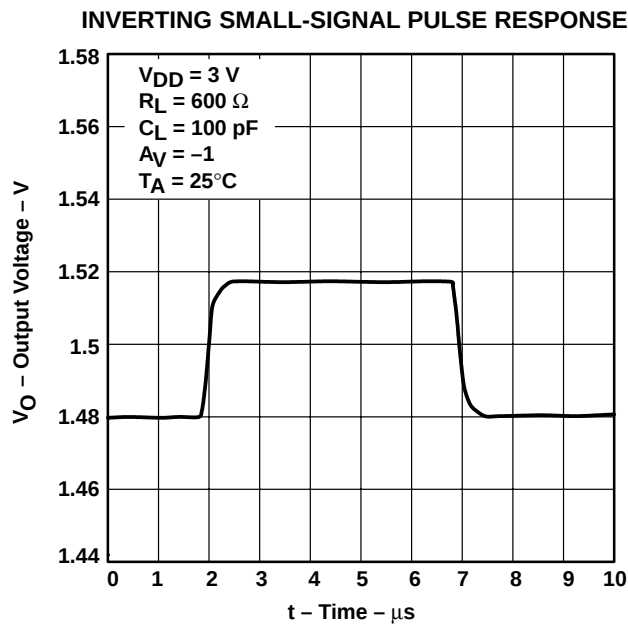


Figure 37


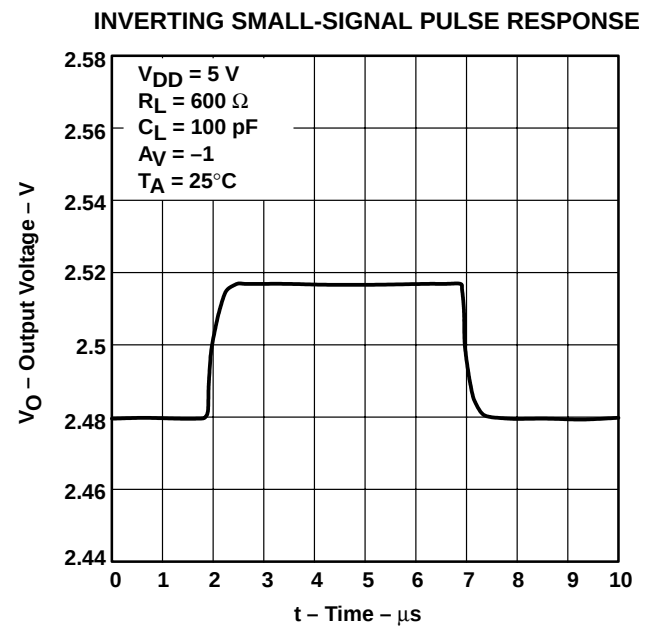


Figure 38


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

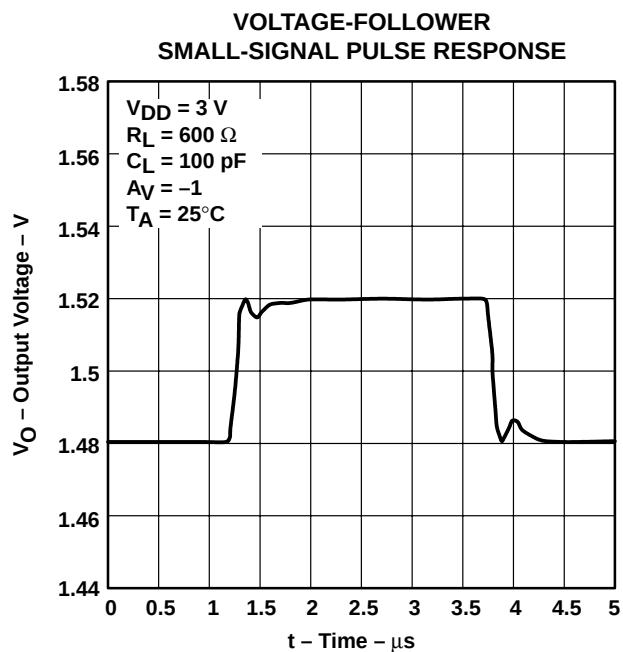


**Figure 39**

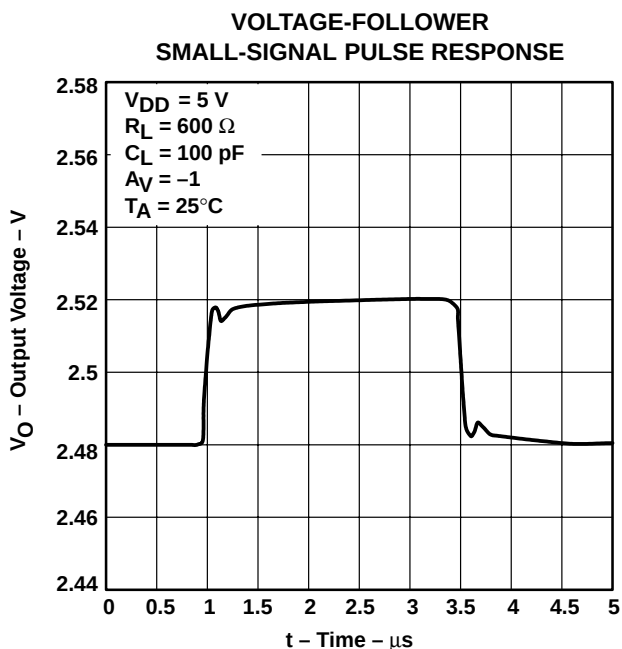

**Figure 40**

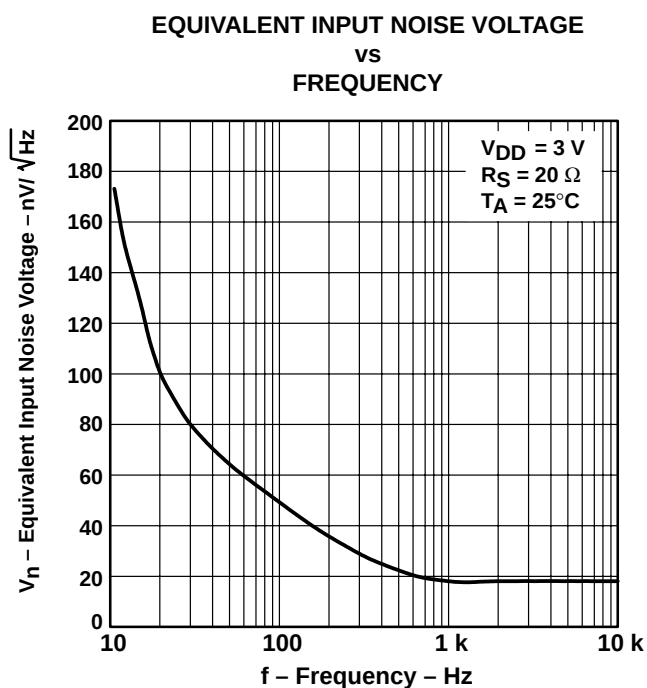

**Figure 41**

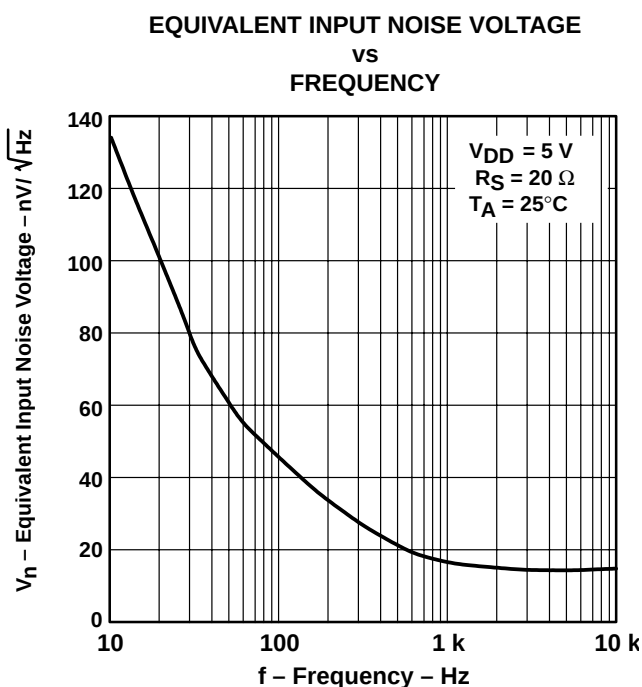

**Figure 42**

## TYPICAL CHARACTERISTICS

NOISE VOLTAGE  
OVER A 10-SECOND PERIOD

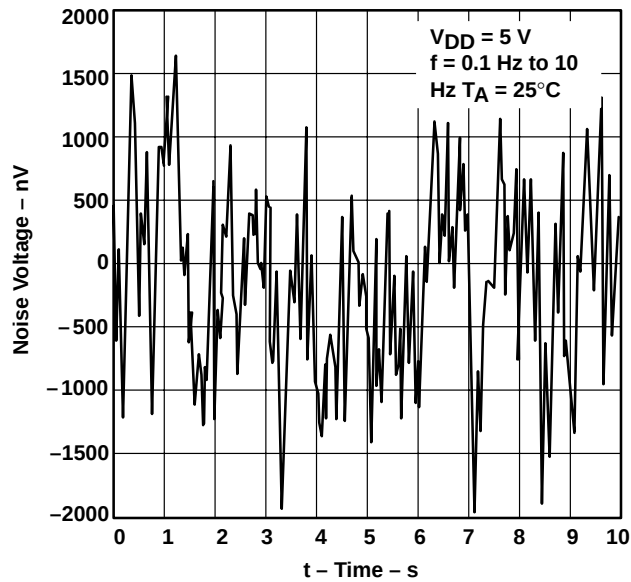


Figure 43

TOTAL HARMONIC DISTORTION PLUS NOISE  
VS  
FREQUENCY

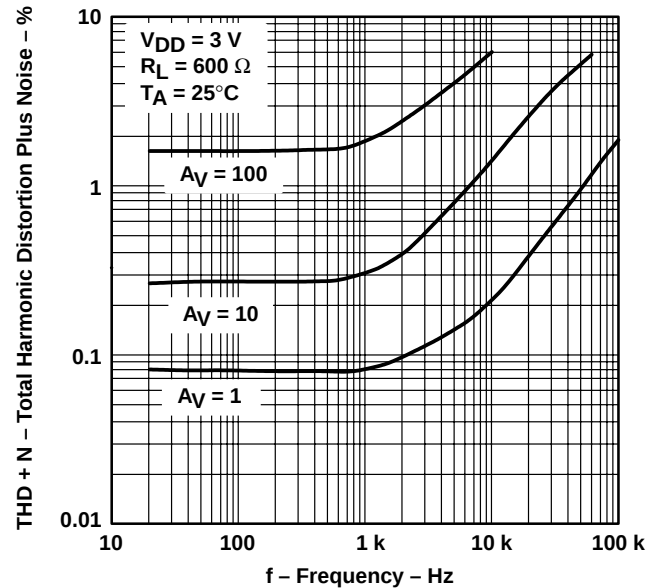


Figure 44

TOTAL HARMONIC DISTORTION PLUS NOISE  
VS  
FREQUENCY

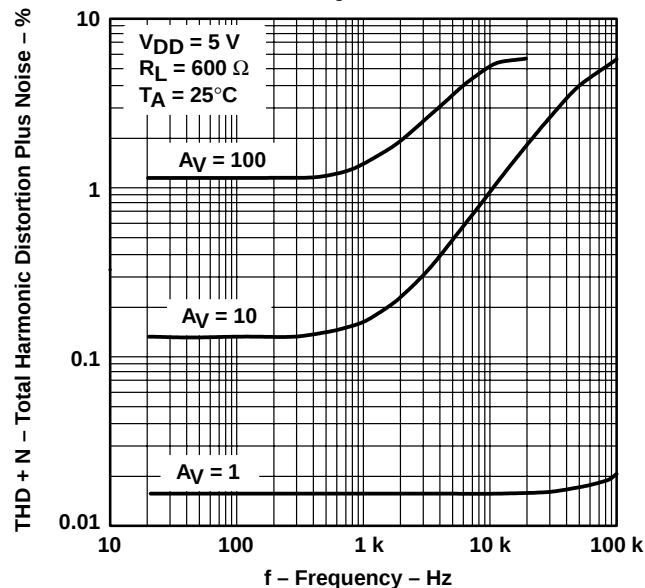


Figure 45

GAIN-BANDWIDTH PRODUCT  
VS  
FREE-AIR TEMPERATURE

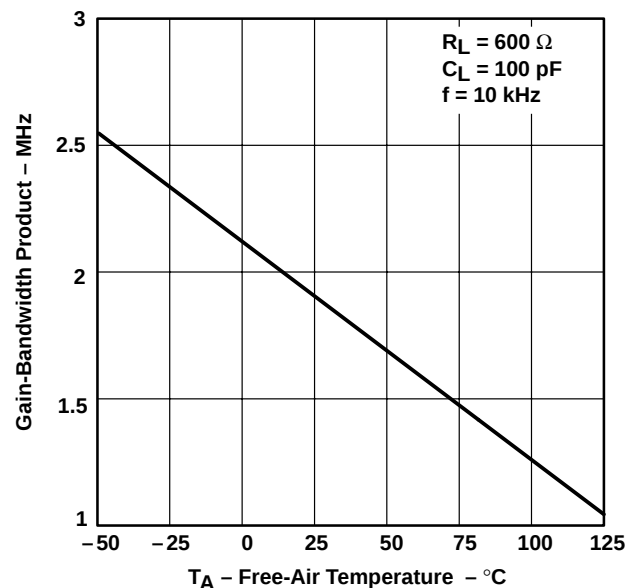


Figure 46

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

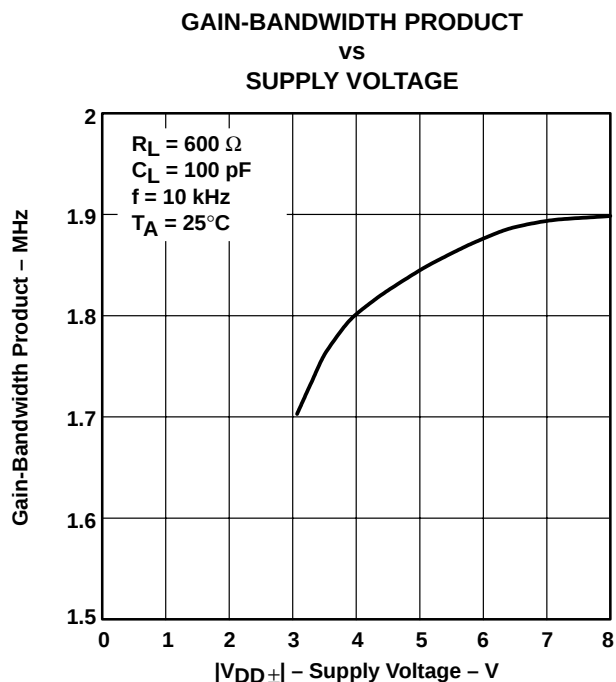


Figure 47

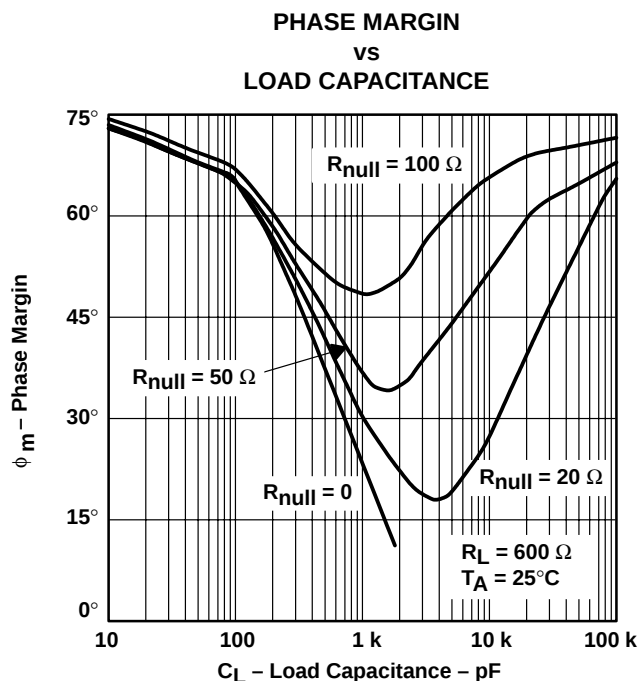


Figure 48

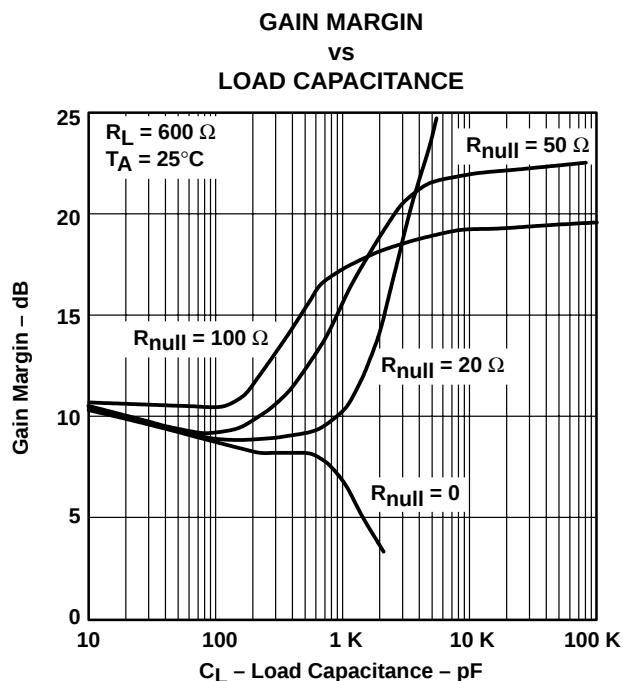


Figure 49

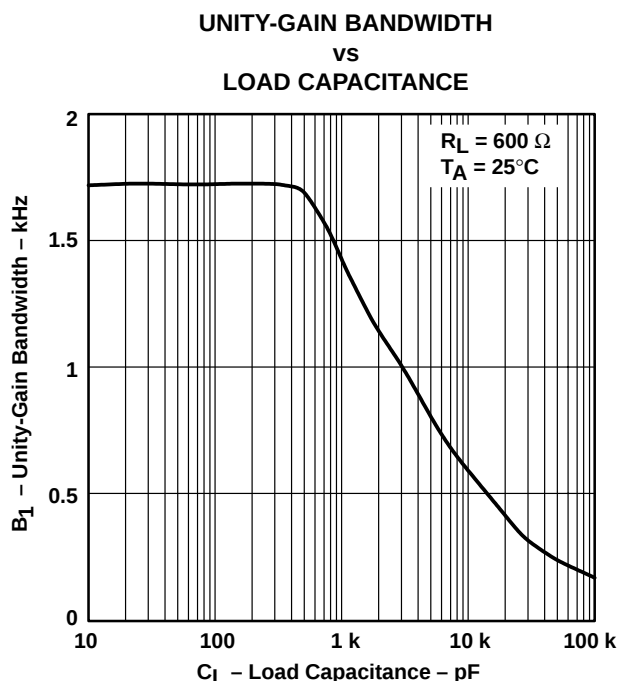


Figure 50



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**


SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**D (R-PDSO-G\*\*)**

**PLASTIC SMALL-OUTLINE PACKAGE**

14 PIN SHOWN

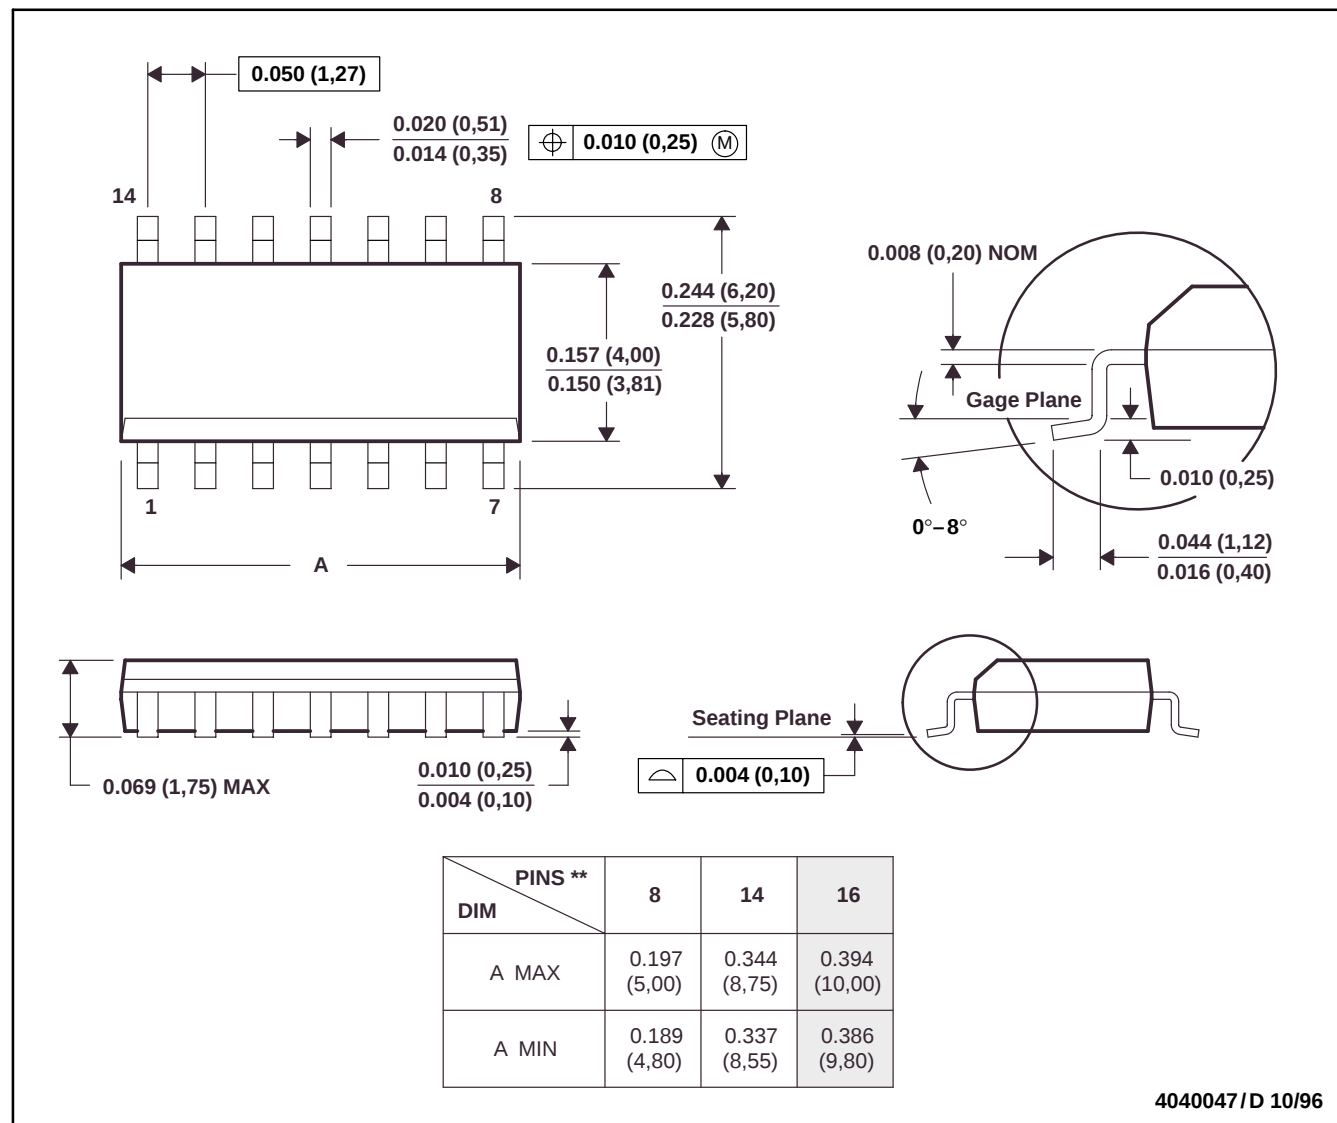

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).  
 D. Falls within JEDEC MS-012

**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**


SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**FK (S-CQCC-N\*\*)**

**LEADLESS CERAMIC CHIP CARRIER**

**28 TERMINAL SHOWN**

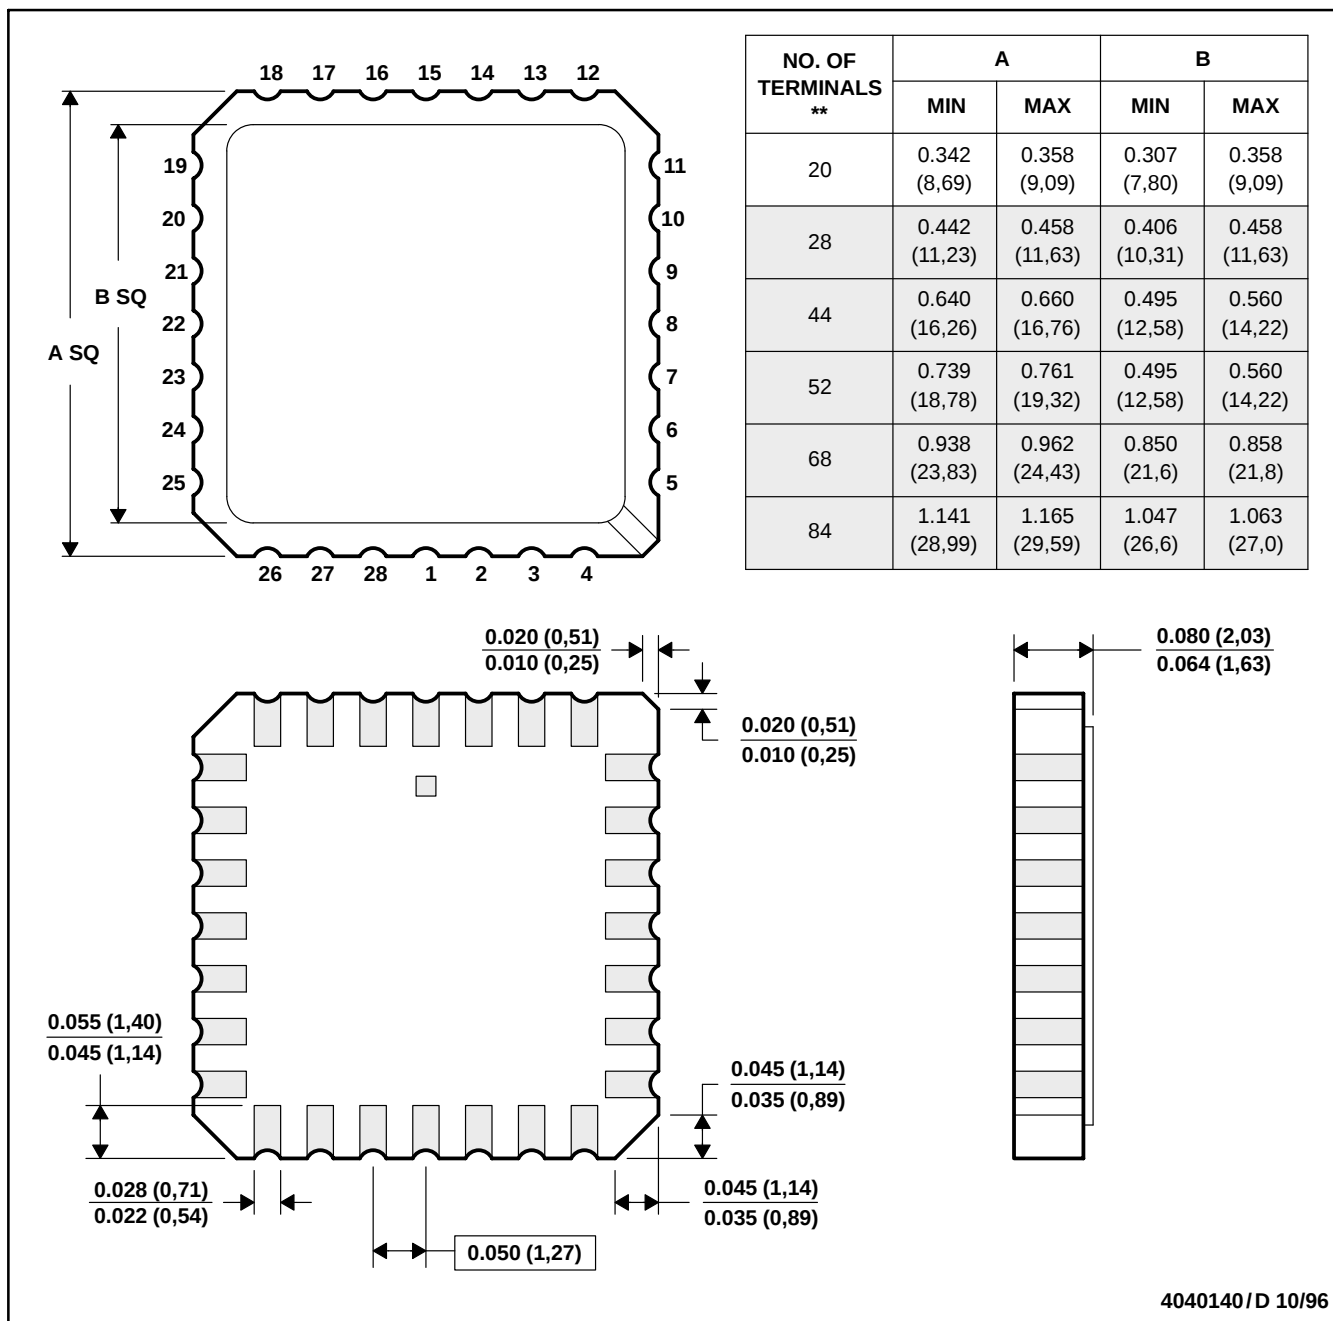

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**JG (R-GDIP-T8)**

**CERAMIC DUAL-IN-LINE PACKAGE**

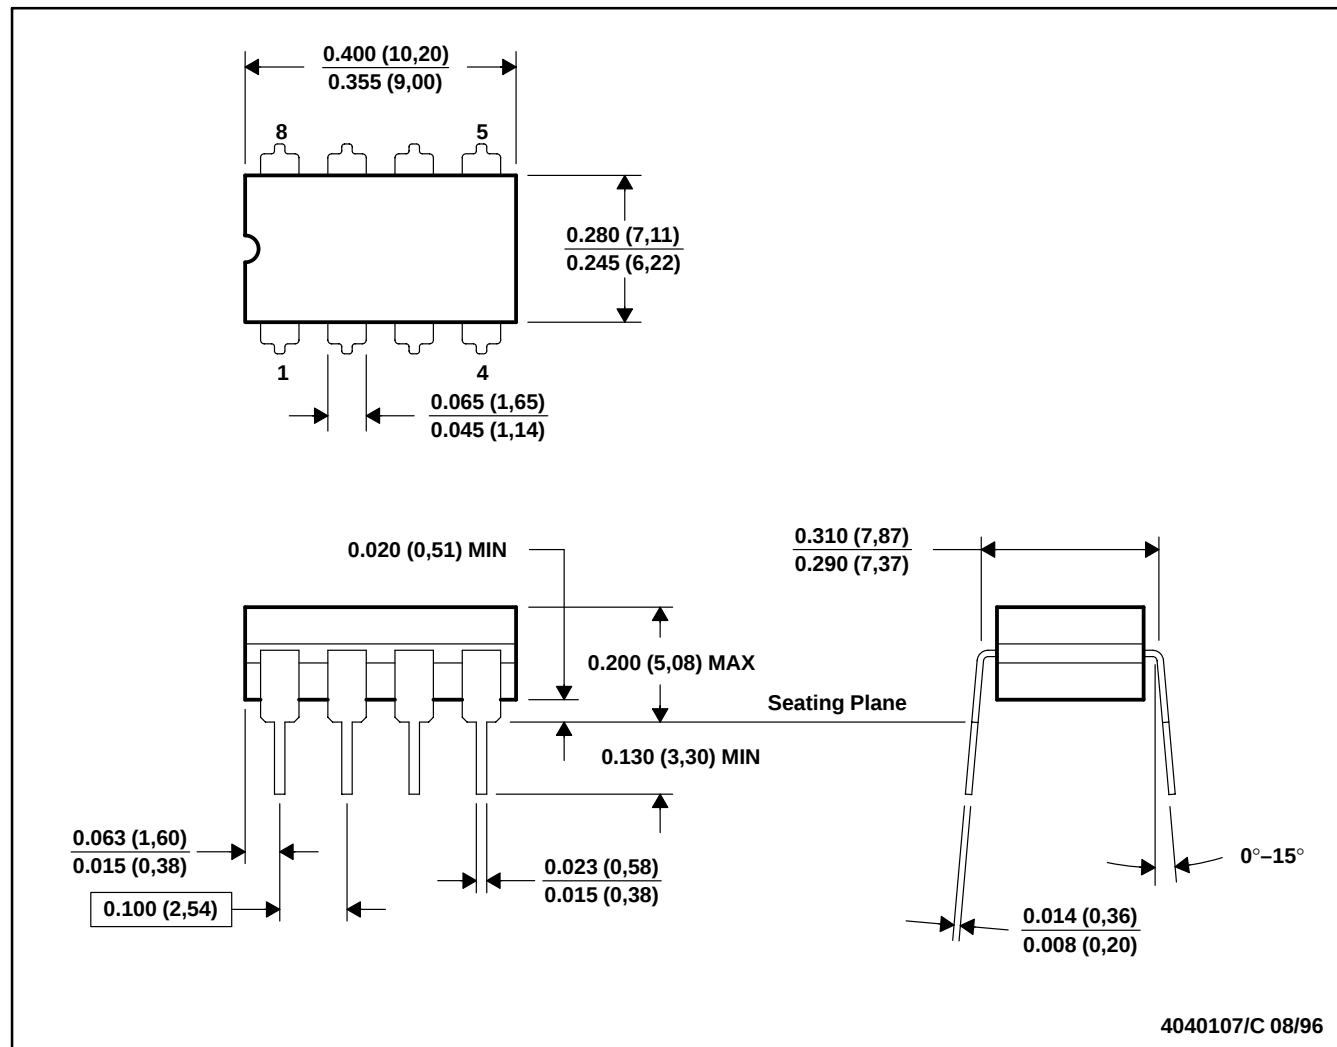


- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification on press ceramic glass frit seal only.  
 E. Falls within MIL-STD-1835 GDIP1-T8

## MECHANICAL DATA

PW (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14 PIN SHOWN

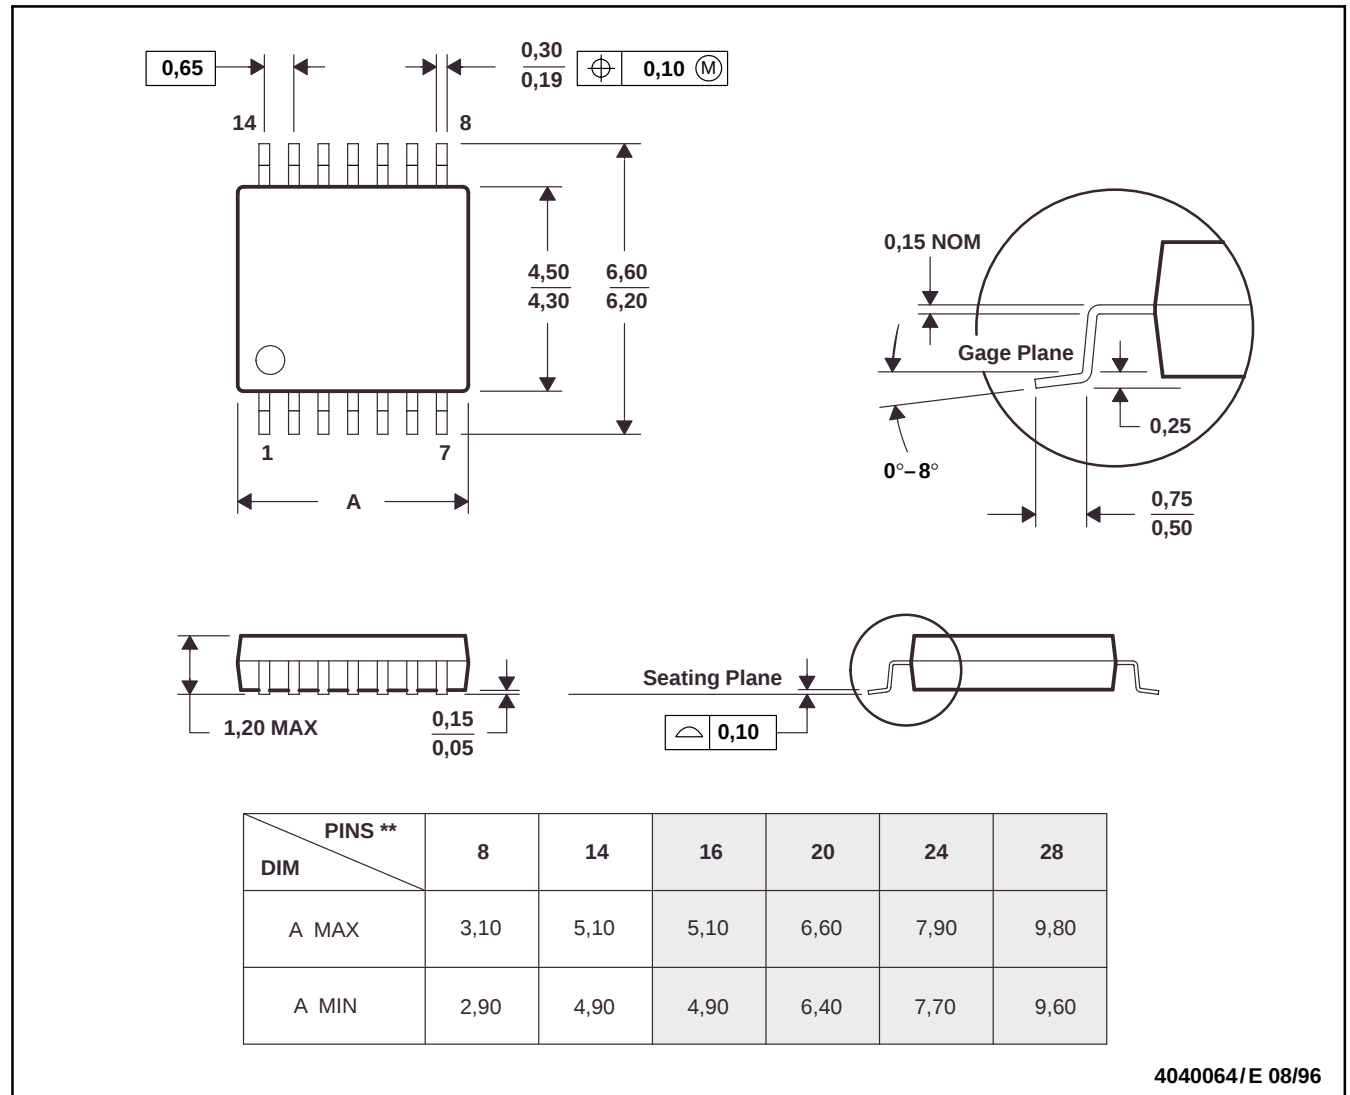

- NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
D. Falls within JEDEC MO-153


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**U (S-GDFP-F10)**

**CERAMIC DUAL FLATPACK**

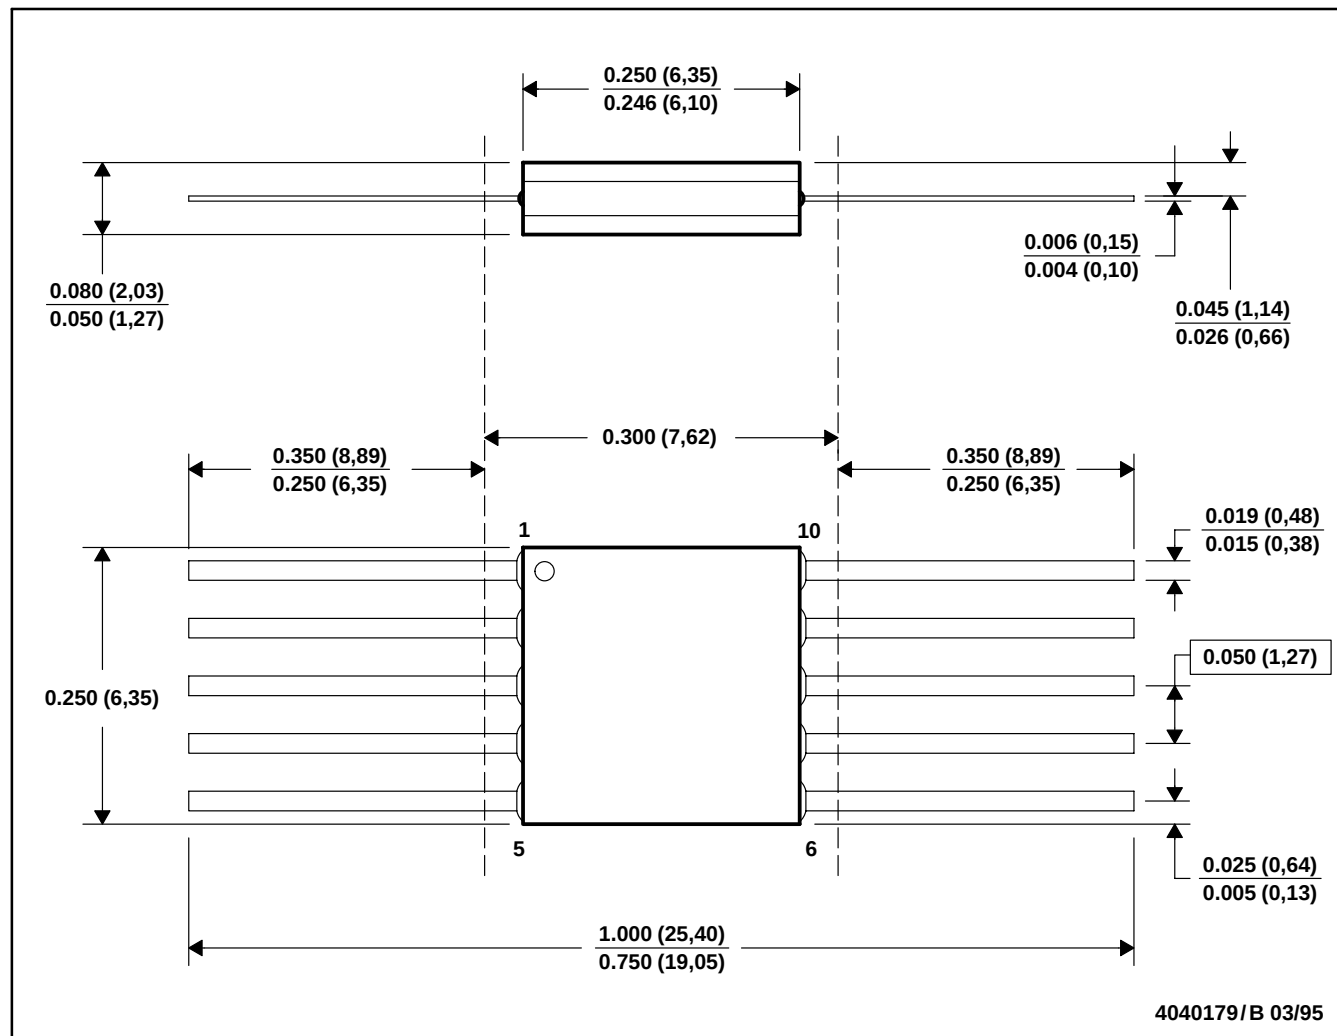

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification only.  
 E. Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| 5962-9751101QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD             | Call TI                              | Call TI              | -55 to 125   | 9751101QPA<br>TLV2442M  | <a href="#">Samples</a> |
| 5962-9751102QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD             | Call TI                              | Call TI              | -55 to 125   | 9751102QPA<br>TLV2442AM | <a href="#">Samples</a> |
| TLV2442AID       | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442AI                  | <a href="#">Samples</a> |
| TLV2442AIDR      | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442AI                  | <a href="#">Samples</a> |
| TLV2442AIPW      | ACTIVE        | TSSOP        | PW                 | 8    | 150            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | TV2442                  | <a href="#">Samples</a> |
| TLV2442AIPWR     | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442AI                  | <a href="#">Samples</a> |
| TLV2442AMJGB     | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD             | Call TI                              | Call TI              | -55 to 125   | 9751102QPA<br>TLV2442AM | <a href="#">Samples</a> |
| TLV2442AQD       | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | V2442A                  | <a href="#">Samples</a> |
| TLV2442AQDG4     | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   |              | V2442A                  | <a href="#">Samples</a> |
| TLV2442AQPW      | ACTIVE        | TSSOP        | PW                 | 8    | 150            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2442AQ                  | <a href="#">Samples</a> |
| TLV2442AQPWR     | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2442AQ                  | <a href="#">Samples</a> |
| TLV2442CD        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2442C                   | <a href="#">Samples</a> |
| TLV2442CDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2442C                   | <a href="#">Samples</a> |
| TLV2442CDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2442C                   | <a href="#">Samples</a> |
| TLV2442CPW       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | TV2442                  | <a href="#">Samples</a> |
| TLV2442CPWR      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | TV2442                  | <a href="#">Samples</a> |
| TLV2442ID        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442I                   | <a href="#">Samples</a> |
| TLV2442IDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442I                   | <a href="#">Samples</a> |
| TLV2442IDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 2442I                   | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TLV2442MJGB      | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD             | Call TI                              | Call TI              | -55 to 125   | 9751101QPA<br>TLV2442M  | <a href="#">Samples</a> |
| TLV2442QPW       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2442Q                   | <a href="#">Samples</a> |
| TLV2442QPWR      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2442Q                   | <a href="#">Samples</a> |
| TLV2442QPWRG4    | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   |              | 2442Q                   | <a href="#">Samples</a> |
| TLV2444AID       | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444AI                  | <a href="#">Samples</a> |
| TLV2444AIPW      | ACTIVE        | TSSOP        | PW                 | 14   | 90             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444AI                  | <a href="#">Samples</a> |
| TLV2444AIPWG4    | ACTIVE        | TSSOP        | PW                 | 14   | 90             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444AI                  | <a href="#">Samples</a> |
| TLV2444AIPWR     | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444AI                  | <a href="#">Samples</a> |
| TLV2444AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444AI                  | <a href="#">Samples</a> |
| TLV2444CD        | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444CDR       | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444CDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444CPW       | ACTIVE        | TSSOP        | PW                 | 14   | 90             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444CPWG4     | ACTIVE        | TSSOP        | PW                 | 14   | 90             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444CPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 2444C                   | <a href="#">Samples</a> |
| TLV2444ID        | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444I                   | <a href="#">Samples</a> |
| TLV2444IDR       | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444I                   | <a href="#">Samples</a> |
| TLV2444IPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2444I                   | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV2442, TLV2442A, TLV2442AM, TLV2442M :**


- Catalog : [TLV2442A](#), [TLV2442](#)
- Automotive : [TLV2442-Q1](#), [TLV2442A-Q1](#), [TLV2442A-Q1](#), [TLV2442-Q1](#)
- Military : [TLV2442M](#), [TLV2442AM](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military - QML certified for Military and Defense Applications


## TAPE AND REEL INFORMATION

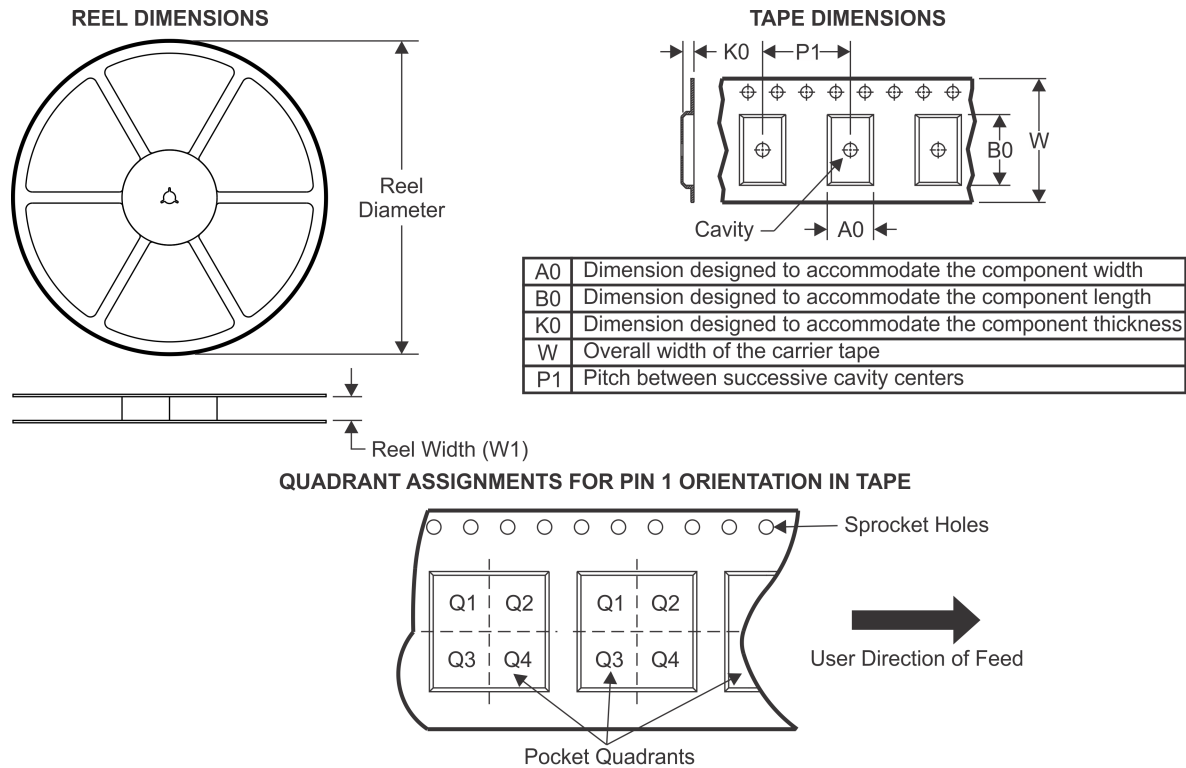

\*All dimensions are nominal


| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV2442AIDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442AIPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442AQPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442CDR    | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442CPWR   | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442IDR    | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442QPWR   | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442QPWRG4 | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444AIPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444CDR    | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLV2444CPWR   | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444IDR    | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLV2444IPWR   | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

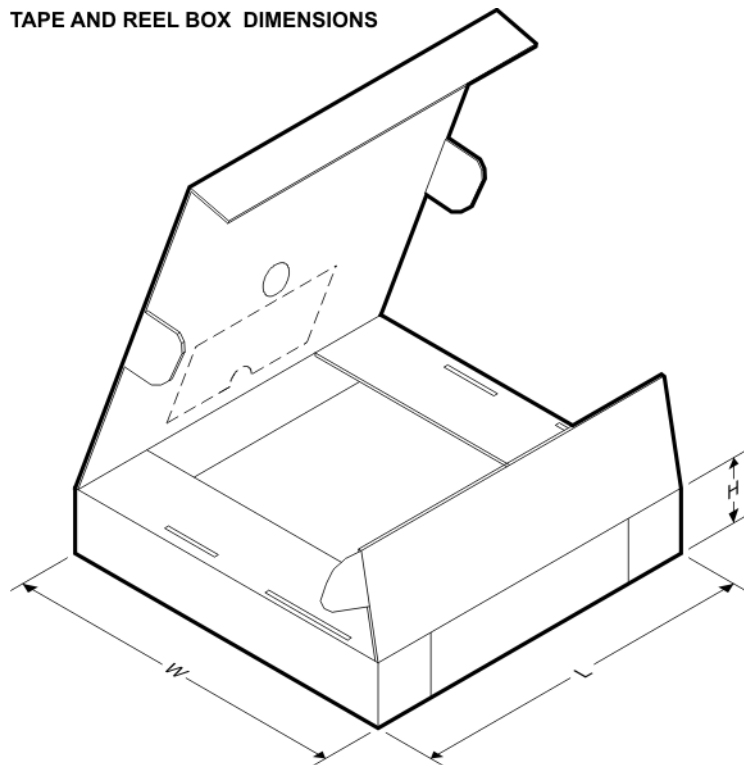

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV2442AIDR   | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLV2442AIPWR  | TSSOP        | PW              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2442AQPWR  | TSSOP        | PW              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2442CDR    | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLV2442CPWR   | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2442IDR    | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLV2442QPWR   | TSSOP        | PW              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2442QPWRG4 | TSSOP        | PW              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2444AIPWR  | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2444CDR    | SOIC         | D               | 14   | 2500 | 350.0       | 350.0      | 43.0        |
| TLV2444CPWR   | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |
| TLV2444IDR    | SOIC         | D               | 14   | 2500 | 350.0       | 350.0      | 43.0        |
| TLV2444IPWR   | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |

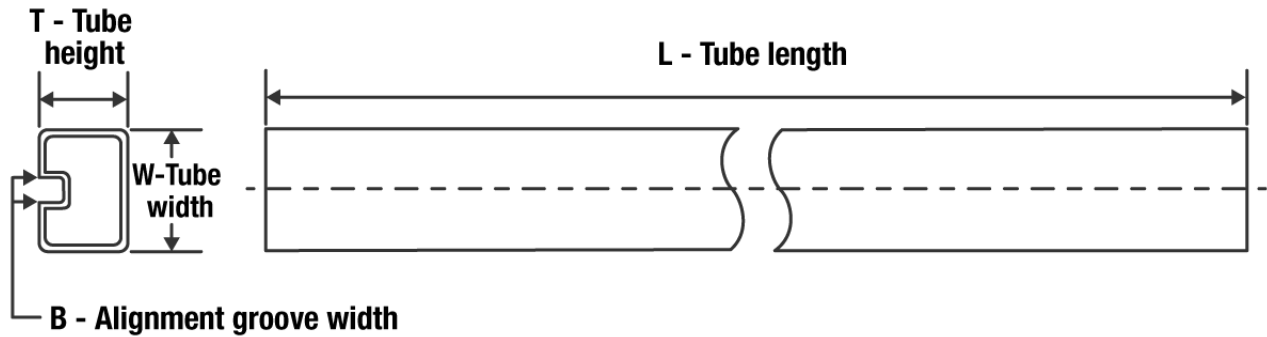
**TUBE**


\*All dimensions are nominal

| Device        | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|---------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TLV2442AID    | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442AID    | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV2442AIPW   | PW           | TSSOP        | 8    | 150 | 530    | 10.2   | 3600   | 3.5    |
| TLV2442AQD    | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442AQDG4  | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442AQPW   | PW           | TSSOP        | 8    | 150 | 530    | 10.2   | 3600   | 3.5    |
| TLV2442CD     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV2442CD     | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442CDG4   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV2442CDG4   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442CPW    | PW           | TSSOP        | 8    | 150 | 530    | 10.2   | 3600   | 3.5    |
| TLV2442ID     | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442ID     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV2442IDG4   | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| TLV2442IDG4   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLV2442QPW    | PW           | TSSOP        | 8    | 150 | 530    | 10.2   | 3600   | 3.5    |
| TLV2444AID    | D            | SOIC         | 14   | 50  | 505.46 | 6.76   | 3810   | 4      |
| TLV2444AIPW   | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TLV2444AIPWG4 | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TLV2444CD     | D            | SOIC         | 14   | 50  | 505.46 | 6.76   | 3810   | 4      |
| TLV2444CPW    | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TLV2444CPWG4  | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TLV2444ID     | D            | SOIC         | 14   | 50  | 505.46 | 6.76   | 3810   | 4      |

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

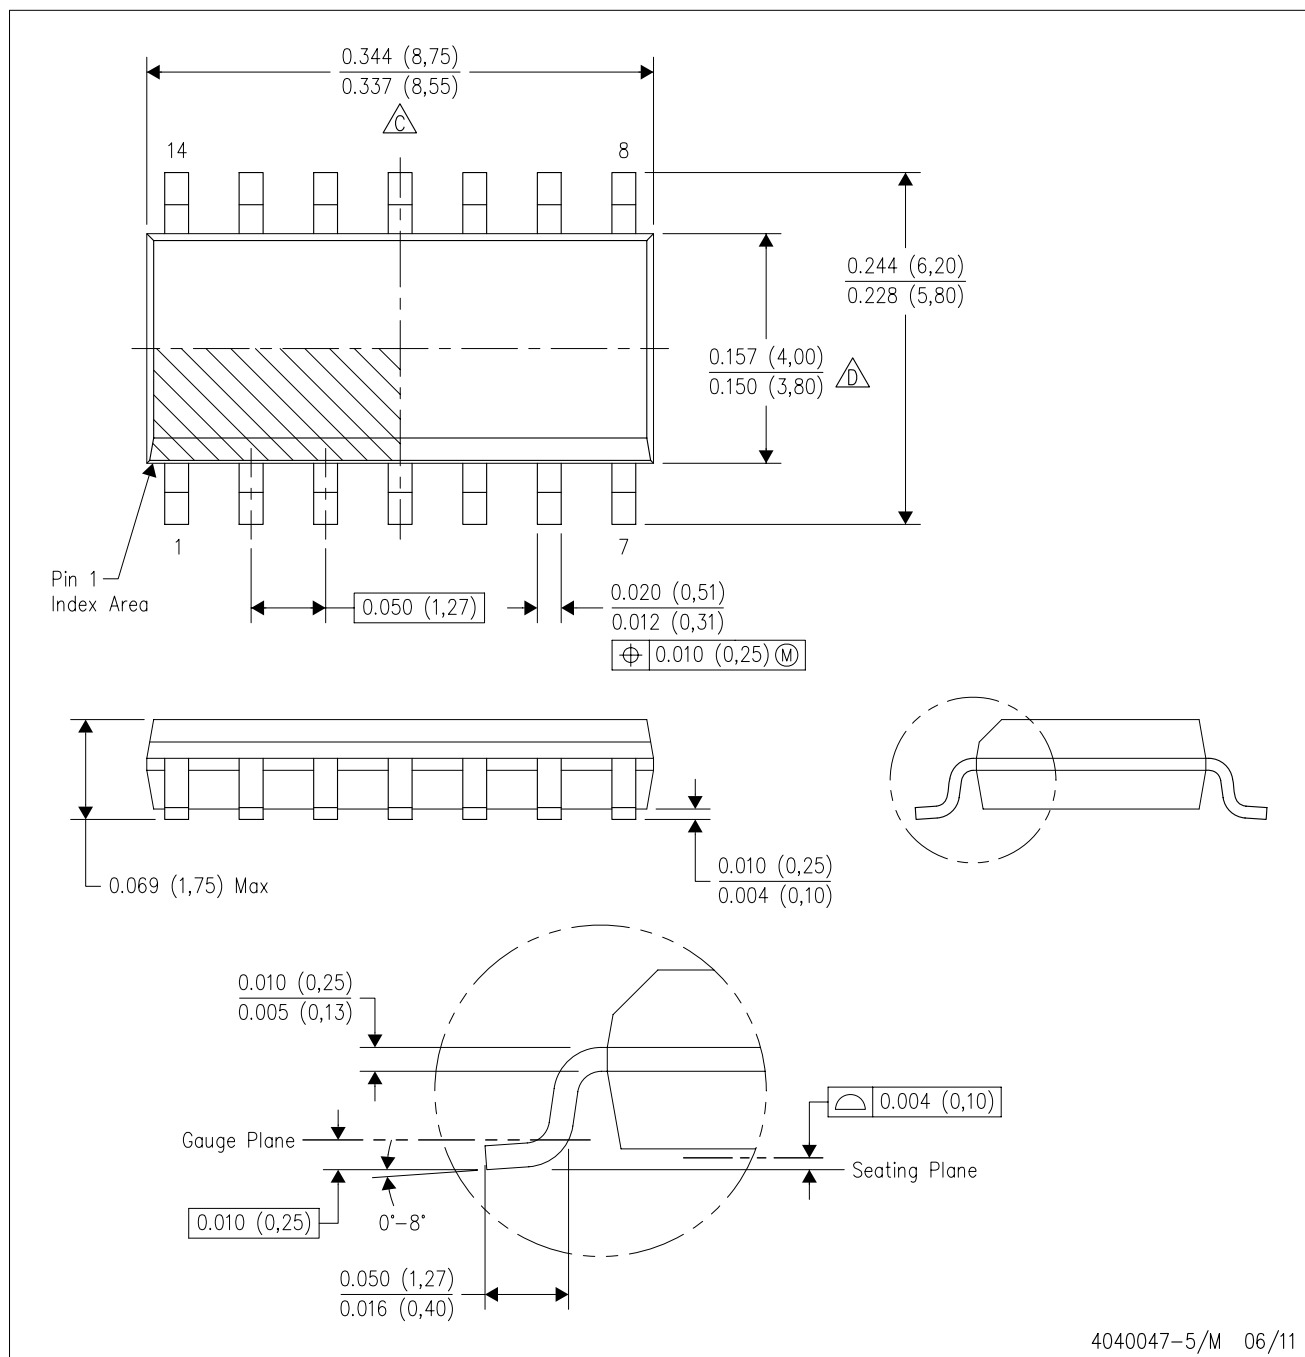


4040047-5/M 06/11

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

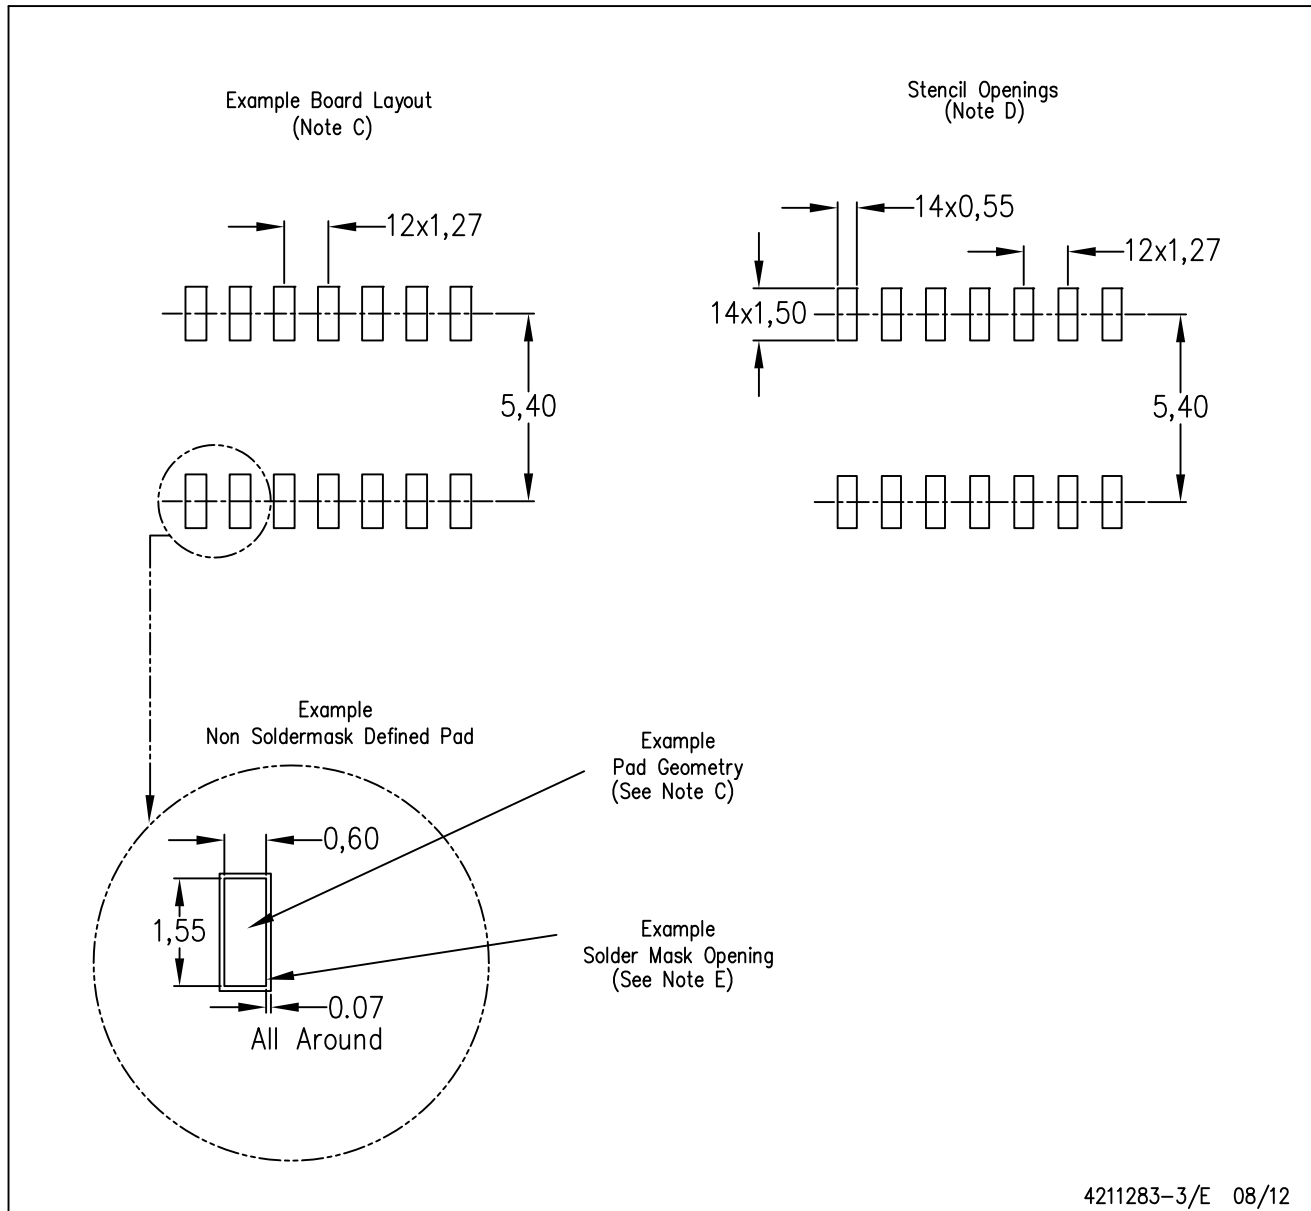

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

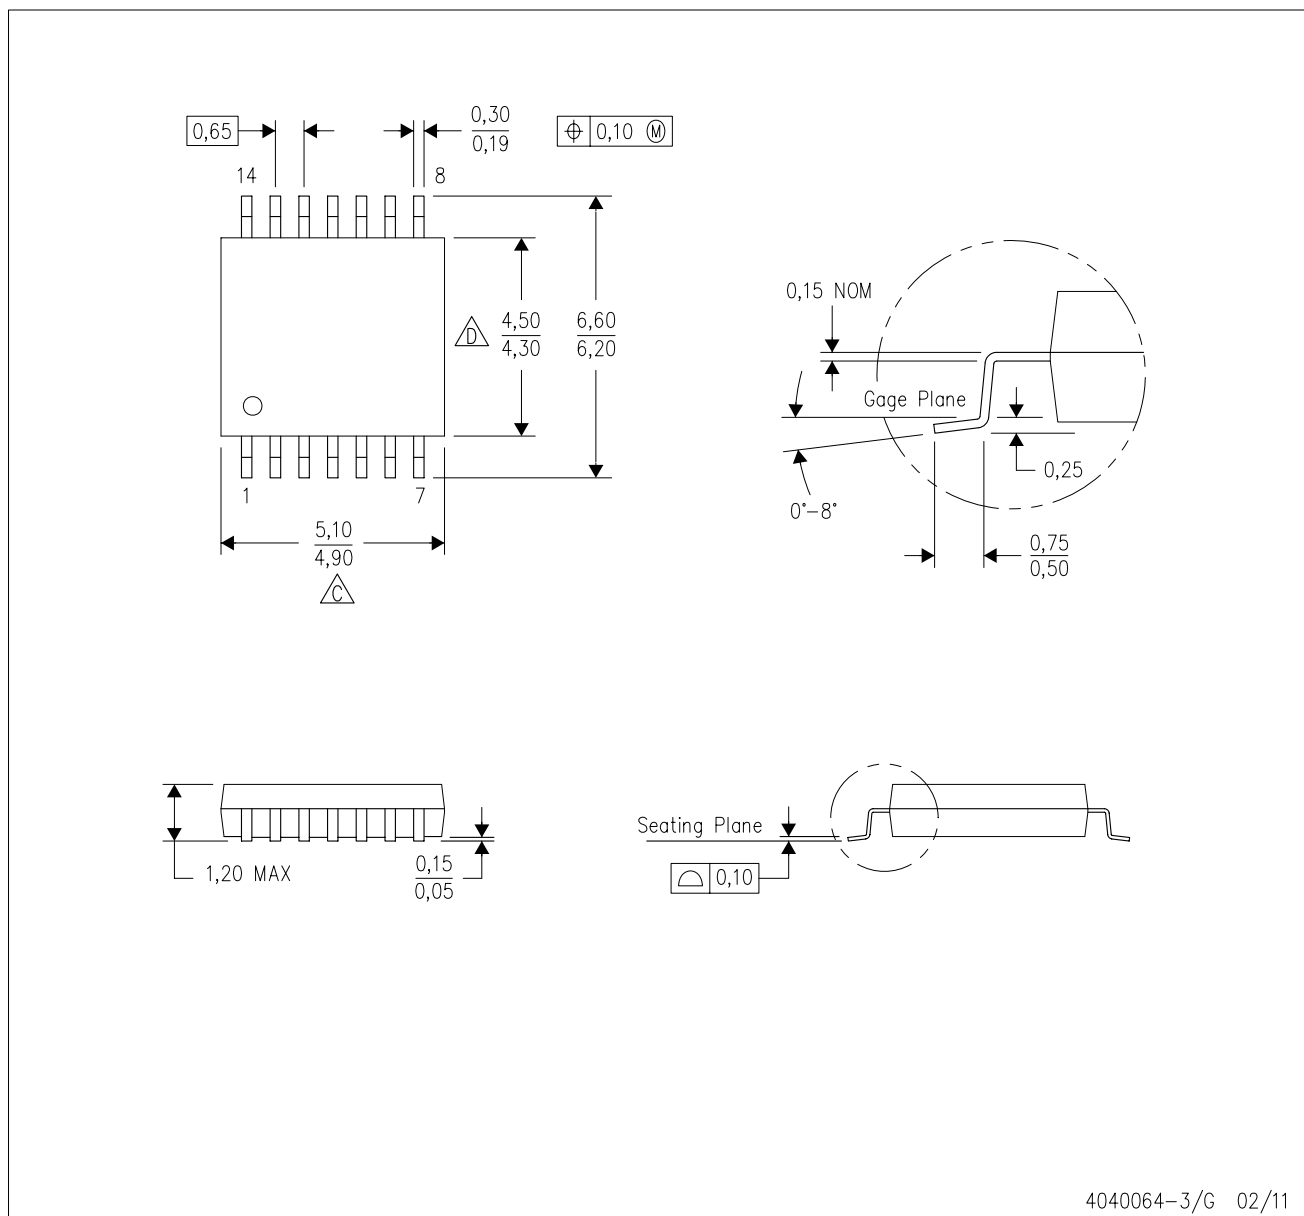


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

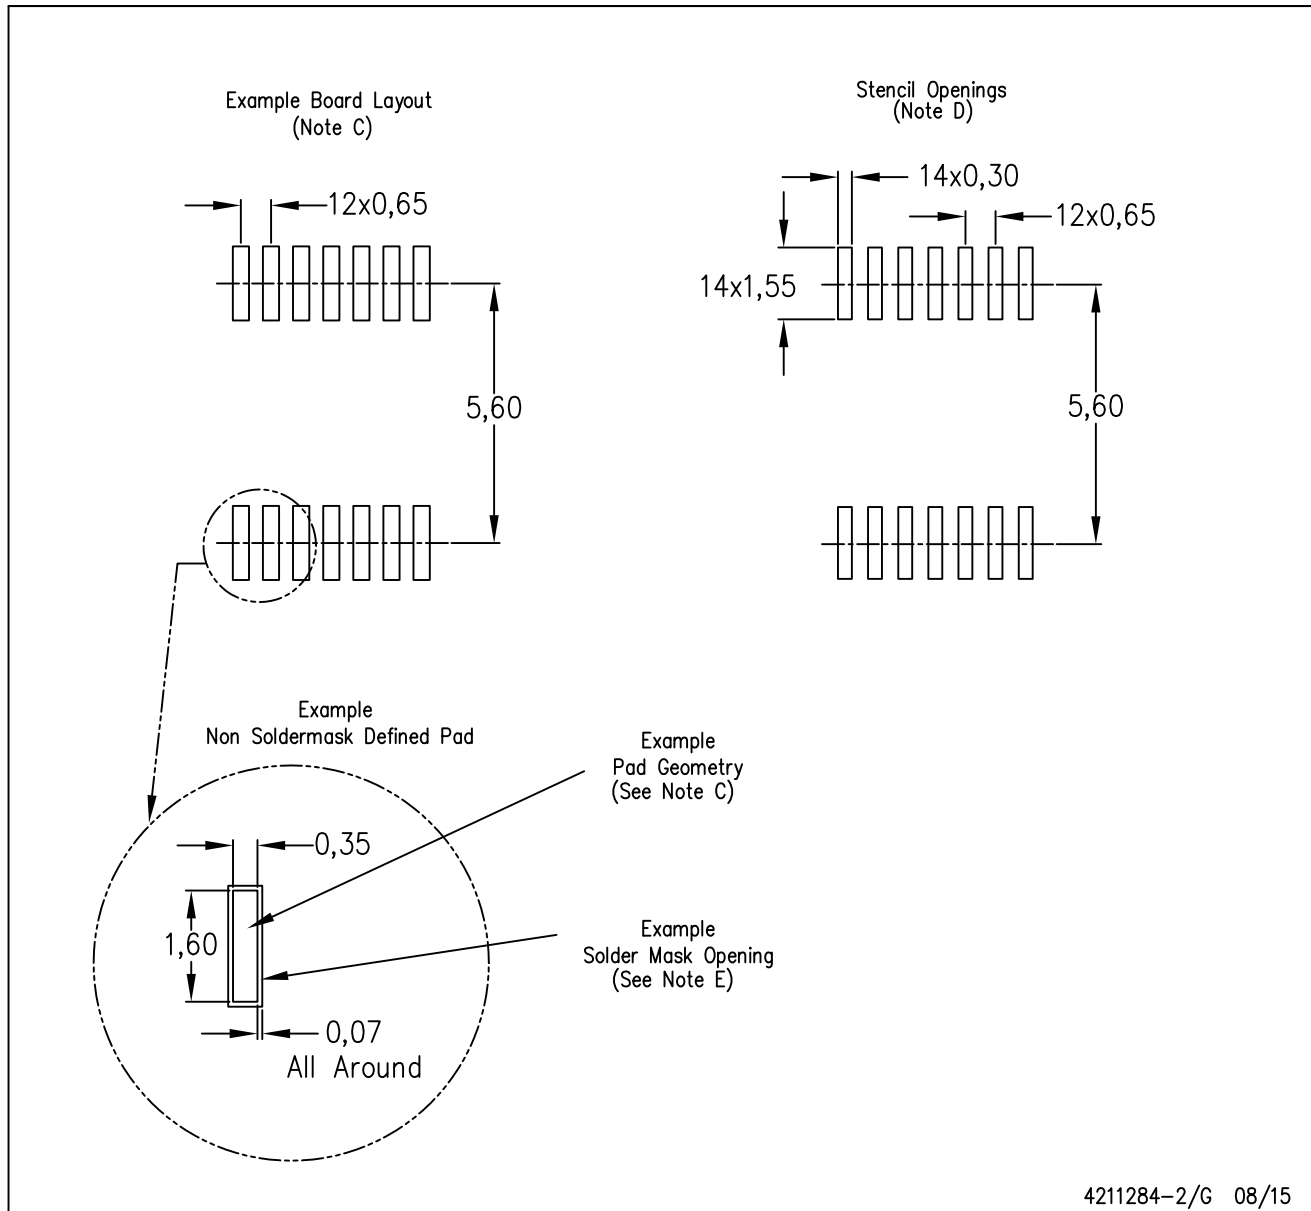

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

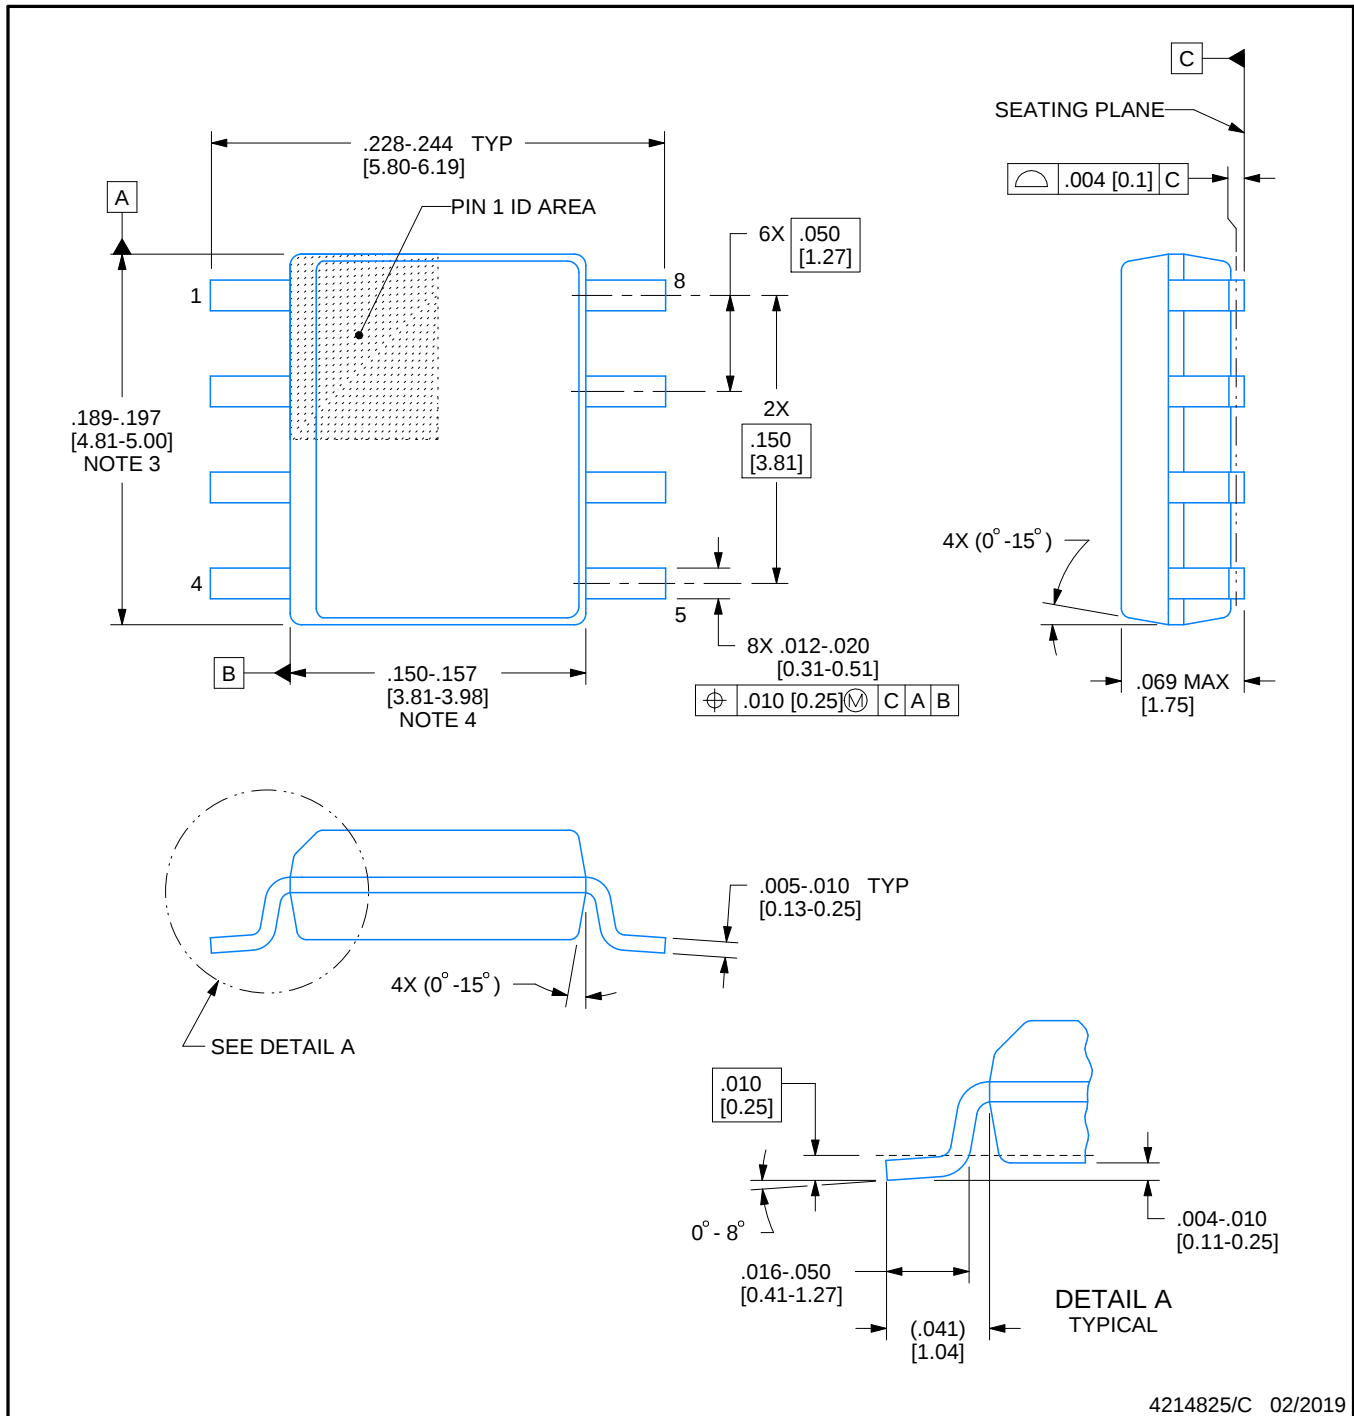

4214825/C 02/2019


## NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.


**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

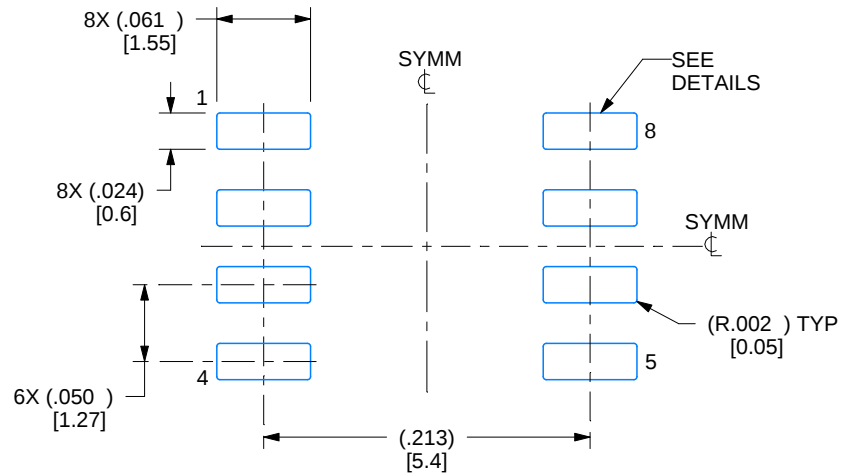

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

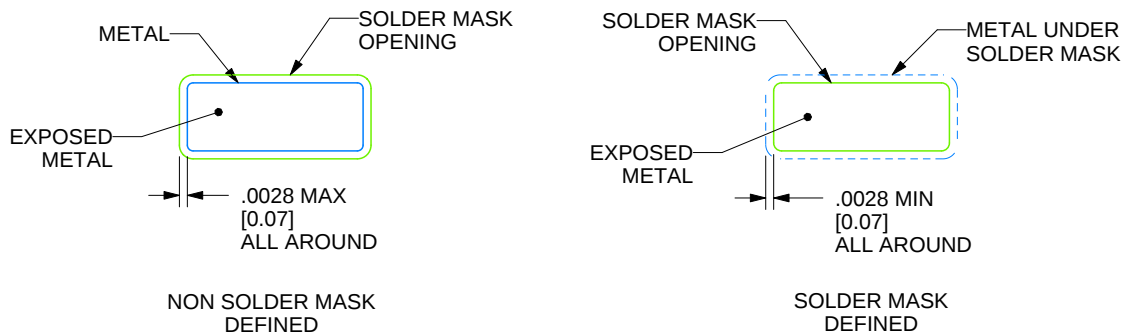

## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

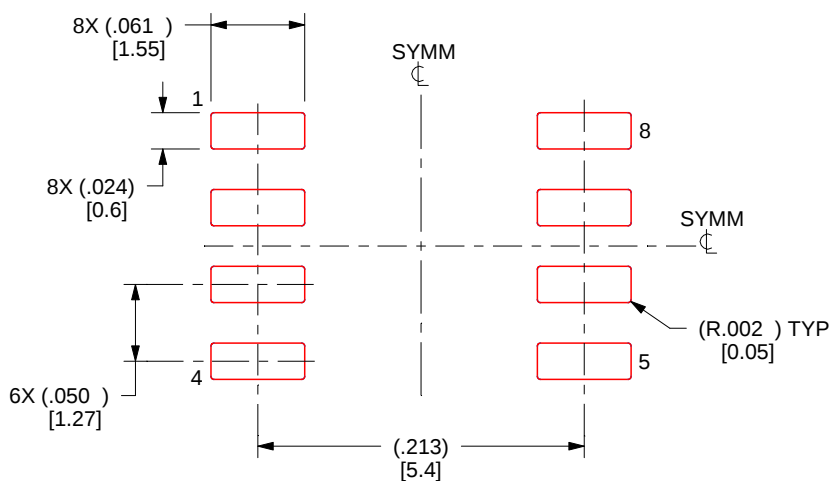

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X


4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

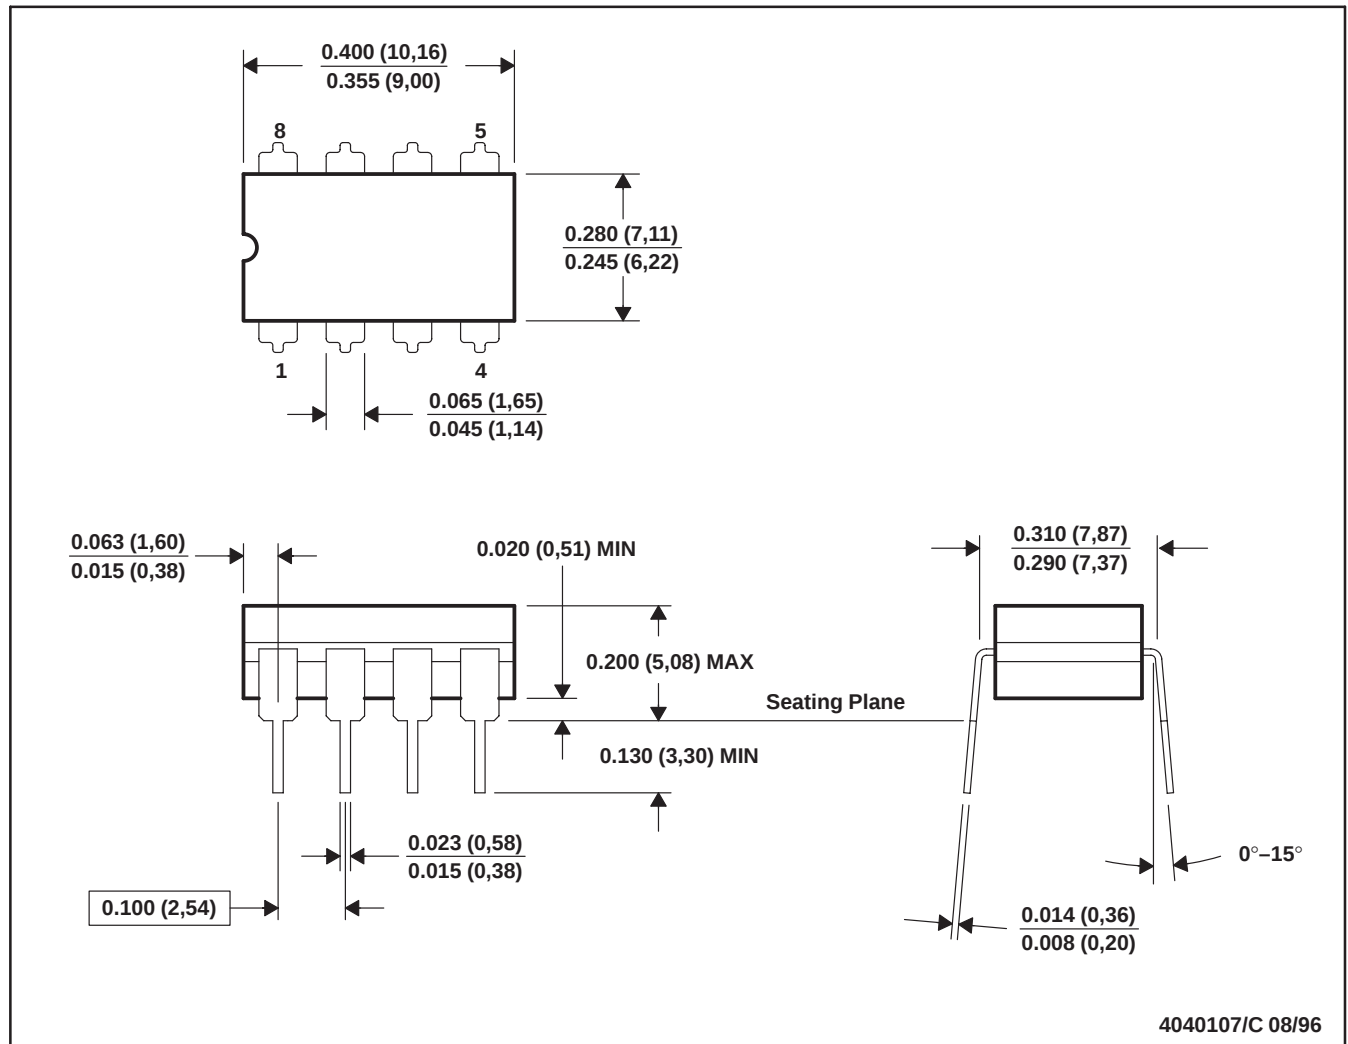

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8




PW0008A



# PACKAGE OUTLINE

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

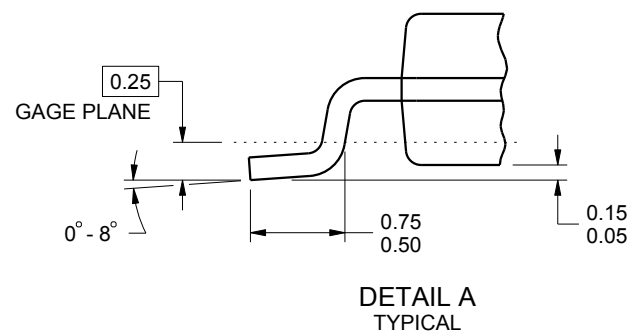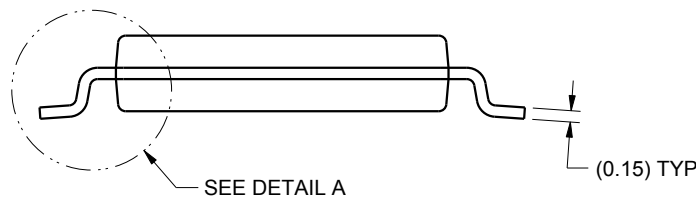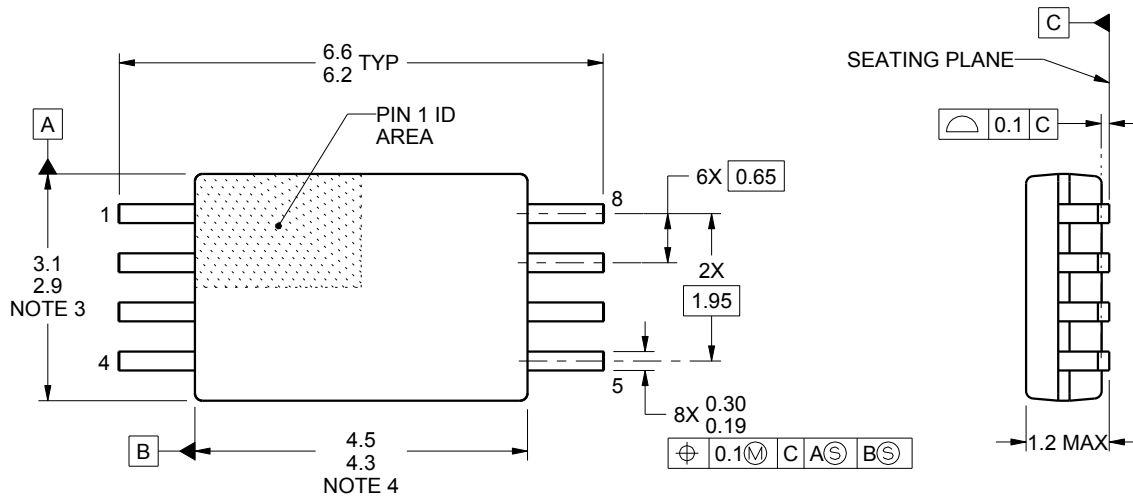

4221848/A 02/2015


### NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153, variation AA.


**PW0008A**

**TSSOP - 1.2 mm max height**

SMALL OUTLINE PACKAGE

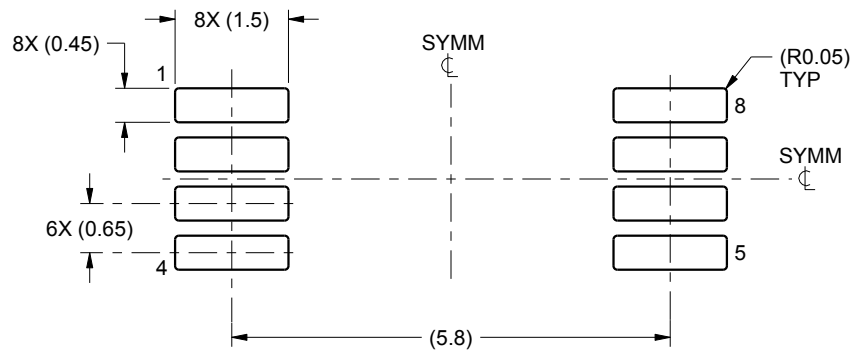

LAND PATTERN EXAMPLE  
SCALE:10X

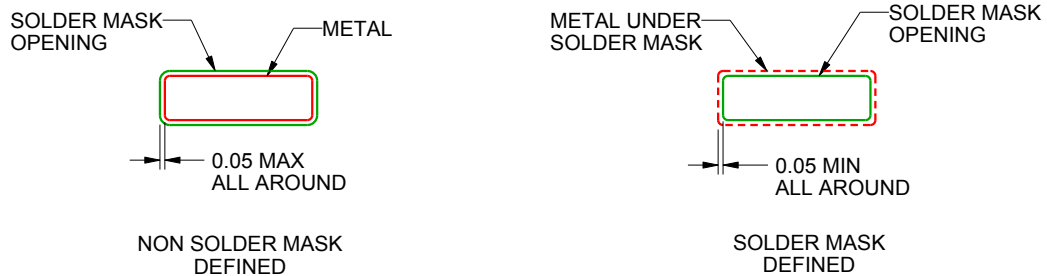

SOLDER MASK DETAILS  
NOT TO SCALE

4221848/A 02/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

PW0008A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

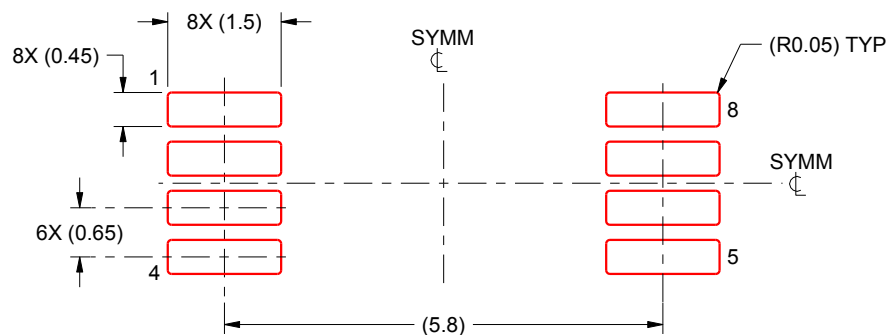

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:10X

4221848/A 02/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated