





# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

- **High Speed**
  - 180 MHz Bandwidth ( $G = 1$ ,  $-3$  dB)
  - 400 V/ $\mu$ s Slew Rate
  - 40-ns Settling Time (0.1%)
- **High Output Drive,  $I_O = 115$  mA (typ)**
- **Excellent Video Performance**
  - 75 MHz 0.1 dB Bandwidth ( $G = 1$ )
  - 0.02% Differential Gain
  - 0.02° Differential Phase
- **Very Low Distortion**
  - THD =  $-72$  dBc at  $f = 1$  MHz
- **Wide Range of Power Supplies**
  - $V_{CC} = \pm 5$  V to  $\pm 15$  V
- **Available in Standard SOIC, MSOP, PowerPAD™, JG, or FK Package**
- **Evaluation Module Available**

## description

The THS4061 and THS4062 are general-purpose, single/dual, high-speed voltage feedback amplifiers ideal for a wide range of applications including video, communication, and imaging. The devices offer very good ac performance with 180-MHz bandwidth, 400-V/ $\mu$ s slew rate, and 40-ns settling time (0.1%). The THS4061/2 are stable at all gains for both inverting and noninverting configurations. These amplifiers have a high output drive capability of 115 mA and draw only 7.8 mA supply current per channel. Excellent professional video results can be obtained with the low differential gain/phase errors of 0.02%/0.02° and wide 0.1 db flatness to 75 MHz. For applications requiring low distortion, the THS4061/2 is ideally suited with total harmonic distortion of  $-72$  dBc at  $f = 1$  MHz.

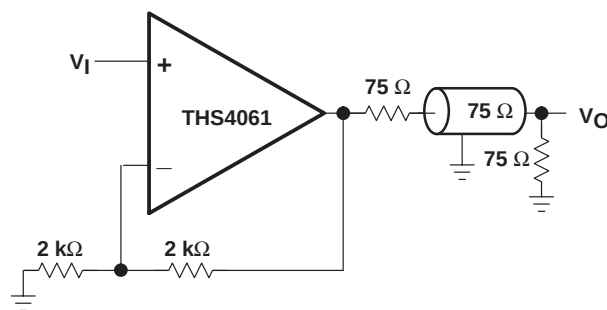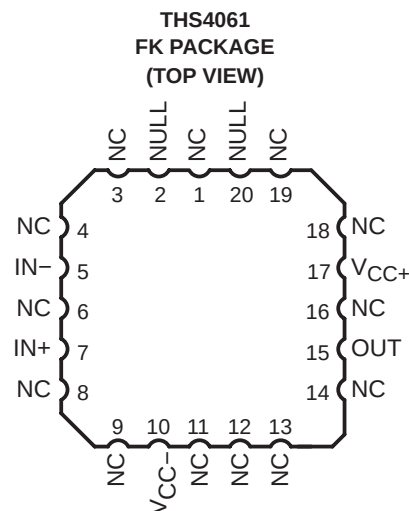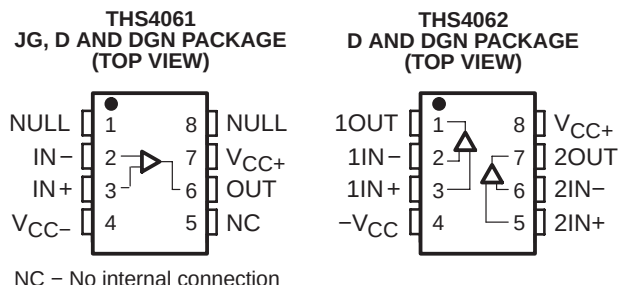

LINE DRIVER ( $G = 2$ )



**CAUTION:** The THS4061 and THS4062 provide ESD protection circuitry. However, permanent damage can still occur if this device is subjected to high-energy electrostatic discharges. Proper ESD precautions are recommended to avoid any performance degradation or loss of functionality.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998 – 2003, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

| RELATED DEVICES |                                              |
|-----------------|----------------------------------------------|
| DEVICE          | DESCRIPTION                                  |
| THS4011/2       | 290-MHz Low Distortion High-Speed Amplifiers |
| THS4031/2       | 100-MHz Low Noise High Speed-Amplifiers      |
| THS4061/2       | 180-MHz High-Speed Amplifiers                |

| AVAILABLE OPTIONS |                    |                            |                     |                  |                   |             |                    |
|-------------------|--------------------|----------------------------|---------------------|------------------|-------------------|-------------|--------------------|
| T <sub>A</sub>    | NUMBER OF CHANNELS | PACKAGED DEVICES           |                     |                  |                   | MSOP SYMBOL | EVALUATION MODULES |
|                   |                    | PLASTIC SMALL OUTLINE† (D) | PLASTIC MSOP† (DGN) | CERAMIC DIP (JG) | CHIP CARRIER (FK) |             |                    |
| 0°C to 70°C       | 1                  | THS4061CD                  | THS4061CDGN         | —                | —                 | TIABS       | THS4061EVM         |
|                   | 2                  | THS4062CD                  | THS4062CDGN         | —                | —                 | TIABM       | THS4062EVM         |
| –40°C to 85°C     | 1                  | THS4061ID                  | THS4061IDGN         | —                | —                 | TIABT       | —                  |
|                   | 2                  | THS4062ID                  | THS4062IDGN         | —                | —                 | TIABN       | —                  |
| –55°C to 125°C    | 1                  | —                          | —                   | THS4061MJG       | THS4061MFK        | —           | —                  |

† The D and DGN packages are available taped and reeled. Add an R suffix to the device type (i.e., THS4061CDGNR).

## functional block diagram

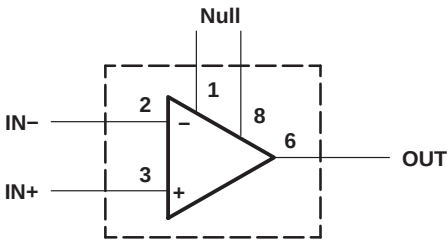


Figure 1. THS4061 – Single Channel

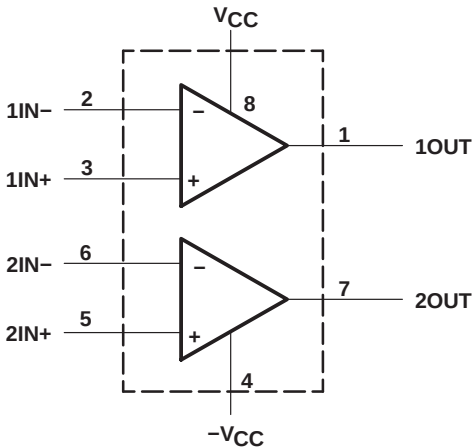


Figure 2. THS4062 – Dual Channel



# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

electrical characteristics at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = \pm 15\text{ V}$ ,  $R_L = 150\ \Omega$  (unless otherwise noted)

## dynamic performance

| PARAMETER |                                                    | TEST CONDITIONS†                                                    |           | THS4061C/I,<br>THS4062C/I |     |     | UNIT             |
|-----------|----------------------------------------------------|---------------------------------------------------------------------|-----------|---------------------------|-----|-----|------------------|
|           |                                                    |                                                                     |           | MIN                       | TYP | MAX |                  |
| BW        | Dynamic performance small-signal bandwidth (–3 dB) | $V_{CC} = \pm 5\text{ V}$                                           | Gain = 1  |                           | 180 |     | MHz              |
|           |                                                    | $V_{CC} = \pm 15\text{ V}$                                          | Gain = –1 |                           | 50  |     | MHz              |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |           |                           | 50  |     |                  |
|           | Bandwidth for 0.1 dB flatness                      | $V_{CC} = \pm 15\text{ V}$                                          | Gain = 1  |                           | 75  |     | MHz              |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |           |                           | 20  |     |                  |
| SR        | Slew rate                                          | $V_{CC} = \pm 15\text{ V}$                                          | Gain = –1 |                           | 400 |     | V/ $\mu\text{s}$ |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |           |                           | 350 |     |                  |
| $t_s$     | Settling time to 0.1%                              | $V_{CC} = \pm 15\text{ V}$ , 5-V step (0 V to 5 V)                  | Gain = –1 |                           | 40  |     | ns               |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$ , $V_O = -2.5\text{ V}$ to $2.5\text{ V}$ |           |                           | 40  |     |                  |
|           | Settling time to 0.01%                             | $V_{CC} = \pm 15\text{ V}$ , 5-V step (0 V to 5 V)                  | Gain = –1 |                           | 140 |     | ns               |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$ , $V_O = -2.5\text{ V}$ to $2.5\text{ V}$ |           |                           | 150 |     |                  |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix

## noise/distortion performance

| PARAMETER |                                             | TEST CONDITIONS†                                                     |                            | THS4061C/I,<br>THS4062C/I |       |     | UNIT                         |
|-----------|---------------------------------------------|----------------------------------------------------------------------|----------------------------|---------------------------|-------|-----|------------------------------|
|           |                                             |                                                                      |                            | MIN                       | TYP   | MAX |                              |
| THD       | Total harmonic distortion                   | $f = 1\text{ MHz}$                                                   |                            |                           | –72   |     | dBc                          |
| $V_n$     | Input voltage noise                         | $f = 10\text{ kHz}$ , $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ |                            |                           | 14.5  |     | $\text{nV}/\sqrt{\text{Hz}}$ |
| $I_n$     | Input current noise                         | $f = 10\text{ kHz}$ , $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ |                            |                           | 1.6   |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|           | Differential gain error                     | Gain = 2, NTSC, 40 IRE modulation                                    | $V_{CC} = \pm 15\text{ V}$ |                           | 0.02  |     | %                            |
|           |                                             |                                                                      | $V_{CC} = \pm 5\text{ V}$  |                           | 0.02  |     | %                            |
|           | Differential phase error                    | Gain = 2, NTSC, 40 IRE modulation                                    | $V_{CC} = \pm 15\text{ V}$ |                           | 0.02° |     |                              |
|           |                                             |                                                                      | $V_{CC} = \pm 5\text{ V}$  |                           | 0.06° |     |                              |
|           | Channel-to-channel crosstalk (THS4062 only) | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $f = 1\text{ MHz}$  |                            |                           | 65    |     | dB                           |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix

## dc performance

| PARAMETER      |                      | TEST CONDITIONS†                                                                |                           | THS4061C/I,<br>THS4062C/I |     |     | UNIT                         |
|----------------|----------------------|---------------------------------------------------------------------------------|---------------------------|---------------------------|-----|-----|------------------------------|
|                |                      |                                                                                 |                           | MIN                       | TYP | MAX |                              |
| Open loop gain |                      | $V_{CC} = \pm 15\text{ V}$ , $V_O = \pm 10\text{ V}$ , $R_L = 1\text{ k}\Omega$ | $T_A = 25^\circ\text{C}$  | 5                         | 15  |     | V/mV                         |
|                |                      |                                                                                 | $T_A = \text{full range}$ | 4                         |     |     |                              |
|                |                      | $V_{CC} = \pm 5\text{ V}$ , $V_O = \pm 2.5\text{ V}$ , $R_L = 1\text{ k}\Omega$ | $T_A = 25^\circ\text{C}$  | 2.5                       | 8   |     | V/mV                         |
|                |                      |                                                                                 | $T_A = \text{full range}$ | 2                         |     |     |                              |
| $V_{OS}$       | Input offset voltage | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$                                  | $T_A = \text{full range}$ |                           | 2.5 | 8   | mV                           |
|                | Offset drift         | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$                                  |                           |                           | 15  |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IB}$       | Input bias current   | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$                                  | $T_A = \text{full range}$ |                           | 3   | 6   | $\mu\text{A}$                |
| $I_{OS}$       | Input offset current | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$                                  | $T_A = \text{full range}$ |                           | 75  | 250 | nA                           |
|                | Offset current drift | $T_A = \text{full range}$                                                       |                           |                           | 0.3 |     | $\text{nA}/^\circ\text{C}$   |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

electrical characteristics at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = \pm 15\text{ V}$ ,  $R_L = 150\ \Omega$  (unless otherwise noted) (continued)

**input characteristics**

| PARAMETER                                 | TEST CONDITIONS†                                         | THS4061C/I,<br>THS4062C/I |            |     | UNIT       |
|-------------------------------------------|----------------------------------------------------------|---------------------------|------------|-----|------------|
|                                           |                                                          | MIN                       | TYP        | MAX |            |
| $V_{ICR}$ Common-mode input voltage range | $V_{CC} = \pm 15\text{ V}$                               | $\pm 13.8$                | $\pm 14.1$ |     | V          |
|                                           | $V_{CC} = \pm 5\text{ V}$                                | $\pm 3.8$                 | $\pm 4.3$  |     |            |
| CMRR Common mode rejection ratio          | $V_{CC} = \pm 15\text{ V}$ , $V_{ICR} = \pm 12\text{ V}$ | 70                        | 110        |     | dB         |
|                                           | $V_{CC} = \pm 5\text{ V}$ , $V_{ICR} = \pm 2.5\text{ V}$ | 70                        | 95         |     |            |
| $R_i$ Input resistance                    |                                                          |                           | 1          |     | M $\Omega$ |
| $C_i$ Input capacitance                   |                                                          |                           | 2          |     | pF         |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix

**output characteristics**

| PARAMETER                      | TEST CONDITIONS†                                      | THS4061C/I,<br>THS4062C/I |            |     | UNIT     |
|--------------------------------|-------------------------------------------------------|---------------------------|------------|-----|----------|
|                                |                                                       | MIN                       | TYP        | MAX |          |
| $V_O$ Output voltage swing     | $V_{CC} = \pm 15\text{ V}$ , $R_L = 250\ \Omega$      | $\pm 11.5$                | $\pm 12.5$ |     | V        |
|                                | $V_{CC} = \pm 5\text{ V}$ , $R_L = 150\ \Omega$       | $\pm 3.2$                 | $\pm 3.5$  |     |          |
|                                | $V_{CC} = \pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$ | $\pm 13$                  | $\pm 13.5$ |     | V        |
|                                | $V_{CC} = \pm 5\text{ V}$ , $R_L = 1\text{ k}\Omega$  | $\pm 3.5$                 | $\pm 3.7$  |     |          |
| $I_O$ Output current           | $V_{CC} = \pm 15\text{ V}$ , $R_L = 20\ \Omega$       | 80                        | 115        |     | mA       |
|                                | $V_{CC} = \pm 5\text{ V}$ , $R_L = 20\ \Omega$        | 50                        | 75         |     |          |
| $I_{SC}$ Short-circuit current | $V_{CC} = \pm 15\text{ V}$                            |                           | 150        |     | mA       |
| $R_O$ Output resistance        | Open loop                                             |                           | 12         |     | $\Omega$ |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix

**power supply**

| PARAMETER                                  | TEST CONDITIONS†                                                           | THS4061C/I,<br>THS4062C/I |     |            | UNIT |
|--------------------------------------------|----------------------------------------------------------------------------|---------------------------|-----|------------|------|
|                                            |                                                                            | MIN                       | TYP | MAX        |      |
| $V_{CC}$ Supply voltage operating range    | Dual supply                                                                | $\pm 4.5$                 |     | $\pm 16.5$ | V    |
|                                            | Single supply                                                              | 9                         |     | 33         |      |
| $I_{CC}$ Quiescent current (per amplifier) | $V_{CC} = \pm 15\text{ V}$ , $T_A = \text{full range}$                     |                           | 7.8 | 10.5       | mA   |
|                                            | $V_{CC} = \pm 5\text{ V}$ , $T_A = \text{full range}$                      |                           | 7.3 | 10         |      |
| PSRR Power supply rejection ratio          | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $T_A = 25^\circ\text{C}$  | 70                        | 78  |            | dB   |
|                                            | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $T_A = \text{full range}$ | 68                        |     |            |      |

† Full range =  $0^\circ\text{C}$  to  $70^\circ\text{C}$  for C suffix and  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  for I suffix

# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

electrical characteristics at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = \pm 15\text{ V}$ ,  $R_L = 150\ \Omega$  (unless otherwise noted)

## dynamic performance

| PARAMETER |                                                    | TEST CONDITIONS†                                                    |                            | THS4061M |     |     | UNIT             |
|-----------|----------------------------------------------------|---------------------------------------------------------------------|----------------------------|----------|-----|-----|------------------|
|           |                                                    |                                                                     |                            | MIN      | TYP | MAX |                  |
| BW        | Unity-gain bandwidth                               | Closed loop, $R_L = 1\text{ k}\Omega$                               | $V_{CC} = \pm 15\text{ V}$ | *140     | 180 |     | MHz              |
|           | Dynamic performance small-signal bandwidth (–3 dB) | $V_{CC} = \pm 15\text{ V}$                                          | Gain = 1                   |          | 180 |     | MHz              |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |                            |          | 180 |     |                  |
|           |                                                    | $V_{CC} = \pm 15\text{ V}$                                          | Gain = –1                  |          | 50  |     | MHz              |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |                            |          | 50  |     |                  |
|           | Bandwidth for 0.1 dB flatness                      | $V_{CC} = \pm 15\text{ V}$                                          | Gain = 1                   |          | 75  |     | MHz              |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$                                           |                            |          | 20  |     |                  |
| SR        | Slew rate                                          | $V_{CC} = \pm 15\text{ V}$                                          | $R_L = 1\text{ k}\Omega$   | *400     | 500 |     | V/ $\mu\text{s}$ |
| $t_s$     | Settling time to 0.1%                              | $V_{CC} = \pm 15\text{ V}$ , 5-V step (0 V to 5 V)                  | Gain = –1                  |          | 40  |     | ns               |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$ , $V_O = -2.5\text{ V}$ to $2.5\text{ V}$ |                            |          | 40  |     |                  |
|           | Settling time to 0.01%                             | $V_{CC} = \pm 15\text{ V}$ , 5-V step (0 V to 5 V)                  | Gain = –1                  |          | 140 |     | ns               |
|           |                                                    | $V_{CC} = \pm 5\text{ V}$ , $V_O = -2.5\text{ V}$ to $2.5\text{ V}$ |                            |          | 150 |     |                  |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix

\*This parameter is not tested.

## noise/distortion performance

| PARAMETER                |                           | TEST CONDITIONS†                                                     |                            | THS4061M |       |     | UNIT                         |
|--------------------------|---------------------------|----------------------------------------------------------------------|----------------------------|----------|-------|-----|------------------------------|
|                          |                           |                                                                      |                            | MIN      | TYP   | MAX |                              |
| THD                      | Total harmonic distortion | $f = 1\text{ MHz}$                                                   |                            |          | –72   |     | dBc                          |
| $V_n$                    | Input voltage noise       | $f = 10\text{ kHz}$ , $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ |                            |          | 14.5  |     | $\text{nV}/\sqrt{\text{Hz}}$ |
| $I_n$                    | Input current noise       | $f = 10\text{ kHz}$ , $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ |                            |          | 1.6   |     | $\text{pA}/\sqrt{\text{Hz}}$ |
| Differential gain error  |                           | Gain = 2, NTSC, 40 IRE Modulation                                    | $V_{CC} = \pm 15\text{ V}$ |          | 0.02  |     | %                            |
|                          |                           |                                                                      | $V_{CC} = \pm 5\text{ V}$  |          | 0.02  |     |                              |
| Differential phase error |                           | Gain = 2, NTSC, 40 IRE Modulation                                    | $V_{CC} = \pm 15\text{ V}$ |          | 0.02° |     |                              |
|                          |                           |                                                                      | $V_{CC} = \pm 5\text{ V}$  |          | 0.06° |     |                              |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix

## dc performance

| PARAMETER            |                      | TEST CONDITIONS†                                                                |                           | THS4061M |     |     | UNIT                         |
|----------------------|----------------------|---------------------------------------------------------------------------------|---------------------------|----------|-----|-----|------------------------------|
|                      |                      |                                                                                 |                           | MIN      | TYP | MAX |                              |
| Open loop gain       |                      | $V_{CC} = \pm 15\text{ V}$ , $V_O = \pm 10\text{ V}$ , $R_L = 1\text{ k}\Omega$ | $T_A = \text{full range}$ | 5        | 9   |     | V/mV                         |
|                      |                      | $V_{CC} = \pm 5\text{ V}$ , $V_O = \pm 2.5\text{ V}$ , $R_L = 1\text{ k}\Omega$ |                           | 2.5      | 6   |     |                              |
| $V_{IO}$             | Input offset voltage | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$       | $T_A = 25^\circ\text{C}$  |          | 2.5 | 8   | mV                           |
|                      |                      |                                                                                 | $T_A = \text{full range}$ |          |     | 9   | mV                           |
|                      | Offset drift         | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$       | $T_A = \text{full range}$ |          | 15  |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IB}$             | Input bias current   | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$       | $T_A = \text{full range}$ |          | 3   | 6   | $\mu\text{A}$                |
| $I_{IO}$             | Input offset current | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$       | $T_A = \text{full range}$ |          | 75  | 250 | nA                           |
| Offset current drift |                      | $V_{CC} = \pm 5\text{ V}$ or $\pm 15\text{ V}$ , $R_L = 1\text{ k}\Omega$       | $T_A = \text{full range}$ |          | 0.3 |     | $\text{nA}/^\circ\text{C}$   |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix



electrical characteristics at  $T_A$  = full range,  $V_{CC} = \pm 15$  V,  $R_L = 1$  k $\Omega$  (unless otherwise noted)  
(continued)

**input characteristics**

| PARAMETER                                 | TEST CONDITIONS†                          | THS4061M   |            |     | UNIT       |
|-------------------------------------------|-------------------------------------------|------------|------------|-----|------------|
|                                           |                                           | MIN        | TYP        | MAX |            |
| $V_{ICR}$ Common-mode input voltage range | $V_{CC} = \pm 15$ V                       | $\pm 13.8$ | $\pm 14.1$ |     | V          |
|                                           | $V_{CC} = \pm 5$ V                        | $\pm 3.8$  | $\pm 4.3$  |     |            |
| CMRR Common mode rejection ratio          | $V_{CC} = \pm 15$ V, $V_{ICR} = \pm 12$ V | 70         | 86         |     | dB         |
|                                           | $V_{CC} = \pm 5$ V, $V_{ICR} = \pm 2.5$ V | 80         | 90         |     |            |
| $R_i$ Input resistance                    |                                           |            | 1          |     | M $\Omega$ |
| $C_i$ Input capacitance                   |                                           |            | 2          |     | pF         |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix

**output characteristics**

| PARAMETER                      | TEST CONDITIONS†    |                          | THS4061M  |            |     | UNIT     |
|--------------------------------|---------------------|--------------------------|-----------|------------|-----|----------|
|                                |                     |                          | MIN       | TYP        | MAX |          |
| $V_O$ Output voltage swing     | $V_{CC} = \pm 15$ V | $R_L = 250$ $\Omega$     | $\pm 12$  | $\pm 13.1$ |     | V        |
|                                | $V_{CC} = \pm 5$ V  | $R_L = 150$ $\Omega$     | $\pm 3.2$ | $\pm 3.5$  |     |          |
|                                | $V_{CC} = \pm 15$ V | $R_L = 1$ k $\Omega$     | $\pm 13$  | $\pm 13.5$ |     | V        |
|                                | $V_{CC} = \pm 5$ V  |                          | $\pm 3.5$ | $\pm 3.7$  |     |          |
| $I_O$ Output current           | $V_{CC} = \pm 15$ V | $R_L = 20$ $\Omega$      | 70        | 115        |     | mA       |
|                                | $V_{CC} = \pm 5$ V  |                          | 50        | 75         |     |          |
| $I_{SC}$ Short-circuit current | $V_{CC} = \pm 15$ V | $T_A = 25^\circ\text{C}$ |           | 150        |     | mA       |
| $R_O$ Output resistance        | Open loop           |                          |           | 12         |     | $\Omega$ |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix

**power supply**

| PARAMETER       |                                | TEST CONDITIONS†                |                             | THS4061M                    |     |       | UNIT |
|-----------------|--------------------------------|---------------------------------|-----------------------------|-----------------------------|-----|-------|------|
|                 |                                |                                 |                             | MIN                         | TYP | MAX   |      |
| V <sub>CC</sub> | Supply voltage operating range | Dual supply                     |                             | ±4.5                        |     | ±16.5 | V    |
|                 |                                | Single supply                   |                             | 9                           |     | 33    |      |
| I <sub>CC</sub> | Quiescent current              | V <sub>CC</sub> = ±15 V         | T <sub>A</sub> = 25°C       |                             | 7.8 | 9     | mA   |
|                 |                                | V <sub>CC</sub> = ±5 V          |                             |                             | 7.3 | 8.5   |      |
|                 |                                | V <sub>CC</sub> = ±15 V         | T <sub>A</sub> = full range |                             |     | 11    |      |
|                 |                                | V <sub>CC</sub> = ±5 V          |                             |                             |     | 10.5  |      |
| PSRR            | Power supply rejection ratio   | V <sub>CC</sub> = ±5 V or ±15 V |                             | T <sub>A</sub> = 25°C       | 76  | 80    | dB   |
|                 |                                |                                 |                             | T <sub>A</sub> = full range | 74  | 78    |      |

† Full range =  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix

# THS4061, THS4062

## 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

### TYPICAL CHARACTERISTICS


|             |                              |                         | FIGURE |
|-------------|------------------------------|-------------------------|--------|
| $I_{IB}$    | Input bias current           | vs Free-air temperature | 3      |
| $V_{IO}$    | Input offset voltage         | vs Free-air temperature | 4      |
|             | Open-loop gain               | vs Frequency            | 5      |
|             | Phase                        | vs Frequency            | 5      |
|             | Differential gain            | vs Number of loads      | 6, 8   |
|             | Differential phase           | vs Number of loads      | 7, 9   |
|             | Closed-loop gain             | vs Frequency            | 10, 11 |
|             | Output amplitude             | vs Frequency            | 12, 13 |
| CMRR        | Common-mode rejection ratio  | vs Frequency            | 14     |
| PSRR        | Power supply rejection ratio | vs Frequency            | 15     |
|             |                              | vs Free-air temperature | 16     |
| $V_{O(PP)}$ | Output voltage swing         | vs Supply voltage       | 17     |
| $I_{CC}$    | Supply current               | vs Free-air temperature | 18     |
| $E_{nv}$    | Noise spectral density       | vs Frequency            | 19     |
| THD         | Total harmonic distortion    | vs Frequency            | 20, 21 |
|             | Crosstalk                    | vs Frequency            | 22, 23 |




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265




**TYPICAL CHARACTERISTICS**

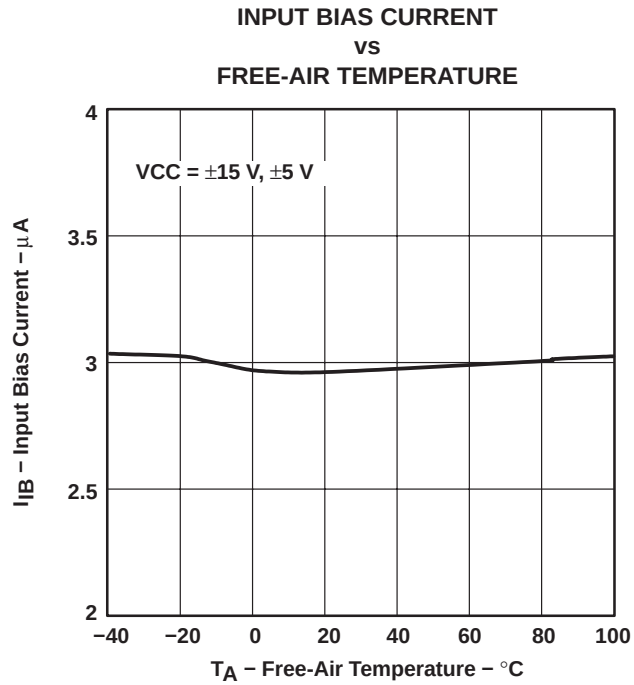

**Figure 3**

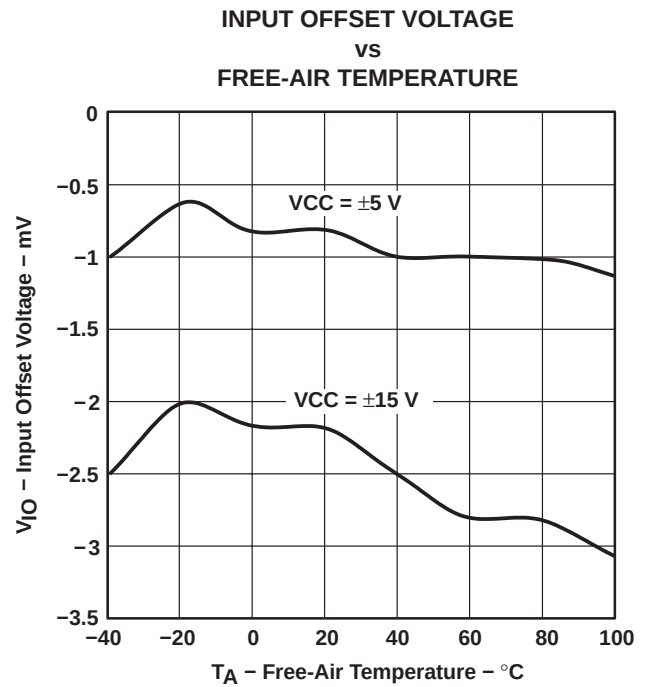

**Figure 4**

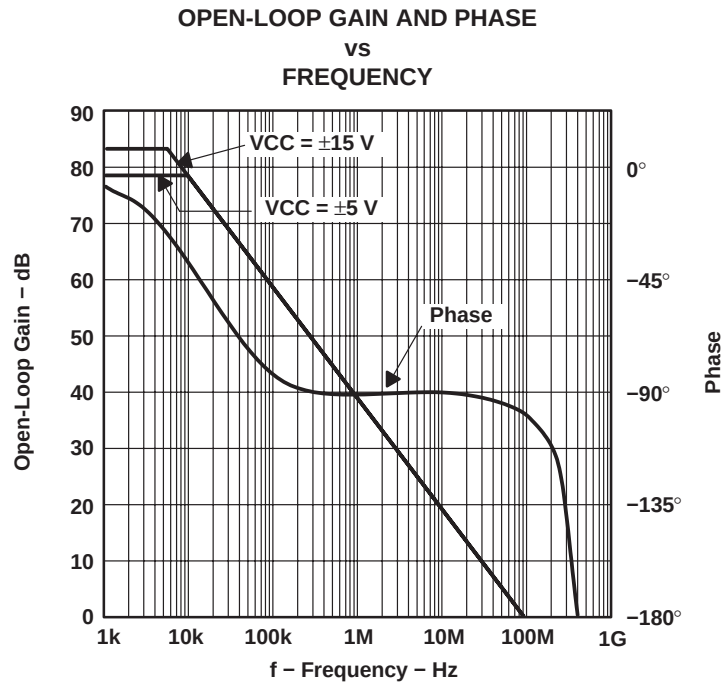

**Figure 5**

# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

## TYPICAL CHARACTERISTICS

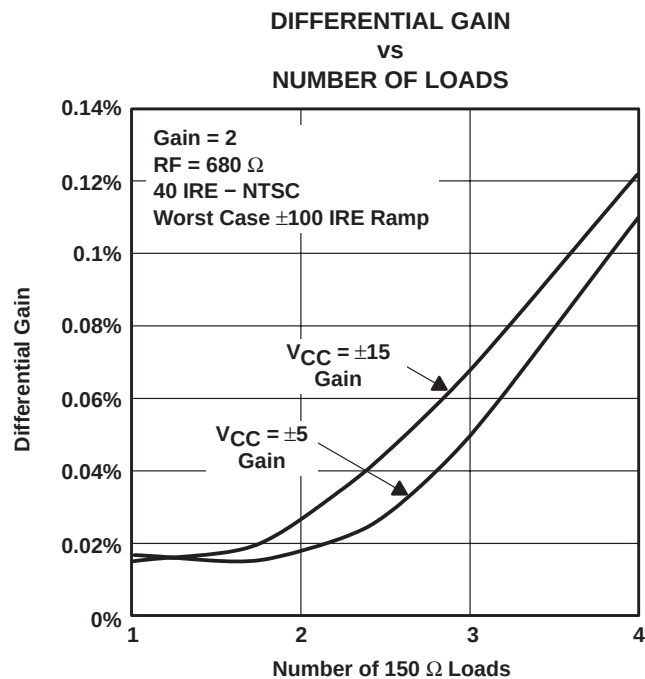


Figure 6

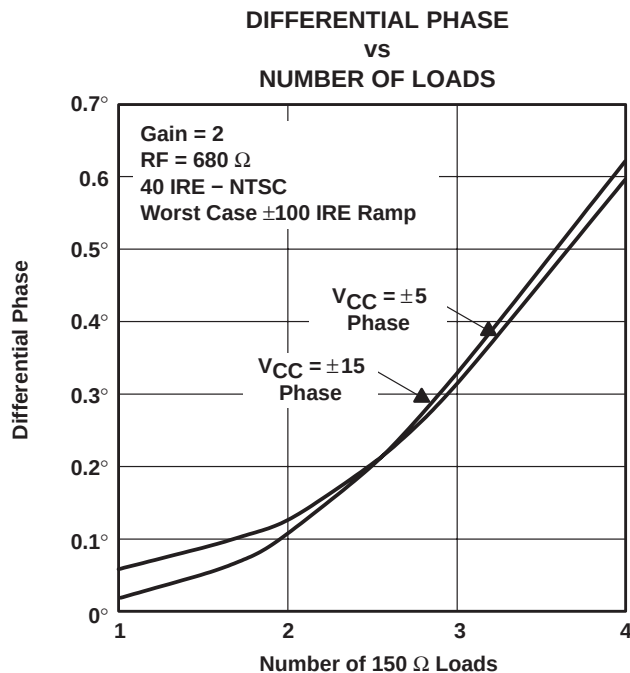


Figure 7

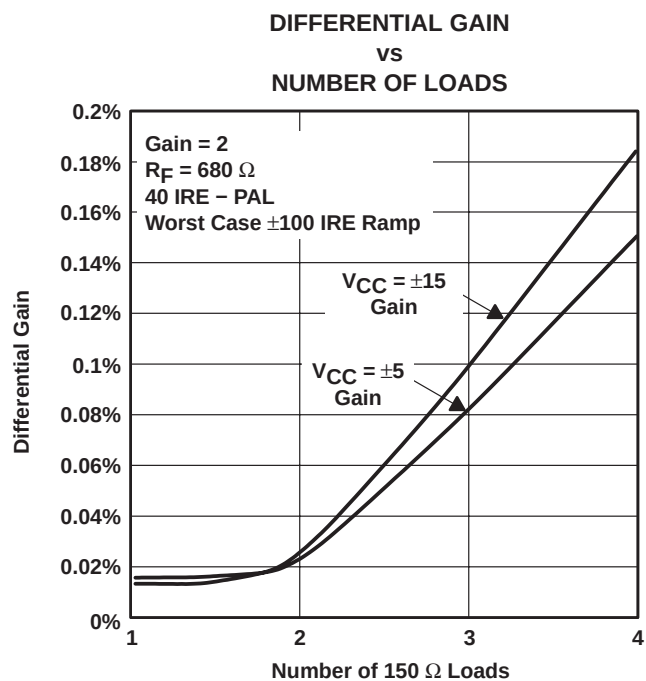


Figure 8



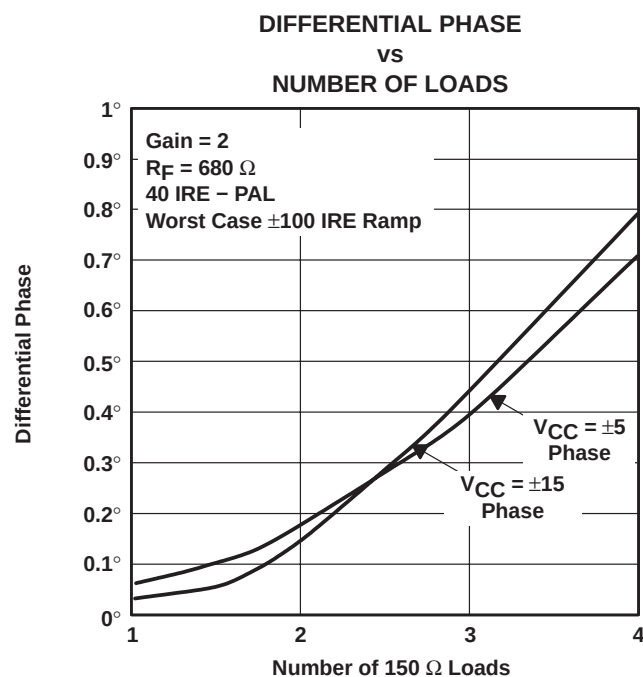


Figure 9


**TYPICAL CHARACTERISTICS**

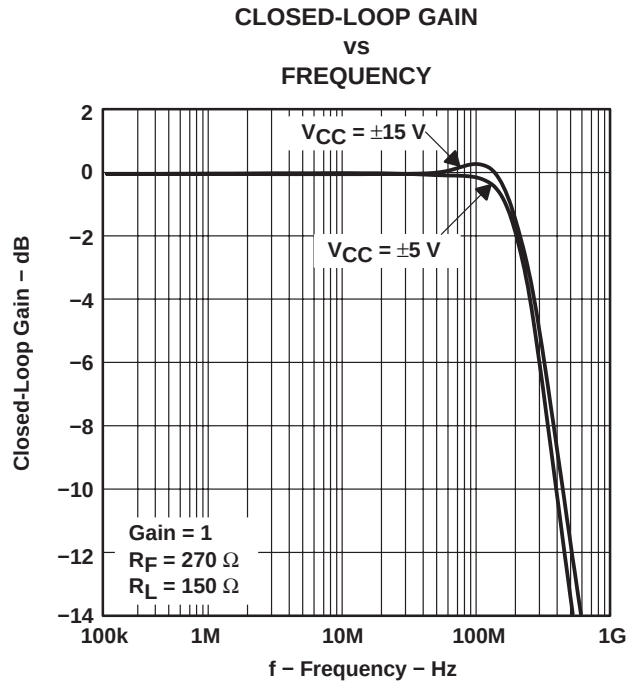


**Figure 10**

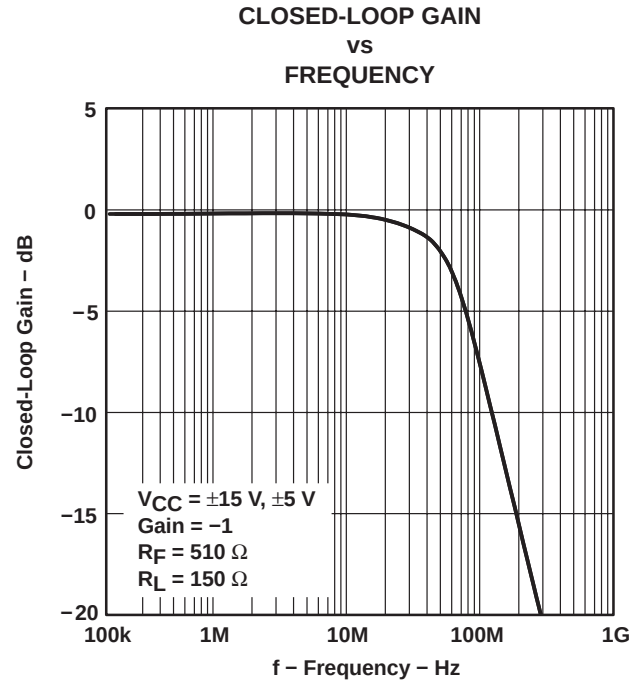

**Figure 11**

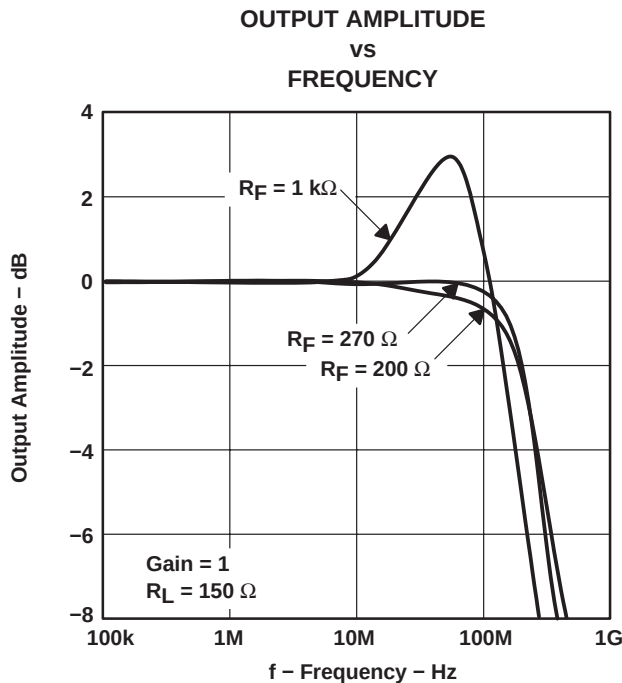

**Figure 12**

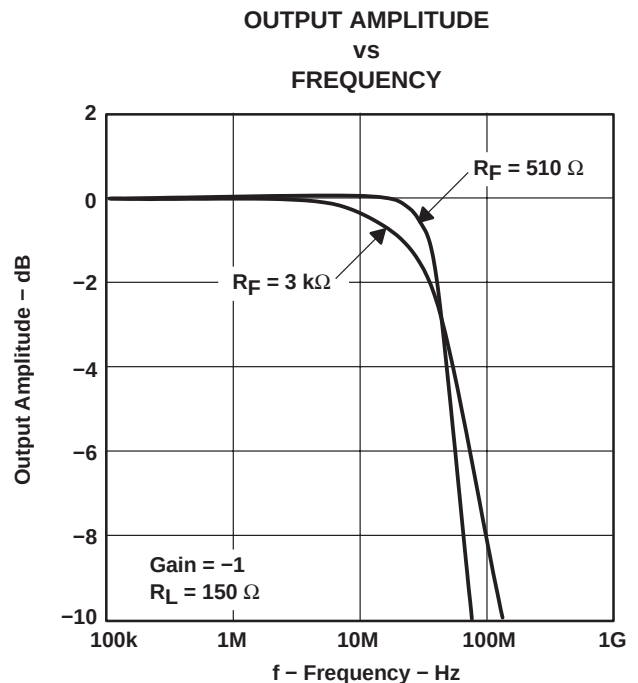

**Figure 13**

# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

## TYPICAL CHARACTERISTICS

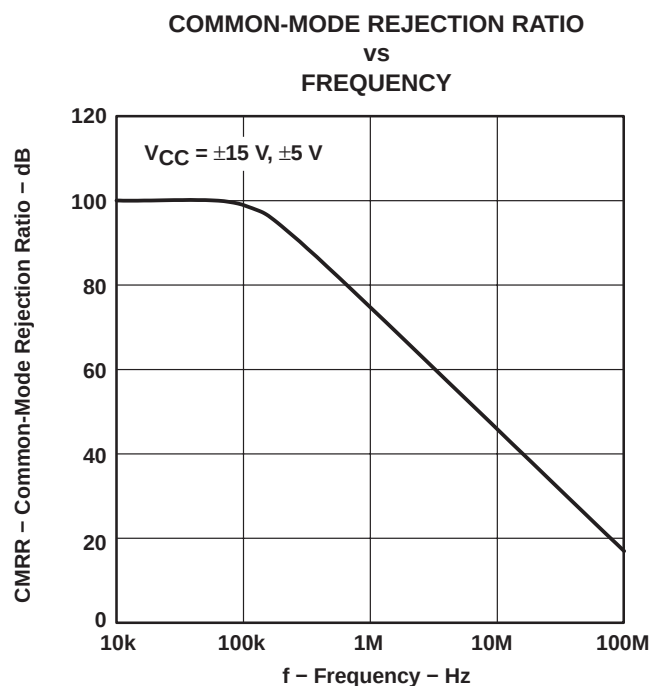


Figure 14

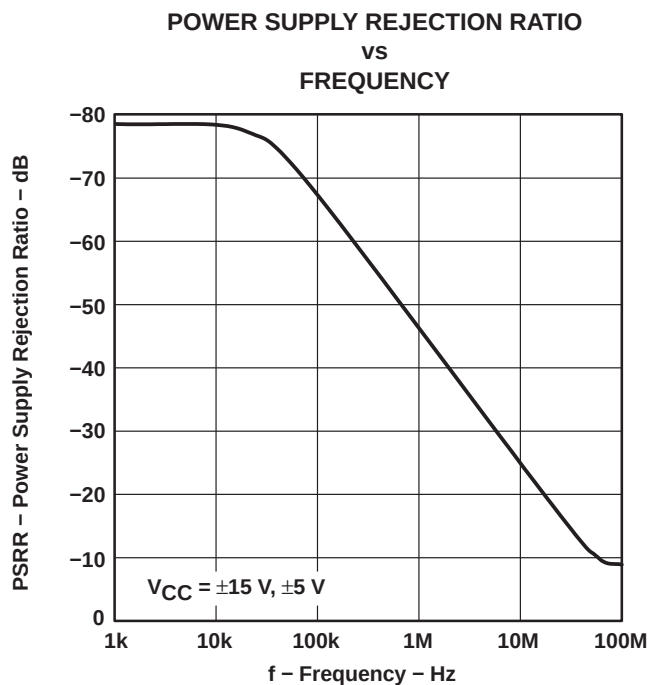


Figure 15

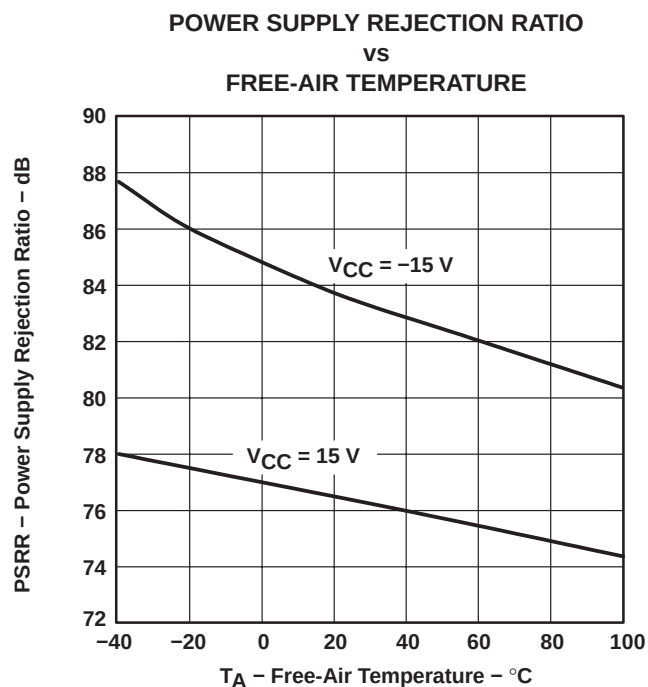


Figure 16



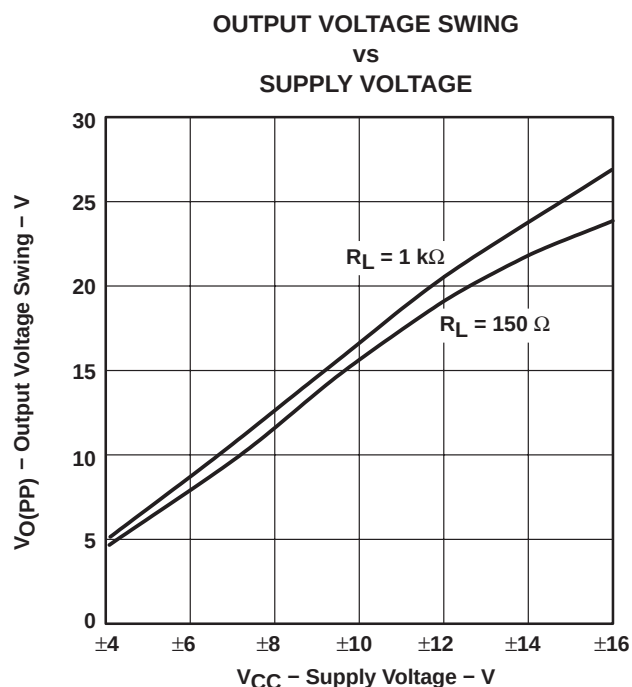


Figure 17


**TYPICAL CHARACTERISTICS**

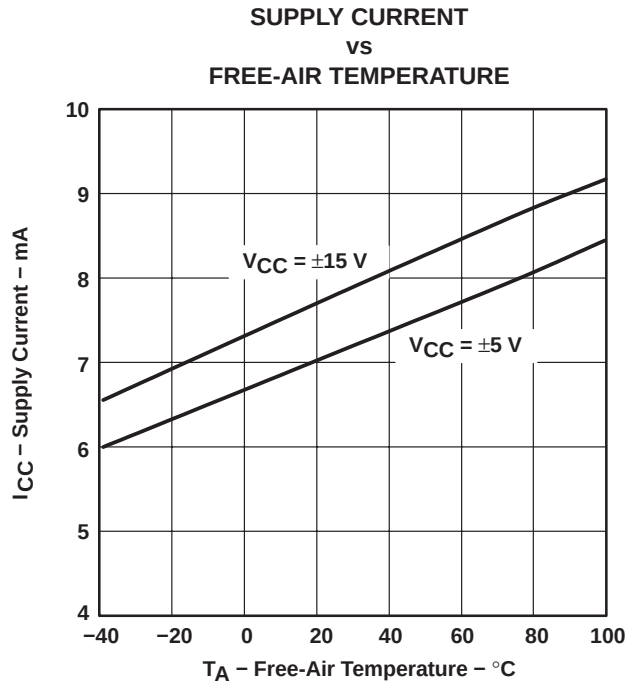


**Figure 18**

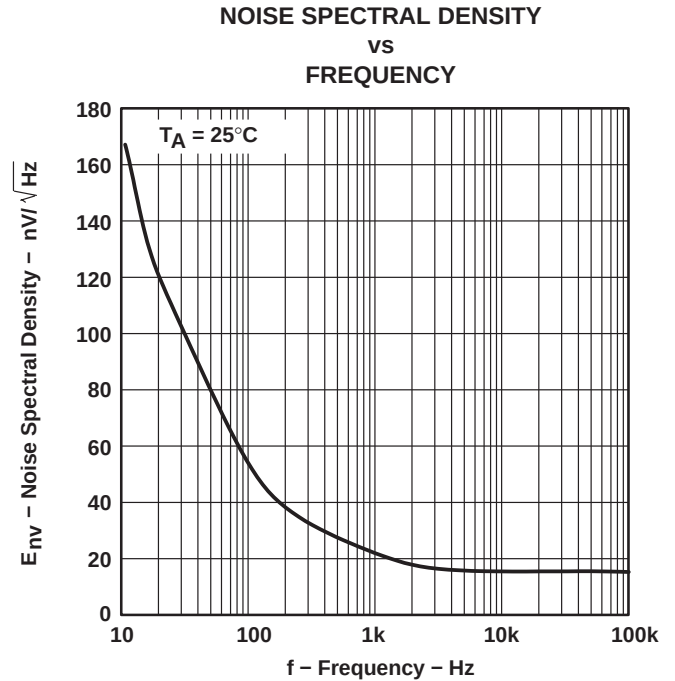

**Figure 19**

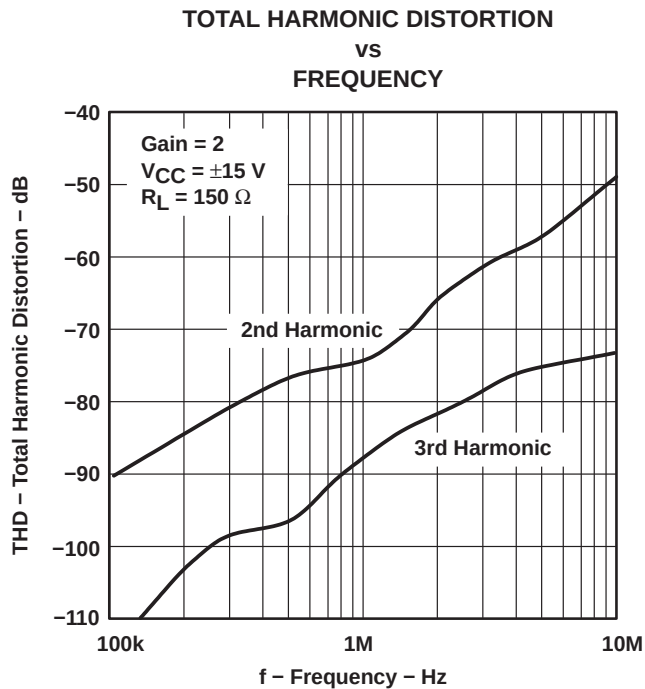

**Figure 20**

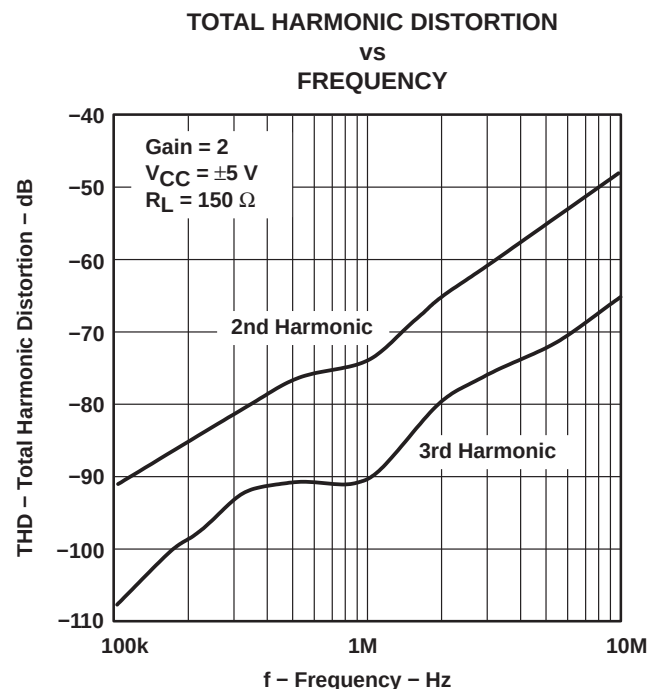

**Figure 21**

# THS4061, THS4062 180-MHz HIGH-SPEED AMPLIFIERS

SLOS234E – DECEMBER 1998 – REVISED DECEMBER 2003

## TYPICAL CHARACTERISTICS

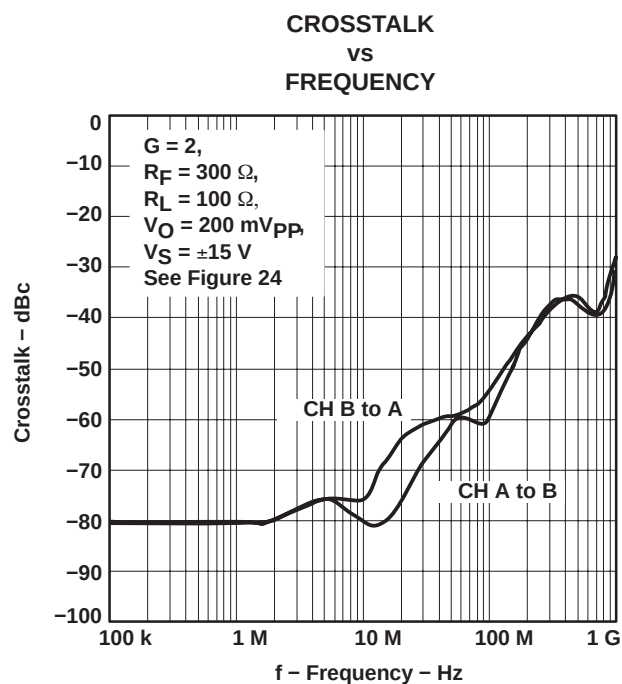


Figure 22

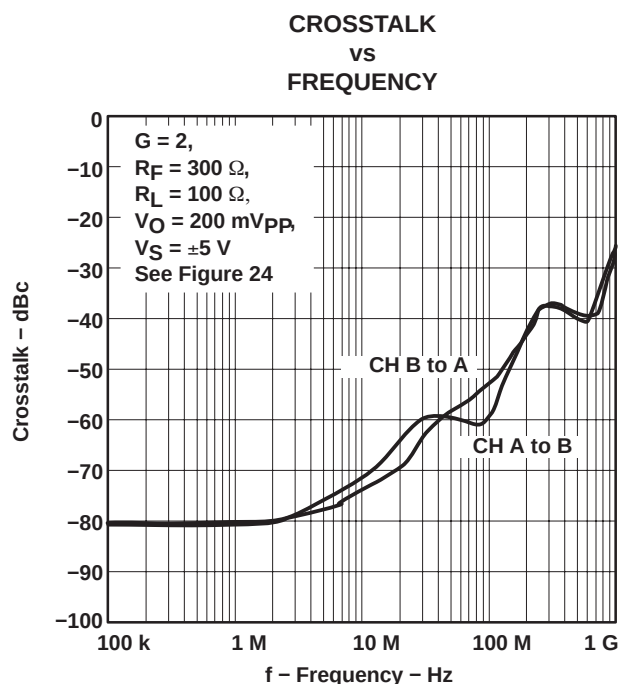


Figure 23


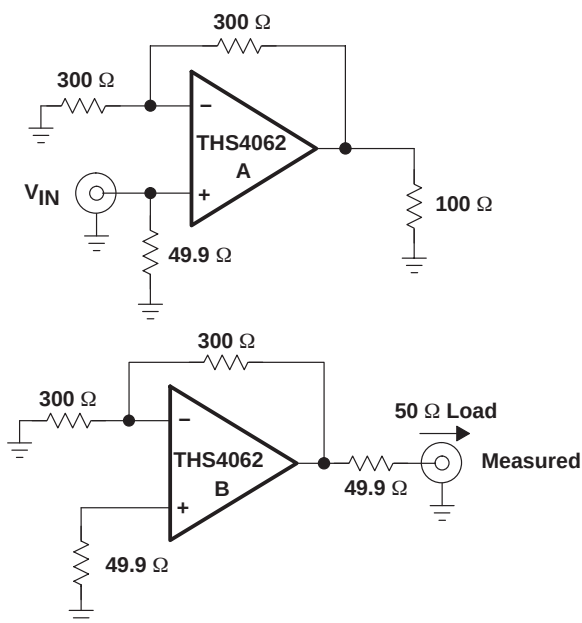


Figure 24. Test Circuits

## APPLICATION INFORMATION

### theory of operation

The THS406x is a high speed, operational amplifier configured in a voltage feedback architecture. It is built using a 30-V, dielectrically isolated, complementary bipolar process with NPN and PNP transistors possessing  $f_T$ s of several GHz. This results in an exceptionally high performance amplifier that has a wide bandwidth, high slew rate, fast settling time, and low distortion. A simplified schematic is shown in Figure 25.

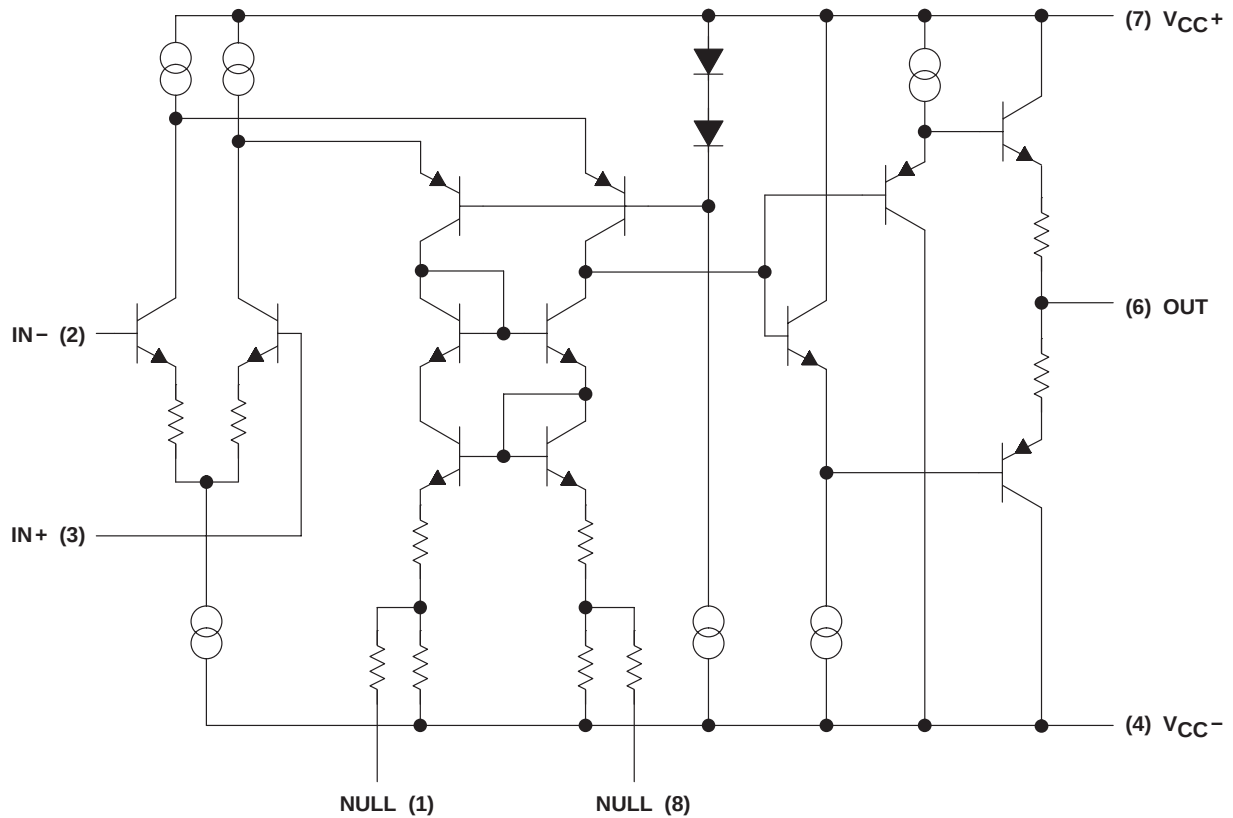

**Figure 25. THS4061 Simplified Schematic**

### APPLICATION INFORMATION

#### offset nulling

The THS4061 has very low input offset voltage for a high-speed amplifier. However, if additional correction is required, an offset nulling function has been provided. By placing a potentiometer between terminals 1 and 8 and tying the wiper to the negative supply, the input offset can be adjusted. This is shown in Figure 26.

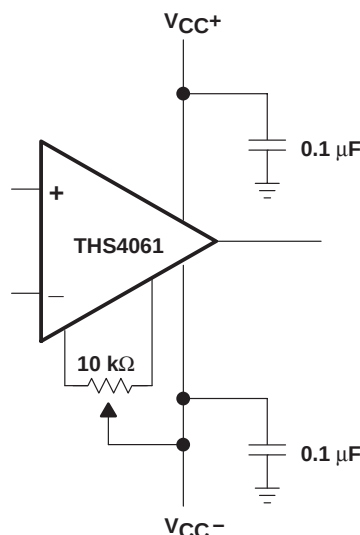


Figure 26. Offset Nulling Schematic

#### optimizing unity gain response

Internal frequency compensation of the THS406x was selected to provide very wideband performance yet still maintain stability when operated in a noninverting unity gain configuration. When amplifiers are compensated in this manner there is usually peaking in the closed loop response and some ringing in the step response for very fast input edges, depending upon the application. This is because a minimum phase margin is maintained for the  $G=+1$  configuration. For optimum settling time and minimum ringing, a feedback resistor of  $270\ \Omega$  should be used as shown in Figure 27. Additional capacitance can also be used in parallel with the feedback resistance if even finer optimization is required.

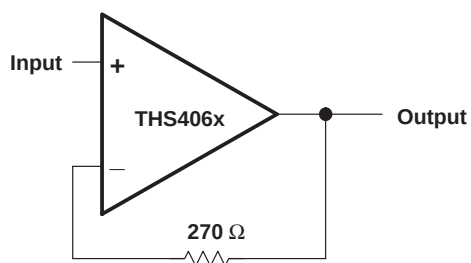


Figure 27. Noninverting, Unity Gain Schematic



## APPLICATION INFORMATION

### driving a capacitive load

Driving capacitive loads with high performance amplifiers is not a problem as long as certain precautions are taken. The first is to realize that the THS406x has been internally compensated to maximize its bandwidth and slew rate performance. When the amplifier is compensated in this manner, capacitive loading directly on the output will decrease the device's phase margin leading to high frequency ringing or oscillations. Therefore, for capacitive loads of greater than 10 pF, it is recommended that a resistor be placed in series with the output of the amplifier, as shown in Figure 28. A minimum value of 20  $\Omega$  should work well for most applications. For example, in 75- $\Omega$  transmission systems, setting the series resistor value to 75  $\Omega$  both isolates any capacitance loading and provides the proper line impedance matching at the source end.

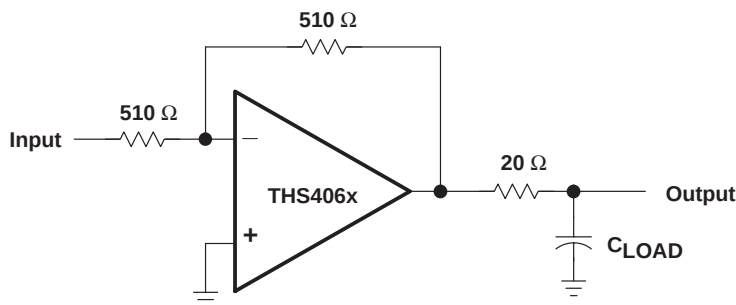


Figure 28. Driving a Capacitive Load

### circuit layout considerations

In order to achieve the levels of high frequency performance of the THS406x, it is essential that proper printed-circuit board high frequency design techniques be followed. A general set of guidelines is given below. In addition, a THS406x evaluation board is available to use as a guide for layout or for evaluating the device performance.

- **Ground planes** – It is highly recommended that a ground plane be used on the board to provide all components with a low inductive ground connection. However, in the areas of the amplifier inputs and output, the ground plane can be removed to minimize the stray capacitance.
- **Proper power supply decoupling** – Use a 6.8- $\mu$ F tantalum capacitor in parallel with a 0.1- $\mu$ F ceramic capacitor on each supply terminal. It may be possible to share the tantalum among several amplifiers depending on the application, but a 0.1- $\mu$ F ceramic capacitor should always be used on the supply terminal of every amplifier. In addition, the 0.1- $\mu$ F capacitor should be placed as close as possible to the supply terminal. As this distance increases, the inductance in the connecting trace makes the capacitor less effective. The designer should strive for distances of less than 0.1 inches between the device power terminals and the ceramic capacitors.
- **Sockets** – Sockets are not recommended for high-speed operational amplifiers. The additional lead inductance in the socket pins will often lead to stability problems. Surface-mount packages soldered directly to the printed-circuit board is the best implementation.
- **Short trace runs/compact part placements** – Optimum high frequency performance is achieved when stray series inductance has been minimized. To realize this, the circuit layout should be made as compact as possible thereby minimizing the length of all trace runs. Particular attention should be paid to the inverting input of the amplifier. Its length should be kept as short as possible. This helps to minimize stray capacitance at the input of the amplifier.

### APPLICATION INFORMATION

#### circuit layout considerations (continued)

- Surface-mount passive components – Using surface-mount passive components is recommended for high-frequency amplifier circuits for several reasons. First, because of the extremely low lead inductance of surface-mount components, the problem with stray series inductance is greatly reduced. Second, the small size of surface-mount components naturally leads to a more compact layout, thereby minimizing both stray inductance and capacitance. If leaded components are used, it is recommended that the lead lengths be kept as short as possible.

#### evaluation board

An evaluation board is available for the THS4061 (literature number SLOP226) and THS4062 (literature number SLOP235). This board has been configured for very low parasitic capacitance in order to realize the full performance of the amplifier. A schematic of the evaluation board is shown in Figure 29. The circuitry has been designed so that the amplifier may be used in either an inverting or noninverting configuration. To order the evaluation board contact your local TI sales office or distributor. For more detailed information, refer to the *THS4061 EVM User's Manual* (literature number SLOU038) or the *THS4062 EVM User's Manual* (literature number SLOU040)

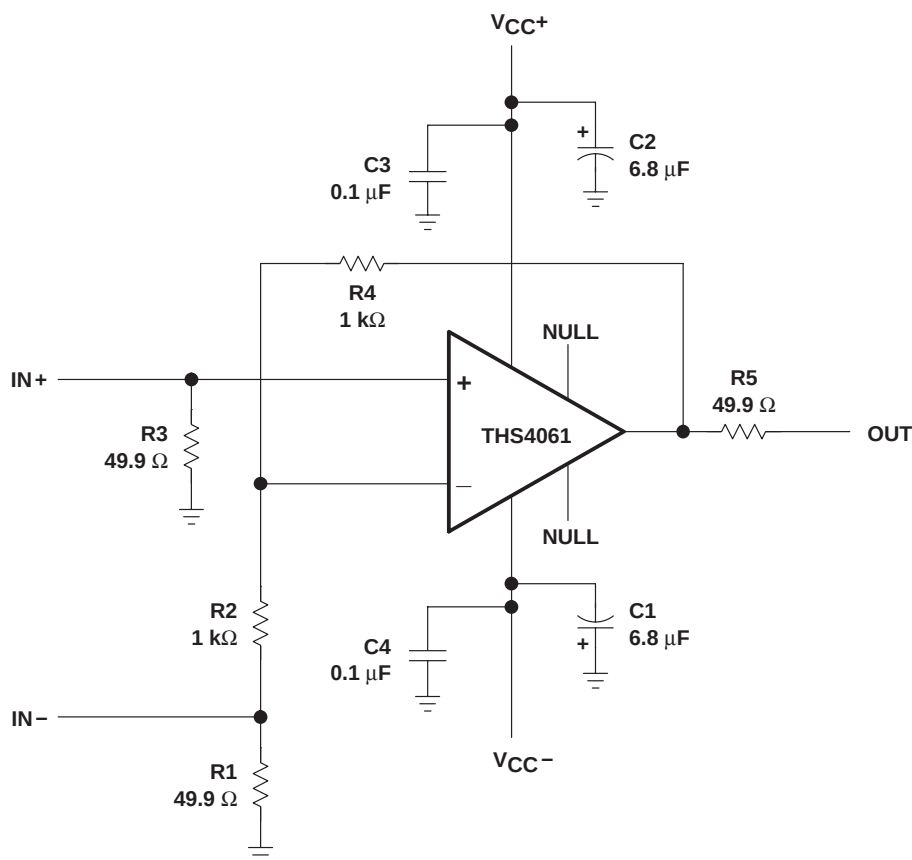


Figure 29. THS4061 Evaluation Board Schematic

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)            | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|------------------------------------|-------------------------|
| 5962-9960101Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-<br>9960101Q2A<br>THS4061MFKB | <a href="#">Samples</a> |
| 5962-9960101QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 9960101QPA<br>THS4061M             | <a href="#">Samples</a> |
| THS4061CD        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4061C                              | <a href="#">Samples</a> |
| THS4061CDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4061C                              | <a href="#">Samples</a> |
| THS4061CDGN      | ACTIVE        | HVSSOP       | DGN                | 8    | 80             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ABS                                | <a href="#">Samples</a> |
| THS4061CDGNR     | ACTIVE        | HVSSOP       | DGN                | 8    | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ABS                                | <a href="#">Samples</a> |
| THS4061CDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4061C                              | <a href="#">Samples</a> |
| THS4061ID        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4061I                              | <a href="#">Samples</a> |
| THS4061IDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4061I                              | <a href="#">Samples</a> |
| THS4061IDGNR     | ACTIVE        | HVSSOP       | DGN                | 8    | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | ABT                                | <a href="#">Samples</a> |
| THS4061IDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4061I                              | <a href="#">Samples</a> |
| THS4061IDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4061I                              | <a href="#">Samples</a> |
| THS4061MFKB      | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 5962-<br>9960101Q2A<br>THS4061MFKB | <a href="#">Samples</a> |
| THS4061MJG       | ACTIVE        | CDIP         | JG                 | 8    | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | THS4061MJG                         | <a href="#">Samples</a> |
| THS4061MJGB      | ACTIVE        | CDIP         | JG                 | 8    | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 9960101QPA<br>THS4061M             | <a href="#">Samples</a> |
| THS4062CD        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4062C                              | <a href="#">Samples</a> |
| THS4062CDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4062C                              | <a href="#">Samples</a> |
| THS4062CDGN      | ACTIVE        | HVSSOP       | DGN                | 8    | 80             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | ABM                                | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| THS4062CDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4062C                   | <a href="#">Samples</a> |
| THS4062CDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 4062C                   | <a href="#">Samples</a> |
| THS4062ID        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4062I                   | <a href="#">Samples</a> |
| THS4062IDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 4062I                   | <a href="#">Samples</a> |
| THS4062IDGN      | ACTIVE        | HVSSOP       | DGN                | 8    | 80             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | ABN                     | <a href="#">Samples</a> |
| THS4062IDGNR     | ACTIVE        | HVSSOP       | DGN                | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | ABN                     | <a href="#">Samples</a> |
| THS4062IDGNRG4   | ACTIVE        | HVSSOP       | DGN                | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | ABN                     | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF THS4061, THS4061M :**

- Catalog : [THS4061](#)

- Military : [THS4061M](#)

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

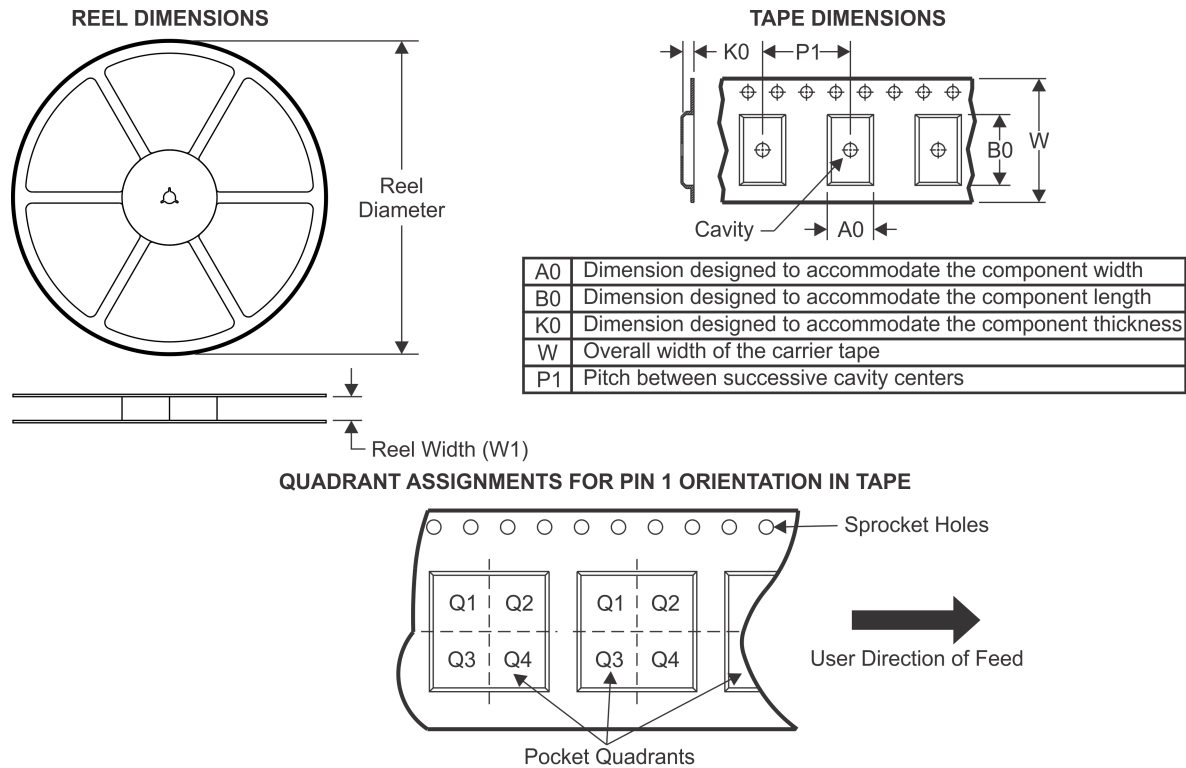**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| THS4061CDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4061CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| THS4061IDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| THS4061IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| THS4062CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| THS4062IDGNR | HVSSOP       | DGN             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS

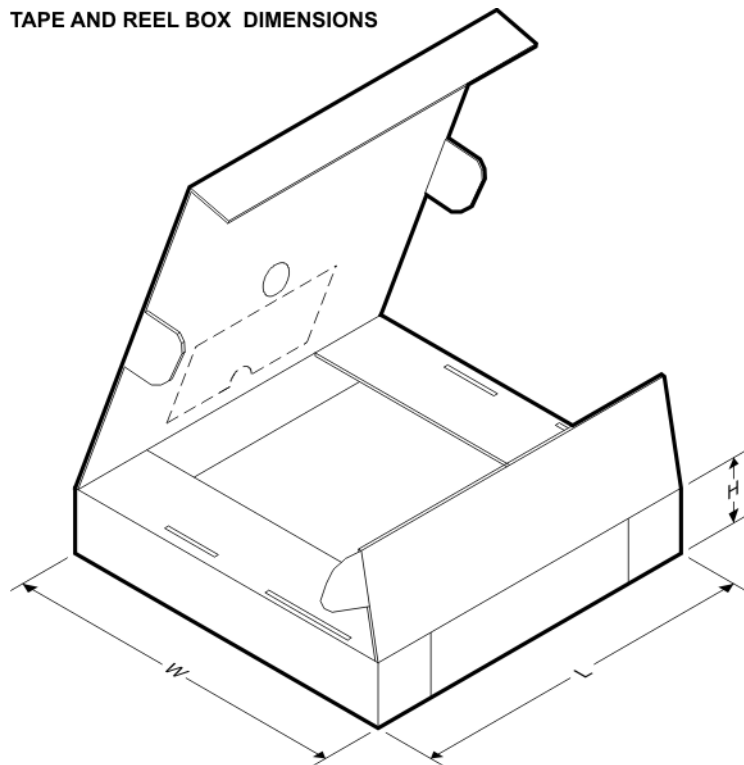

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| THS4061CDGNR | HVSSOP       | DGN             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4061CDR   | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| THS4061IDGNR | HVSSOP       | DGN             | 8    | 2500 | 358.0       | 335.0      | 35.0        |
| THS4061IDR   | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| THS4062CDR   | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| THS4062IDGNR | HVSSOP       | DGN             | 8    | 2500 | 358.0       | 335.0      | 35.0        |

## TUBE

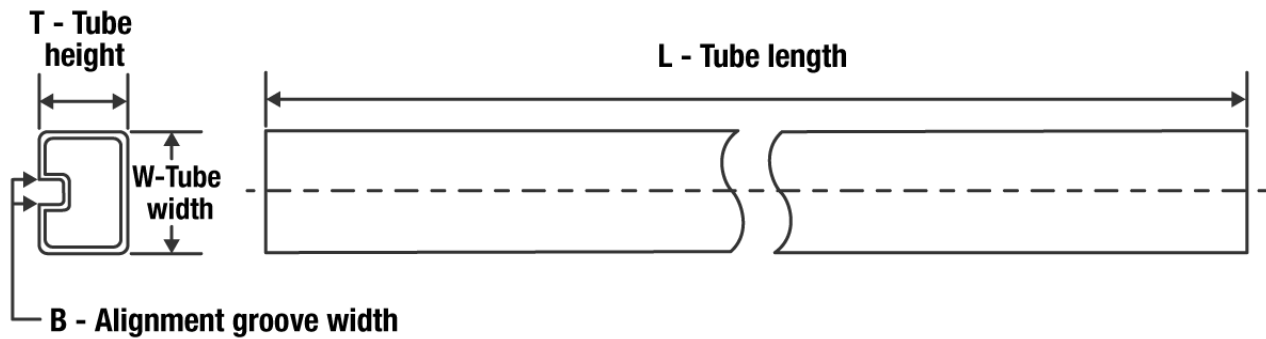

\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 5962-9960101Q2A | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| THS4061CD       | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4061CDG4     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4061ID       | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4061IDG4     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4061MFKB     | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| THS4062CD       | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4062CDG4     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4062ID       | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |
| THS4062IDG4     | D            | SOIC         | 8    | 75  | 505.46 | 6.76   | 3810   | 4      |



## GENERIC PACKAGE VIEW


**DGN 8**

**PowerPAD VSSOP - 1.1 mm max height**



3 x 3, 0.65 mm pitch

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

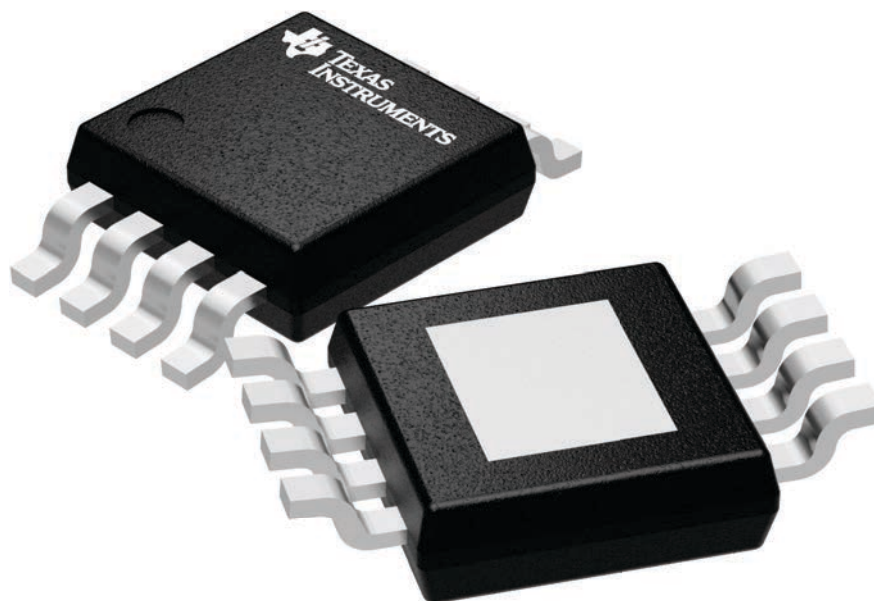

4225482/A

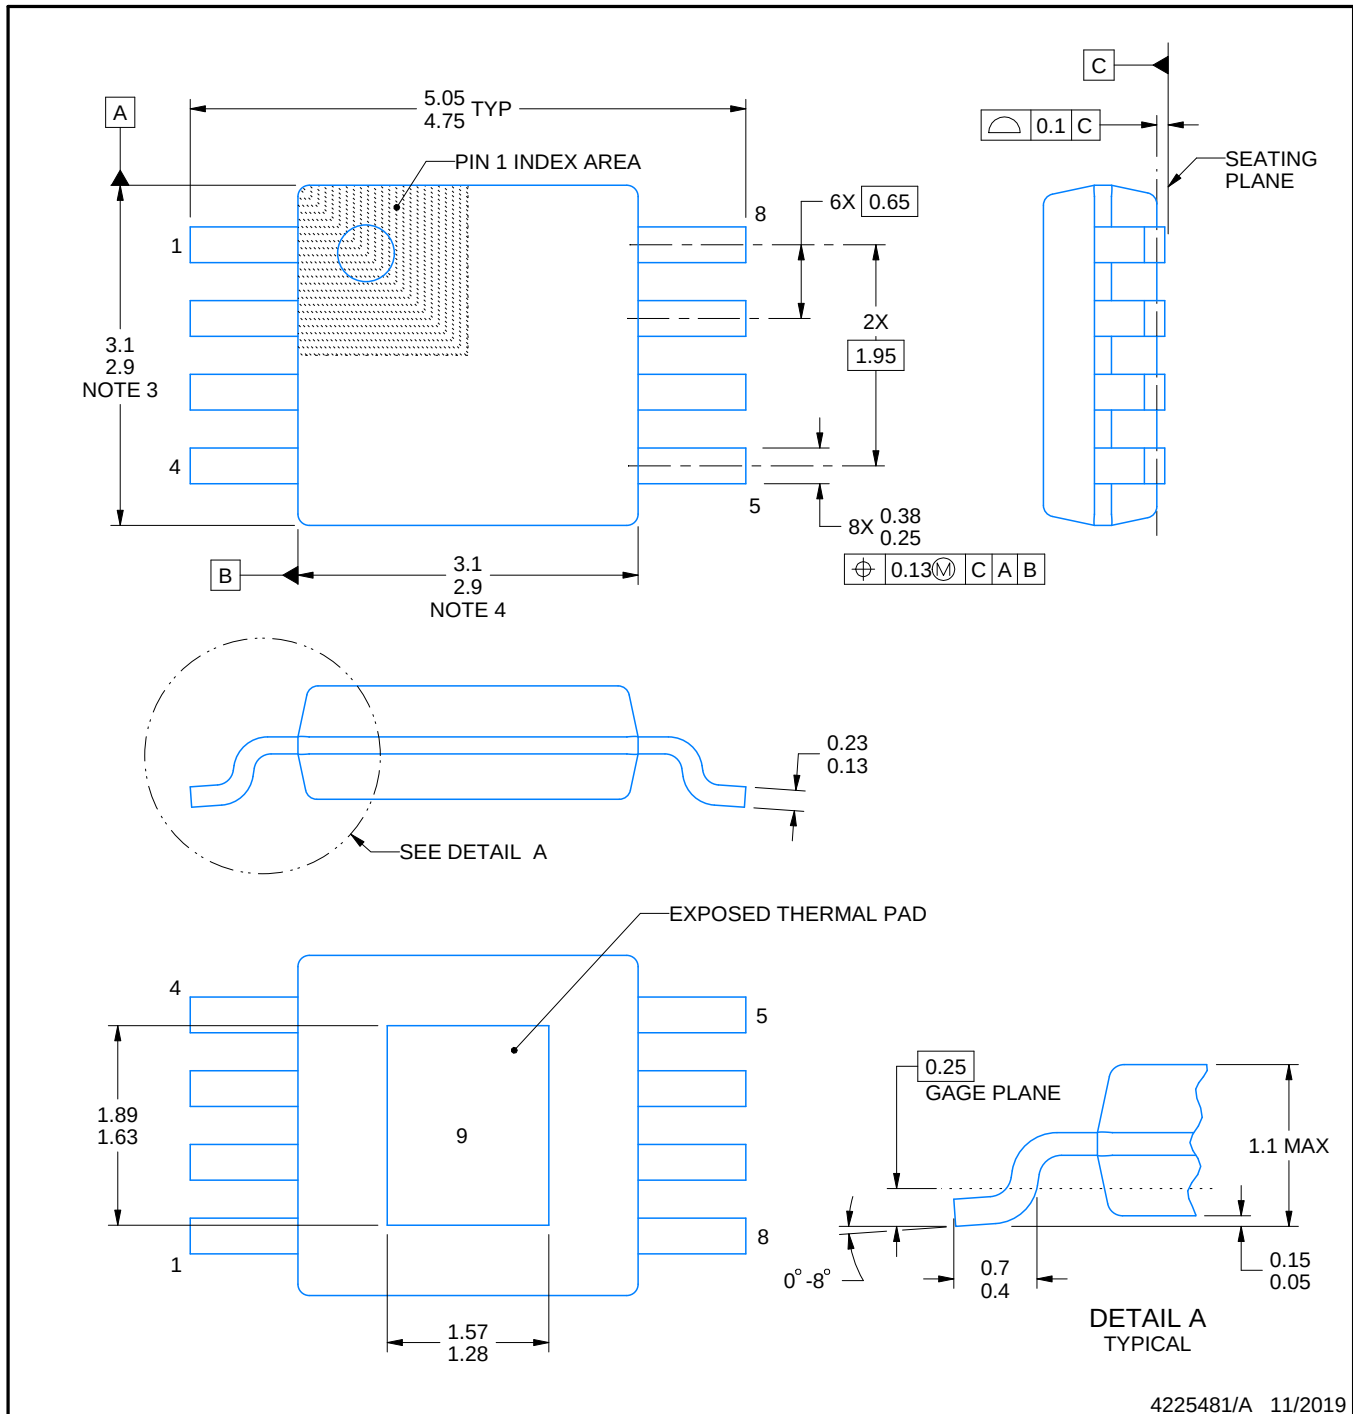

4225481/A 11/2019

## NOTES:


PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.


**DGN0008D**

# PowerPAD™ VSSOP - 1.1 mm max height

## SMALL OUTLINE PACKAGE

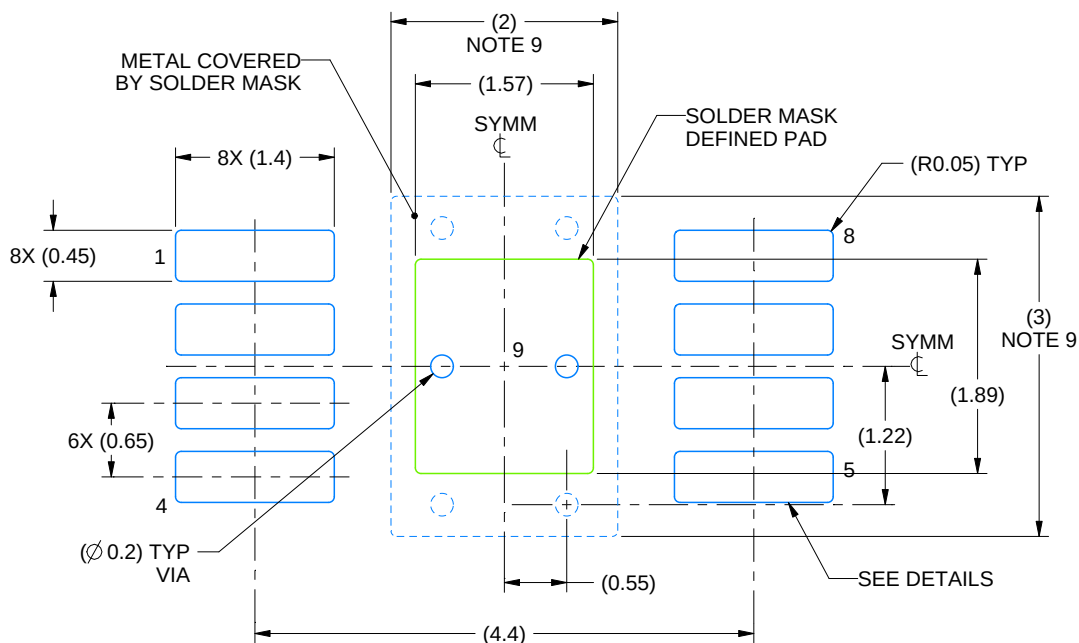

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

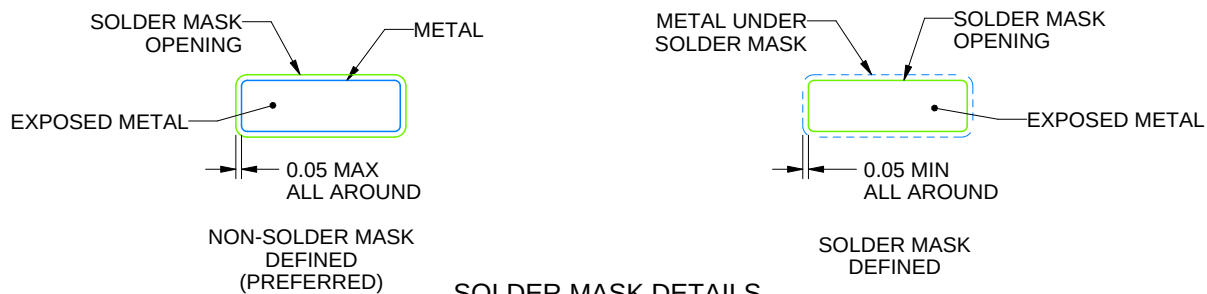

## SOLDER MASK DETAILS

4225481/A 11/2019


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

**DGN0008D**

# PowerPAD™ VSSOP - 1.1 mm max height

## SMALL OUTLINE PACKAGE

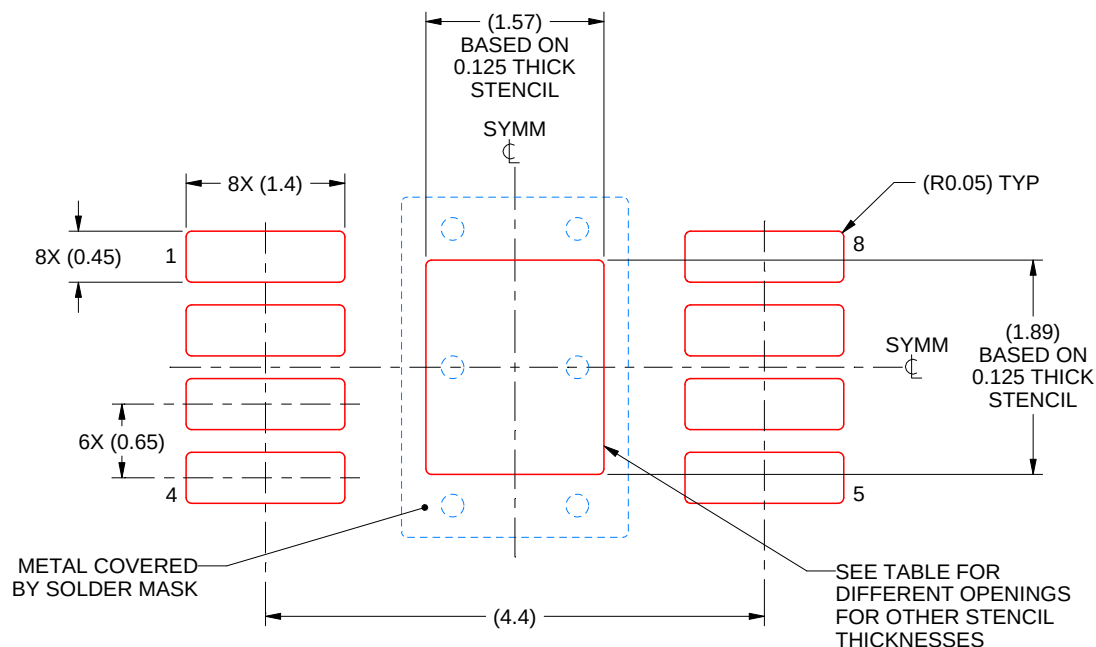

## SOLDER PASTE EXAMPLE


EXPOSED PAD 9:  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE: 15X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 1.76 X 2.11            |
| 0.125             | 1.57 X 1.89 (SHOWN)    |
| 0.15              | 1.43 X 1.73            |
| 0.175             | 1.33 X 1.60            |

4225481/A 11/2019

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

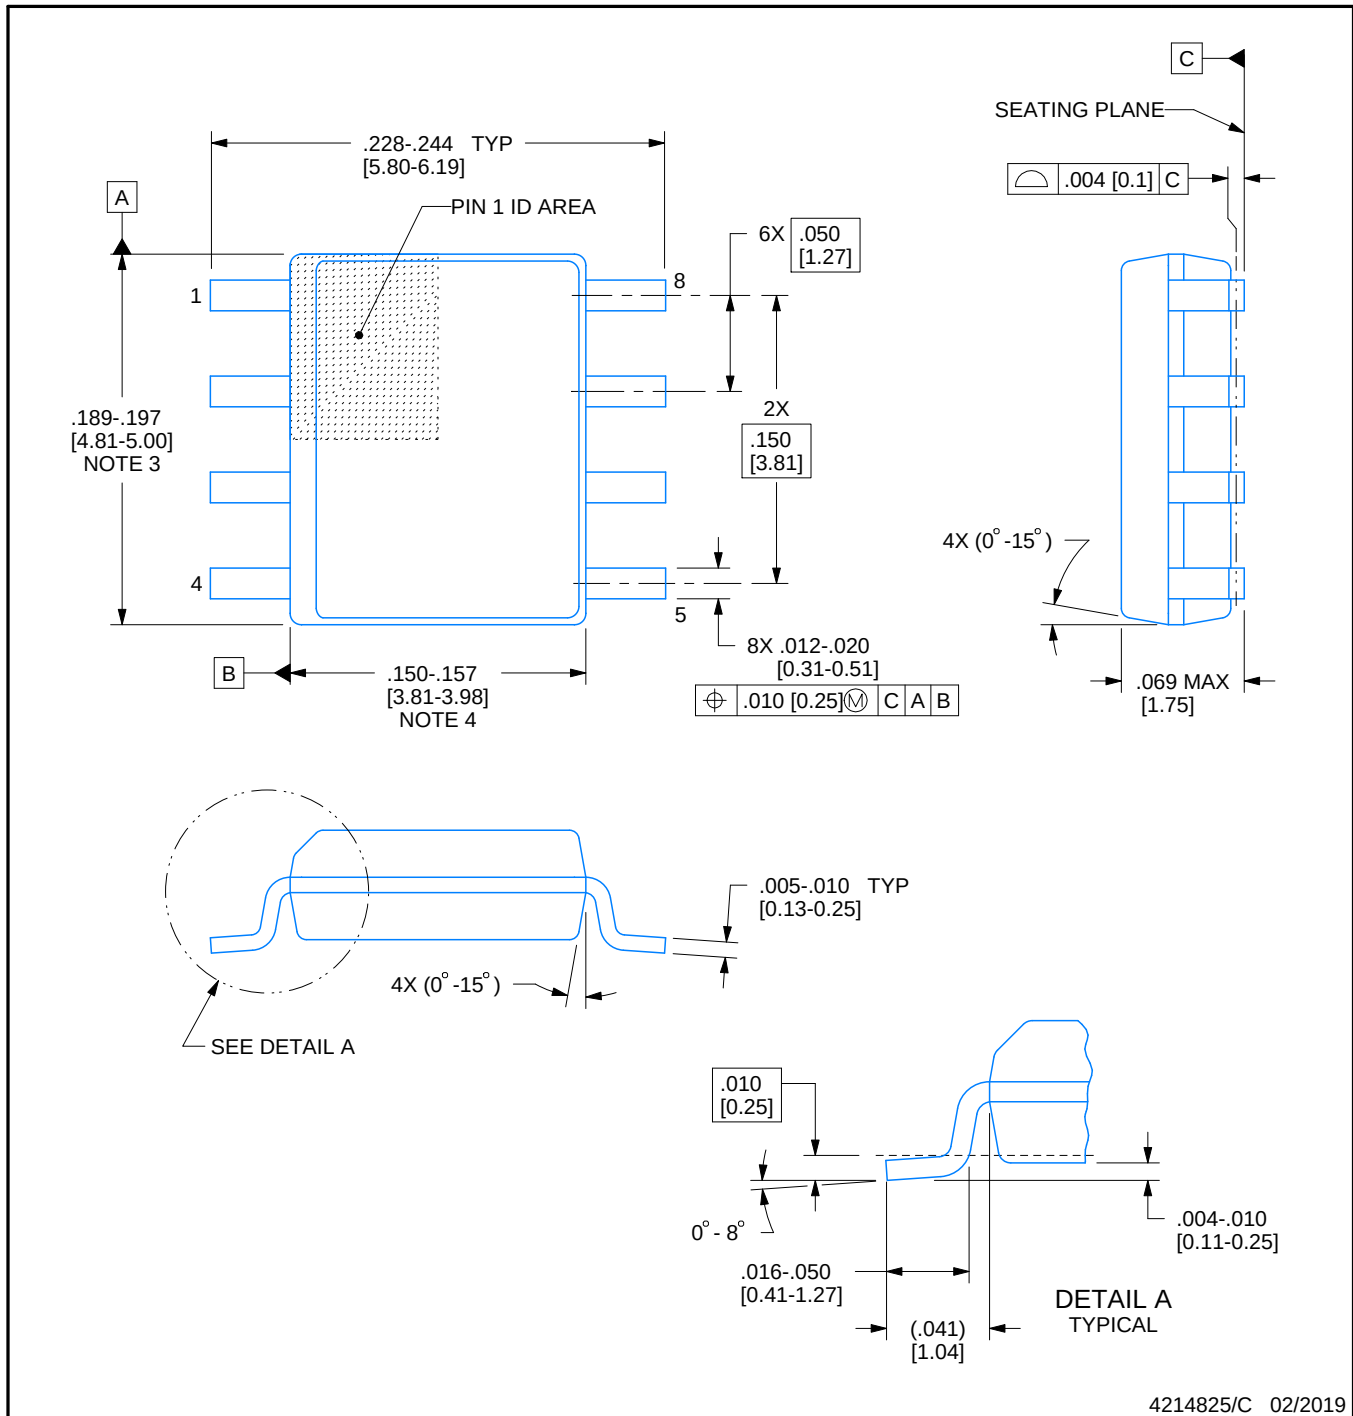

4214825/C 02/2019

## NOTES:



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

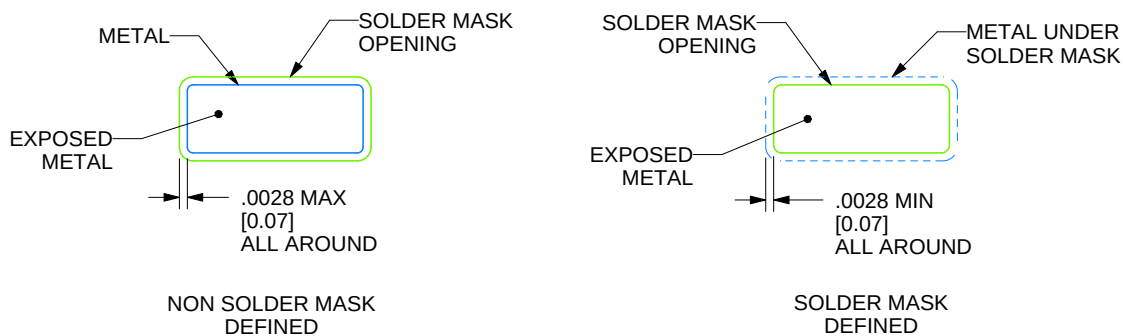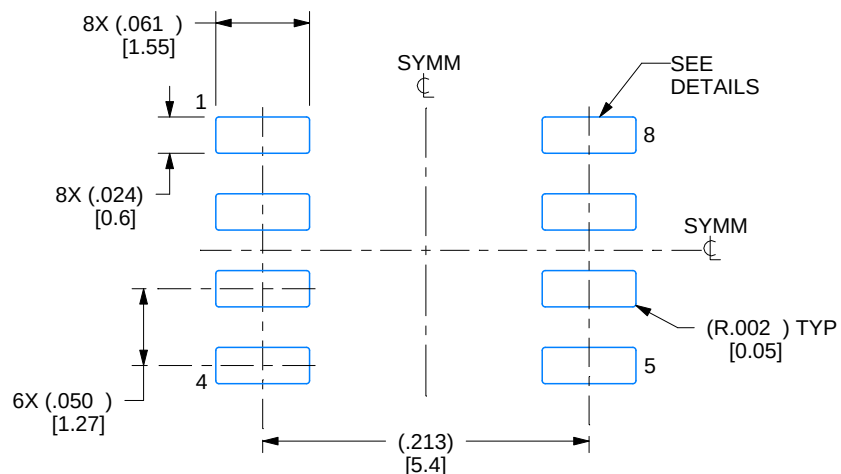

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

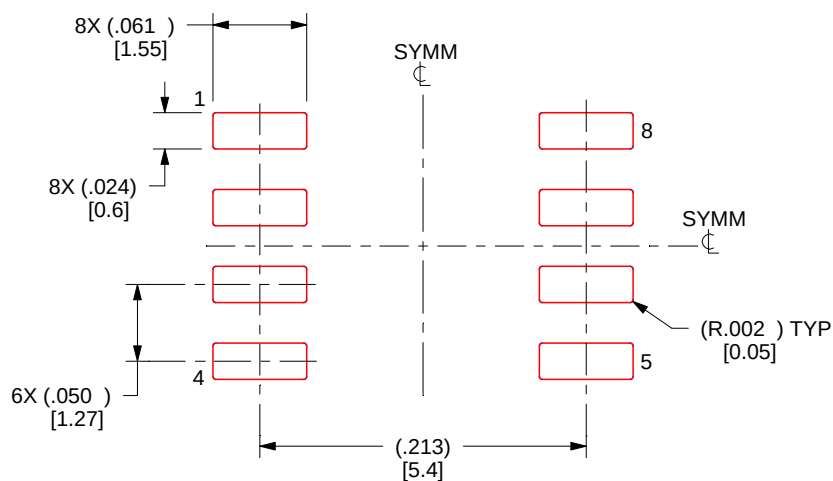

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X


4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

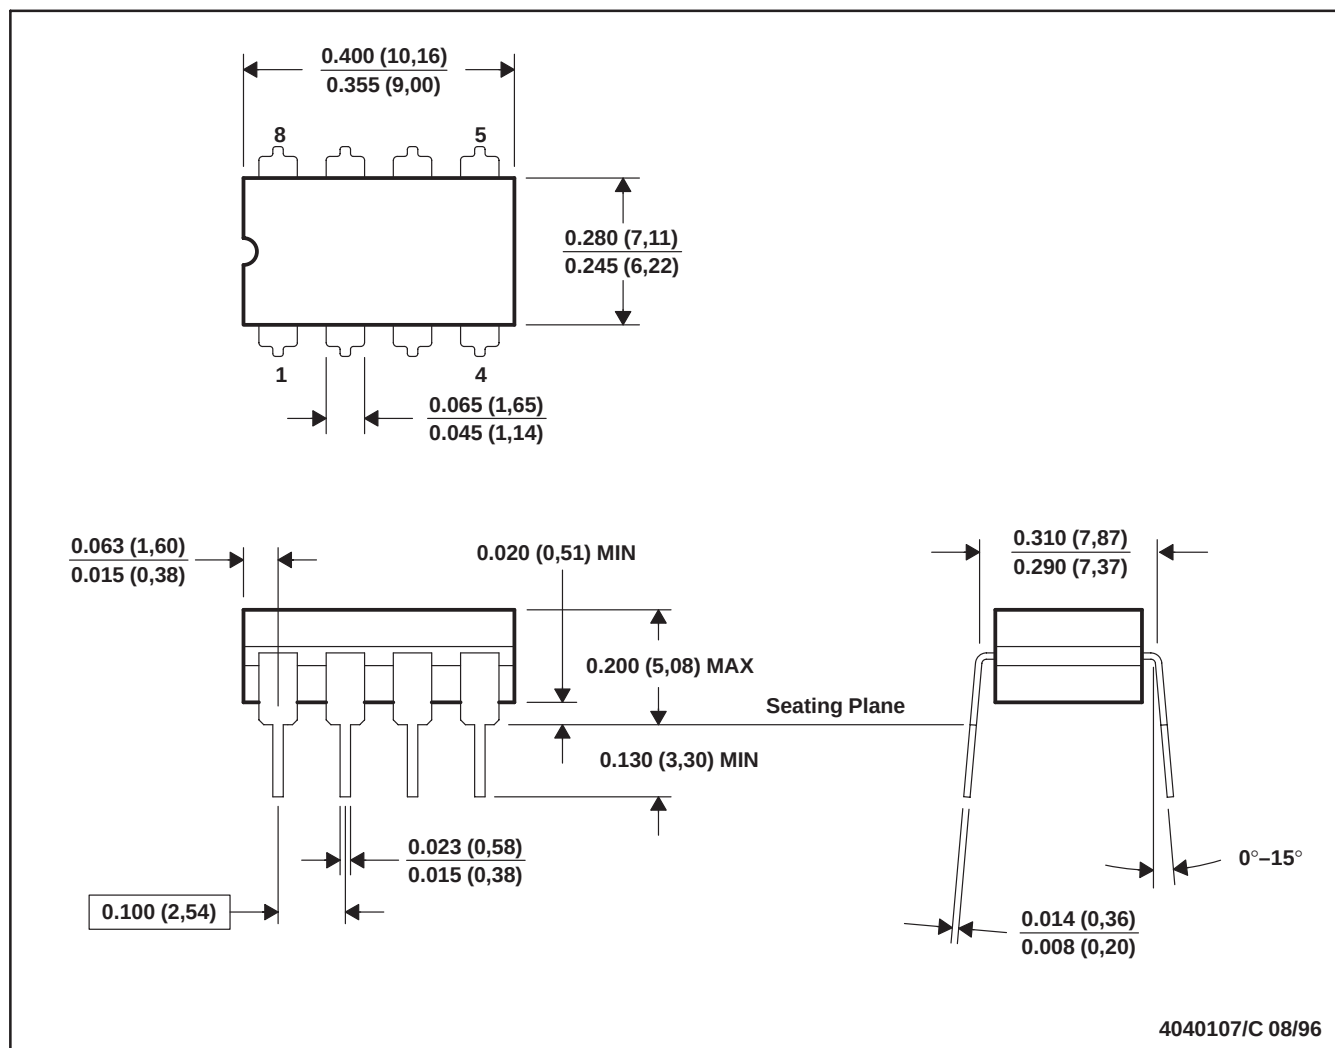


- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification.  
 E. Falls within MIL STD 1835 GDIP1-T8





FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

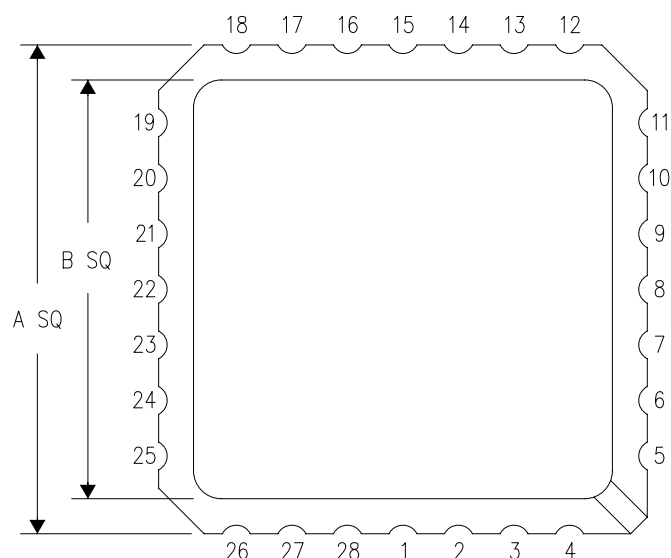

| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |

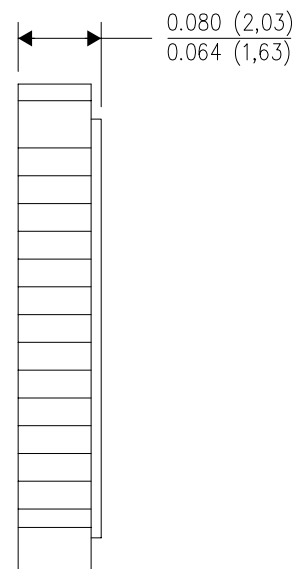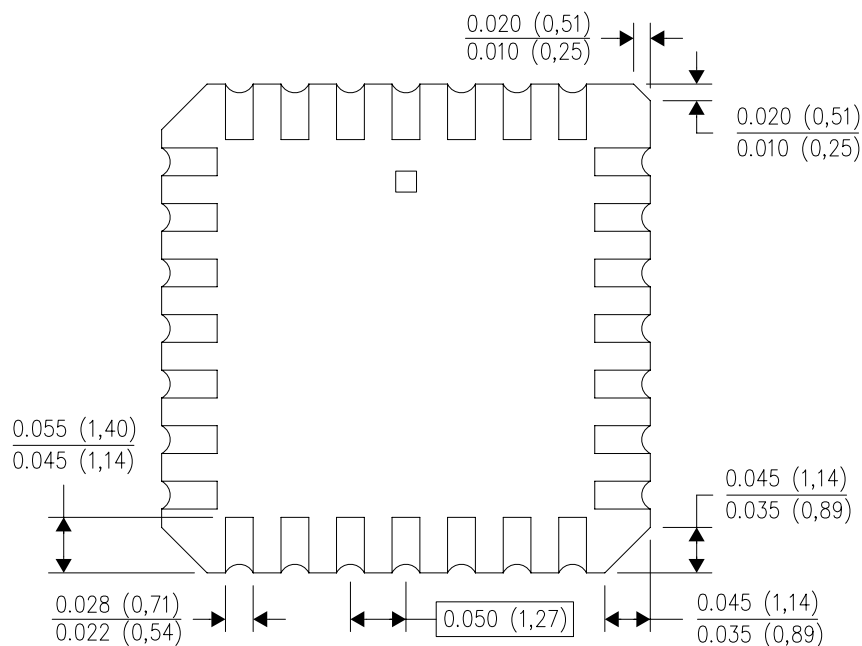

4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated