

# SN54F245, SN74F245 OCTAL BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDFS010A – MARCH 1987 – REVISED OCTOBER 1993

- 3-State Outputs Drive Bus Lines Directly
- Package Options Include Plastic Small-Outline (SOIC) and Shrink Small-Outline (SSOP) Packages, Ceramic Chip Carriers, and Plastic and Ceramic DIPs


## description

These octal bus transceivers are designed for asynchronous communication between data buses. The devices transmit data from the A bus to the B bus or from the B bus to the A bus depending upon the logic level at the direction-control (DIR) input. The output enable ( $\overline{OE}$ ) input can be used to disable the device so the buses are effectively isolated.


The SN74F245 is available in TI's shrink small-outline package (DB), which provides the same I/O pin count and functionality of standard small-outline packages in less than half the printed-circuit-board area.

The SN54F245 is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74F245 is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

SN54F245 . . . J PACKAGE  
SN74F245 . . . DB, DW, OR N PACKAGE  
(TOP VIEW)

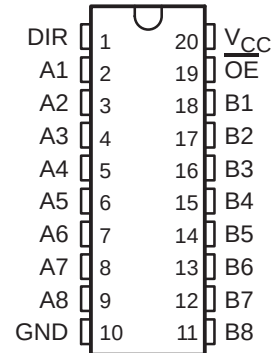

SN54F245 . . . FK PACKAGE  
(TOP VIEW)

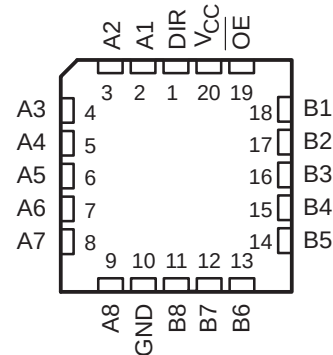

FUNCTION TABLE

| INPUTS          |     | OPERATION       |
|-----------------|-----|-----------------|
| $\overline{OE}$ | DIR |                 |
| L               | L   | B data to A bus |
| L               | H   | A data to B bus |
| H               | X   | Isolation       |


# SN54F245, SN74F245

## OCTAL BUS TRANSCEIVERS


### WITH 3-STATE OUTPUTS

SDFS010A – MARCH 1987 – REVISED OCTOBER 1993

#### logic symbol†

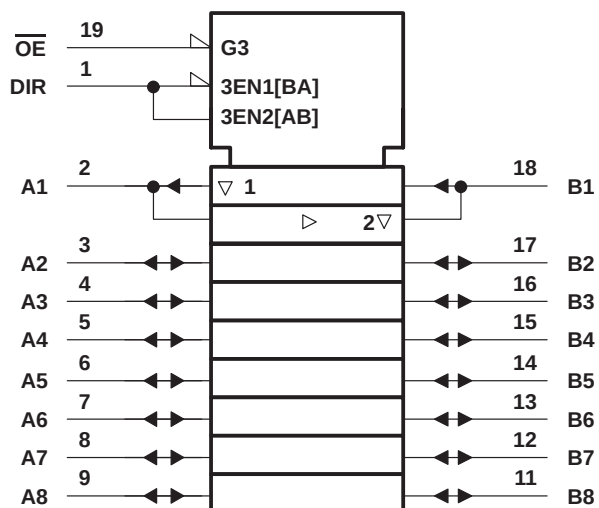

#### logic diagram (positive logic)

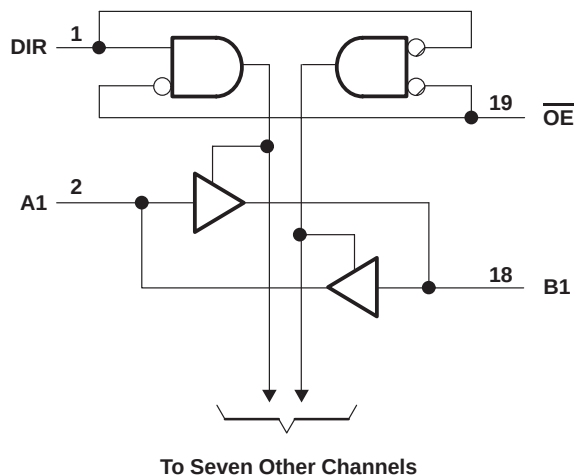

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

|                                                                        |                    |
|------------------------------------------------------------------------|--------------------|
| Supply voltage range, $V_{CC}$                                         | –0.5 V to 7 V      |
| Input voltage range, $V_I$ (except I/O ports) (see Note 1)             | –1.2 V to 7 V      |
| Input current range                                                    | –30 mA to 5 mA     |
| Voltage range applied to any output in the disabled or power-off state | –0.5 V to 5.5 V    |
| Voltage range applied to any output in the high state                  | –0.5 V to $V_{CC}$ |
| Current into any output in the low state: SN54F245 (A1 thru A8)        | 40 mA              |
| SN54F245 (B1 thru B8)                                                  | 96 mA              |
| SN74F245 (A1 thru A8)                                                  | 48 mA              |
| SN74F245 (B1 thru B8)                                                  | 128 mA             |
| Operating free-air temperature range: SN54F245                         | –55°C to 125°C     |
| SN74F245                                                               | 0°C to 70°C        |
| Storage temperature range                                              | –65°C to 150°C     |

‡ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input voltage ratings may be exceeded provided the input current ratings are observed.

# SN54F245, SN74F245

## OCTAL BUS TRANSCEIVERS

### WITH 3-STATE OUTPUTS

SDFS010A – MARCH 1987 – REVISED OCTOBER 1993

#### recommended operating conditions

|          |                                | SN54F245   |     |     | SN74F245   |     |     | UNIT |
|----------|--------------------------------|------------|-----|-----|------------|-----|-----|------|
|          |                                | MIN        | NOM | MAX | MIN        | NOM | MAX |      |
| $V_{CC}$ | Supply voltage                 | 4.5        | 5   | 5.5 | 4.5        | 5   | 5.5 | V    |
| $V_{IH}$ | High-level input voltage       | 2          |     |     | 2          |     |     | V    |
| $V_{IL}$ | Low-level input voltage        |            |     | 0.8 |            |     | 0.8 | V    |
| $I_{IK}$ | Input clamp current            |            |     | –18 |            |     | –18 | mA   |
| $I_{OH}$ | High-level output current      | A1 thru A8 |     | –3  | A1 thru A8 |     | –3  | mA   |
|          |                                | B1 thru B8 |     | –12 | B1 thru B8 |     | –15 |      |
| $I_{OL}$ | Low-level output current       | A1 thru A8 |     | 20  | A1 thru A8 |     | 24  | mA   |
|          |                                | B1 thru B8 |     | 48  | B1 thru B8 |     | 64  |      |
| $T_A$    | Operating free-air temperature | –55        |     | 125 | 0          |     | 70  | °C   |

#### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER         |                      | TEST CONDITIONS                                                        |                          | SN54F245 |      | SN74F245 |      | UNIT          |
|-------------------|----------------------|------------------------------------------------------------------------|--------------------------|----------|------|----------|------|---------------|
|                   |                      |                                                                        |                          | MIN      | TYP† | MAX      | MIN  |               |
| $V_{IK}$          |                      | $V_{CC} = 4.5\text{ V}$ ,<br>$I_I = -18\text{ mA}$                     |                          |          |      | –1.2     | –1.2 | V             |
| $V_{OH}$          | A1 thru A8           | $V_{CC} = 4.5\text{ V}$                                                | $I_{OH} = -1\text{ mA}$  | 2.5      | 3.4  | 2.5      | 3.4  | V             |
|                   |                      |                                                                        | $I_{OH} = -3\text{ mA}$  | 2.4      | 3.3  | 2.4      | 3.3  |               |
|                   | B1 thru B8           | $V_{CC} = 4.5\text{ V}$                                                | $I_{OH} = -12\text{ mA}$ | 2        | 3.2  |          |      |               |
|                   |                      |                                                                        | $I_{OH} = -15\text{ mA}$ |          |      | 2        | 3.1  |               |
|                   | Any output           | $V_{CC} = 4.75\text{ V}$ ,<br>$I_{OH} = -1\text{ mA to } -3\text{ mA}$ |                          |          |      |          | 2.7  |               |
| $V_{OL}$          | A1 thru A8           | $V_{CC} = 4.5\text{ V}$                                                | $I_{OL} = 20\text{ mA}$  | 0.3      | 0.5  |          |      | V             |
|                   |                      |                                                                        | $I_{OL} = 24\text{ mA}$  |          |      | 0.35     | 0.5  |               |
|                   | B1 thru B8           | $V_{CC} = 4.5\text{ V}$                                                | $I_{OL} = 48\text{ mA}$  | 0.38     | 0.55 |          |      |               |
|                   |                      |                                                                        | $I_{OL} = 64\text{ mA}$  |          |      | 0.42     | 0.55 |               |
| $I_I$             | A and B              | $V_{CC} = 5.5\text{ V}$                                                | $V_I = 5.5\text{ V}$     |          |      | 1        | 1    | mA            |
|                   | DIR, $\overline{OE}$ |                                                                        | $V_I = 7\text{ V}$       |          |      | 0.1      | 0.1  |               |
| $I_{IH}^\ddagger$ | A and B              | $V_{CC} = 5.5\text{ V}$ ,<br>$V_I = 2.7\text{ V}$                      |                          | 70       |      | 70       |      | $\mu\text{A}$ |
|                   | DIR, $\overline{OE}$ |                                                                        |                          | 20       |      | 20       |      |               |
| $I_{IL}^\ddagger$ | A and B              | $V_{CC} = 5.5\text{ V}$ ,<br>$V_I = 0.5\text{ V}$                      |                          | –0.65    |      | –0.65    |      | mA            |
|                   | DIR, $\overline{OE}$ |                                                                        |                          | –1.2     |      | –1.2     |      |               |
| $I_{OS}^\S$       | A1 thru A8           | $V_{CC} = 5.5\text{ V}$ ,<br>$V_O = 0$                                 |                          | –60      | –150 | –60      | –150 | mA            |
|                   | B1 thru B8           |                                                                        |                          | –100     | –225 | –100     | –225 |               |
| $I_{CC}$          |                      | $V_{CC} = 5.5\text{ V}$                                                | Outputs high             | 70       | 90   | 70       | 90   | mA            |
|                   |                      |                                                                        | Outputs low              | 95       | 120  | 95       | 120  |               |
|                   |                      |                                                                        | Outputs disabled         | 85       | 110  | 85       | 110  |               |

† All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

‡ For I/O ports, the parameters  $I_{IH}$  and  $I_{IL}$  include the off-state output current.

§ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

# SN54F245, SN74F245

## OCTAL BUS TRANSCEIVERS

### WITH 3-STATE OUTPUTS

SDFS010A – MARCH 1987 – REVISED OCTOBER 1993

#### switching characteristics (see Note 2)

| PARAMETER        | FROM<br>(INPUT)        | TO<br>(OUTPUT) | V <sub>CC</sub> = 5 V,<br>C <sub>L</sub> = 50 pF,<br>R <sub>L</sub> = 500 Ω,<br>T <sub>A</sub> = 25°C |     |     | V <sub>CC</sub> = 4.5 V to 5.5 V,<br>C <sub>L</sub> = 50 pF,<br>R <sub>L</sub> = 500 Ω,<br>T <sub>A</sub> = MIN to MAX† |     |          | UNIT |     |
|------------------|------------------------|----------------|-------------------------------------------------------------------------------------------------------|-----|-----|-------------------------------------------------------------------------------------------------------------------------|-----|----------|------|-----|
|                  |                        |                | 'F245                                                                                                 |     |     | SN54F245                                                                                                                |     | SN74F245 |      |     |
|                  |                        |                | MIN                                                                                                   | TYP | MAX | MIN                                                                                                                     | MAX | MIN      |      | MAX |
| t <sub>PLH</sub> | A or B                 | B or A         | 1.7                                                                                                   | 3.8 | 6   | 1.2                                                                                                                     | 7.5 | 1.7      | 7    | ns  |
| t <sub>PHL</sub> |                        |                | 1.7                                                                                                   | 4.2 | 6   | 1.2                                                                                                                     | 7.5 | 1.7      | 7    |     |
| t <sub>PZH</sub> | $\overline{\text{OE}}$ | A or B         | 2.2                                                                                                   | 4.9 | 7   | 1.7                                                                                                                     | 9   | 2.2      | 8    | ns  |
| t <sub>PZL</sub> |                        |                | 2.7                                                                                                   | 5.6 | 8   | 2.2                                                                                                                     | 10  | 2.7      | 9    |     |
| t <sub>PHZ</sub> | $\overline{\text{OE}}$ | A or B         | 2.2                                                                                                   | 4.6 | 6.5 | 1.7                                                                                                                     | 9   | 2.2      | 7.5  | ns  |
| t <sub>PLZ</sub> |                        |                | 1.2                                                                                                   | 4.6 | 6.5 | 1.2                                                                                                                     | 10  | 1.2      | 7.5  |     |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTE 2: Load circuits and waveforms are shown in Section 1.

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)      | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|------------------------------|-------------------------|
| 85511012A        | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 85511012A<br>SNJ54F<br>245FK | <a href="#">Samples</a> |
| 8551101RA        | ACTIVE        | CDIP         | J                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8551101RA<br>SNJ54F245J      | <a href="#">Samples</a> |
| 8551101SA        | ACTIVE        | CFP          | W                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8551101SA<br>SNJ54F245W      | <a href="#">Samples</a> |
| JM38510/34803B2A | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803B2A         | <a href="#">Samples</a> |
| JM38510/34803BRA | ACTIVE        | CDIP         | J                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803BRA         | <a href="#">Samples</a> |
| JM38510/34803BSA | ACTIVE        | CFP          | W                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803BSA         | <a href="#">Samples</a> |
| M38510/34803B2A  | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803B2A         | <a href="#">Samples</a> |
| M38510/34803BRA  | ACTIVE        | CDIP         | J                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803BRA         | <a href="#">Samples</a> |
| M38510/34803BSA  | ACTIVE        | CFP          | W                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>34803BSA         | <a href="#">Samples</a> |
| SN54F245J        | ACTIVE        | CDIP         | J                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | SN54F245J                    | <a href="#">Samples</a> |
| SN74F245DBR      | ACTIVE        | SSOP         | DB                 | 20   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | F245                         | <a href="#">Samples</a> |
| SN74F245DW       | ACTIVE        | SOIC         | DW                 | 20   | 25             | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | F245                         | <a href="#">Samples</a> |
| SN74F245DWR      | ACTIVE        | SOIC         | DW                 | 20   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | F245                         | <a href="#">Samples</a> |
| SN74F245N        | ACTIVE        | PDIP         | N                  | 20   | 20             | RoHS &<br>Non-Green | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | SN74F245N                    | <a href="#">Samples</a> |
| SN74F245NE4      | ACTIVE        | PDIP         | N                  | 20   | 20             | RoHS &<br>Non-Green | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | SN74F245N                    | <a href="#">Samples</a> |
| SN74F245NSR      | ACTIVE        | SO           | NS                 | 20   | 2000           | RoHS & Green        | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 74F245                       | <a href="#">Samples</a> |
| SNJ54F245FK      | ACTIVE        | LCCC         | FK                 | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 85511012A<br>SNJ54F          | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)     | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|---------------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
|                  |               |              |                    |      |                |                     |                                      |                      |              | 245FK                   |                         |
| SNJ54F245J       | ACTIVE        | CDIP         | J                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8551101RA<br>SNJ54F245J | <a href="#">Samples</a> |
| SNJ54F245W       | ACTIVE        | CFP          | W                  | 20   | 1              | Non-RoHS<br>& Green | SNPB                                 | N / A for Pkg Type   | -55 to 125   | 8551101SA<br>SNJ54F245W | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF SN54F245, SN74F245 :**

- Catalog : [SN74F245](#)
- Military : [SN54F245](#)

## NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

## TAPE AND REEL INFORMATION

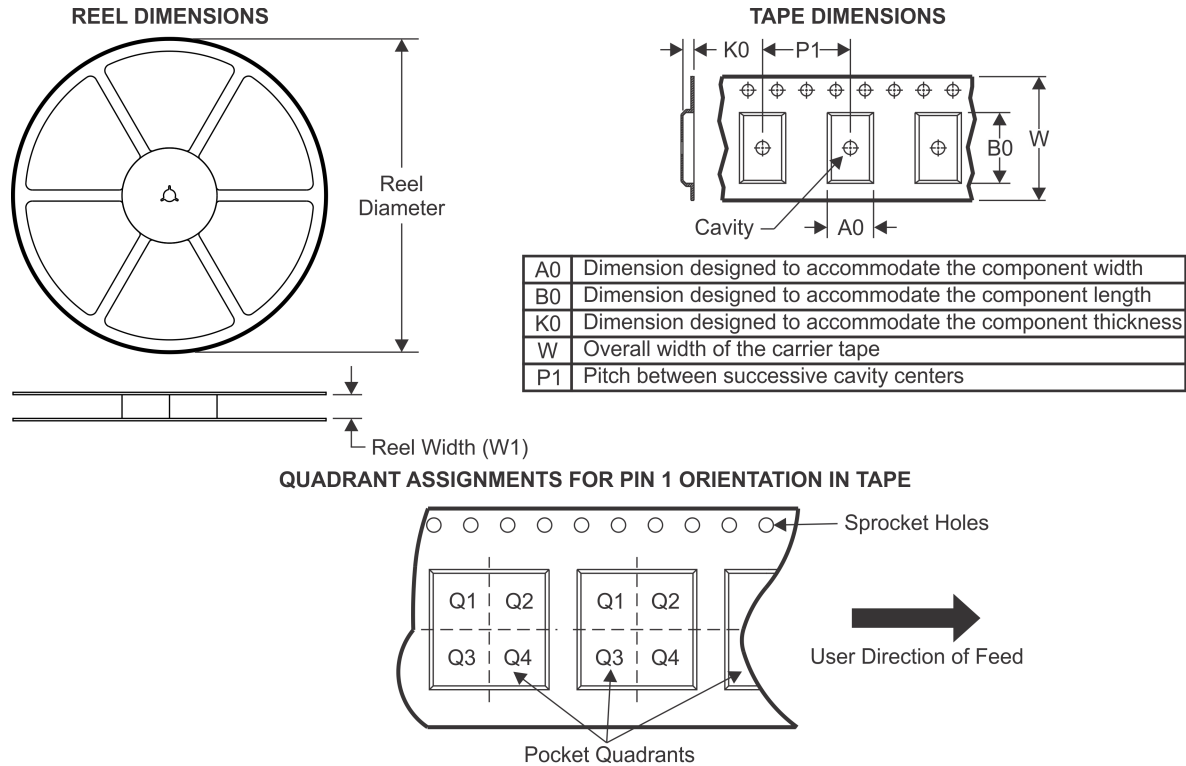


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74F245DBR | SSOP         | DB              | 20   | 2000 | 330.0              | 16.4               | 8.2     | 7.5     | 2.5     | 12.0    | 16.0   | Q1            |
| SN74F245DWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.3    | 2.7     | 12.0    | 24.0   | Q1            |
| SN74F245NSR | SO           | NS              | 20   | 2000 | 330.0              | 24.4               | 8.4     | 13.0    | 2.5     | 12.0    | 24.0   | Q1            |




## TAPE AND REEL BOX DIMENSIONS

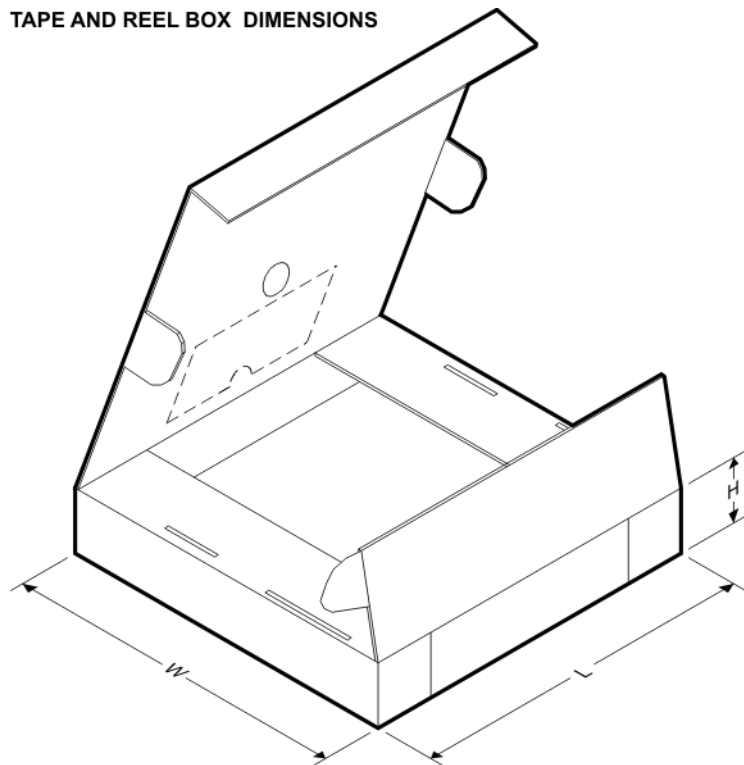

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74F245DBR | SSOP         | DB              | 20   | 2000 | 853.0       | 449.0      | 35.0        |
| SN74F245DWR | SOIC         | DW              | 20   | 2000 | 367.0       | 367.0      | 45.0        |
| SN74F245NSR | SO           | NS              | 20   | 2000 | 367.0       | 367.0      | 45.0        |

## TUBE

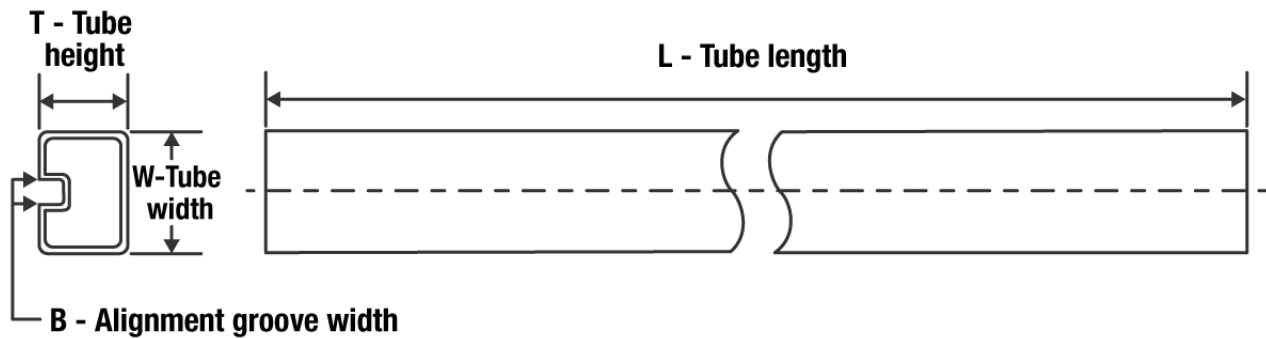


\*All dimensions are nominal

| Device           | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| 85511012A        | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| JM38510/34803B2A | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| M38510/34803B2A  | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |
| SN74F245DW       | DW           | SOIC         | 20   | 25  | 507    | 12.83  | 5080   | 6.6    |
| SN74F245N        | N            | PDIP         | 20   | 20  | 506    | 13.97  | 11230  | 4.32   |
| SN74F245NE4      | N            | PDIP         | 20   | 20  | 506    | 13.97  | 11230  | 4.32   |
| SNJ54F245FK      | FK           | LCCC         | 20   | 1   | 506.98 | 12.06  | 2030   | NA     |


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

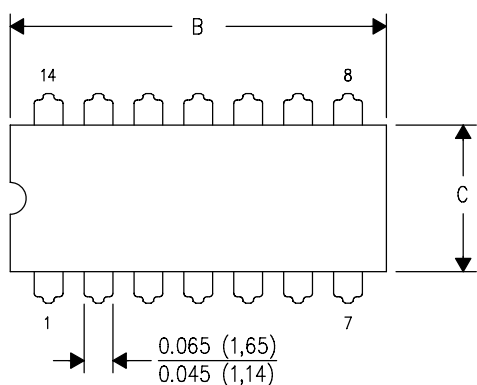

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

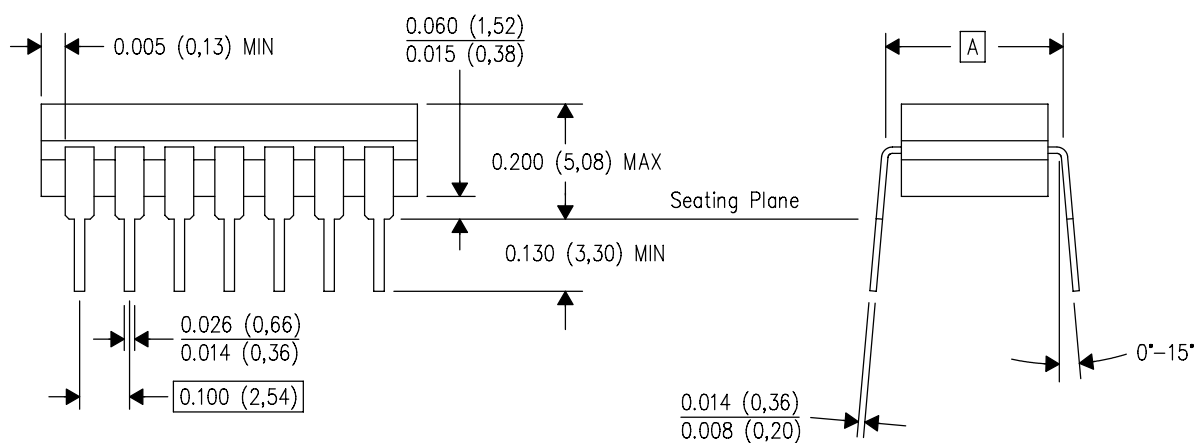


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.


## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

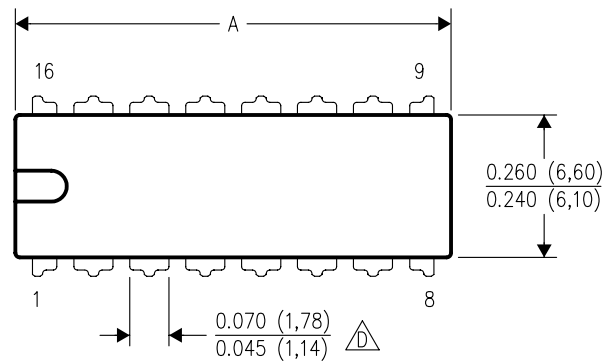


| PINS **             | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| DIM                 |                  |                  |                  |                  |
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

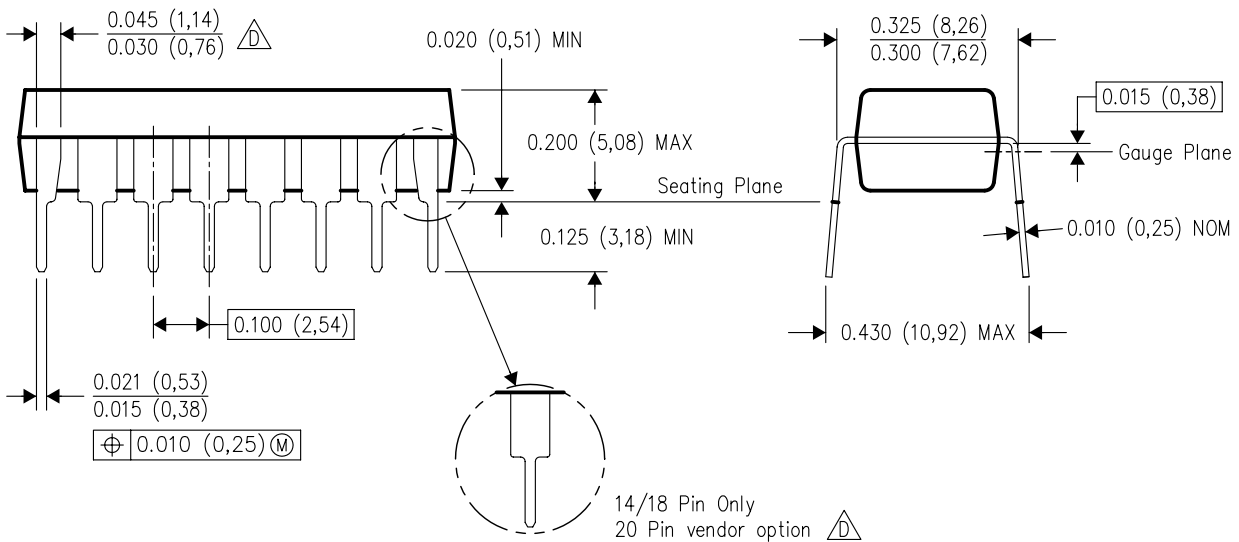

14/18 Pin Only  
20 Pin vendor option

4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - The 20 pin end lead shoulder width is a vendor option, either half or full width.

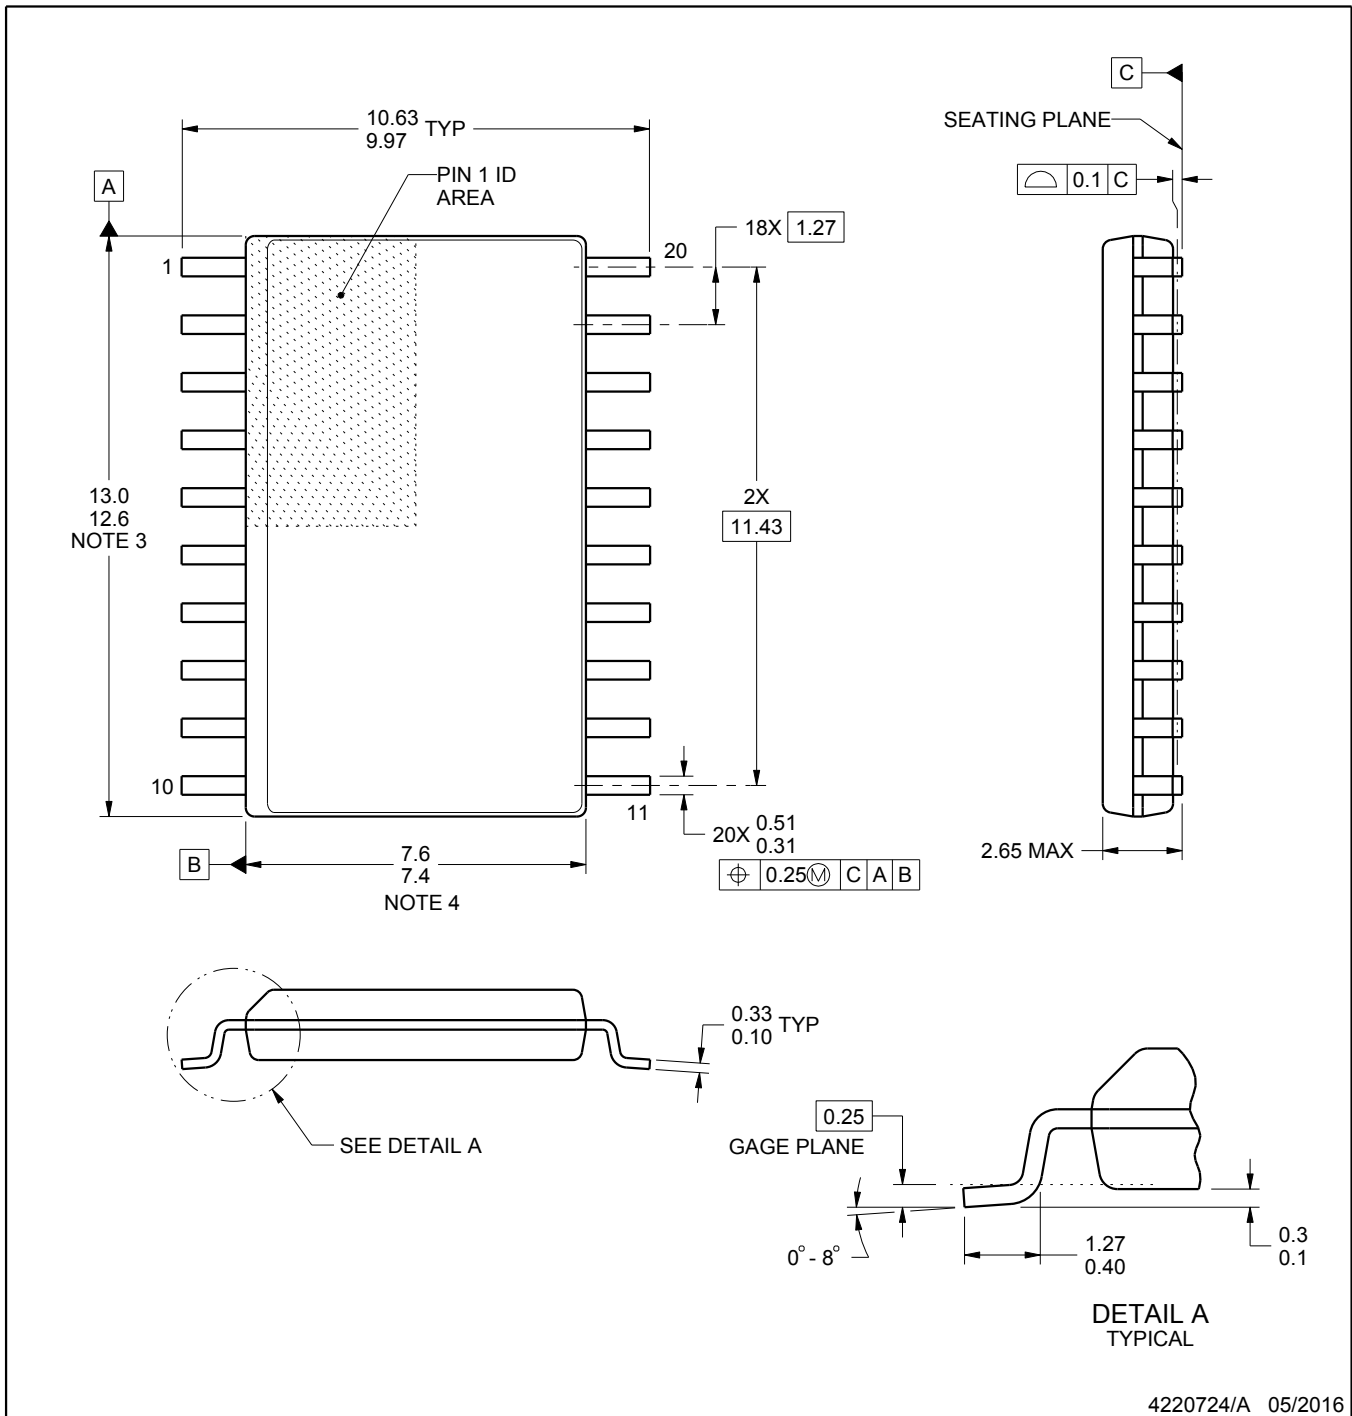

4220724/A 05/2016


## NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
5. Reference JEDEC registration MS-013.



**DW0020A**

**SOIC - 2.65 mm max height**

SOIC

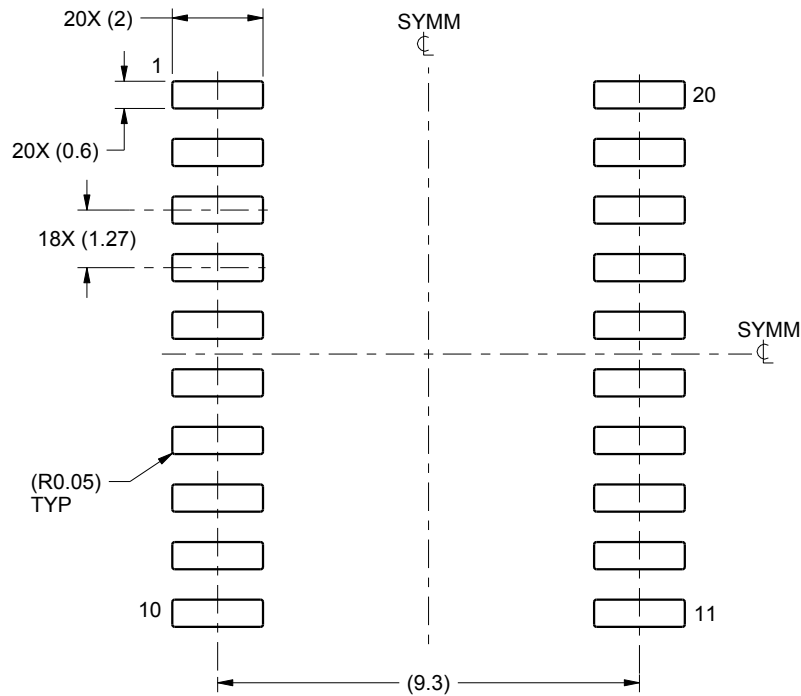

LAND PATTERN EXAMPLE  
SCALE:6X

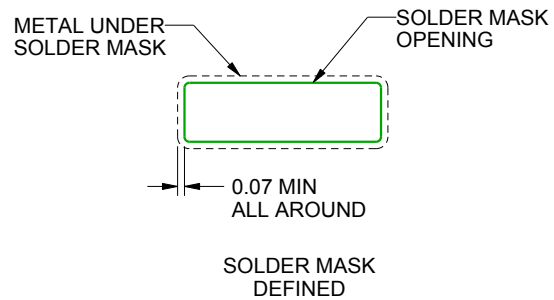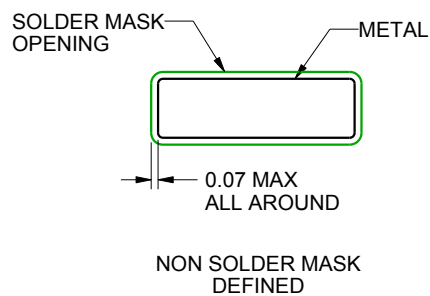

## SOLDER MASK DETAILS

4220724/A 05/2016

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.  
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DW0020A

SOIC - 2.65 mm max height

SOIC

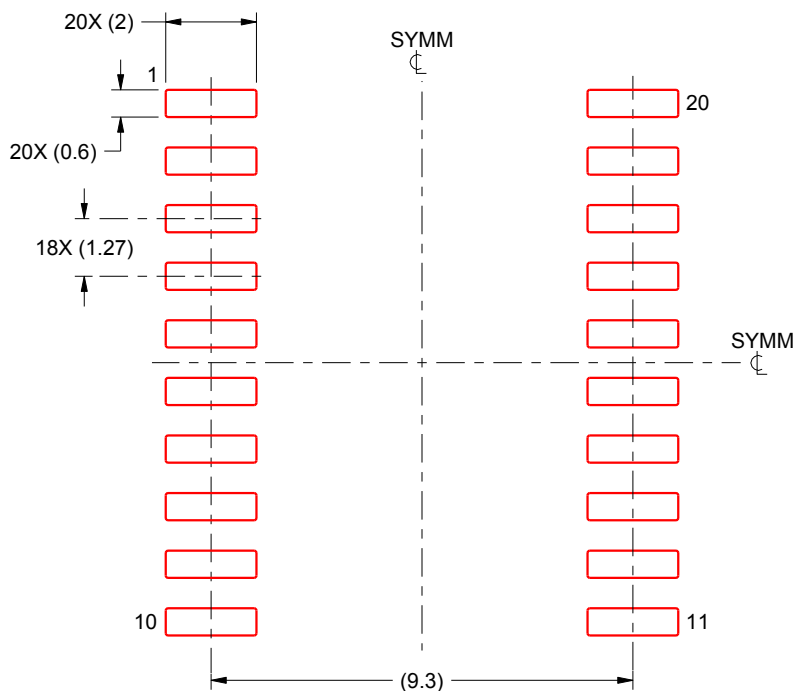

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:6X

4220724/A 05/2016


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

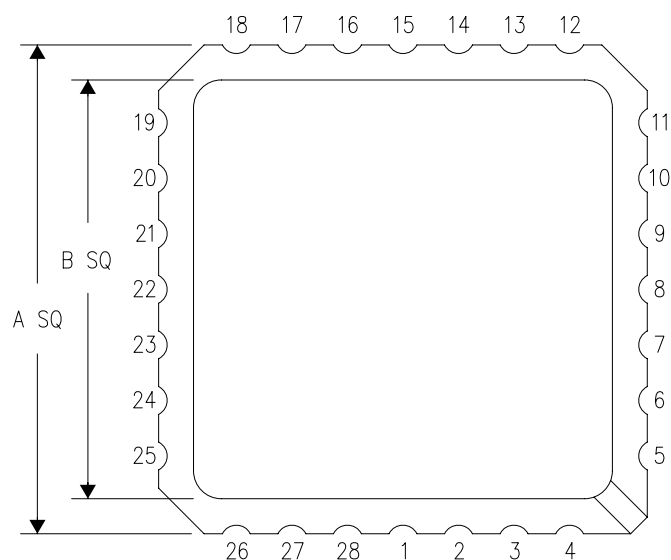



| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |

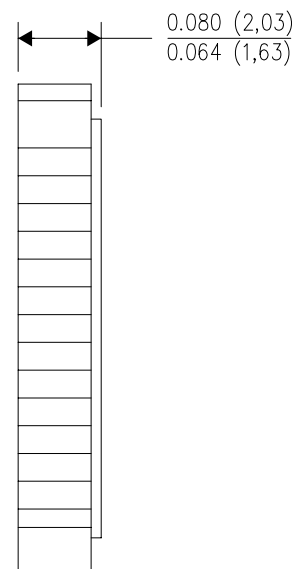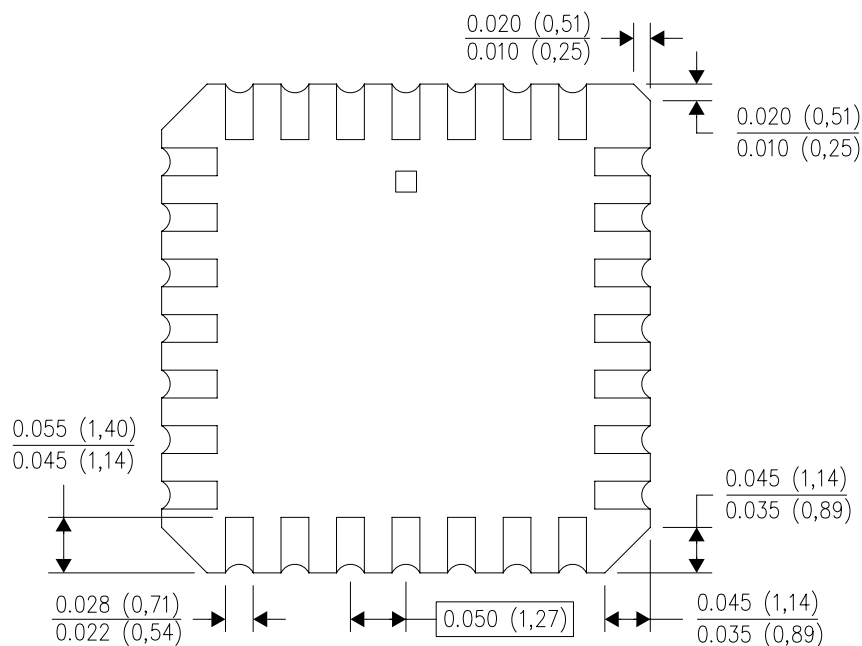

4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004



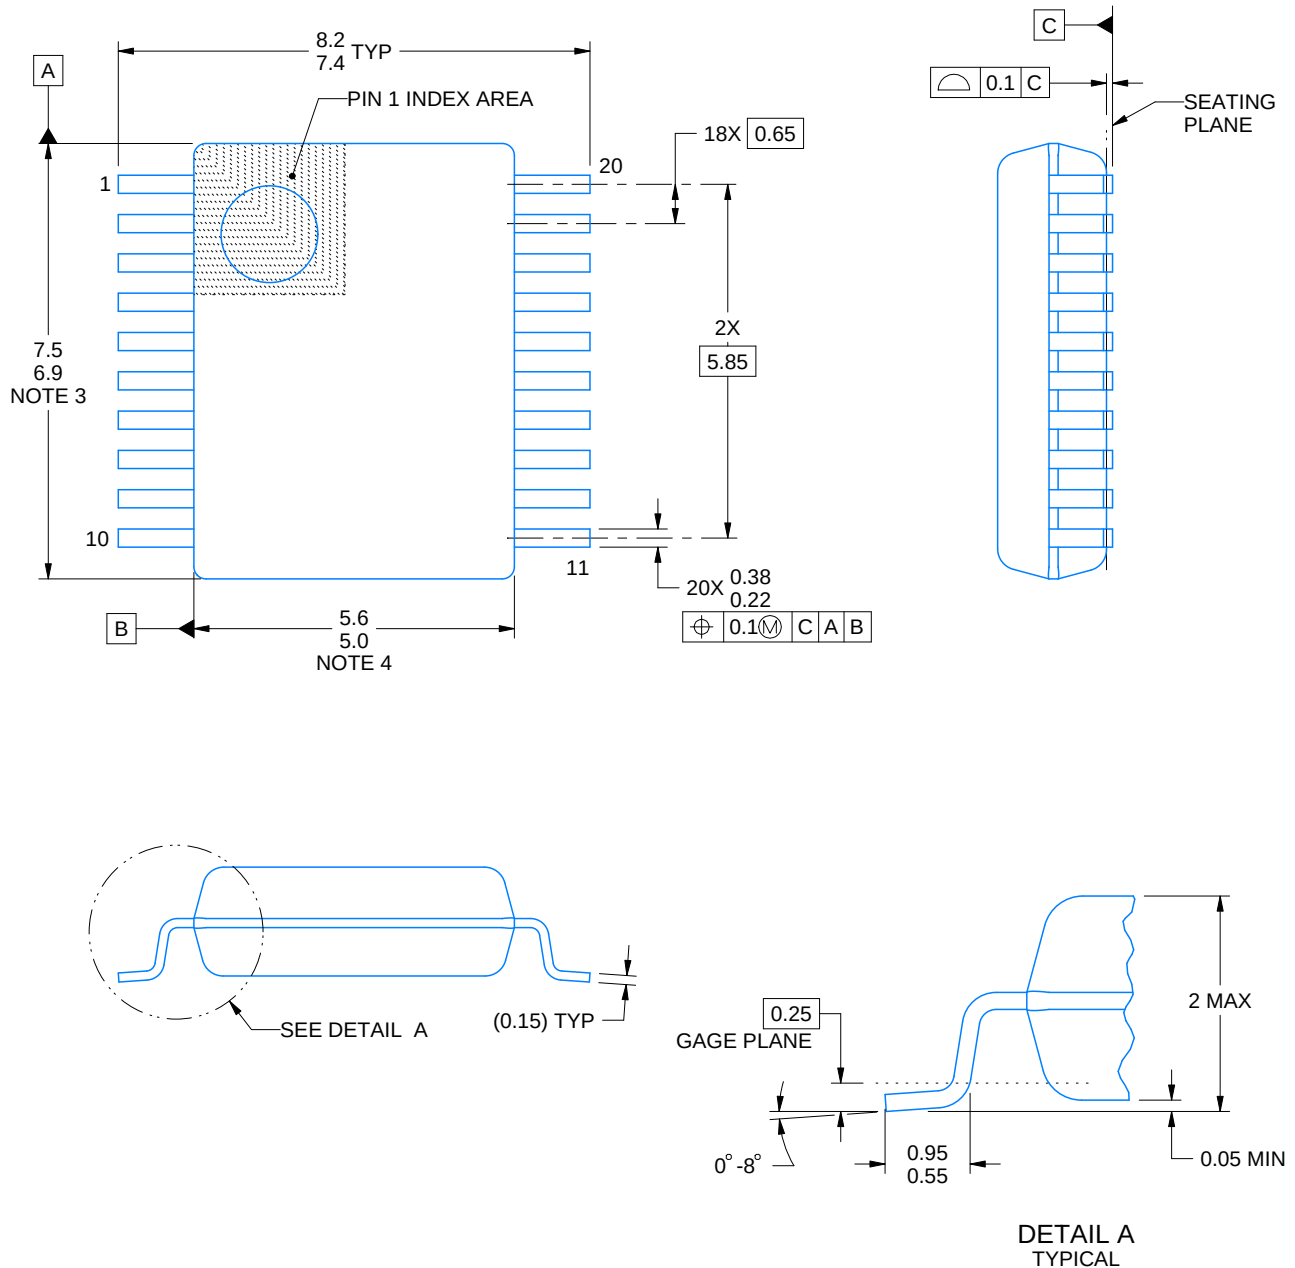

4214851/B 08/2019

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-150.

# EXAMPLE BOARD LAYOUT



DB0020A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

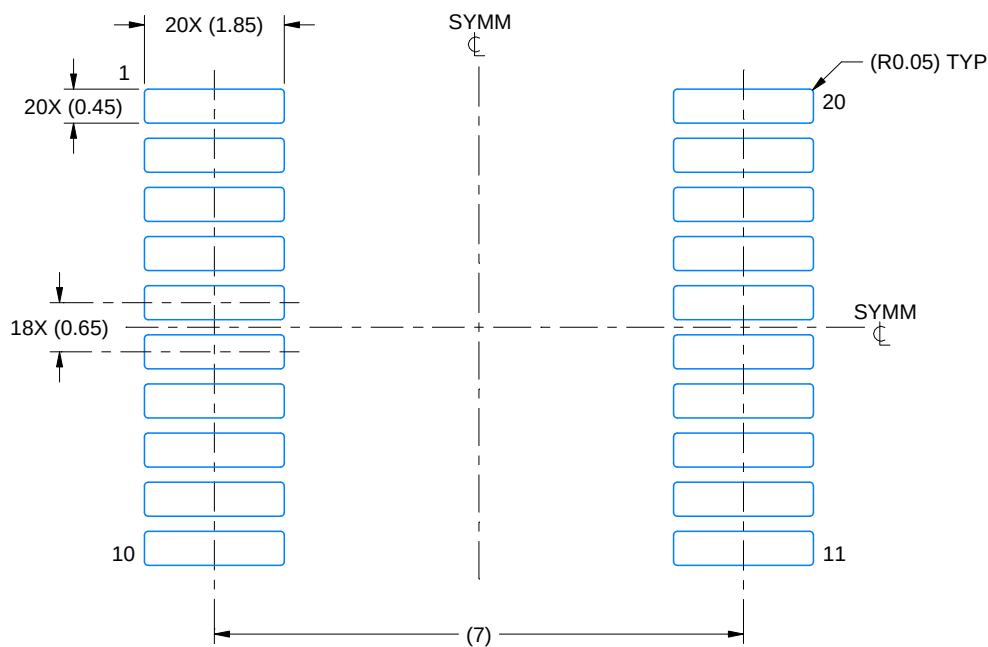

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

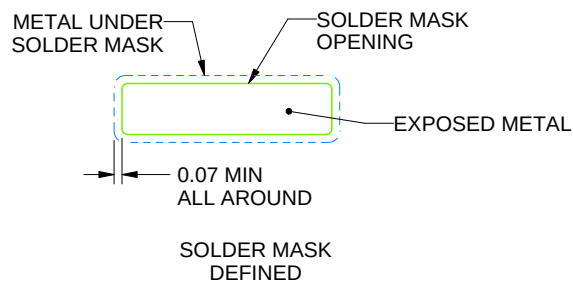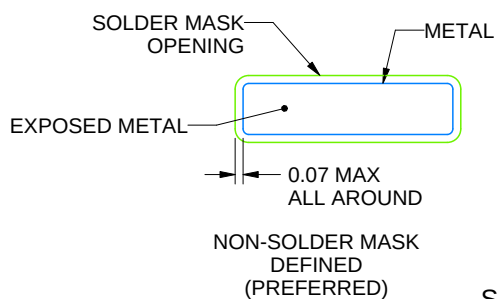

SOLDER MASK DETAILS

4214851/B 08/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DB0020A

SSOP - 2 mm max height

SMALL OUTLINE PACKAGE

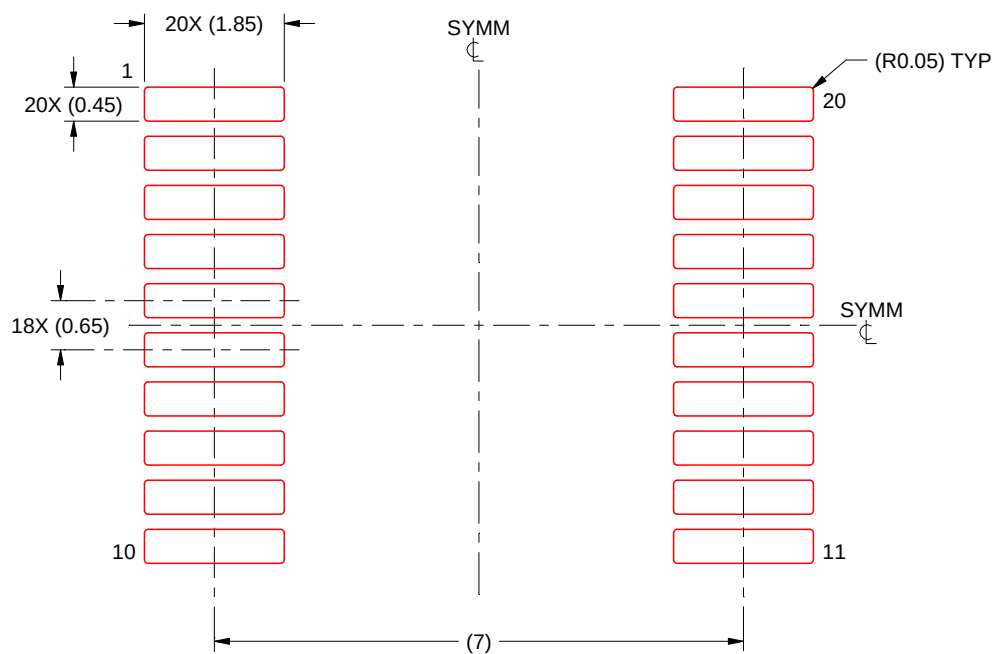

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4214851/B 08/2019

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE


14-PINS SHOWN

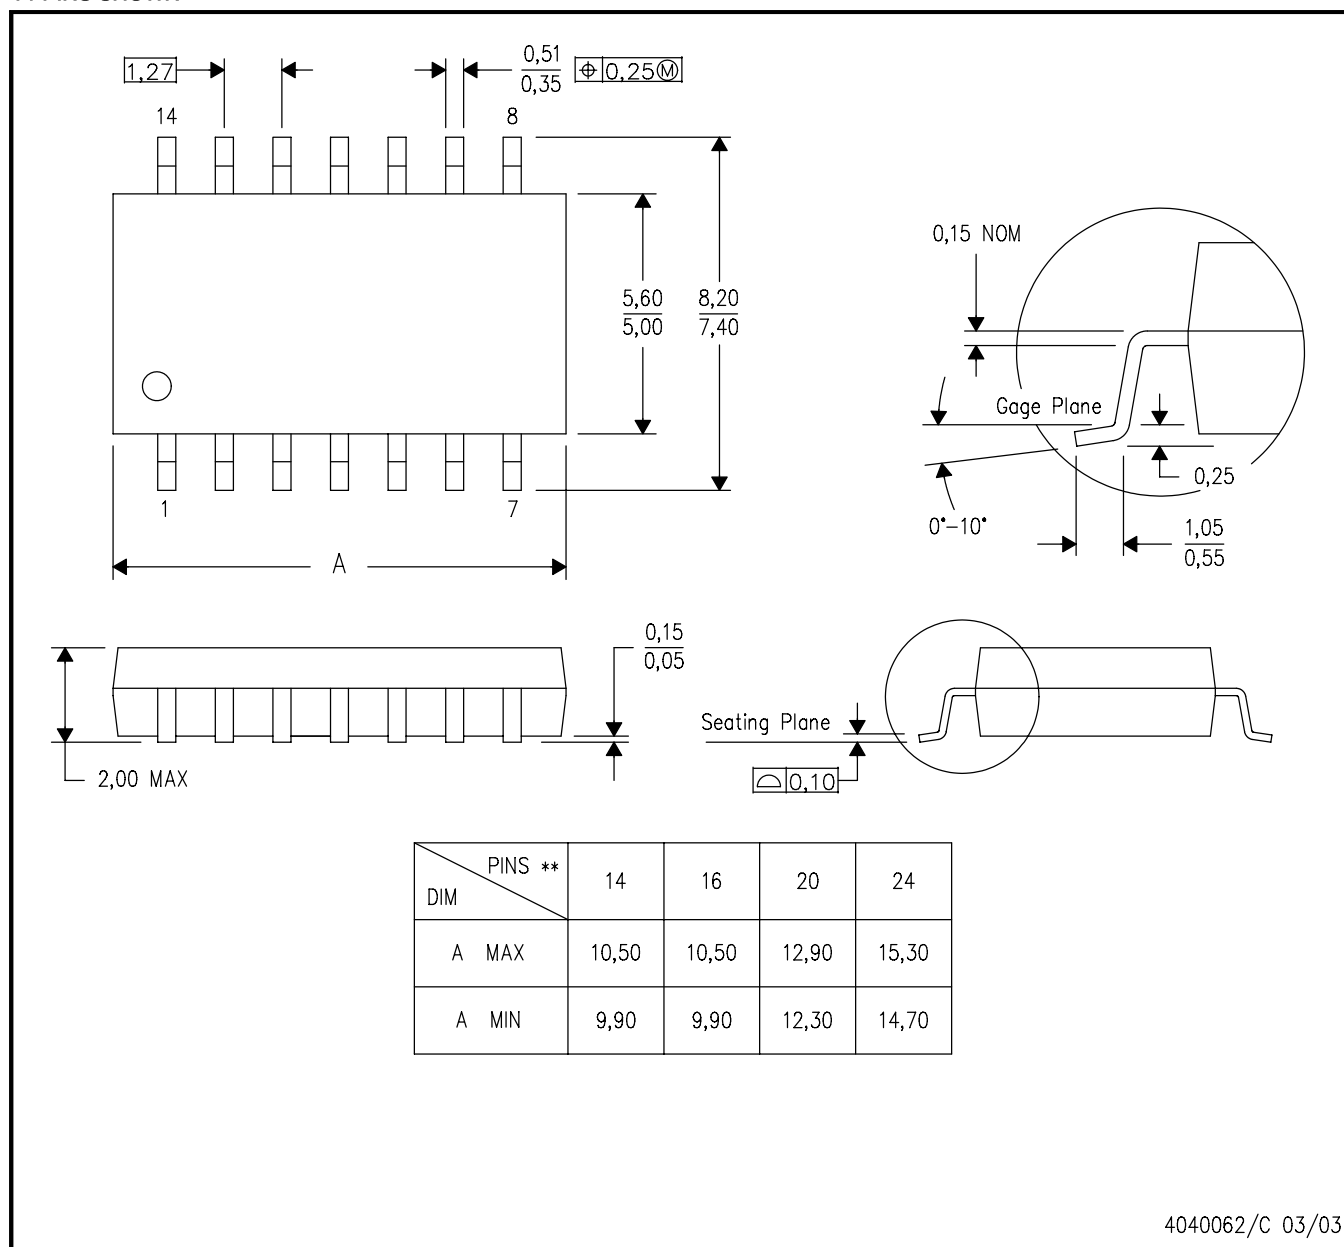

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

W (R-GDFP-F20)

CERAMIC DUAL FLATPACK

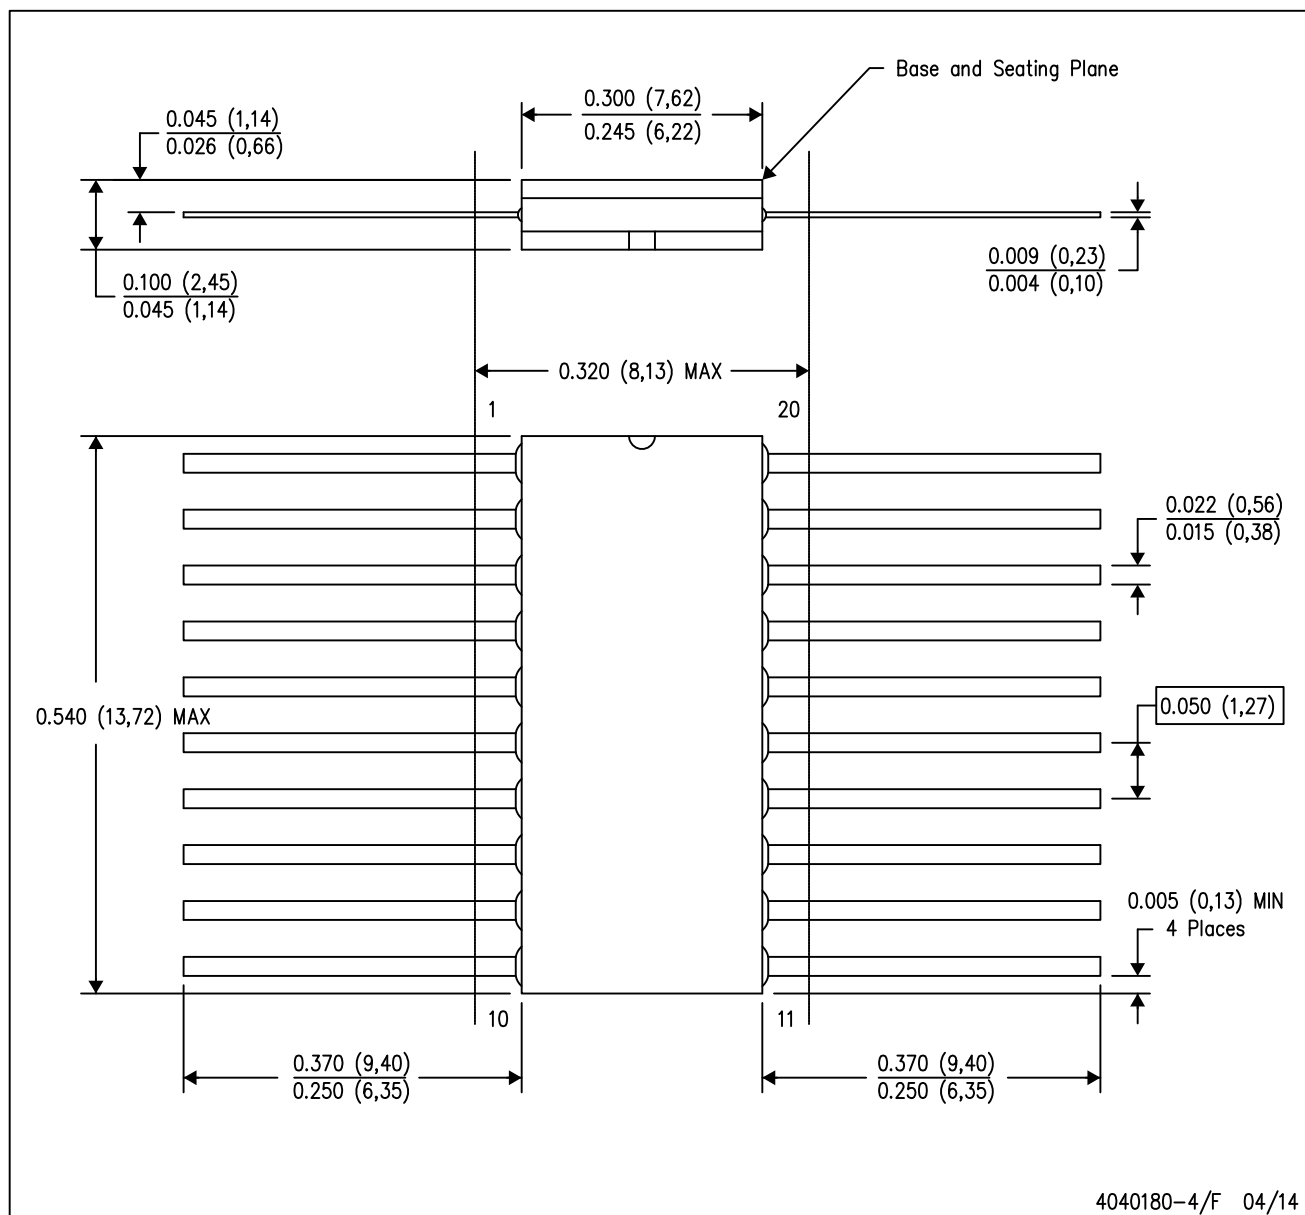

## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only.
- E. Falls within Mil-Std 1835 GDFP2-F20

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated