

# LM2902-Q1 QUADRUPLE OPERATIONAL AMPLIFIER


SGLS178E – AUGUST 2003 – REVISED APRIL 2008

- **Qualified for Automotive Applications**
- **ESD Protection <500 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0); 1500 V Using Charged Device Model**
- **ESD Human Body Model >2 kV Machine Model >200 V and Charge Device Model = 2 kV For K-Suffix Devices.**
- **Low Supply-Current Drain Independent of Supply Voltage . . . 0.8 mA Typ**
- **Low Input Bias and Offset Parameters:**
  - Input Offset Voltage . . . 3 mV Typ
  - Input Offset Current . . . 2 nA Typ
  - Input Bias Current . . . 20 nA Typ
- **Common-Mode Input Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage:**
  - Non-V devices . . . 26 V
  - V-Suffix devices . . . 32 V
- **Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ**
- **Internal Frequency Compensation**

## description/ordering information

This device consists of four independent high-gain frequency-compensated operational amplifiers that are designed specifically to operate from a single supply over a wide range of voltages. Operation from split supplies is possible when the difference between the two supplies is 3 V to 26 V (3 V to 32 V for V-suffixed devices), and  $V_{CC}$  is at least 1.5 V more positive than the input common-mode voltage. The low supply-current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, dc amplification blocks, and all the conventional operational-amplifier circuits that now can be more easily implemented in single-supply-voltage systems. For example, the LM2902 can be operated directly from the standard 5-V supply that is used in digital systems and easily provides the required interface electronics without requiring additional  $\pm 15$ -V supplies.



## ORDERING INFORMATION<sup>†</sup>

| $T_A$          | $V_{IO\ max}$<br>AT 25°C | MAX $V_{CC}$ | PACKAGE <sup>‡</sup> |              | ORDERABLE<br>PART NUMBER | TOP-SIDE<br>MARKING |
|----------------|--------------------------|--------------|----------------------|--------------|--------------------------|---------------------|
| –40°C to 125°C | 7 mV                     | 26 V         | SOIC (D)             | Reel of 2500 | LM2902QDRQ1              | 2902Q1              |
|                |                          |              | TSSOP (PW)           | Reel of 2000 | LM2902QPWRQ1             | 2902Q1              |
|                | 7 mV                     | 32 V         | SOIC (D)             | Reel of 2500 | LM2902KVQDRQ1            | 2902KVQ             |
|                |                          |              | TSSOP (PW)           | Reel of 2000 | LM2902KVQPWRQ1           | 2902KVQ             |
|                | 2 mV                     | 32 V         | SOIC (D)             | Reel of 2500 | LM2902KAVQDRQ1           | 2902KAQ             |
|                |                          |              | TSSOP (PW)           | Reel of 2000 | LM2902KAVQPWRQ1          | 2902KAQ             |

<sup>†</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at <http://www.ti.com>.

<sup>‡</sup> Package drawings, thermal data, and symbolization are available at <http://www.ti.com/packaging>.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2008 Texas Instruments Incorporated


# LM2902-Q1 QUADRUPLE OPERATIONAL AMPLIFIER

SGLS178E – AUGUST 2003 – REVISED APRIL 2008

## symbol (each amplifier)

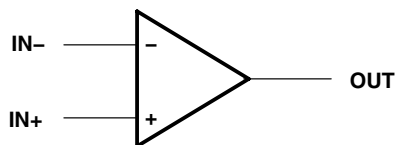

## schematic (each amplifier)

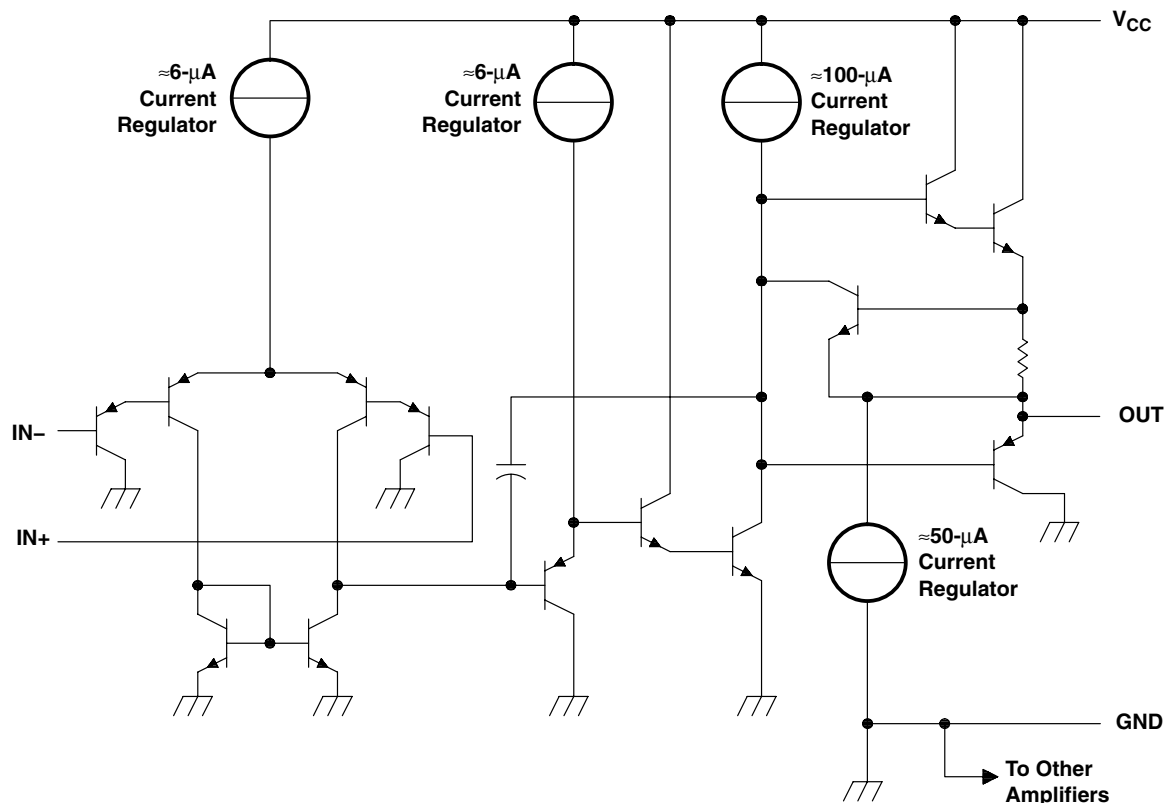

| COMPONENT COUNT<br>(TOTAL DEVICE) |    |
|-----------------------------------|----|
| Epi-FET                           | 1  |
| Transistors                       | 95 |
| Diodes                            | 4  |
| Resistors                         | 11 |
| Capacitors                        | 4  |

# LM2902-Q1 QUADRUPLE OPERATIONAL AMPLIFIER

SGLS178E – AUGUST 2003 – REVISED APRIL 2008

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|  | LM2902-Q1          | LM2902KV-Q1 | UNIT               |
|--|--------------------|-------------|--------------------|
| Supply voltage, $V_{CC}$ (see Note 1)  | 26                 | 32          | V                  |
| Differential input voltage, $V_{ID}$ (see Note 2)  | $\pm 26$           | $\pm 32$    | V                  |
| Input voltage, $V_I$ (either input)  | -0.3 to 26         | -0.3 to 32  | V                  |
| Duration of output short circuit (one amplifier) to ground at (or below) $T_A = 25^\circ\text{C}$ , $V_{CC} \leq 15\text{ V}$ (see Note 3) | Unlimited          | Unlimited   |                    |
| Package thermal impedance, $\theta_{JA}$ (see Notes 4 and 5)   | D package (0 LFPM) | 101         | $^\circ\text{C/W}$ |
|  | PW package         | 113         |                    |
| Operating virtual junction temperature, $T_J$  | 142                | 142         | $^\circ\text{C}$   |
| Storage temperature range, $T_{stg}$   | -65 to 150         | -65 to 150  | $^\circ\text{C}$   |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages and  $V_{CC}$  specified for the measurement of  $I_{OS}$ , are with respect to the network GND.
  2. Differential voltages are at  $IN+$  with respect to  $IN-$ .
  3. Short circuits from outputs to  $V_{CC}$  can cause excessive heating and eventual destruction.
  4. Maximum power dissipation is a function of  $T_J(\text{max})$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of  $142^\circ\text{C}$  can affect reliability.
  5. The package thermal impedance is calculated in accordance with JESD 51-7.

# LM2902-Q1

## QUADRUPLE OPERATIONAL AMPLIFIER

SGLS178E – AUGUST 2003 – REVISED APRIL 2008

### electrical characteristics at specified free-air temperature, $V_{CC} = 5\text{ V}$ (unless otherwise noted)

| PARAMETER  | TEST CONDITIONS†   | $T_A$ ‡    | LM2902-Q1           |          |               | UNIT |
|--|--|------------|---------------------|----------|---------------|------|
|  |  |            | MIN                 | TYP§     | MAX           |      |
| $V_{IO}$ Input offset voltage  | $V_{CC} = 5\text{ V to } 26\text{ V}$ ,<br>$V_{IC} = V_{ICRmin}$ , $V_O = 1.4\text{ V}$      | 25°C       | 3                   | 7        |               | mV   |
|  |  | Full range |                     |          | 10            |      |
| $I_{IO}$ Input offset current  | $V_O = 1.4\text{ V}$   | 25°C       | 2                   | 50       |               | nA   |
|  |  | Full range |                     |          | 300           |      |
| $I_{IB}$ Input bias current  | $V_O = 1.4\text{ V}$   | 25°C       | -20                 | -250     |               | nA   |
|  |  | Full range |                     |          | -500          |      |
| $V_{ICR}$ Common-mode input voltage range                                  | $V_{CC} = 5\text{ V to } 26\text{ V}$  | 25°C       | 0 to $V_{CC} - 1.5$ |          |               | V    |
|  |  | Full range | 0 to $V_{CC} - 2$   |          |               |      |
| $V_{OH}$ High-level output voltage   | $R_L = 10\text{ k}\Omega$  | 25°C       | $V_{CC} - 1.5$      |          |               | V    |
|  | $V_{CC} = 26\text{ V}$ , $R_L = 2\text{ k}\Omega$  | Full range | 22                  |          |               |      |
|  | $V_{CC} = 26\text{ V}$ , $R_L \geq 10\text{ k}\Omega$  | Full range | 23                  | 24       |               |      |
| $V_{OL}$ Low-level output voltage  | $R_L \leq 10\text{ k}\Omega$   | Full range | 5                   | 20       |               | mV   |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{CC} = 15\text{ V}$ , $V_O = 1\text{ V to } 11\text{ V}$ ,<br>$R_L \geq 2\text{ k}\Omega$ | 25°C       | 100                 |          |               | V/mV |
|  |  | Full range | 15                  |          |               |      |
| CMRR Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}$  | 25°C       | 50                  | 80       |               | dB   |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ ) |  | 25°C       | 50                  | 100      |               | dB   |
| $V_{O1}/V_{O2}$ Crosstalk attenuation                                      | $f = 1\text{ kHz to } 20\text{ kHz}$   | 25°C       | 120                 |          |               | dB   |
| $I_O$ Output current   | $V_{CC} = 15\text{ V}$ , $V_{ID} = 1\text{ V}$ ,<br>$V_O = 0$                                | 25°C       | -20                 | -30      | -60           | mA   |
|  |  | Full range | -10                 |          |               |      |
|  | $V_{CC} = 15\text{ V}$ , $V_{ID} = -1\text{ V}$ ,<br>$V_O = 15\text{ V}$                     | 25°C       | 10                  | 20       |               |      |
|  |  | Full range | 5                   |          |               |      |
| $V_{ID} = -1\text{ V}$ , $V_O = 200\text{ mV}$                             | 25°C   | 30         |                     |          | $\mu\text{A}$ |      |
| $I_{OS}$ Short-circuit output current                                      | $V_{CC}$ at 5 V, $V_O = 0$ ,<br>GND at -5 V  | 25°C       | $\pm 40$            | $\pm 60$ |               | mA   |
| $I_{CC}$ Supply current (four amplifiers)                                  | $V_O = 2.5\text{ V}$ , No load   | Full range | 0.7                 | 1.2      |               | mA   |
|  | $V_{CC} = 26\text{ V}$ ,<br>$V_O = 0.5 V_{CC}$ , No load                                     | Full range | 1.4                 | 3        |               |      |

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified.

‡ Full range is -40°C to 125°C.

§ All typical values are at  $T_A = 25^\circ\text{C}$ .



# LM2902-Q1 QUADRUPLE OPERATIONAL AMPLIFIER

SGLS178E – AUGUST 2003 – REVISED APRIL 2008

**electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)  
(continued)**

| PARAMETER  | TEST CONDITIONS†  |                        | $T_A$ ‡             | LM2902KV-Q1 |               |                              | UNIT |
|--|---|------------------------|---------------------|-------------|---------------|------------------------------|------|
|  |   |                        |                     | MIN         | TYP§          | MAX                          |      |
| $V_{IO}$ Input offset voltage  | $V_{CC} = 5\text{ V to }32\text{ V}$ ,<br>$V_{IC} = V_{ICRmin}$ ,<br>$V_O = 1.4\text{ V}$   | Non-A devices          | 25°C                | 3           | 7             | mV                           |      |
|  |   |                        | Full range          |             | 10            |                              |      |
|  |   | A-suffix devices       | 25°C                | 1           | 2             |                              |      |
|  |   |                        | Full range          |             | 4             |                              |      |
| $\Delta V_{IO}/\Delta T$ Temperature drift                                 | $R_S = 0\ \Omega$   | Full range             |                     | 7           |               | $\mu\text{V}/^\circ\text{C}$ |      |
| $I_{IO}$ Input offset current  | $V_O = 1.4\text{ V}$  | 25°C                   | 2                   | 50          | nA            |                              |      |
|  |   | Full range             |                     | 150         |               |                              |      |
| $\Delta I_{IO}/\Delta T$ Temperature drift                                 |   | Full range             |                     | 10          |               | $\text{pA}/^\circ\text{C}$   |      |
| $I_{IB}$ Input bias current  | $V_O = 1.4\text{ V}$  | 25°C                   | -20                 | -250        | nA            |                              |      |
|  |   | Full range             |                     | -500        |               |                              |      |
| $V_{ICR}$ Common-mode input voltage range                                  | $V_{CC} = 5\text{ V to }32\text{ V}$  | 25°C                   | 0 to $V_{CC} - 1.5$ |             | V             |                              |      |
|  |   | Full range             | 0 to $V_{CC} - 2$   |             |               |                              |      |
| $V_{OH}$ High-level output voltage   | $R_L = 10\text{ k}\Omega$   | 25°C                   | $V_{CC} - 1.5$      |             | V             |                              |      |
|  | $V_{CC} = 32\text{ V}$ , $R_L = 2\text{ k}\Omega$   | Full range             | 26                  |             |               |                              |      |
|  | $V_{CC} = 32\text{ V}$ , $R_L \geq 10\text{ k}\Omega$                                       | Full range             | 27                  |             |               |                              |      |
| $V_{OL}$ Low-level output voltage  | $R_L \leq 10\text{ k}\Omega$  | Full range             | 5                   | 20          | mV            |                              |      |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{CC} = 15\text{ V}$ , $V_O = 1\text{ V to }11\text{ V}$ ,<br>$R_L \geq 2\text{ k}\Omega$ | 25°C                   | 25                  | 100         | V/mV          |                              |      |
|  |   | Full range             | 15                  |             |               |                              |      |
| Amplifier-to-amplifier coupling¶   | $f = 1\text{ kHz to }20\text{ kHz}$ ,<br>input referred                                     | 25°C                   | 120                 |             | dB            |                              |      |
| CMRR Common-mode rejection ratio   | $V_{IC} = V_{ICRmin}$   | 25°C                   | 60                  | 80          | dB            |                              |      |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{CC}/\Delta V_{IO}$ ) |   | 25°C                   | 60                  | 100         | dB            |                              |      |
| $V_{O1}/V_{O2}$ Crosstalk attenuation                                      | $f = 1\text{ kHz to }20\text{ kHz}$   | 25°C                   | 120                 |             | dB            |                              |      |
| $I_O$ Output current   | $V_{CC} = 15$<br>$V_O = 0$  | $V_{ID} = 1\text{ V}$  | 25°C                | -20         | -30           | -60                          | mA   |
|  |   |                        | Full range          | -10         |               |                              |      |
|  | $V_{CC} = 15$<br>$V_O = 15\text{ V}$  | $V_{ID} = -1\text{ V}$ | 25°C                | 10          | 20            |                              |      |
|  |   |                        | Full range          | 5           |               |                              |      |
|  | $V_{ID} = -1\text{ V}$ ,<br>$V_O = 200\text{ mV}$   | 25°C                   | 12                  | 40          | $\mu\text{A}$ |                              |      |
| $I_{OS}$ Short-circuit output current                                      | $V_{CC}$ at 5 V,<br>GND at -5 V   | $V_O = 0$ ,            | 25°C                | $\pm 40$    | $\pm 60$      | mA                           |      |
| $I_{CC}$ Supply current (four amplifiers)                                  | $V_O = 2.5\text{ V}$ ,<br>$V_{CC} = 32\text{ V}$  | No load                | Full range          | 0.7         | 1.2           | mA                           |      |
|  | $V_O = 0.5 V_{CC}$ ,  | No load                | Full range          | 1.4         | 3             |                              |      |

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified.

‡ Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

§ All typical values are at  $T_A = 25^\circ\text{C}$ .

¶ Due to proximity of external components, ensure that coupling is not originating via stray capacitance between these external parts. Typically, this can be detected, as this type of coupling increases at higher frequencies.



# LM2902-Q1 QUADRUPLE OPERATIONAL AMPLIFIER

SGLS178E – AUGUST 2003 – REVISED APRIL 2008

operating conditions,  $V_{CC} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER |                                | TEST CONDITIONS   | TYP | UNIT                         |
|-----------|--------------------------------|---|-----|------------------------------|
| SR        | Slew rate at unity gain        | $R_L = 1\text{ M}\Omega$ , $C_L = 30\text{ pF}$ , $V_I = \pm 10\text{ V}$<br>(see Figure 1) | 0.5 | $\text{V}/\mu\text{s}$       |
| $B_1$     | Unity-gain bandwidth           | $R_L = 1\text{ M}\Omega$ , $C_L = 20\text{ pF}$ (see Figure 1)                              | 1.2 | MHz                          |
| $V_n$     | Equivalent input noise voltage | $R_S = 100\ \Omega$ , $V_I = 0\text{ V}$ , $f = 1\text{ kHz}$<br>(see Figure 2)             | 35  | $\text{nV}/\sqrt{\text{Hz}}$ |

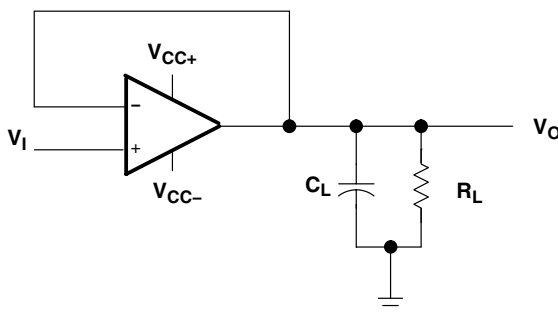


Figure 1. Unity-Gain Amplifier

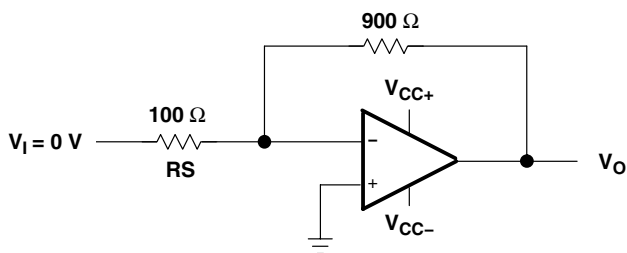


Figure 2. Noise-Test Circuit

**PACKAGING INFORMATION**

| Orderable Device  | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|-------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LM2902KAVQDRQ1    | ACTIVE        | SOIC         | D               | 14   | 2500        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KAQ                 | <a href="#">Samples</a> |
| LM2902KAVQPWRG4Q1 | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KAQ                 | <a href="#">Samples</a> |
| LM2902KAVQPWRQ1   | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KAQ                 | <a href="#">Samples</a> |
| LM2902KVQDRQ1     | ACTIVE        | SOIC         | D               | 14   | 2500        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KVQ                 | <a href="#">Samples</a> |
| LM2902KVQPWRG4Q1  | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KVQ                 | <a href="#">Samples</a> |
| LM2902KVQPWRQ1    | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902KVQ                 | <a href="#">Samples</a> |
| LM2902QDRG4Q1     | ACTIVE        | SOIC         | D               | 14   | 2500        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902Q1                  | <a href="#">Samples</a> |
| LM2902QDRQ1       | ACTIVE        | SOIC         | D               | 14   | 2500        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902Q1                  | <a href="#">Samples</a> |
| LM2902QPWRG4Q1    | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902Q1                  | <a href="#">Samples</a> |
| LM2902QPWRQ1      | ACTIVE        | TSSOP        | PW              | 14   | 2000        | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 125   | 2902Q1                  | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF LM2902-Q1 :**

- Catalog: [LM2902](#)
- Enhanced Product: [LM2902-EP](#)

**NOTE: Qualified Version Definitions:**

- Catalog - TI's standard catalog product
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM2902KAVQPWRG4Q1 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2902KAVQPWRQ1   | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2902KVQPWRG4Q1  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2902KVQPWRQ1    | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2902QPWRG4Q1    | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2902QPWRQ1      | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |


**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device            | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM2902KAVQPWRG4Q1 | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| LM2902KAVQPWRQ1   | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| LM2902KVQPWRG4Q1  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| LM2902KVQPWRQ1    | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |
| LM2902QPWRG4Q1    | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |
| LM2902QPWRQ1      | TSSOP        | PW              | 14   | 2000 | 853.0       | 449.0      | 35.0        |

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

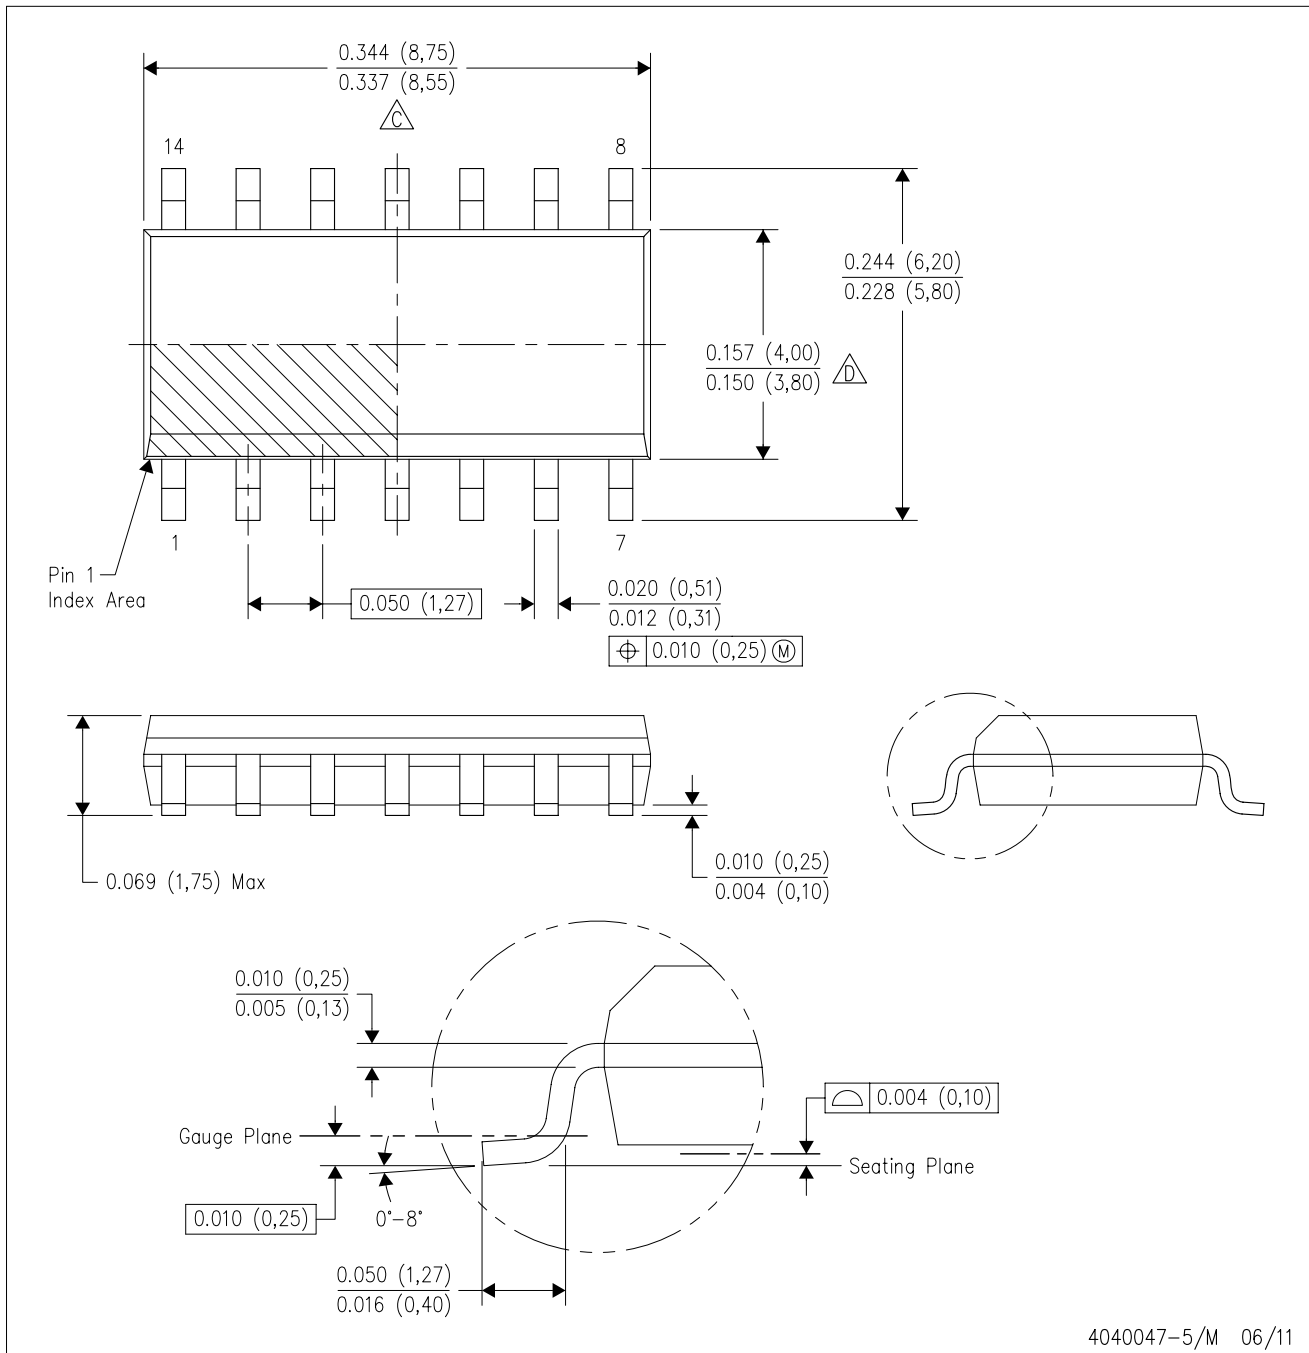

4040047-5/M 06/11

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE




4211283-3/E 08/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

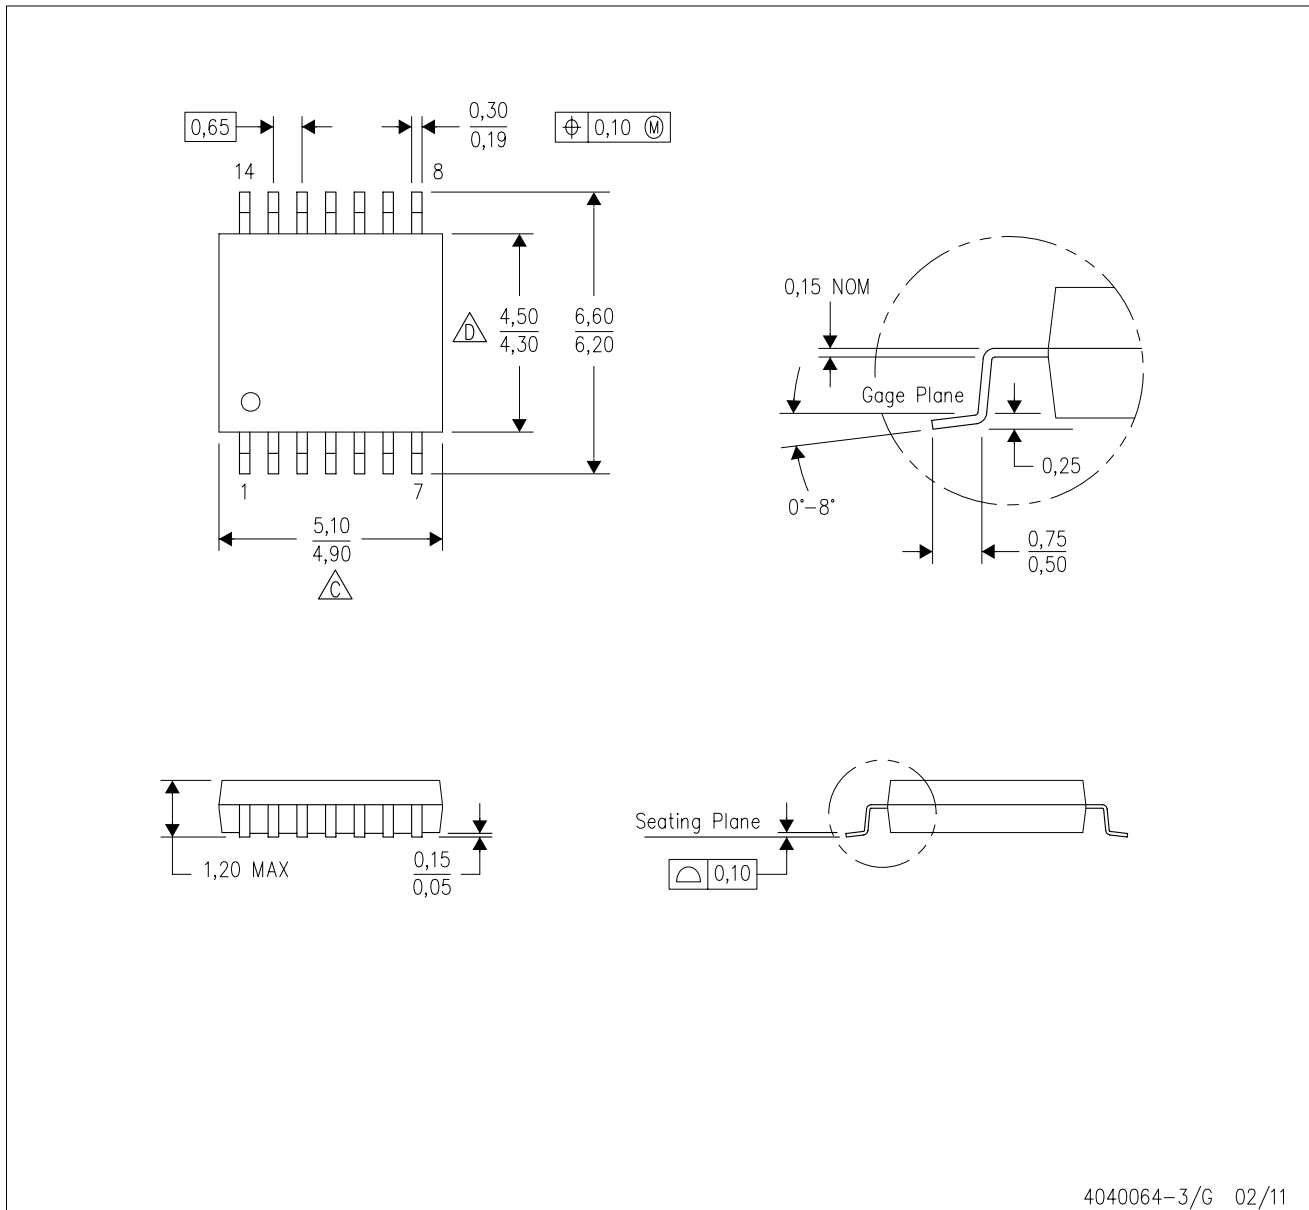

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4211284-2/G 08/15

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated