

- Low Supply-Voltage Range, 1.8 V to 3.6 V
- Ultralow-Power Consumption:
  - Active Mode: 300  $\mu$ A at 1 MHz, 2.2 V
  - Standby Mode: 1.1  $\mu$ A
  - Off Mode (RAM Retention): 0.1  $\mu$ A
- Five Power Saving Modes
- Wake-Up From Standby Mode in Less Than 6  $\mu$ s
- 16-Bit RISC Architecture, 125-ns Instruction Cycle Time
- Single-Channel Internal DMA
- 12-Bit A/D Converter With Internal Reference, Sample-and-Hold and Autoscan Feature
- 16-Bit Timer\_A With Three Capture/Compare Registers
- 16-Bit Timer\_B With Three Capture/Compare-With-Shadow Registers
- On-Chip Comparator
- Serial Communication Interface (USART), Select Asynchronous UART or Synchronous SPI by Software
- Brownout Detector
- Supply Voltage Supervisor/Monitor With Programmable Level Detection
- Bootstrap Loader
- Serial Onboard Programming, No External Programming Voltage Needed
- Programmable Code Protection by Security Fuse
- Integrated LCD Driver for Up to 128 Segments
- Family Members Include:
  - MSP430F438: 48KB+256B Flash Memory, 2KB RAM
  - MSP430F439: 60KB+256B Flash Memory, 2KB RAM
- For Complete Module Descriptions, See *The MSP430x4xx Family User's Guide*, Literature Number SLAU056

## description

The Texas Instruments MSP430 family of ultralow power microcontrollers consists of several devices featuring different sets of peripherals targeted for various applications. The architecture, combined with five low-power modes, is optimized to achieve extended battery life in portable measurement applications. The device features a powerful 16-bit RISC CPU, 16-bit registers, and constant generators that contribute to maximum code efficiency. The digitally controlled oscillator (DCO) allows wake-up from low-power modes to active mode in less than 6 $\mu$ s.

The MSP430F43x series are microcontroller configurations with two 16-bit timers, a high performance 12-bit A/D converter, one universal synchronous/asynchronous communication interface (USART), DMA, 48 I/O pins, and a liquid crystal display (LCD) driver.

Typical applications for this device include analog and digital sensor systems, digital motor control, remote controls, thermostats, digital timers, hand-held meters, etc.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications. These devices have limited built-in ESD protection.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2010, Texas Instruments Incorporated

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010


AVAILABLE OPTIONS

| T <sub>A</sub> | PACKAGED DEVICES               |
|----------------|--------------------------------|
|                | PLASTIC 80-PIN QFP (PN)        |
| -40°C to 85°C  | MSP430F438IPN<br>MSP430F439IPN |


† For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

‡ Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

pin designation, MSP430F438IPN, MSP430F439IPN

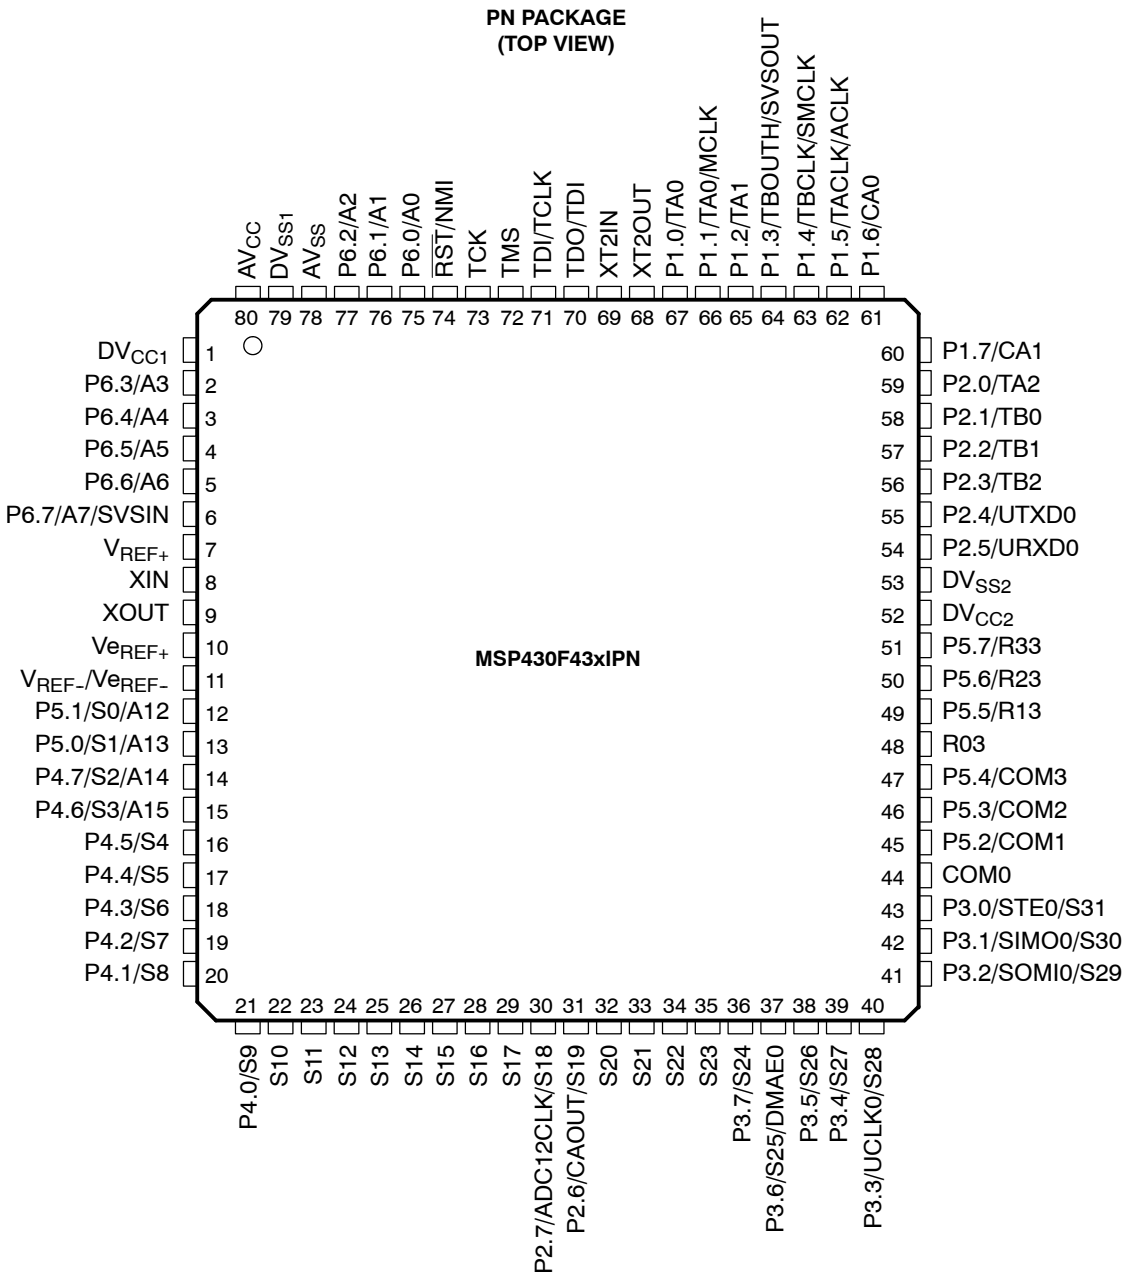

**functional block diagram**

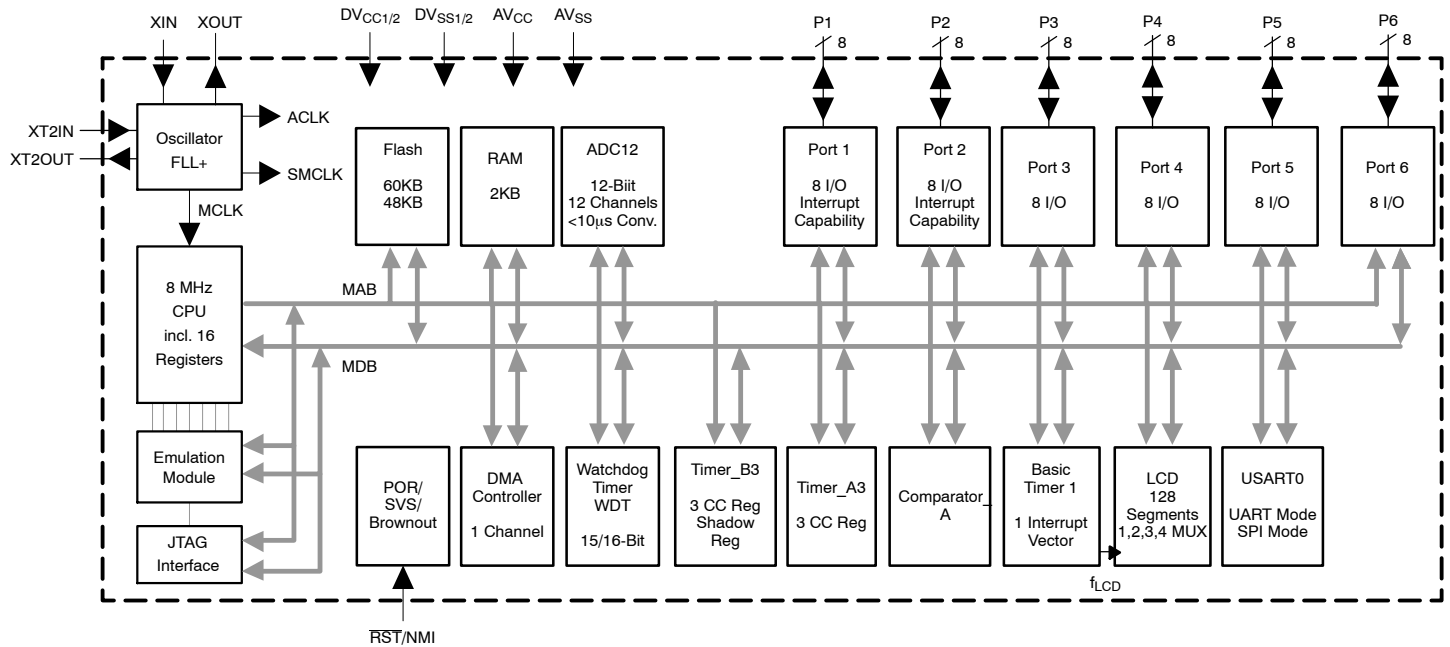

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

## Terminal Functions

| TERMINAL                             |     |     | DESCRIPTION                                                                                                                                                         |
|--------------------------------------|-----|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PN<br>NAME                           | NO. | I/O |                                                                                                                                                                     |
| DV <sub>CC1</sub>                    | 1   |     | Digital supply voltage, positive terminal.                                                                                                                          |
| P6.3/A3                              | 2   | I/O | General-purpose digital I/O / analog input a3—12-bit ADC                                                                                                            |
| P6.4/A4                              | 3   | I/O | General-purpose digital I/O / analog input a4—12-bit ADC                                                                                                            |
| P6.5/A5                              | 4   | I/O | General-purpose digital I/O / analog input a5—12-bit ADC                                                                                                            |
| P6.6/A6                              | 5   | I/O | General-purpose digital I/O / analog input a6—12-bit ADC                                                                                                            |
| P6.7/A7/SVSIN                        | 6   | I/O | General-purpose digital I/O / analog input a7—12-bit ADC / analog input to supply voltage supervisor                                                                |
| V <sub>REF+</sub>                    | 7   | O   | Positive output terminal of the reference voltage in the ADC                                                                                                        |
| XIN                                  | 8   | I   | Input terminal of crystal oscillator XT1                                                                                                                            |
| XOUT                                 | 9   | O   | Output terminal of crystal oscillator XT1                                                                                                                           |
| V <sub>REF+</sub>                    | 10  | I/O | Positive input terminal for an external reference voltage to the 12-bit ADC                                                                                         |
| V <sub>REF-</sub> /V <sub>REF-</sub> | 11  | I   | Negative terminal for the 12-bit ADC reference voltage for both sources, the internal reference voltage or an external applied reference voltage to the 12-bit ADC. |
| P5.1/S0/A12                          | 12  | I/O | General-purpose digital I/O / LCD segment output 0/ analog input a12—12-bit ADC                                                                                     |
| P5.0/S1/A13                          | 13  | I/O | General-purpose digital I/O / LCD segment output 1/ analog input a13—12-bit ADC                                                                                     |
| P4.7/S2/A14                          | 14  | I/O | General-purpose digital I/O / LCD segment output 2/ analog input a14—12-bit ADC                                                                                     |
| P4.6/S3/A15                          | 15  | I/O | General-purpose digital I/O / LCD segment output 3/ analog input a15—12-bit ADC                                                                                     |
| P4.5/S4                              | 16  | I/O | General-purpose digital I/O / LCD segment output 4                                                                                                                  |
| P4.4/S5                              | 17  | I/O | General-purpose digital I/O / LCD segment output 5                                                                                                                  |
| P4.3/S6                              | 18  | I/O | General-purpose digital I/O / LCD segment output 6                                                                                                                  |
| P4.2/S7                              | 19  | I/O | General-purpose digital I/O / LCD segment output 7                                                                                                                  |
| P4.1/S8                              | 20  | I/O | General-purpose digital I/O / LCD segment output 8                                                                                                                  |
| P4.0/S9                              | 21  | I/O | General-purpose digital I/O / LCD segment output 9                                                                                                                  |
| S10                                  | 22  | O   | LCD segment output 10                                                                                                                                               |
| S11                                  | 23  | O   | LCD segment output 11                                                                                                                                               |
| S12                                  | 24  | O   | LCD segment output 12                                                                                                                                               |
| S13                                  | 25  | O   | LCD segment output 13                                                                                                                                               |
| S14                                  | 26  | O   | LCD segment output 14                                                                                                                                               |
| S15                                  | 27  | O   | LCD segment output 15                                                                                                                                               |
| S16                                  | 28  | O   | LCD segment output 16                                                                                                                                               |
| S17                                  | 29  | O   | LCD segment output 17                                                                                                                                               |
| P2.7/ADC12CLK/S18                    | 30  | I/O | General-purpose digital I/O / conversion clock—12-bit ADC / LCD segment output 18                                                                                   |
| P2.6/CAOUT/S19                       | 31  | I/O | General-purpose digital I/O / Comparator_A output / LCD segment output 19                                                                                           |
| S20                                  | 32  | O   | LCD segment output 20                                                                                                                                               |
| S21                                  | 33  | O   | LCD segment output 21                                                                                                                                               |
| S22                                  | 34  | O   | LCD segment output 22                                                                                                                                               |
| S23                                  | 35  | O   | LCD segment output 23                                                                                                                                               |
| P3.7/S24                             | 36  | I/O | General-purpose digital I/O / LCD segment output 24                                                                                                                 |
| P3.6/S25/DMAE0                       | 37  | I/O | General-purpose digital I/O / LCD segment output 25/DMA Channel 0 external trigger                                                                                  |
| P3.5/S26                             | 38  | I/O | General-purpose digital I/O / LCD segment output 26                                                                                                                 |
| P3.4/S27                             | 39  | I/O | General-purpose digital I/O / LCD segment output 27                                                                                                                 |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

### Terminal Functions (Continued)

| TERMINAL               |     |     | DESCRIPTION                                                                                                                                |
|------------------------|-----|-----|--------------------------------------------------------------------------------------------------------------------------------------------|
| PN<br>NAME             | NO. | I/O |                                                                                                                                            |
| P3.3/UCLK0/S28         | 40  | I/O | General-purpose digital I/O / ext. clock i/p—USART0/UART or SPI mode, clock o/p—USART0/SPI mode / LCD segment output 28                    |
| P3.2/SOMI0/S29         | 41  | I/O | General-purpose digital I/O / slave out/master in of USART0/SPI mode / LCD segment output 29                                               |
| P3.1/SIMO0/S30         | 42  | I/O | General-purpose digital I/O / slave out/master out of USART0/SPI mode / LCD segment output 30                                              |
| P3.0/STE0/S31          | 43  | I/O | General-purpose digital I/O / slave transmit enable-USART0/SPI mode / LCD segment output 31                                                |
| COM0                   | 44  | O   | Common output, COM0–3 are used for LCD backplanes.                                                                                         |
| P5.2/COM1              | 45  | I/O | General-purpose digital I/O / common output, COM0–3 are used for LCD backplanes.                                                           |
| P5.3/COM2              | 46  | I/O | General-purpose digital I/O / common output, COM0–3 are used for LCD backplanes.                                                           |
| P5.4/COM3              | 47  | I/O | General-purpose digital I/O / common output, COM0–3 are used for LCD backplanes.                                                           |
| R03                    | 48  | I   | Input port of fourth positive (lowest) analog LCD level (V5)                                                                               |
| P5.5/R13               | 49  | I/O | General-purpose digital I/O / input port of third most positive analog LCD level (V4 or V3)                                                |
| P5.6/R23               | 50  | I/O | General-purpose digital I/O / input port of second most positive analog LCD level (V2)                                                     |
| P5.7/R33               | 51  | I/O | General-purpose digital I/O / output port of most positive analog LCD level (V1)                                                           |
| DV <sub>CC2</sub>      | 52  |     | Digital supply voltage, positive terminal.                                                                                                 |
| DV <sub>SS2</sub>      | 53  |     | Digital supply voltage, negative terminal.                                                                                                 |
| P2.5/URXD0             | 54  | I/O | General-purpose digital I/O / receive data in—USART0/UART mode                                                                             |
| P2.4/UTXD0             | 55  | I/O | General-purpose digital I/O / transmit data out—USART0/UART mode                                                                           |
| P2.3/TB2               | 56  | I/O | General-purpose digital I/O / Timer_B3 CCR2.<br>Capture: CCI2A/CCI2B input, compare: Out2 output                                           |
| P2.2/TB1               | 57  | I/O | General-purpose digital I/O / Timer_B3 CCR1.<br>Capture: CCI1A/CCI1B input, compare: Out1 output                                           |
| P2.1/TB0               | 58  | I/O | General-purpose digital I/O / Timer_B3 CCR0.<br>Capture: CCI0A/CCI0B input, compare: Out0 output                                           |
| P2.0/TA2               | 59  | I/O | General-purpose digital I/O / Timer_A<br>Capture: CCI2A input, compare: Out2 output                                                        |
| P1.7/CA13              | 60  | I/O | General-purpose digital I/O / Comparator_A input                                                                                           |
| P1.6/CA0               | 61  | I/O | General-purpose digital I/O / Comparator_A input                                                                                           |
| P1.5/TACLK/<br>ACLK    | 62  | I/O | General-purpose digital I/O / Timer_A, clock signal TACLK input /<br>ACLK output (divided by 1, 2, 4, or 8)                                |
| P1.4/TBCLK/<br>SMCLK   | 63  | I/O | General-purpose digital I/O / input clock TBCLK—Timer_B3 / submain system clock SMCLK output                                               |
| P1.3/TBOUTH/<br>SVSOUT | 64  | I/O | General-purpose digital I/O / switch all PWM digital output ports to high impedance—Timer_B3 TB0 to TB2<br>/ SVS: output of SVS comparator |
| P1.2/TA1               | 65  | I/O | General-purpose digital I/O / Timer_A, Capture: CCI1A, compare: Out1 output                                                                |
| P1.1/TA0/MCLK          | 66  | I/O | General-purpose digital I/O / Timer_A. Capture: CCI0B / MCLK output. Note: TA0 is only an input on this<br>pin / BSL receive               |
| P1.0/TA0               | 67  | I/O | General-purpose digital I/O / Timer_A. Capture: CCI0A input, compare: Out0 output / BSL transmit                                           |
| XT2OUT                 | 68  | O   | Output terminal of crystal oscillator XT2                                                                                                  |
| XT2IN                  | 69  | I   | Input port for crystal oscillator XT2. Only standard crystals can be connected.                                                            |
| TDO/TDI                | 70  | I/O | Test data output port. TDO/TDI data output or programming data input terminal                                                              |
| TDI/TCLK               | 71  | I   | Test data input or test clock input. The device protection fuse is connected to TDI/TCLK.                                                  |
| TMS                    | 72  | I   | Test mode select. TMS is used as an input port for device programming and test.                                                            |
| TCK                    | 73  | I   | Test clock. TCK is the clock input port for device programming and test.                                                                   |

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

### Terminal Functions (Continued)

| TERMINAL          |     |     | DESCRIPTION                                                                                                                                                                                                |
|-------------------|-----|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PN<br>NAME        | NO. | I/O |                                                                                                                                                                                                            |
| RST/NMI           | 74  | I   | Reset or nonmaskable interrupt input                                                                                                                                                                       |
| P6.0/A0           | 75  | I/O | General-purpose digital I/O / analog input a0 – 12-bit ADC                                                                                                                                                 |
| P6.1/A1           | 76  | I/O | General-purpose digital I/O / analog input a1 – 12-bit ADC                                                                                                                                                 |
| P6.2/A2           | 77  | I/O | General-purpose digital I/O / analog input a2 – 12-bit ADC                                                                                                                                                 |
| AV <sub>SS</sub>  | 78  |     | Analog supply voltage, negative terminal. Supplies SVS, brownout, oscillator, comparator_A, port 1, and LCD resistive divider circuitry.                                                                   |
| DV <sub>SS1</sub> | 79  |     | Digital supply voltage, negative terminal.                                                                                                                                                                 |
| AV <sub>CC</sub>  | 80  |     | Analog supply voltage, positive terminal. Supplies SVS, brownout, oscillator, comparator_A, port 1, and LCD resistive divider circuitry; must not power up prior to DV <sub>CC1</sub> /DV <sub>CC2</sub> . |



## short-form description

### CPU

The MSP430 CPU has a 16-bit RISC architecture that is highly transparent to the application. All operations, other than program-flow instructions, are performed as register operations in conjunction with seven addressing modes for source operand and four addressing modes for destination operand.

The CPU is integrated with 16 registers that provide reduced instruction execution time. The register-to-register operation execution time is one cycle of the CPU clock.

Four of the registers, R0 to R3, are dedicated as program counter, stack pointer, status register, and constant generator respectively. The remaining registers are general-purpose registers.

Peripherals are connected to the CPU using data, address, and control buses, and can be handled with all instructions.

### instruction set

The instruction set consists of 51 instructions with three formats and seven address modes. Each instruction can operate on word and byte data. Table 1 shows examples of the three types of instruction formats; Table 2 shows the address modes.

|                          |           |
|--------------------------|-----------|
| Program Counter          | PC/R0     |
| Stack Pointer            | SP/R1     |
| Status Register          | SR/CG1/R2 |
| Constant Generator       | CG2/R3    |
| General-Purpose Register | R4        |
| General-Purpose Register | R5        |
| General-Purpose Register | R6        |
| General-Purpose Register | R7        |
| General-Purpose Register | R8        |
| General-Purpose Register | R9        |
| General-Purpose Register | R10       |
| General-Purpose Register | R11       |
| General-Purpose Register | R12       |
| General-Purpose Register | R13       |
| General-Purpose Register | R14       |
| General-Purpose Register | R15       |

**Table 1. Instruction Word Formats**

|                                   |                |                       |
|-----------------------------------|----------------|-----------------------|
| Dual operands, source-destination | e.g. ADD R4,R5 | R4 + R5 ---> R5       |
| Single operands, destination only | e.g. CALL R8   | PC -->(TOS), R8--> PC |
| Relative jump, un/conditional     | e.g. JNE       | Jump-on-equal bit = 0 |

**Table 2. Address Mode Descriptions**

| ADDRESS MODE           | S | D | SYNTAX           | EXAMPLE          | OPERATION                     |
|------------------------|---|---|------------------|------------------|-------------------------------|
| Register               | ● | ● | MOV Rs,Rd        | MOV R10,R11      | R10 → R11                     |
| Indexed                | ● | ● | MOV X(Rn),Y(Rm)  | MOV 2(R5),6(R6)  | M(2+R5)→ M(6+R6)              |
| Symbolic (PC relative) | ● | ● | MOV EDE,TONI     |                  | M(EDE) → M(TONI)              |
| Absolute               | ● | ● | MOV &MEM, &TCDAT |                  | M(MEM) → M(TCDAT)             |
| Indirect               | ● |   | MOV @Rn,Y(Rm)    | MOV @R10,Tab(R6) | M(R10) → M(Tab+R6)            |
| Indirect autoincrement | ● |   | MOV @Rn+,Rm      | MOV @R10+,R11    | M(R10) → R11<br>R10 + 2 → R10 |
| Immediate              | ● |   | MOV #X,TONI      | MOV #45,TONI     | #45 → M(TONI)                 |

NOTE: S = source D = destination

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

---

### operating modes

The MSP430 has one active mode and five software selectable low-power modes of operation. An interrupt event can wake up the device from any of the five low-power modes, service the request, and restore back to the low-power mode on return from the interrupt program.

The following six operating modes can be configured by software:

- Active mode (AM)
  - All clocks are active
- Low-power mode 0 (LPM0)
  - CPU is disabled
  - ACLK and SMCLK remain active, MCLK is disabled
  - FLL+ loop control remains active
- Low-power mode 1 (LPM1)
  - CPU is disabled
  - FLL+ loop control is disabled
  - ACLK and SMCLK remain active, MCLK is disabled
- Low-power mode 2 (LPM2)
  - CPU is disabled
  - MCLK, FLL+ loop control, and DCOCLK are disabled
  - DCO's dc-generator remains enabled
  - ACLK remains active
- Low-power mode 3 (LPM3)
  - CPU is disabled
  - MCLK, FLL+ loop control, and DCOCLK are disabled
  - DCO's dc-generator is disabled
  - ACLK remains active
- Low-power mode 4 (LPM4)
  - CPU is disabled
  - ACLK is disabled
  - MCLK, FLL+ loop control, and DCOCLK are disabled
  - DCO's dc-generator is disabled
  - Crystal oscillator is stopped



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## interrupt vector addresses

The interrupt vectors and the power-up starting address are located in the address range 0FFFFh to 0FFE0h. The vector contains the 16-bit address of the appropriate interrupt-handler instruction sequence.

| INTERRUPT SOURCE                                         | INTERRUPT FLAG                                                                         | SYSTEM INTERRUPT                                | WORD ADDRESS | PRIORITY    |
|----------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------|--------------|-------------|
| Power-Up<br>External Reset<br>Watchdog<br>Flash Memory   | WDTIFG<br>KEYV<br>(see Note 1)                                                         | Reset                                           | 0FFFEh       | 15, highest |
| NMI<br>Oscillator Fault<br>Flash Memory Access Violation | NMIIFG (see Notes 1 and 3)<br>OFIFG (see Notes 1 and 3)<br>ACCVIFG (see Notes 1 and 3) | (Non)maskable<br>(Non)maskable<br>(Non)maskable | 0FFFCh       | 14          |
| Timer_B3                                                 | TBCCR0 CCIFG0 (see Note 2)                                                             | Maskable                                        | 0FFFAh       | 13          |
| Timer_B3                                                 | TBCCR1 CCIFG1, TBCCR2 CCIFG2,<br>TBIFG (see Notes 1 and 2)                             | Maskable                                        | 0FFF8h       | 12          |
| Comparator_A                                             | CAIFG                                                                                  | Maskable                                        | 0FFF6h       | 11          |
| Watchdog Timer                                           | WDTIFG                                                                                 | Maskable                                        | 0FFF4h       | 10          |
| USART0 Receive                                           | URXIFG0                                                                                | Maskable                                        | 0FFF2h       | 9           |
| USART0 Transmit                                          | UTXIFG0                                                                                | Maskable                                        | 0FFF0h       | 8           |
| ADC12                                                    | ADC12IFG (see Notes 1 and 2)                                                           | Maskable                                        | 0FFEEh       | 7           |
| Timer_A3                                                 | TACCR0 CCIFG0 (see Note 2)                                                             | Maskable                                        | 0FFECCh      | 6           |
| Timer_A3                                                 | TACCR1 CCIFG1 and TACCR2 CCIFG2,<br>TAIFG (see Notes 1 and 2)                          | Maskable                                        | 0FFEAh       | 5           |
| I/O Port P1 (Eight Flags)                                | P1IFG.0 to P1IFG.7 (see Notes 1 and 2)                                                 | Maskable                                        | 0FFE8h       | 4           |
| DMA                                                      | DMA0IFG (see Notes 1 and 2)                                                            | Maskable                                        | 0FFE6h       | 3           |
|                                                          |                                                                                        |                                                 | 0FFE4h       | 2           |
| I/O Port P2 (Eight Flags)                                | P2IFG.0 to P2IFG.7 (see Notes 1 and 2)                                                 | Maskable                                        | 0FFE2h       | 1           |
| Basic Timer1                                             | BTIFG                                                                                  | Maskable                                        | 0FFE0h       | 0, lowest   |

- NOTES: 1. Multiple source flags  
2. Interrupt flags are located in the module.  
3. (Non)maskable: the individual interrupt-enable bit can disable an interrupt event, but the general-interrupt enable cannot disable it.

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

### special function registers

The MSP430 special function registers (SFR) are located in the lowest address space and are organized as byte mode registers. SFRs should be accessed with byte instructions.

#### interrupt enable 1 and 2

| Address | 7      | 6      | 5      | 4     | 3 | 2 | 1    | 0     |
|---------|--------|--------|--------|-------|---|---|------|-------|
| 0h      | UTXIE0 | URXIE0 | ACCVIE | NMIIE |   |   | OFIE | WDTIE |
|         | rw-0   | rw-0   | rw-0   | rw-0  |   |   | rw-0 | rw-0  |

WDTIE: Watchdog timer interrupt enable. Inactive if watchdog mode is selected.  
Active if watchdog timer is configured as a general-purpose timer.

OFIE: Oscillator fault interrupt enable

NMIIE: Nonmaskable interrupt enable

ACCVIE: Flash access violation interrupt enable

URXIE0: USART0: UART and SPI receive-interrupt enable

UTXIE0: USART0: UART and SPI transmit-interrupt enable

| Address | 7    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|------|---|---|---|---|---|---|---|
| 01h     | BTIE |   |   |   |   |   |   |   |
|         | rw-0 |   |   |   |   |   |   |   |

BTIE: Basic timer interrupt enable

#### interrupt flag register 1 and 2

| Address | 7       | 6       | 5 | 4      | 3 | 2 | 1     | 0      |
|---------|---------|---------|---|--------|---|---|-------|--------|
| 02h     | UTXIFG0 | URXIFG0 |   | NMIIFG |   |   | OFIFG | WDTIFG |
|         | rw-1    | rw-0    |   | rw-0   |   |   | rw-1  | rw-(0) |

WDTIFG: Set on watchdog timer overflow (in watchdog mode) or security key violation  
Reset on  $V_{CC}$  power-on or a reset condition at the  $\overline{RST}/NMI$  pin in reset mode

OFIFG: Flag set on oscillator fault

NMIIFG: Set via  $\overline{RST}/NMI$  pin

URXIFG0: USART0: UART and SPI receive flag

UTXIFG0: USART0: UART and SPI transmit flag

| Address | 7     | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------|-------|---|---|---|---|---|---|---|
| 03h     | BTIFG |   |   |   |   |   |   |   |
|         | rw-0  |   |   |   |   |   |   |   |

BTIFG: Basic timer flag



## module enable registers 1 and 2

|         |       |                 |   |   |   |   |   |   |
|---------|-------|-----------------|---|---|---|---|---|---|
| Address | 7     | 6               | 5 | 4 | 3 | 2 | 1 | 0 |
| 04h     | UTXE0 | URXE0<br>USPIE0 |   |   |   |   |   |   |
|         | rw-0  | rw-0            |   |   |   |   |   |   |

URXE0: USART0: UART mode receive enable  
 UTXE0: USART0: UART mode transmit enable  
 USPIE0: USART0: SPI mode transmit and receive enable

|         |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|
| Address | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 05h     |   |   |   |   |   |   |   |   |

**Legend:**  
 rw-0,1: Bit Can Be Read and Written  
 rw-(0,1): Bit Can Be Read and Written. It Is Reset or Set by PUC.  
 Bit Can Be Read and Written. It Is Reset or Set by POR.  
 SFR Bit Not Present in Device

## memory organization

|                        |           | MSP430F438      | MSP430F439      |
|------------------------|-----------|-----------------|-----------------|
| Memory                 | Size      | 48KB            | 60KB            |
| Main: interrupt vector | Flash     | 0FFFFh – 0FFE0h | 0FFFFh – 0FFE0h |
| Main: code memory      | Flash     | 0FFFFh – 04000h | 0FFFFh – 01100h |
| Information memory     | Size      | 256 Byte        | 256 Byte        |
|                        | Flash     | 010FFh – 01000h | 010FFh – 01000h |
| Boot memory            | Size      | 1KB             | 1KB             |
|                        | ROM       | 0FFFh – 0C00h   | 0FFFh – 0C00h   |
| RAM                    | Size      | 2KB             | 2KB             |
|                        |           | 09FFh – 0200h   | 09FFh – 0200h   |
| Peripherals            | 16-bit    | 01FFh – 0100h   | 01FFh – 0100h   |
|                        | 8-bit     | 0FFh – 010h     | 0FFh – 010h     |
|                        | 8-bit SFR | 0Fh – 00h       | 0Fh – 00h       |

## bootstrap loader (BSL)

The MSP430 bootstrap loader (BSL) enables users to program the flash memory or RAM using a UART serial interface. Access to the MSP430 memory via the BSL is protected by user-defined password. For complete description of the features of the BSL and its implementation, see the *MSP430 Memory Programming User's Guide* (SLAU265).

| BSL Function  | PN Package Pins |
|---------------|-----------------|
| Data Transmit | 67 – P1.0       |
| Data Receive  | 66 – P1.1       |


# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

## flash memory

The flash memory can be programmed via the JTAG port, the bootstrap loader, or in-system by the CPU. The CPU can perform single-byte and single-word writes to the flash memory. Features of the flash memory include:

- Flash memory has n segments of main memory and two segments of information memory (A and B) of 128 bytes each. Each segment in main memory is 512 bytes in size.
- Segments 0 to n may be erased in one step, or each segment may be individually erased.
- Segments A and B can be erased individually, or as a group with segments 0 to n. Segments A and B are also called *information memory*.
- New devices may have some bytes programmed in the information memory (needed for test during manufacturing). The user should perform an erase of the information memory prior to the first use.

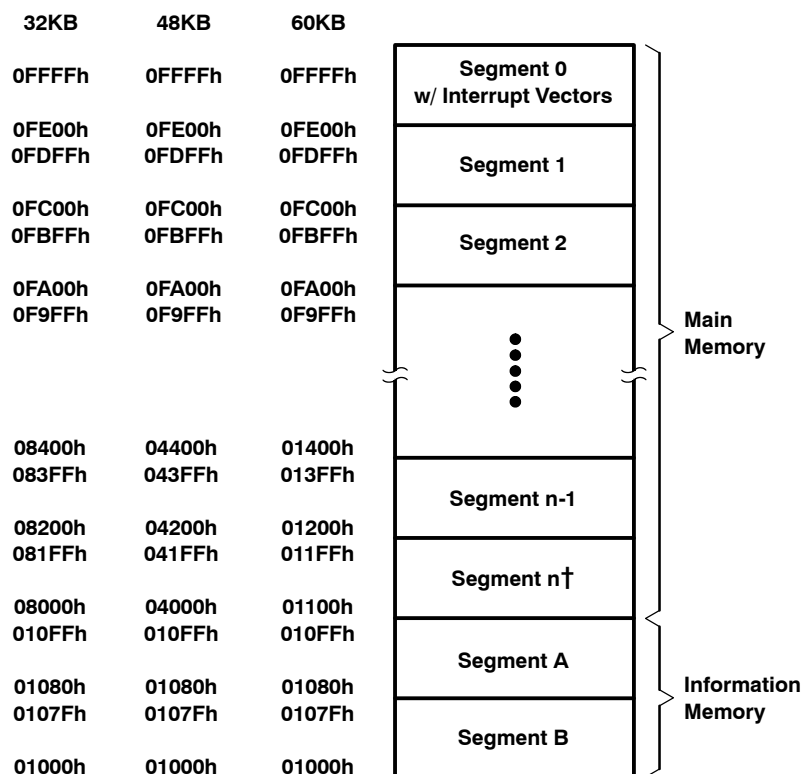

<sup>†</sup> MSP430F439 flash segment n = 256 bytes.

---

## peripherals

Peripherals are connected to the CPU through data, address, and control busses and can be handled using all instructions. For complete module descriptions, see the *MSP430x4xx Family User's Guide* (SLAU056).

### DMA controller

The DMA controller allows movement of data from one memory address to another without CPU intervention. For example, the DMA controller can be used to move data from the ADC12 conversion memory to RAM. Using the DMA controller can increase the throughput of peripheral modules. The DMA controller reduces system power consumption by allowing the CPU to remain in sleep mode without having to awaken to move data to or from a peripheral.

### oscillator and system clock

The clock system in the MSP430F43x family of devices is supported by the FLL+ module that includes support for a 32768-Hz watch crystal oscillator, an internal digitally-controlled oscillator (DCO), and a high-frequency crystal oscillator. The FLL+ clock module is designed to meet the requirements of both low system cost and low-power consumption. The FLL+ features digital frequency locked loop (FLL) hardware which in conjunction with a digital modulator stabilizes the DCO frequency to a programmable multiple of the watch crystal frequency. The internal DCO provides a fast turn-on clock source and stabilizes in less than 6  $\mu$ s. The FLL+ module provides the following clock signals:

- Auxiliary clock (ACLK), sourced from a 32768-Hz watch crystal or a high-frequency crystal.
- Main clock (MCLK), the system clock used by the CPU.
- Sub-Main clock (SMCLK), the sub-system clock used by the peripheral modules.
- ACLK/n, the buffered output of ACLK, ACLK/2, ACLK/4, or ACLK/8.

### brownout, supply voltage supervisor

The brownout circuit is implemented to provide the proper internal reset signal to the device during power-on and power-off. The supply voltage supervisor (SVS) circuitry detects if the supply voltage drops below a user selectable level and supports both supply voltage supervision (the device is automatically reset) and supply voltage monitoring (SVM, the device is not automatically reset).

The CPU begins code execution after the brownout circuit releases the device reset. However,  $V_{CC}$  may not have ramped to  $V_{CC(min)}$  at that time. The user must insure the default FLL+ settings are not changed until  $V_{CC}$  reaches  $V_{CC(min)}$ . If desired, the SVS circuit can be used to determine when  $V_{CC}$  reaches  $V_{CC(min)}$ .

### digital I/O

There are six 8-bit I/O ports implemented—ports P1 through P6:

- All individual I/O bits are independently programmable.
- Any combination of input, output, and interrupt conditions is possible.
- Edge-selectable interrupt input capability for all the eight bits of ports P1 and P2.
- Read/write access to port-control registers is supported by all instructions.

### Basic Timer1

The Basic Timer1 has two independent 8-bit timers which can be cascaded to form a 16-bit timer/counter. Both timers can be read and written by software. The Basic Timer1 can be used to generate periodic interrupts and clock for the LCD module.



# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

### LCD drive

The LCD driver generates the segment and common signals required to drive an LCD display. The LCD controller has dedicated data memory to hold segment drive information. Common and segment signals are generated as defined by the mode. Static, 2-MUX, 3-MUX, and 4-MUX LCDs are supported by this peripheral.

### watchdog timer

The primary function of the watchdog timer (WDT) module is to perform a controlled system restart after a software problem occurs. If the selected time interval expires, a system reset is generated. If the watchdog function is not needed in an application, the module can be configured as an interval timer and can generate interrupts at selected time intervals.

### USART0

The MSP430F43x has one hardware universal synchronous/asynchronous receive transmit (USART) peripheral module that is used for serial data communication. The USART supports synchronous SPI (3 or 4 pin) and asynchronous UART communication protocols, using double-buffered transmit and receive channels.

### Timer\_A3

Timer\_A3 is a 16-bit timer/counter with three capture/compare registers. Timer\_A3 can support multiple capture/compares, PWM outputs, and interval timing. Timer\_A3 also has extensive interrupt capabilities. Interrupts may be generated from the counter on overflow conditions and from each of the capture/compare registers.

| Timer_A3 Signal Connections |                     |                   |              |                      |                   |
|-----------------------------|---------------------|-------------------|--------------|----------------------|-------------------|
| Input Pin Number            | Device Input Signal | Module Input Name | Module Block | Module Output Signal | Output Pin Number |
| PN                          |                     |                   |              |                      | PN                |
| 62 - P1.5                   | TACLK               | TACLK             | Timer        | NA                   |                   |
|                             | ACLK                | ACLK              |              |                      |                   |
|                             | SMCLK               | SMCLK             |              |                      |                   |
| 62 - P1.5                   | TACLK               | INCLK             | CCR0         | TA0                  |                   |
| 67 - P1.0                   | TA0                 | CCI0A             |              |                      | 67 - P1.0         |
| 66 - P1.1                   | TA0                 | CCI0B             |              |                      |                   |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   | CCR1         | TA1                  |                   |
| 65 - P1.2                   | TA1                 | CCI1A             |              |                      | 65 - P1.2         |
|                             | CAOUT (internal)    | CCI1B             |              |                      | ADC12 (internal)  |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   | CCR2         | TA2                  |                   |
| 59 - P2.0                   | TA2                 | CCI2A             |              |                      | 59 - P2.0         |
|                             | ACLK (internal)     | CCI2B             |              |                      |                   |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   |              |                      |                   |

## Timer\_B3

Timer\_B3 is a 16-bit timer/counter with three capture/compare registers. Timer\_B3 can support multiple capture/compares, PWM outputs, and interval timing. Timer\_B3 also has extensive interrupt capabilities. Interrupts may be generated from the counter on overflow conditions and from each of the capture/compare registers.

| Timer_B3 Signal Connections |                     |                   |              |                      |                   |
|-----------------------------|---------------------|-------------------|--------------|----------------------|-------------------|
| Input Pin Number            | Device Input Signal | Module Input Name | Module Block | Module Output Signal | Output Pin Number |
| PN                          |                     |                   |              |                      | PN                |
| 63 - P1.4                   | TBCLK               | TBCLK             | Timer        | NA                   |                   |
|                             | ACLK                | ACLK              |              |                      |                   |
|                             | SMCLK               | SMCLK             |              |                      |                   |
| 63 - P1.4                   | TBCLK               | INCLK             |              |                      |                   |
| 58 - P2.1                   | TB0                 | CCI0A             | CCR0         | TB0                  | 58 - P2.1         |
| 58 - P2.1                   | TB0                 | CCI0B             |              |                      | ADC12 (internal)  |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   |              |                      |                   |
| 57 - P2.2                   | TB1                 | CCI1A             | CCR1         | TB1                  | 57 - P2.2         |
| 57 - P2.2                   | TB1                 | CCI1B             |              |                      | ADC12 (internal)  |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   |              |                      |                   |
| 56 - P2.3                   | TB2                 | CCI2A             | CCR2         | TB2                  | 56 - P2.3         |
| 56 - P2.3                   | TB2                 | CCI2B             |              |                      |                   |
|                             | DV <sub>SS</sub>    | GND               |              |                      |                   |
|                             | DV <sub>CC</sub>    | V <sub>CC</sub>   |              |                      |                   |

## Comparator\_A

The primary function of the Comparator\_A module is to support precision slope analog-to-digital conversions, battery-voltage supervision, and monitoring of external analog signals.

## ADC12

The ADC12 module supports fast, 12-bit analog-to-digital conversions. The module implements a 12-bit SAR core, sample select control, reference generator and a 16 word conversion-and-control buffer. The conversion-and-control buffer allows up to 16 independent ADC samples to be converted and stored without any CPU intervention.

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

## peripheral file map

| PERIPHERALS WITH WORD ACCESS |                                   |         |       |
|------------------------------|-----------------------------------|---------|-------|
| <b>Watchdog</b>              | Watchdog timer control            | WDTCTL  | 0120h |
| <b>Timer_B3</b>              | Capture/compare register 2        | TBCCR2  | 0196h |
|                              | Capture/compare register 1        | TBCCR1  | 0194h |
|                              | Capture/compare register 0        | TBCCR0  | 0192h |
|                              | Timer_B register                  | TBR     | 0190h |
|                              | Capture/compare control 2         | TBCCTL2 | 0186h |
|                              | Capture/compare control 1         | TBCCTL1 | 0184h |
|                              | Capture/compare control 0         | TBCCTL0 | 0182h |
|                              | Timer_B control                   | TBCTL   | 0180h |
|                              | Timer_B interrupt vector          | TBIV    | 011Eh |
|                              | <b>Timer_A3</b>                   | TACCR2  | 0176h |
|                              |                                   | TACCR1  | 0174h |
|                              |                                   | TACCR0  | 0172h |
|                              |                                   | TAR     | 0170h |
|                              |                                   | TACCTL2 | 0166h |
|                              |                                   | TACCTL1 | 0164h |
|                              |                                   | TACCTL0 | 0162h |
|                              |                                   | TACTL   | 0160h |
|                              |                                   | TAIV    | 012Eh |
| <b>Flash</b>                 | Flash control 3                   | FCTL3   | 012Ch |
|                              | Flash control 2                   | FCTL2   | 012Ah |
|                              | Flash control 1                   | FCTL1   | 0128h |
| <b>DMA</b>                   | DMA module control 0              | DMACTL0 | 0122h |
|                              | DMA module control 1              | DMACTL1 | 0124h |
|                              | DMA channel 0 control             | DMA0CTL | 01E0h |
|                              | DMA channel 0 source address      | DMA0SA  | 01E2h |
|                              | DMA channel 0 destination address | DMA0DA  | 01E4h |
|                              | DMA channel 0 transfer size       | DMA0SZ  | 01E6h |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**peripheral file map (continued)**

| <b>PERIPHERALS WITH WORD ACCESS (CONTINUED)</b>                  |                                |            |       |
|------------------------------------------------------------------|--------------------------------|------------|-------|
| <b>ADC12</b><br><i>See also Peripherals<br/>with Byte Access</i> | Conversion memory 15           | ADC12MEM15 | 015Eh |
|                                                                  | Conversion memory 14           | ADC12MEM14 | 015Ch |
|                                                                  | Conversion memory 13           | ADC12MEM13 | 015Ah |
|                                                                  | Conversion memory 12           | ADC12MEM12 | 0158h |
|                                                                  | Conversion memory 11           | ADC12MEM11 | 0156h |
|                                                                  | Conversion memory 10           | ADC12MEM10 | 0154h |
|                                                                  | Conversion memory 9            | ADC12MEM9  | 0152h |
|                                                                  | Conversion memory 8            | ADC12MEM8  | 0150h |
|                                                                  | Conversion memory 7            | ADC12MEM7  | 014Eh |
|                                                                  | Conversion memory 6            | ADC12MEM6  | 014Ch |
|                                                                  | Conversion memory 5            | ADC12MEM5  | 014Ah |
|                                                                  | Conversion memory 4            | ADC12MEM4  | 0148h |
|                                                                  | Conversion memory 3            | ADC12MEM3  | 0146h |
|                                                                  | Conversion memory 2            | ADC12MEM2  | 0144h |
|                                                                  | Conversion memory 1            | ADC12MEM1  | 0142h |
|                                                                  | Conversion memory 0            | ADC12MEM0  | 0140h |
|                                                                  | Interrupt-vector-word register | ADC12IV    | 01A8h |
|                                                                  | Interrupt-enable register      | ADC12IE    | 01A6h |
|                                                                  | Interrupt-flag register        | ADC12IFG   | 01A4h |
|                                                                  | Control register 1             | ADC12CTL1  | 01A2h |
|                                                                  | Control register 0             | ADC12CTL0  | 01A0h |

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

### peripheral file map (continued)

| PERIPHERALS WITH BYTE ACCESS                                   |                                                 |             |      |
|----------------------------------------------------------------|-------------------------------------------------|-------------|------|
| <b>LCD</b>                                                     | LCD memory 20                                   | LCDM20      | 0A4h |
|                                                                | :                                               | :           | :    |
|                                                                | LCD memory 16                                   | LCDM16      | 0A0h |
|                                                                | LCD memory 15                                   | LCDM15      | 09Fh |
|                                                                | :                                               | :           | :    |
|                                                                | LCD memory 1                                    | LCDM1       | 091h |
|                                                                | LCD control and mode                            | LCDCTL      | 090h |
| <b>ADC12</b><br>(Memory control registers require byte access) | ADC memory-control register 15                  | ADC12MCTL15 | 08Fh |
|                                                                | ADC memory-control register 14                  | ADC12MCTL14 | 08Eh |
|                                                                | ADC memory-control register 13                  | ADC12MCTL13 | 08Dh |
|                                                                | ADC memory-control register 12                  | ADC12MCTL12 | 08Ch |
|                                                                | ADC memory-control register 11                  | ADC12MCTL11 | 08Bh |
|                                                                | ADC memory-control register 10                  | ADC12MCTL10 | 08Ah |
|                                                                | ADC memory-control register 9                   | ADC12MCTL9  | 089h |
|                                                                | ADC memory-control register 8                   | ADC12MCTL8  | 088h |
|                                                                | ADC memory-control register 7                   | ADC12MCTL7  | 087h |
|                                                                | ADC memory-control register 6                   | ADC12MCTL6  | 086h |
|                                                                | ADC memory-control register 5                   | ADC12MCTL5  | 085h |
|                                                                | ADC memory-control register 4                   | ADC12MCTL4  | 084h |
|                                                                | ADC memory-control register 3                   | ADC12MCTL3  | 083h |
|                                                                | ADC memory-control register 2                   | ADC12MCTL2  | 082h |
|                                                                | ADC memory-control register 1                   | ADC12MCTL1  | 081h |
|                                                                | ADC memory-control register 0                   | ADC12MCTL0  | 080h |
| <b>USART0</b><br>(UART or SPI mode)                            | Transmit buffer                                 | U0TXBUF     | 077h |
|                                                                | Receive buffer                                  | U0RXBUF     | 076h |
|                                                                | Baud rate                                       | U0BR1       | 075h |
|                                                                | Baud rate                                       | U0BR0       | 074h |
|                                                                | Modulation control                              | U0MCTL      | 073h |
|                                                                | Receive control                                 | U0RCTL      | 072h |
|                                                                | Transmit control                                | U0TCTL      | 071h |
|                                                                | USART control                                   | U0CTL       | 070h |
| <b>Comparator_A</b>                                            | Comparator_A port disable                       | CAPD        | 05Bh |
|                                                                | Comparator_A control 2                          | CACTL2      | 05Ah |
|                                                                | Comparator_A control 1                          | CACTL1      | 059h |
| <b>BrownOUT, SVS</b>                                           | SVS control register (Reset by brownout signal) | SVSCTL      | 056h |

**peripheral file map (continued)**

| <b>PERIPHERALS WITH BYTE ACCESS (CONTINUED)</b> |                                   |          |      |
|-------------------------------------------------|-----------------------------------|----------|------|
| <b>FLL+ Clock</b>                               | FLL+ Control 1                    | FLL_CTL1 | 054h |
|                                                 | FLL+ Control 0                    | FLL_CTL0 | 053h |
|                                                 | System clock frequency control    | SCFQCTL  | 052h |
|                                                 | System clock frequency integrator | SCFI1    | 051h |
|                                                 | System clock frequency integrator | SCFI0    | 050h |
|                                                 |                                   |          |      |
| <b>Basic Timer1</b>                             | BT counter 2                      | BTCNT2   | 047h |
|                                                 | BT counter 1                      | BTCNT1   | 046h |
|                                                 | BT control                        | BTCTL    | 040h |
| <b>Port P6</b>                                  | Port P6 selection                 | P6SEL    | 037h |
|                                                 | Port P6 direction                 | P6DIR    | 036h |
|                                                 | Port P6 output                    | P6OUT    | 035h |
|                                                 | Port P6 input                     | P6IN     | 034h |
| <b>Port P5</b>                                  | Port P5 selection                 | P5SEL    | 033h |
|                                                 | Port P5 direction                 | P5DIR    | 032h |
|                                                 | Port P5 output                    | P5OUT    | 031h |
|                                                 | Port P5 input                     | P5IN     | 030h |
| <b>Port P4</b>                                  | Port P4 selection                 | P4SEL    | 01Fh |
|                                                 | Port P4 direction                 | P4DIR    | 01Eh |
|                                                 | Port P4 output                    | P4OUT    | 01Dh |
|                                                 | Port P4 input                     | P4IN     | 01Ch |
| <b>Port P3</b>                                  | Port P3 selection                 | P3SEL    | 01Bh |
|                                                 | Port P3 direction                 | P3DIR    | 01Ah |
|                                                 | Port P3 output                    | P3OUT    | 019h |
|                                                 | Port P3 input                     | P3IN     | 018h |
| <b>Port P2</b>                                  | Port P2 selection                 | P2SEL    | 02Eh |
|                                                 | Port P2 interrupt enable          | P2IE     | 02Dh |
|                                                 | Port P2 interrupt-edge select     | P2IES    | 02Ch |
|                                                 | Port P2 interrupt flag            | P2IFG    | 02Bh |
|                                                 | Port P2 direction                 | P2DIR    | 02Ah |
|                                                 | Port P2 output                    | P2OUT    | 029h |
|                                                 | Port P2 input                     | P2IN     | 028h |
|                                                 |                                   |          |      |
| <b>Port P1</b>                                  | Port P1 selection                 | P1SEL    | 026h |
|                                                 | Port P1 interrupt enable          | P1IE     | 025h |
|                                                 | Port P1 interrupt-edge select     | P1IES    | 024h |
|                                                 | Port P1 interrupt flag            | P1IFG    | 023h |
|                                                 | Port P1 direction                 | P1DIR    | 022h |
|                                                 | Port P1 output                    | P1OUT    | 021h |
|                                                 | Port P1 input                     | P1IN     | 020h |
|                                                 |                                   |          |      |
| <b>Special functions</b>                        | SFR module enable 2               | ME2      | 005h |
|                                                 | SFR module enable 1               | ME1      | 004h |
|                                                 | SFR interrupt flag 2              | IFG2     | 003h |
|                                                 | SFR interrupt flag 1              | IFG1     | 002h |
|                                                 | SFR interrupt enable 2            | IE2      | 001h |
|                                                 | SFR interrupt enable 1            | IE1      | 000h |

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

## absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>†</sup>

|                                                      |                            |
|------------------------------------------------------|----------------------------|
| Voltage applied at $V_{CC}$ to $V_{SS}$              | –0.3 V to 4.1 V            |
| Voltage applied to any pin (see Note)                | –0.3 V to $V_{CC} + 0.3$ V |
| Diode current at any device terminal                 | ±2 mA                      |
| Storage temperature, $T_{stg}$ : Unprogrammed device | –55°C to 150°C             |
| Programmed device                                    | –40°C to 85°C              |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE: All voltages referenced to  $V_{SS}$ . The JTAG fuse-blow voltage,  $V_{FB}$ , is allowed to exceed the absolute maximum rating. The voltage is applied to the TDI/TCLK pin when blowing the JTAG fuse.

## recommended operating conditions

|                                                                                                                                     |                         |                   | MIN  | NOM    | MAX  | UNITS |
|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------|------|--------|------|-------|
| Supply voltage during program execution (see Note 1), $V_{CC}$ ( $AV_{CC} = DV_{CC1/2} = V_{CC}$ )                                  |                         |                   | 1.8  |        | 3.6  | V     |
| Supply voltage during program execution, SVS enabled, PORON=1 (see Note 1 and Note 2), $V_{CC}$ ( $AV_{CC} = DV_{CC1/2} = V_{CC}$ ) |                         |                   | 2    |        | 3.6  | V     |
| Supply voltage during flash memory programming (see Note 1), $V_{CC}$ ( $AV_{CC} = DV_{CC1/2} = V_{CC}$ )                           |                         |                   | 2.7  |        | 3.6  | V     |
| Supply voltage, $V_{SS}$ ( $AV_{SS} = DV_{SS1/2} = V_{SS}$ )                                                                        |                         |                   | 0    |        | 0    | V     |
| Operating free-air temperature range, $T_A$                                                                                         |                         |                   | –40  |        | 85   | °C    |
| LFXT1 crystal frequency, $f_{(LFXT1)}$ (see Note 3)                                                                                 | LF selected, XTS_FLL=0  | Watch crystal     |      | 32.768 |      | kHz   |
|                                                                                                                                     | XT1 selected, XTS_FLL=1 | Ceramic resonator | 450  |        | 8000 | kHz   |
|                                                                                                                                     | XT1 selected, XTS_FLL=1 | Crystal           | 1000 |        | 8000 | kHz   |
| XT2 crystal frequency, $f_{(XT2)}$                                                                                                  |                         | Ceramic resonator | 450  |        | 8000 | kHz   |
|                                                                                                                                     |                         | Crystal           | 1000 |        | 8000 |       |
| Processor frequency (signal MCLK), $f_{(System)}$                                                                                   |                         | $V_{CC} = 1.8$ V  | DC   |        | 4.15 | MHz   |
|                                                                                                                                     |                         | $V_{CC} = 3.6$ V  | DC   |        | 8    |       |

- NOTES: 1. It is recommended to power  $AV_{CC}$  and  $DV_{CC}$  from the same source. A maximum difference of 0.3 V between  $AV_{CC}$  and  $DV_{CC}$  can be tolerated during power up and operation.
2. The minimum operating supply voltage is defined according to the trip point where POR is going active by decreasing the supply voltage. POR is going inactive when the supply voltage is raised above the minimum supply voltage plus the hysteresis of the SVS circuitry.
3. In LF mode, the LFXT1 oscillator requires a watch crystal. In XT1 mode, LFXT1 accepts a ceramic resonator or a crystal.

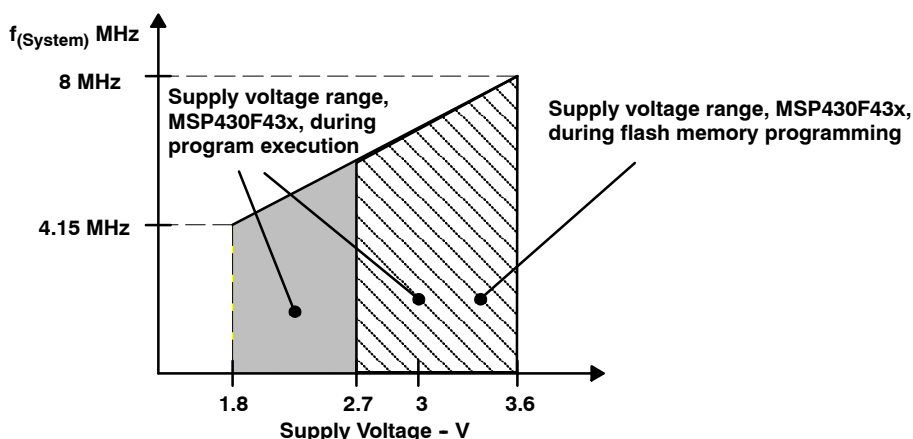


Figure 1. Frequency vs Supply Voltage, Typical Characteristics

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**supply current into  $V_{CC}$  +  $DV_{CC1/2}$  excluding external current**

| PARAMETER    |                                                                                                                                                              | TEST CONDITIONS                                 |                          | MIN | TYP | MAX | UNIT          |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|--------------------------|-----|-----|-----|---------------|
| $I_{(AM)}$   | Active mode, (see Note 1)<br>$f_{(MCLK)} = f_{(SMCLK)} = 1 \text{ MHz}$ ,<br>$f_{(ACLK)} = 32,768 \text{ Hz}$<br>$XTS\_FLL=0$ , $SELM=(0,1)$                 | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ | $V_{CC} = 2.2 \text{ V}$ |     | 300 | 370 | $\mu\text{A}$ |
|              |                                                                                                                                                              |                                                 | $V_{CC} = 3 \text{ V}$   |     | 470 | 570 |               |
| $I_{(LPM0)}$ | Low-power mode, (LPM0)<br>(see Note 1 and Note 4)                                                                                                            | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ | $V_{CC} = 2.2 \text{ V}$ |     | 55  | 70  | $\mu\text{A}$ |
|              |                                                                                                                                                              |                                                 | $V_{CC} = 3 \text{ V}$   |     | 95  | 110 |               |
| $I_{(LPM2)}$ | Low-power mode, (LPM2),<br>$f_{(MCLK)} = f_{(SMCLK)} = 0 \text{ MHz}$ ,<br>$f_{(ACLK)} = 32,768 \text{ Hz}$ , $SCG0 = 0$<br>(see Note 2 and Note 4)          | $T_A = -40^\circ\text{C}$ to $85^\circ\text{C}$ | $V_{CC} = 2.2 \text{ V}$ |     | 11  | 14  | $\mu\text{A}$ |
|              |                                                                                                                                                              |                                                 | $V_{CC} = 3 \text{ V}$   |     | 17  | 22  |               |
| $I_{(LPM3)}$ | Low-power mode, (LPM3)<br>$f_{(MCLK)} = f_{(SMCLK)} = 0 \text{ MHz}$ ,<br>$f_{(ACLK)} = 32,768 \text{ Hz}$ , $SCG0 = 1$<br>(see Note 2, Note 3, and Note 4)  | $T_A = -40^\circ\text{C}$                       | $V_{CC} = 2.2 \text{ V}$ |     | 1   | 2.0 | $\mu\text{A}$ |
|              |                                                                                                                                                              | $T_A = 25^\circ\text{C}$                        |                          |     | 1.1 | 2.0 |               |
|              |                                                                                                                                                              | $T_A = 60^\circ\text{C}$                        |                          |     | 2   | 3   |               |
|              |                                                                                                                                                              | $T_A = 85^\circ\text{C}$                        |                          |     | 3.5 | 6   |               |
|              |                                                                                                                                                              | $T_A = -40^\circ\text{C}$                       | $V_{CC} = 3 \text{ V}$   |     | 1.8 | 2.8 |               |
|              |                                                                                                                                                              | $T_A = 25^\circ\text{C}$                        |                          |     | 1.6 | 2.7 |               |
|              |                                                                                                                                                              | $T_A = 60^\circ\text{C}$                        |                          |     | 2.5 | 3.5 |               |
|              |                                                                                                                                                              | $T_A = 85^\circ\text{C}$                        |                          |     | 4.2 | 7.5 |               |
| $I_{(LPM4)}$ | Low-power mode, (LPM4)<br>$f_{(MCLK)} = 0 \text{ MHz}$ , $f_{(SMCLK)} = 0 \text{ MHz}$ ,<br>$f_{(ACLK)} = 0 \text{ Hz}$ , $SCG0 = 1$ (see Note 2 and Note 4) | $T_A = -40^\circ\text{C}$                       | $V_{CC} = 2.2 \text{ V}$ |     | 0.1 | 0.5 | $\mu\text{A}$ |
|              |                                                                                                                                                              | $T_A = 25^\circ\text{C}$                        |                          |     | 0.1 | 0.5 |               |
|              |                                                                                                                                                              | $T_A = 60^\circ\text{C}$                        |                          |     | 0.7 | 1.1 |               |
|              |                                                                                                                                                              | $T_A = 85^\circ\text{C}$                        |                          |     | 1.7 | 3   |               |
|              |                                                                                                                                                              | $T_A = -40^\circ\text{C}$                       | $V_{CC} = 3 \text{ V}$   |     | 0.1 | 0.8 |               |
|              |                                                                                                                                                              | $T_A = 25^\circ\text{C}$                        |                          |     | 0.1 | 0.8 |               |
|              |                                                                                                                                                              | $T_A = 60^\circ\text{C}$                        |                          |     | 0.8 | 1.2 |               |
|              |                                                                                                                                                              | $T_A = 85^\circ\text{C}$                        |                          |     | 1.9 | 3.5 |               |

- NOTES: 1. Timer\_B is clocked by  $f_{(DCOCLK)} = f_{(DCO)} = 1 \text{ MHz}$ . All inputs are tied to 0 V or to  $V_{CC}$ . Outputs do not source or sink any current.  
2. All inputs are tied to 0 V or to  $V_{CC}$ . Outputs do not source or sink any current.  
3. The current consumption in LPM3 is measured with active Basic Timer1 and LCD (ACLK selected). The current consumption of the Comparator\_A and the SVS module are specified in the respective sections. The LPM3 currents are characterized with a KDS Daishinku DT-38 (6 pF) crystal and OSCCAPx=01h.  
4. Current for brownout included.

#### Current consumption of active mode versus system frequency

$$I_{(AM)} = I_{(AM)} [1 \text{ MHz}] \times f_{(\text{System})} [\text{MHz}]$$

#### Current consumption of active mode versus supply voltage

$$I_{(AM)} = I_{(AM)} [3 \text{ V}] + 175 \mu\text{A/V} \times (V_{CC} - 3 \text{ V})$$

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

**Schmitt-trigger inputs - Ports P1, P2, P3, P4, P5, and P6;  $\overline{\text{RST}}/\text{NMI}$ ; JTAG: TCK, TMS, TDI/TCLK, TDO/TDI**

| PARAMETER |                                                  | TEST CONDITIONS          | MIN | TYP | MAX  | UNIT |
|-----------|--------------------------------------------------|--------------------------|-----|-----|------|------|
| $V_{IT+}$ | Positive-going input threshold voltage           | $V_{CC} = 2.2 \text{ V}$ | 1.1 |     | 1.55 | V    |
|           |                                                  | $V_{CC} = 3 \text{ V}$   | 1.5 |     | 1.98 |      |
| $V_{IT-}$ | Negative-going input threshold voltage           | $V_{CC} = 2.2 \text{ V}$ | 0.4 |     | 0.9  | V    |
|           |                                                  | $V_{CC} = 3 \text{ V}$   | 0.9 |     | 1.3  |      |
| $V_{hys}$ | Input voltage hysteresis ( $V_{IT+} - V_{IT-}$ ) | $V_{CC} = 2.2 \text{ V}$ | 0.3 |     | 1.1  | V    |
|           |                                                  | $V_{CC} = 3 \text{ V}$   | 0.5 |     | 1    |      |

**inputs Px.x, TA<sub>x</sub>, TB<sub>x</sub>**

| PARAMETER     |                                                            | TEST CONDITIONS                                                                         | $V_{CC}$ | MIN | TYP | MAX | UNIT |
|---------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------|----------|-----|-----|-----|------|
| $t_{(int)}$   | External interrupt timing                                  | Port P1, P2: P1.x to P2.x, external trigger signal for the interrupt flag, (see Note 1) | 2.2 V    | 62  |     |     | ns   |
|               |                                                            |                                                                                         | 3 V      | 50  |     |     |      |
| $t_{(cap)}$   | Timer_A, Timer_B capture timing                            | TA0, TA1, TA2<br>TB0, TB1, TB2                                                          | 2.2 V    | 62  |     |     | ns   |
|               |                                                            |                                                                                         | 3 V      | 50  |     |     |      |
| $f_{(TAext)}$ | Timer_A, Timer_B clock frequency externally applied to pin | TACLK, TBCLK, INCLK: $t_{(H)} = t_{(L)}$                                                | 2.2 V    |     |     | 8   | MHz  |
| $f_{(TBext)}$ |                                                            |                                                                                         | 3 V      |     |     | 10  |      |
| $f_{(TAint)}$ | Timer_A, Timer_B clock frequency                           | SMCLK or ACLK signal selected                                                           | 2.2 V    |     |     | 8   | MHz  |
| $f_{(TBint)}$ |                                                            |                                                                                         | 3 V      |     |     | 10  |      |

NOTES: 1. The external signal sets the interrupt flag every time the minimum  $t_{(int)}$  parameters are met. It may be set even with trigger signals shorter than  $t_{(int)}$ .

**leakage current - Ports P1, P2, P3, P4, P5, and P6 (see Note 1)**

| PARAMETER       |                 |         | TEST CONDITIONS           |                                      | MIN | TYP | MAX | UNIT |
|-----------------|-----------------|---------|---------------------------|--------------------------------------|-----|-----|-----|------|
| $I_{lkg}(Px.y)$ | Leakage current | Port Px | $V_{(Px.y)}$ (see Note 2) | $V_{CC} = 2.2 \text{ V}/3 \text{ V}$ |     |     | ±50 | nA   |

NOTES: 1. The leakage current is measured with  $V_{SS}$  or  $V_{CC}$  applied to the corresponding pin(s), unless otherwise noted.  
2. The port pin must be selected as input.



**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

**outputs – Ports P1, P2, P3, P4, P5, and P6**

| PARAMETER                                 | TEST CONDITIONS                                                     | MIN                   | TYP | MAX                   | UNIT |
|-------------------------------------------|---------------------------------------------------------------------|-----------------------|-----|-----------------------|------|
| V <sub>OH</sub> High-level output voltage | I <sub>OH(max)</sub> = -1.5 mA, V <sub>CC</sub> = 2.2 V, See Note 1 | V <sub>CC</sub> -0.25 |     | V <sub>CC</sub>       | V    |
|                                           | I <sub>OH(max)</sub> = -6 mA, V <sub>CC</sub> = 2.2 V, See Note 2   | V <sub>CC</sub> -0.6  |     | V <sub>CC</sub>       |      |
|                                           | I <sub>OH(max)</sub> = -1.5 mA, V <sub>CC</sub> = 3 V, See Note 1   | V <sub>CC</sub> -0.25 |     | V <sub>CC</sub>       |      |
|                                           | I <sub>OH(max)</sub> = -6 mA, V <sub>CC</sub> = 3 V, See Note 2     | V <sub>CC</sub> -0.6  |     | V <sub>CC</sub>       |      |
| V <sub>OL</sub> Low-level output voltage  | I <sub>OL(max)</sub> = 1.5 mA, V <sub>CC</sub> = 2.2 V, See Note 1  | V <sub>SS</sub>       |     | V <sub>SS</sub> +0.25 | V    |
|                                           | I <sub>OL(max)</sub> = 6 mA, V <sub>CC</sub> = 2.2 V, See Note 2    | V <sub>SS</sub>       |     | V <sub>SS</sub> +0.6  |      |
|                                           | I <sub>OL(max)</sub> = 1.5 mA, V <sub>CC</sub> = 3 V, See Note 1    | V <sub>SS</sub>       |     | V <sub>SS</sub> +0.25 |      |
|                                           | I <sub>OL(max)</sub> = 6 mA, V <sub>CC</sub> = 3 V, See Note 2      | V <sub>SS</sub>       |     | V <sub>SS</sub> +0.6  |      |

NOTES: 1. The maximum total current, I<sub>OH(max)</sub> and I<sub>OL(max)</sub>, for all outputs combined, should not exceed ±12 mA to satisfy the maximum specified voltage drop.  
2. The maximum total current, I<sub>OH(max)</sub> and I<sub>OL(max)</sub>, for all outputs combined, should not exceed ±48 mA to satisfy the maximum specified voltage drop.

**output frequency**

| PARAMETER                                                          | TEST CONDITIONS                                                                   | MIN                                                             | TYP | MAX                 | UNIT        |
|--------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------|-----|---------------------|-------------|
| f <sub>(Px.y)</sub> (1 ≤ x ≤ 6, 0 ≤ y ≤ 7)                         | C <sub>L</sub> = 20 pF, I <sub>L</sub> = ±1.5 mA<br>V <sub>CC</sub> = 2.2 V / 3 V | DC                                                              |     | f <sub>System</sub> | MHz         |
| f <sub>(MCLK)</sub><br>f <sub>(SMCLK)</sub><br>f <sub>(ACLK)</sub> | P1.1/TA0/MCLK,<br>P1.4/TBCLK/SMCLK,<br>P1.5/TACLK/ACLK<br>C <sub>L</sub> = 20 pF  |                                                                 |     | f <sub>System</sub> | MHz         |
| t <sub>(Xdc)</sub> Duty cycle of output frequency                  | P1.5/TACLK/ACLK,<br>C <sub>L</sub> = 20 pF<br>V <sub>CC</sub> = 2.2 V / 3 V       | f <sub>(ACLK)</sub> = f <sub>(LFXT1)</sub> = f <sub>(XT1)</sub> |     | 40%                 | 60%         |
|                                                                    |                                                                                   | f <sub>(ACLK)</sub> = f <sub>(LFXT1)</sub> = f <sub>(LF)</sub>  |     | 30%                 | 70%         |
|                                                                    |                                                                                   | f <sub>(ACLK)</sub> = f <sub>(LFXT1)</sub>                      |     | 50%                 |             |
|                                                                    | P1.1/TA0/MCLK,<br>C <sub>L</sub> = 20 pF,<br>V <sub>CC</sub> = 2.2 V / 3 V        | f <sub>(MCLK)</sub> = f <sub>(XT1)</sub>                        |     | 40%                 | 60%         |
|                                                                    |                                                                                   | f <sub>(MCLK)</sub> = f <sub>(DCOCLK)</sub>                     |     | 50% - 15 ns         | 50% + 15 ns |
|                                                                    | P1.4/TBCLK/SMCLK,<br>C <sub>L</sub> = 20 pF,<br>V <sub>CC</sub> = 2.2 V / 3 V     | f <sub>(SMCLK)</sub> = f <sub>(XT2)</sub>                       |     | 40%                 | 60%         |
|                                                                    |                                                                                   | f <sub>(SMCLK)</sub> = f <sub>(DCOCLK)</sub>                    |     | 50% - 15 ns         | 50% + 15 ns |

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 - JUNE 2010

electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)

outputs - Ports P1, P2, P3, P4, P5, and P6 (continued)

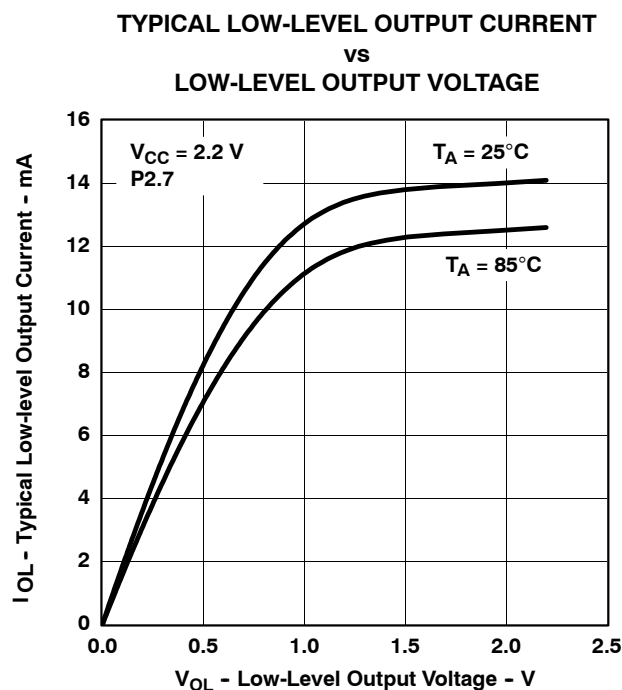


Figure 2

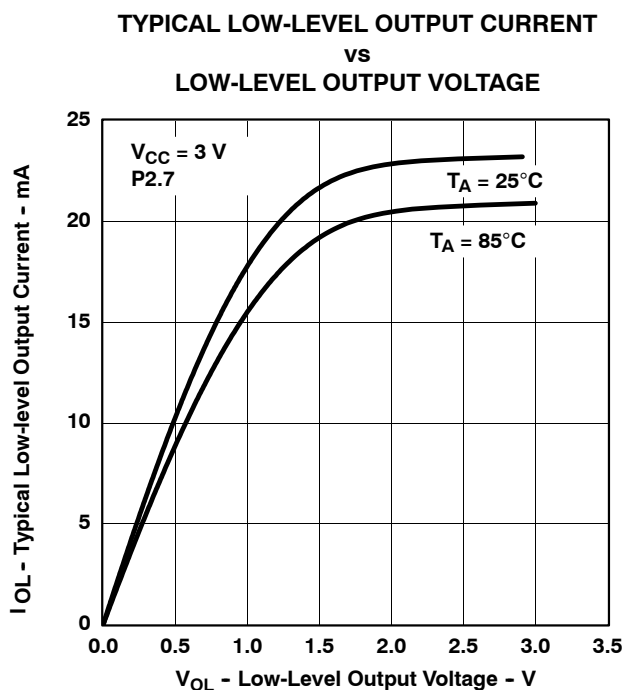


Figure 3

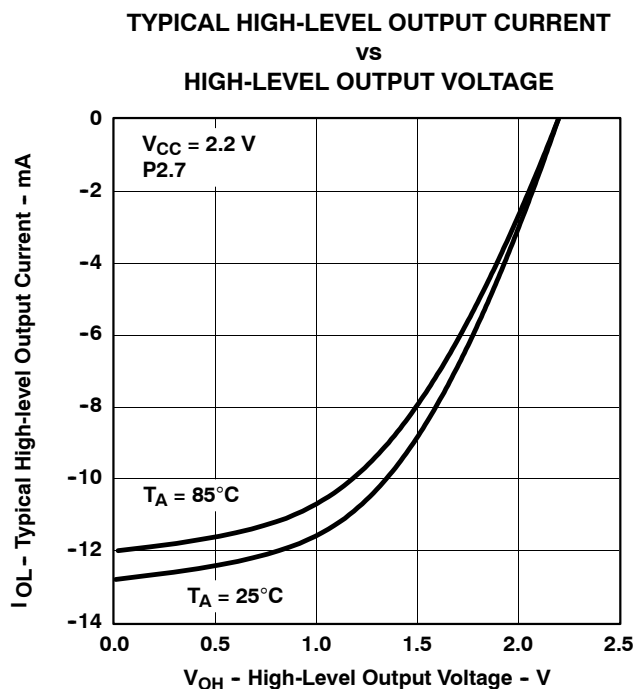


Figure 4

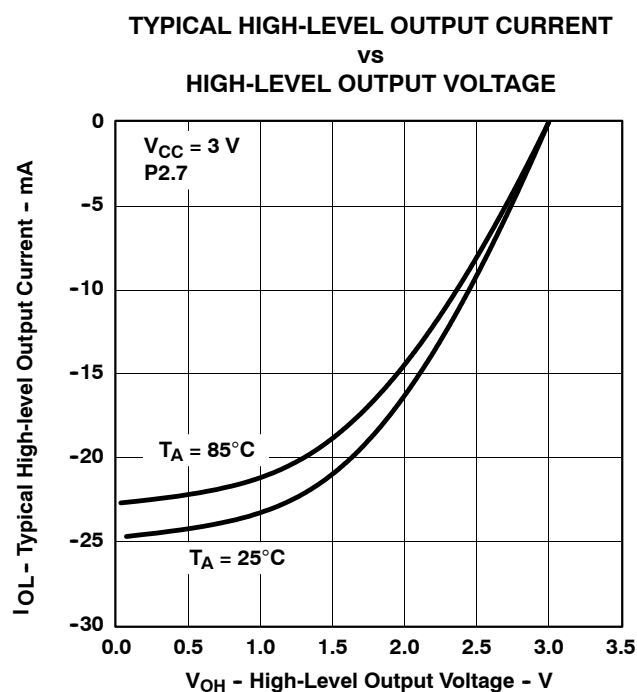


Figure 5

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**wake-up LPM3**

| PARAMETER     |            | TEST CONDITIONS |                      | MIN | TYP | MAX | UNIT    |
|---------------|------------|-----------------|----------------------|-----|-----|-----|---------|
| $t_{d(LPM3)}$ | Delay time | f = 1 MHz       | $V_{CC} = 2.2 V/3 V$ |     |     | 6   | $\mu s$ |
|               |            | f = 2 MHz       |                      |     |     | 6   |         |
|               |            | f = 3 MHz       |                      |     |     | 6   |         |

**RAM**

| PARAMETER | TEST CONDITIONS         | MIN | TYP | MAX | UNIT |
|-----------|-------------------------|-----|-----|-----|------|
| VRAMh     | CPU halted (see Note 1) | 1.6 |     |     | V    |

NOTE 1: This parameter defines the minimum supply voltage when the data in program memory RAM remain unchanged. No program execution should take place during this supply voltage condition.

**LCD**

| PARAMETER                             |                      | TEST CONDITIONS                                   |                                                                | MIN                                           | TYP                   | MAX                     | UNIT |
|---------------------------------------|----------------------|---------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------|-----------------------|-------------------------|------|
| V <sub>(33)</sub>                     | Analog voltage       | Voltage at P5.7/R33                               | V <sub>CC</sub> = 3 V                                          | 2.5                                           |                       | V <sub>CC</sub> + 0.2   | V    |
| V <sub>(23)</sub>                     |                      | Voltage at P5.6/R23                               |                                                                | $[V_{(33)} - V_{(03)}] \times 2/3 + V_{(03)}$ |                       |                         |      |
| V <sub>(13)</sub>                     |                      | Voltage at P5.5/R13                               |                                                                | $[V_{(33)} - V_{(03)}] \times 1/3 + V_{(03)}$ |                       |                         |      |
| V <sub>(33)</sub> - V <sub>(03)</sub> |                      | Voltage at R33 to R03                             |                                                                | 2.5                                           | V <sub>CC</sub> + 0.2 |                         |      |
| I <sub>(R03)</sub>                    | Input leakage        | R03 = V <sub>SS</sub>                             | No load at all segment and common lines, V <sub>CC</sub> = 3 V |                                               |                       | ±20                     | nA   |
| I <sub>(R13)</sub>                    |                      | P5.5/R13 = V <sub>CC</sub> /3                     |                                                                |                                               |                       | ±20                     |      |
| I <sub>(R23)</sub>                    |                      | P5.6/R23 = 2 × V <sub>CC</sub> /3                 |                                                                |                                               |                       | ±20                     |      |
| V <sub>(Sxx0)</sub>                   | Segment line voltage | I <sub>(Sxx)</sub> = -3 μA, V <sub>CC</sub> = 3 V |                                                                | V <sub>(03)</sub>                             |                       | V <sub>(03)</sub> - 0.1 | V    |
| V <sub>(Sxx1)</sub>                   |                      |                                                   |                                                                | V <sub>(13)</sub>                             |                       | V <sub>(13)</sub> - 0.1 |      |
| V <sub>(Sxx2)</sub>                   |                      |                                                   |                                                                | V <sub>(23)</sub>                             |                       | V <sub>(23)</sub> - 0.1 |      |
| V <sub>(Sxx3)</sub>                   |                      |                                                   |                                                                | V <sub>(33)</sub>                             |                       | V <sub>(33)</sub> + 0.1 |      |

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010


**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

### Comparator\_A (see Note 1)


| PARAMETER                          | TEST CONDITIONS                                                                                                                   | MIN                                  | TYP | MAX            | UNIT          |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----|----------------|---------------|
| $I_{(CC)}$                         | CAON=1, CARSEL=0, CAREF=0                                                                                                         | $V_{CC} = 2.2\text{ V}$              | 25  | 40             | $\mu\text{A}$ |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 45  | 60             |               |
| $I_{(\text{Ref ladder/RefDiode})}$ | CAON=1, CARSEL=0, CAREF=1/2/3,<br>No load at P1.6/CA0 and P1.7/CA1                                                                | $V_{CC} = 2.2\text{ V}$              | 30  | 50             | $\mu\text{A}$ |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 45  | 71             |               |
| $V_{(\text{Ref025})}$              | $\frac{\text{Voltage @ } 0.25\text{ V}_{CC} \text{ node}}{V_{CC}}$ PCA0=1, CARSEL=1, CAREF=1,<br>No load at P1.6/CA0 and P1.7/CA1 | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |     | 0.23 0.24 0.25 |               |
| $V_{(\text{Ref050})}$              | $\frac{\text{Voltage @ } 0.5\text{ V}_{CC} \text{ node}}{V_{CC}}$ PCA0=1, CARSEL=1, CAREF=2,<br>No load at P1.6/CA0 and P1.7/CA1  | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |     | 0.47 0.48 0.5  |               |
| $V_{(\text{RefVT})}$               | see Figure 6 and Figure 7<br>PCA0=1, CARSEL=1, CAREF=3,<br>No load at P1.6/CA0 and P1.7/CA1;<br>$T_A = 85^\circ\text{C}$          | $V_{CC} = 2.2\text{ V}$              | 390 | 480            | mV            |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 400 | 490            |               |
| $V_{IC}$                           | Common-mode input voltage range<br>CAON=1                                                                                         | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |     | 0 $V_{CC}-1$   | V             |
| $V_p - V_s$                        | Offset voltage<br>See Note 2                                                                                                      | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |     | -30 30         | mV            |
| $V_{hys}$                          | Input hysteresis<br>CAON = 1                                                                                                      | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |     | 0 0.7 1.4      | mV            |
| $t_{(\text{response LH})}$         | $T_A = 25^\circ\text{C}$ ,<br>Overdrive 10 mV, without filter: CAF = 0                                                            | $V_{CC} = 2.2\text{ V}$              | 160 | 210            | ns            |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 80  | 150            |               |
|                                    | $T_A = 25^\circ\text{C}$ ,<br>Overdrive 10 mV, with filter: CAF = 1                                                               | $V_{CC} = 2.2\text{ V}$              | 1.4 | 1.9            | $\mu\text{s}$ |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 0.9 | 1.5            |               |
| $t_{(\text{response HL})}$         | $T_A = 25^\circ\text{C}$ ,<br>Overdrive 10 mV, without filter: CAF = 0                                                            | $V_{CC} = 2.2\text{ V}$              | 130 | 210            | ns            |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 80  | 150            |               |
|                                    | $T_A = 25^\circ\text{C}$ ,<br>Overdrive 10 mV, with filter: CAF = 1                                                               | $V_{CC} = 2.2\text{ V}$              | 1.4 | 1.9            | $\mu\text{s}$ |
|                                    |                                                                                                                                   | $V_{CC} = 3\text{ V}$                | 0.9 | 1.5            |               |

- NOTES: 1. The leakage current for the Comparator\_A terminals is identical to  $I_{lkg(Px.x)}$  specification.  
 2. The input offset voltage can be cancelled by using the CAEX bit to invert the Comparator\_A inputs on successive measurements. The two successive measurements are then summed together.


**typical characteristics**

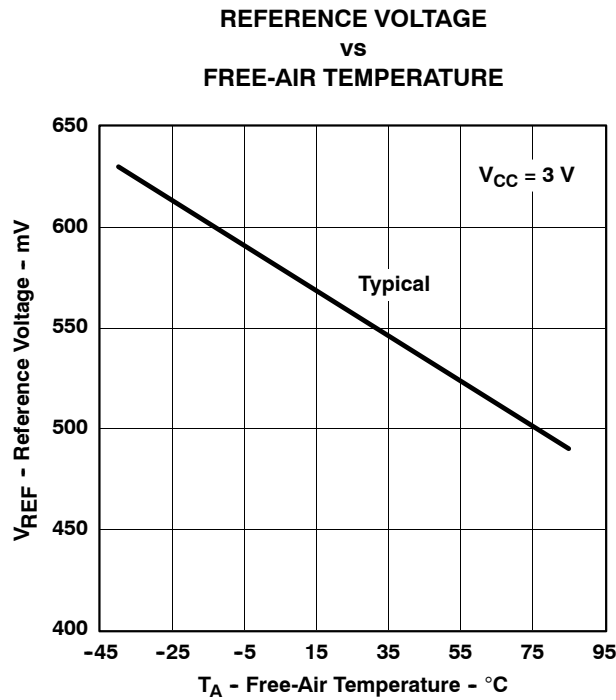


**Figure 6. V<sub>(RefVT)</sub> vs Temperature**

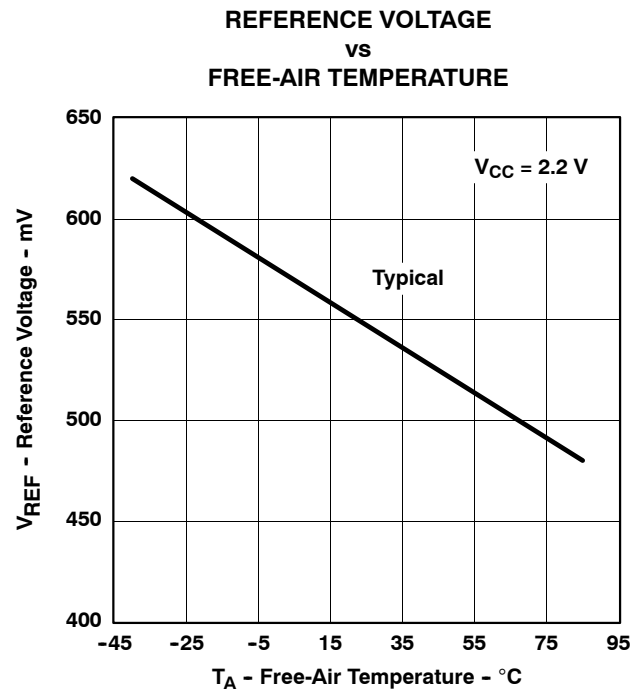

**Figure 7. V<sub>(RefVT)</sub> vs Temperature**

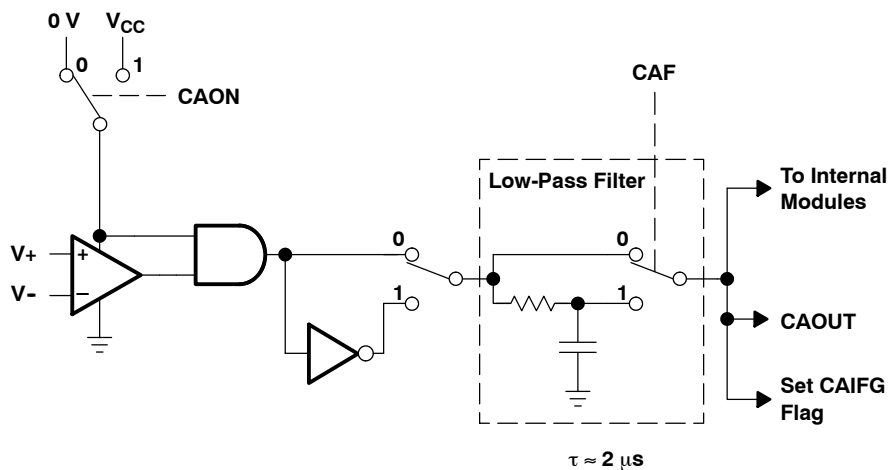

**Figure 8. Block Diagram of Comparator\_A Module**

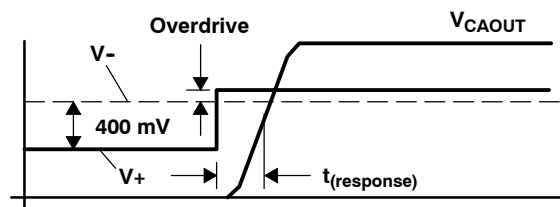

**Figure 9. Overdrive Definition**

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**POR/brownout reset (BOR) (see Note 1)**

| PARAMETER         | TEST CONDITIONS                                                                          | MIN | TYP                       | MAX  | UNIT    |
|-------------------|------------------------------------------------------------------------------------------|-----|---------------------------|------|---------|
| $t_{d(BOR)}$      |                                                                                          |     |                           | 2000 | $\mu s$ |
| $V_{CC(start)}$   | $dV_{CC}/dt \leq 3 V/s$ (see Figure 10)                                                  |     | $0.7 \times V_{(B\_IT-)}$ |      | V       |
| $V_{(B\_IT-)}$    | $dV_{CC}/dt \leq 3 V/s$ (see Figure 10 through Figure 12)                                |     |                           | 1.71 | V       |
| $V_{hys(B\_IT-)}$ | $dV_{CC}/dt \leq 3 V/s$ (see Figure 10)                                                  | 70  | 130                       | 180  | mV      |
| $t_{(reset)}$     | Pulse length needed at RST/NMI pin to accepted reset internally,<br>$V_{CC} = 2.2 V/3 V$ | 2   |                           |      | $\mu s$ |

NOTES: 1. The current consumption of the brownout module is already included in the  $I_{CC}$  current consumption data. The voltage level  $V_{(B\_IT-)} + V_{hys(B\_IT-)}$  is  $\leq 1.8V$ .  
2. During power up, the CPU begins code execution following a period of  $t_{d(BOR)}$  after  $V_{CC} = V_{(B\_IT-)} + V_{hys(B\_IT-)}$ . The default FLL+ settings must not be changed until  $V_{CC} \geq V_{CC(min)}$ , where  $V_{CC(min)}$  is the minimum supply voltage for the desired operating frequency. See the *MSP430x4xx Family User's Guide* (SLAU056) for more information on the brownout/SVS circuit.

## typical characteristics

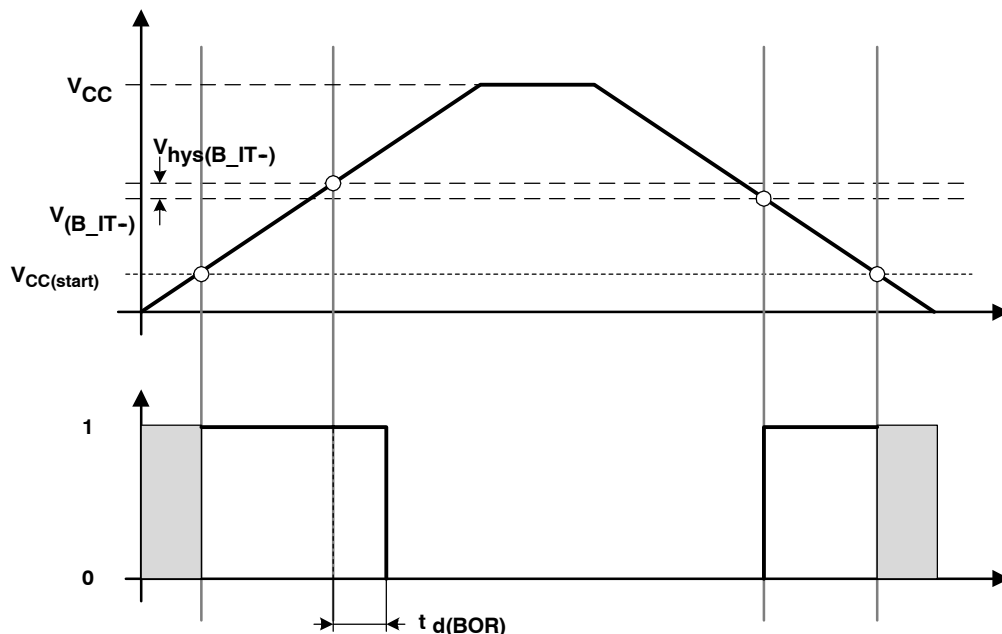


Figure 10. POR/Brownout Reset (BOR) vs Supply Voltage


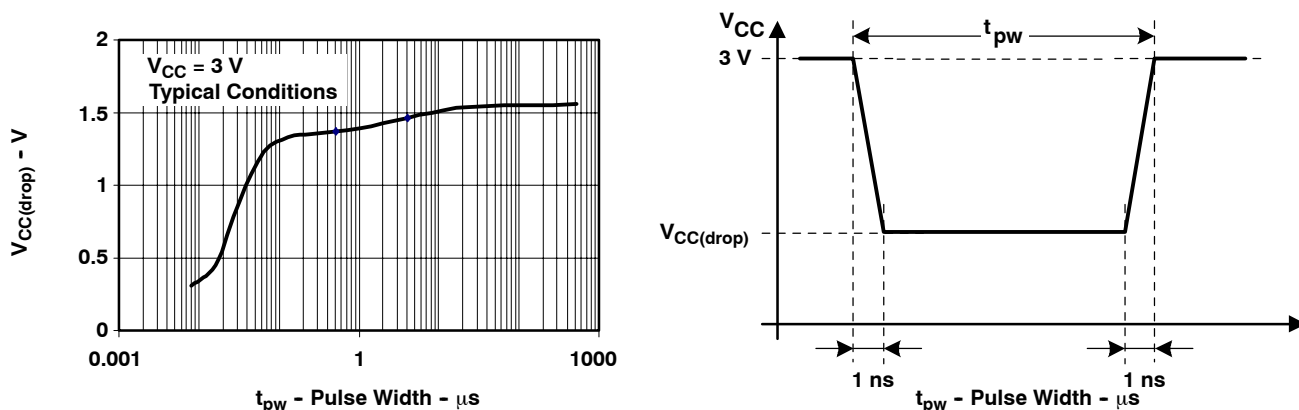


Figure 11.  $V_{CC(drop)}$  Level With a Square Voltage Drop to Generate a POR/Brownout Signal

**typical characteristics**

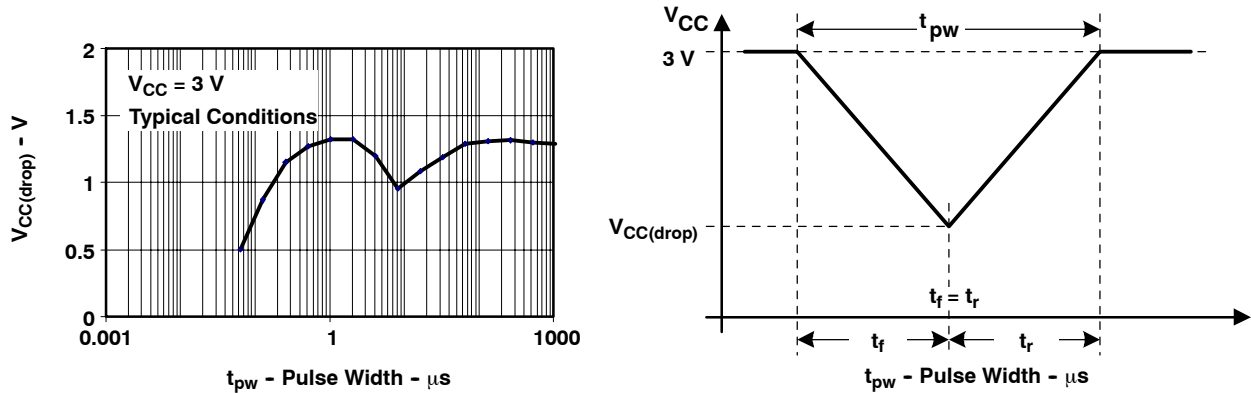

**Figure 12.  $V_{CC(drop)}$  Level With a Triangle Voltage Drop to Generate a POR/Brownout Signal**

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**SVS (supply voltage supervisor/monitor)**

| PARAMETER                     | TEST CONDITIONS                                                                |                    | MIN                           | NOM              | MAX                           | UNIT          |
|-------------------------------|--------------------------------------------------------------------------------|--------------------|-------------------------------|------------------|-------------------------------|---------------|
| $t_{(SVSR)}$                  | $dV_{CC}/dt > 30 \text{ V/ms}$ (see Figure 13)                                 |                    | 5                             |                  | 150                           | $\mu\text{s}$ |
|                               | $dV_{CC}/dt \leq 30 \text{ V/ms}$                                              |                    |                               |                  | 2000                          | $\mu\text{s}$ |
| $t_{d(SVSR)}$                 | SVSRon, switch from $VLD=0$ to $VLD \neq 0$ , $V_{CC} = 3 \text{ V}$           |                    | 20                            |                  | 150                           | $\mu\text{s}$ |
| $t_{settle}$                  | $VLD \neq 0^\dagger$                                                           |                    |                               |                  | 12                            | $\mu\text{s}$ |
| $V_{(SVSRstart)}$             | $VLD \neq 0$ , $V_{CC}/dt \leq 3 \text{ V/s}$ (see Figure 13)                  |                    |                               | 1.55             | 1.7                           | V             |
| $V_{hys(SVS\_IT-)}$           | $V_{CC}/dt \leq 3 \text{ V/s}$ (see Figure 13)                                 | $VLD = 1$          | 70                            | 120              | 155                           | mV            |
|                               |                                                                                | $VLD = 2 \dots 14$ | $V_{(SVS\_IT-)} \times 0.001$ |                  | $V_{(SVS\_IT-)} \times 0.016$ |               |
|                               | $V_{CC}/dt \leq 3 \text{ V/s}$ (see Figure 13), external voltage applied on A7 | $VLD = 15$         | 4.4                           |                  | 20                            | mV            |
| $V_{(SVS\_IT-)}$              | $V_{CC}/dt \leq 3 \text{ V/s}$ (see Figure 13)                                 | $VLD = 1$          | 1.8                           | 1.9              | 2.05                          | V             |
|                               |                                                                                | $VLD = 2$          | 1.94                          | 2.1              | 2.23                          |               |
|                               |                                                                                | $VLD = 3$          | 2.05                          | 2.2              | 2.35                          |               |
|                               |                                                                                | $VLD = 4$          | 2.14                          | 2.3              | 2.46                          |               |
|                               |                                                                                | $VLD = 5$          | 2.24                          | 2.4              | 2.58                          |               |
|                               |                                                                                | $VLD = 6$          | 2.33                          | 2.5              | 2.69                          |               |
|                               |                                                                                | $VLD = 7$          | 2.46                          | 2.65             | 2.84                          |               |
|                               |                                                                                | $VLD = 8$          | 2.58                          | 2.8              | 2.97                          |               |
|                               |                                                                                | $VLD = 9$          | 2.69                          | 2.9              | 3.10                          |               |
|                               |                                                                                | $VLD = 10$         | 2.83                          | 3.05             | 3.26                          |               |
|                               |                                                                                | $VLD = 11$         | 2.94                          | 3.2              | 3.39                          |               |
|                               |                                                                                | $VLD = 12$         | 3.11                          | 3.35             | 3.58 <sup>†</sup>             |               |
|                               |                                                                                | $VLD = 13$         | 3.24                          | 3.5              | 3.73 <sup>†</sup>             |               |
|                               |                                                                                | $VLD = 14$         | 3.43                          | 3.7 <sup>†</sup> | 3.96 <sup>†</sup>             |               |
|                               | $V_{CC}/dt \leq 3 \text{ V/s}$ (see Figure 13), external voltage applied on A7 | $VLD = 15$         | 1.1                           | 1.2              | 1.3                           |               |
| $I_{CC(SVS)}$<br>(see Note 1) | $VLD \neq 0$ , $V_{CC} = 2.2 \text{ V}/3 \text{ V}$                            |                    |                               | 10               | 15                            | $\mu\text{A}$ |

<sup>†</sup> The recommended operating voltage range is limited to 3.6 V.

<sup>‡</sup>  $t_{settle}$  is the settling time that the comparator o/p needs to have a stable level after VLD is switched  $VLD \neq 0$  to a different VLD value somewhere between 2 and 15. The overdrive is assumed to be  $> 50 \text{ mV}$ .

NOTE 1: The current consumption of the SVS module is not included in the  $I_{CC}$  current consumption data.

typical characteristics

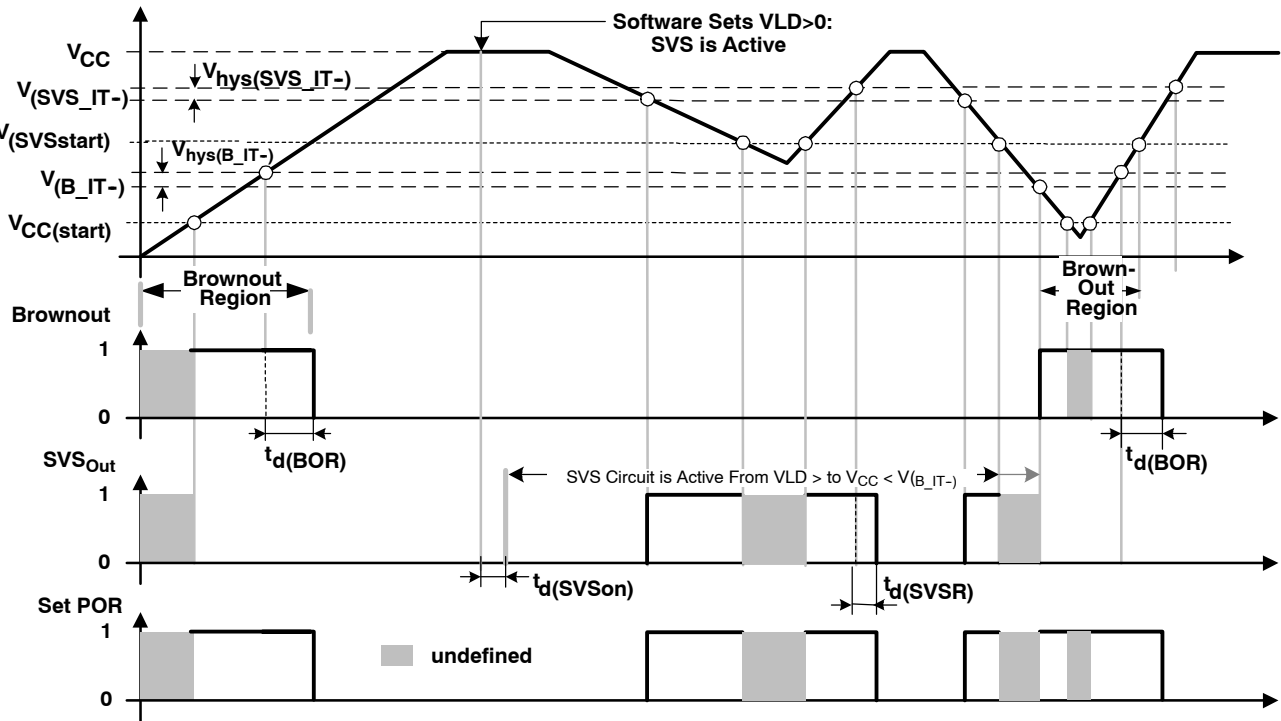


Figure 13. SVS Reset (SVSR) vs Supply Voltage


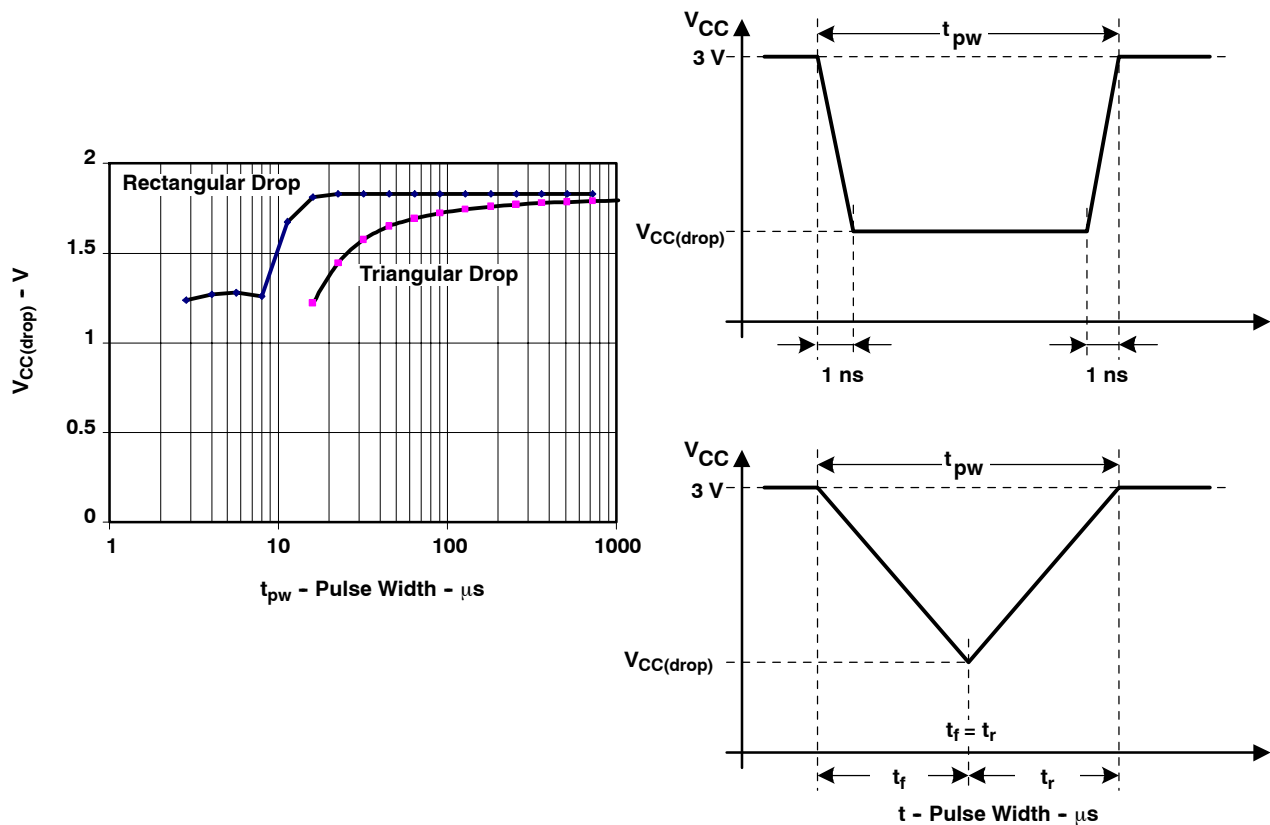


Figure 14.  $V_{CC(drop)}$  With a Square Voltage Drop and a Triangle Voltage Drop to Generate an SVS Signal

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**DCO**

| PARAMETER             | TEST CONDITIONS                                                                                                                                            | V <sub>CC</sub> | MIN  | TYP  | MAX  | UNIT   |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|------|------|--------|
| f <sub>(DCOCLK)</sub> | N <sub>(DCO)</sub> =01Eh, FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =0, D = 2; DCOPLUS = 0, f <sub>Crystal</sub> = 32.738 kHz     | 2.2 V/3 V       |      | 1    |      | MHz    |
| f <sub>(DCO=2)</sub>  | FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =0; DCOPLUS = 1                                                                         | 2.2 V           | 0.3  | 0.65 | 1.25 | MHz    |
|                       |                                                                                                                                                            | 3 V             | 0.3  | 0.7  | 1.3  |        |
| f <sub>(DCO=27)</sub> | FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =0; DCOPLUS = 1                                                                         | 2.2 V           | 2.5  | 5.6  | 10.5 | MHz    |
|                       |                                                                                                                                                            | 3 V             | 2.7  | 6.1  | 11.3 |        |
| f <sub>(DCO=2)</sub>  | FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =0, FN <sub>2</sub> =1; DCOPLUS = 1                                                                      | 2.2 V           | 0.7  | 1.3  | 2.3  | MHz    |
|                       |                                                                                                                                                            | 3 V             | 0.8  | 1.5  | 2.5  |        |
| f <sub>(DCO=27)</sub> | FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =0, FN <sub>2</sub> =1; DCOPLUS = 1                                                                      | 2.2 V           | 5.7  | 10.8 | 18   | MHz    |
|                       |                                                                                                                                                            | 3 V             | 6.5  | 12.1 | 20   |        |
| f <sub>(DCO=2)</sub>  | FN <sub>8</sub> =FN <sub>4</sub> =0, FN <sub>3</sub> = 1, FN <sub>2</sub> =x; DCOPLUS = 1                                                                  | 2.2 V           | 1.2  | 2    | 3    | MHz    |
|                       |                                                                                                                                                            | 3 V             | 1.3  | 2.2  | 3.5  |        |
| f <sub>(DCO=27)</sub> | FN <sub>8</sub> =FN <sub>4</sub> =0, FN <sub>3</sub> = 1, FN <sub>2</sub> =x; DCOPLUS = 1                                                                  | 2.2 V           | 9    | 15.5 | 25   | MHz    |
|                       |                                                                                                                                                            | 3 V             | 10.3 | 17.9 | 28.5 |        |
| f <sub>(DCO=2)</sub>  | FN <sub>8</sub> =0, FN <sub>4</sub> = 1, FN <sub>3</sub> = FN <sub>2</sub> =x; DCOPLUS = 1                                                                 | 2.2 V           | 1.8  | 2.8  | 4.2  | MHz    |
|                       |                                                                                                                                                            | 3 V             | 2.1  | 3.4  | 5.2  |        |
| f <sub>(DCO=27)</sub> | FN <sub>8</sub> =0, FN <sub>4</sub> =1, FN <sub>3</sub> = FN <sub>2</sub> =x; DCOPLUS = 1                                                                  | 2.2 V           | 13.5 | 21.5 | 33   | MHz    |
|                       |                                                                                                                                                            | 3 V             | 16   | 26.6 | 41   |        |
| f <sub>(DCO=2)</sub>  | FN <sub>8</sub> =1, FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =x; DCOPLUS = 1                                                                      | 2.2 V           | 2.8  | 4.2  | 6.2  | MHz    |
|                       |                                                                                                                                                            | 3 V             | 4.2  | 6.3  | 9.2  |        |
| f <sub>(DCO=27)</sub> | FN <sub>8</sub> =1, FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =x; DCOPLUS = 1                                                                      | 2.2 V           | 21   | 32   | 46   | MHz    |
|                       |                                                                                                                                                            | 3 V             | 30   | 46   | 70   |        |
| S <sub>n</sub>        | Step size between adjacent DCO taps:<br>S <sub>n</sub> = f <sub>DCO(Tap n+1)</sub> / f <sub>DCO(Tap n)</sub> (see Figure 16 for taps 21 to 27)             | 1 < TAP ≤ 20    | 1.06 |      | 1.11 |        |
|                       |                                                                                                                                                            | TAP = 27        | 1.07 |      | 1.17 |        |
| D <sub>t</sub>        | Temperature drift, N <sub>(DCO)</sub> = 01Eh, FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =0, D = 2; DCOPLUS = 0                    | 2.2 V           | –0.2 | –0.3 | –0.4 | % / °C |
|                       |                                                                                                                                                            | 3 V             | –0.2 | –0.3 | –0.4 |        |
| D <sub>V</sub>        | Drift with V <sub>CC</sub> variation, N <sub>(DCO)</sub> = 01Eh, FN <sub>8</sub> =FN <sub>4</sub> =FN <sub>3</sub> =FN <sub>2</sub> =0, D = 2; DCOPLUS = 0 | 2.2 V / 3 V     | 0    | 5    | 15   | % / V  |

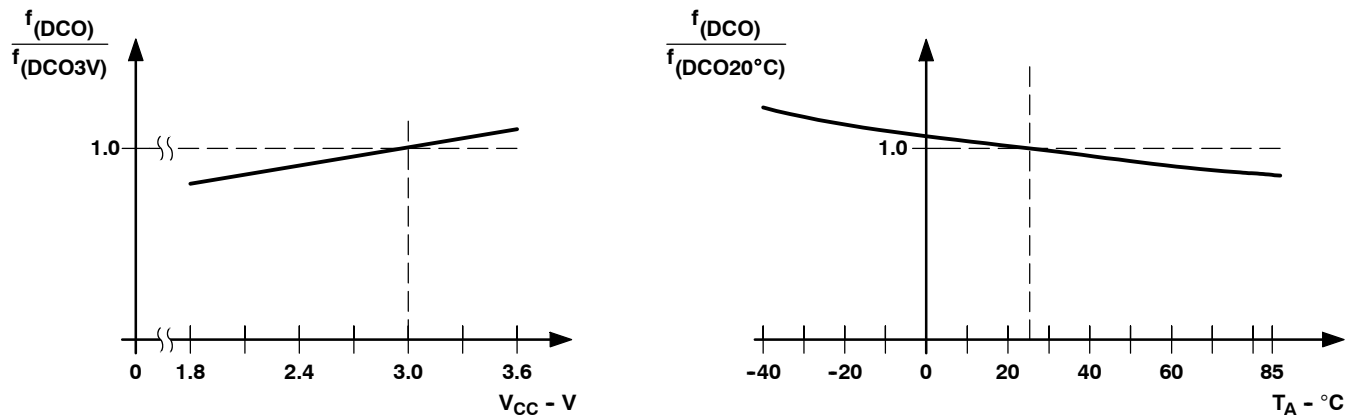

**Figure 15. DCO Frequency vs Supply Voltage V<sub>CC</sub> and vs Ambient Temperature**

electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)

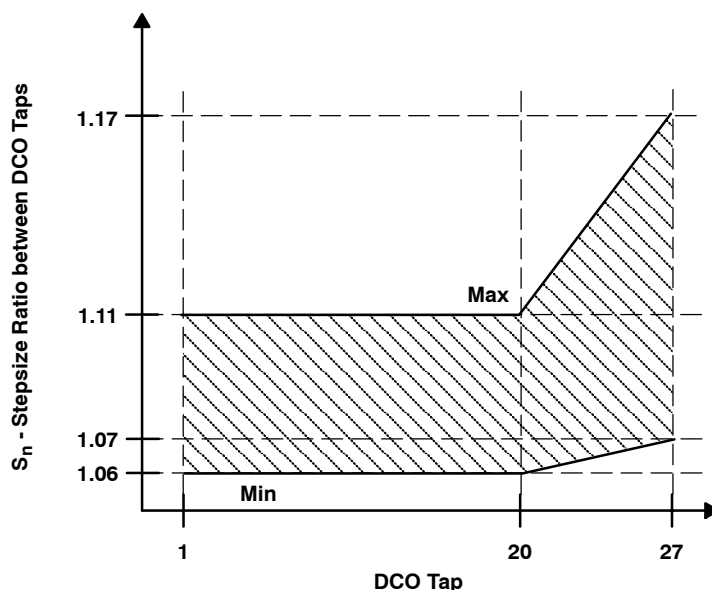


Figure 16. DCO Tap Step Size

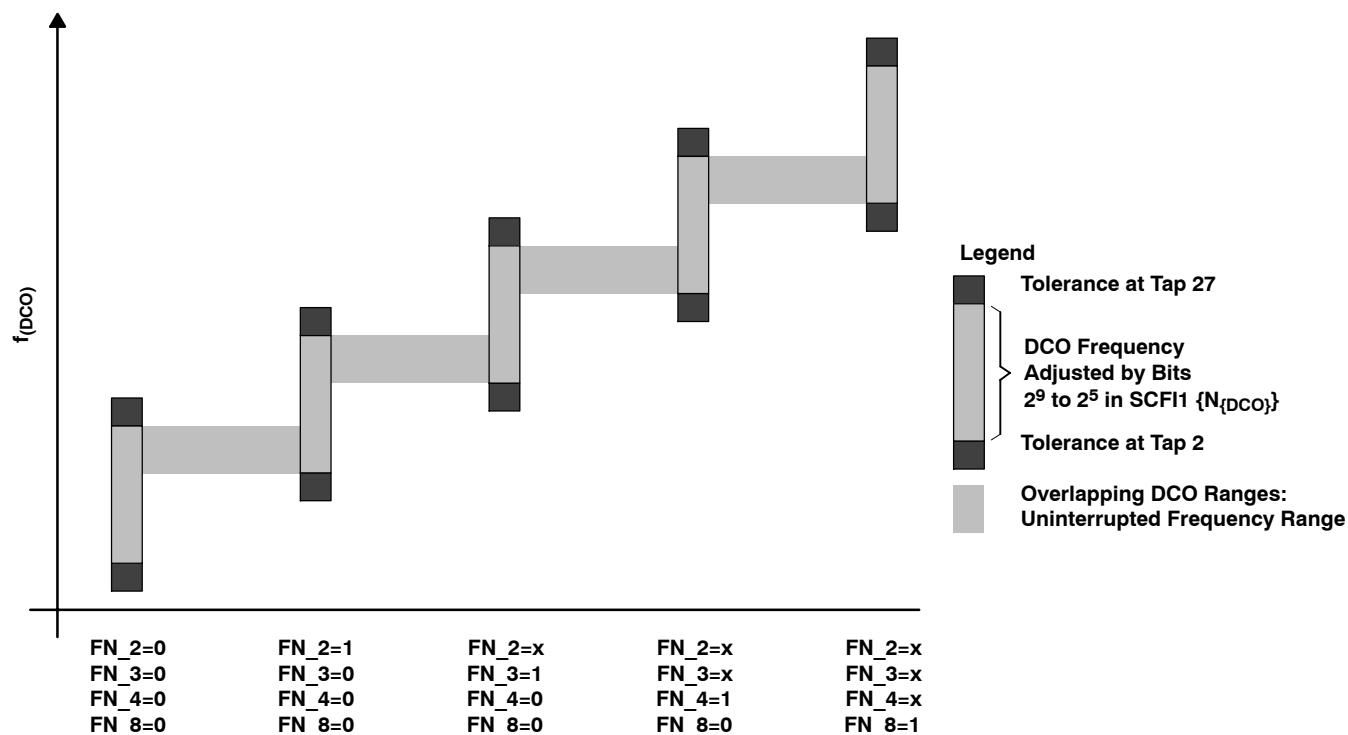


Figure 17. Five Overlapping DCO Ranges Controlled by FN\_x Bits

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**crystal oscillator, LFXT1 oscillator (see Notes 1 and 2)**

| PARAMETER  |                                               | TEST CONDITIONS                                    | MIN                 | TYP | MAX                 | UNIT |
|------------|-----------------------------------------------|----------------------------------------------------|---------------------|-----|---------------------|------|
| $C_{XIN}$  | Integrated input capacitance<br>(see Note 4)  | OSCCAPx = 0h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 0   |                     | pF   |
|            |                                               | OSCCAPx = 1h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 10  |                     |      |
|            |                                               | OSCCAPx = 2h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 14  |                     |      |
|            |                                               | OSCCAPx = 3h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 18  |                     |      |
| $C_{XOUT}$ | Integrated output capacitance<br>(see Note 4) | OSCCAPx = 0h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 0   |                     | pF   |
|            |                                               | OSCCAPx = 1h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 10  |                     |      |
|            |                                               | OSCCAPx = 2h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 14  |                     |      |
|            |                                               | OSCCAPx = 3h, $V_{CC} = 2.2\text{ V} / 3\text{ V}$ |                     | 18  |                     |      |
| $V_{IL}$   | Input levels at XIN                           | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ (see Note 3)  | $V_{SS}$            |     | $0.2 \times V_{CC}$ | V    |
| $V_{IH}$   |                                               |                                                    | $0.8 \times V_{CC}$ |     | $V_{CC}$            |      |

- NOTES: 1. The parasitic capacitance from the package and board may be estimated to be 2 pF. The effective load capacitor for the crystal is  $(C_{XIN} \times C_{XOUT}) / (C_{XIN} + C_{XOUT})$ . This is independent of XTS\_FLL.
2. To improve EMI on the low-power LFXT1 oscillator, particularly in the LF mode (32 kHz), the following guidelines should be observed.
- Keep the trace between the MSP430 device and the crystal as short as possible.
  - Design a good ground plane around the oscillator pins.
  - Prevent crosstalk from other clock or data lines into oscillator pins XIN and XOUT.
  - Avoid running PCB traces underneath or adjacent to the XIN and XOUT pins.
  - Use assembly materials and praxis to avoid any parasitic load on the oscillator XIN and XOUT pins.
  - If conformal coating is used, ensure that it does not induce capacitive/resistive leakage between the oscillator pins.
  - Do not route the XOUT line to the JTAG header to support the serial programming adapter as shown in other documentation. This signal is no longer required for the serial programming adapter.
3. Applies only when using an external logic-level clock source. XTS\_FLL must be set. Not applicable when using a crystal or resonator.
4. External capacitance is recommended for precision real-time clock applications; OSCCAPx = 0h.

**crystal oscillator, XT2 oscillator (see Note 1)**

| PARAMETER    |                               | TEST CONDITIONS                                   | MIN                 | TYP | MAX                 | UNIT |
|--------------|-------------------------------|---------------------------------------------------|---------------------|-----|---------------------|------|
| $C_{XT2IN}$  | Integrated input capacitance  | $V_{CC} = 2.2\text{ V} / 3\text{ V}$              |                     | 2   |                     | pF   |
| $C_{XT2OUT}$ | Integrated output capacitance | $V_{CC} = 2.2\text{ V} / 3\text{ V}$              |                     | 2   |                     | pF   |
| $V_{IL}$     | Input levels at XT2IN         | $V_{CC} = 2.2\text{ V} / 3\text{ V}$ (see Note 2) | $V_{SS}$            |     | $0.2 \times V_{CC}$ | V    |
| $V_{IH}$     |                               |                                                   | $0.8 \times V_{CC}$ |     | $V_{CC}$            | V    |

- NOTES: 1. The oscillator needs capacitors at both terminals, with values specified by the crystal manufacturer.
2. Applies only when using an external logic-level clock source. Not applicable when using a crystal or resonator.

**USART0 (see Note 1)**

| PARAMETER    |                       | TEST CONDITIONS                               | MIN | TYP | MAX | UNIT |
|--------------|-----------------------|-----------------------------------------------|-----|-----|-----|------|
| $t_{(\tau)}$ | USART0: deglitch time | $V_{CC} = 2.2\text{ V}$ , SYNC = 0, UART mode | 200 | 430 | 800 | ns   |
|              |                       | $V_{CC} = 3\text{ V}$ , SYNC = 0, UART mode   | 150 | 280 | 500 |      |

- NOTES: 1. The signal applied to the USART0 receive signal/terminal (URXD0) should meet the timing requirements of  $t_{(\tau)}$  to ensure that the URXS flip-flop is set. The URXS flip-flop is set with negative pulses meeting the minimum-timing condition of  $t_{(\tau)}$ . The operating conditions to set the flag must be met independently from this timing constraint. The deglitch circuitry is active only on negative transitions on the URXD0 line.

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

### electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)

#### 12-bit ADC, power supply and input range conditions (see Note 1)

| PARAMETER                                                                 | TEST CONDITIONS                                                                                                                            | MIN | TYP  | MAX        | UNIT     |
|---------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----|------|------------|----------|
| $V_{AVCC}$ Analog supply voltage                                          | $AV_{CC}$ and $DV_{CC}$ are connected together<br>$AV_{SS}$ and $DV_{SS}$ are connected together<br>$V_{(AVSS)} = V_{(DVSS)} = 0\text{ V}$ | 2.2 |      | 3.6        | V        |
| $V_{(P6.x/Ax)}$ Analog input voltage range (see Note 2)                   | All external Ax terminals. Analog inputs selected in $ADC12MCTLx$ register and $P6Sel.x=1$<br>$V_{(AVSS)} \leq V_{Ax} \leq V_{(AVCC)}$     | 0   |      | $V_{AVCC}$ | V        |
| $I_{ADC12}$ Operating supply current into $AV_{CC}$ terminal (see Note 3) | $f_{ADC12CLK} = 5.0\text{ MHz}$<br>$ADC12ON = 1$ , $REFON = 0$<br>$SHT0=0$ , $SHT1=0$ , $ADC12DIV=0$                                       |     |      |            |          |
|                                                                           | $V_{CC} = 2.2\text{ V}$                                                                                                                    |     | 0.65 | 1.3        | mA       |
|                                                                           | $V_{CC} = 3\text{ V}$                                                                                                                      |     | 0.8  | 1.6        |          |
| $I_{REF+}$ Operating supply current into $AV_{CC}$ terminal (see Note 4)  | $f_{ADC12CLK} = 5.0\text{ MHz}$<br>$ADC12ON = 0$ ,<br>$REFON = 1$ , $REF2\_5V = 1$                                                         |     |      |            |          |
|                                                                           | $V_{CC} = 3\text{ V}$                                                                                                                      |     | 0.5  | 0.8        | mA       |
|                                                                           | $f_{ADC12CLK} = 5.0\text{ MHz}$<br>$ADC12ON = 0$ ,<br>$REFON = 1$ , $REF2\_5V = 0$                                                         |     |      |            |          |
|                                                                           | $V_{CC} = 2.2\text{ V}$                                                                                                                    |     | 0.5  | 0.8        | mA       |
|                                                                           | $V_{CC} = 3\text{ V}$                                                                                                                      |     | 0.5  | 0.8        |          |
| $C_I$ Input capacitance                                                   | Only one terminal can be selected at one time, Ax                                                                                          |     |      | 40         | pF       |
| $R_I$ Input MUX ON resistance                                             | $0V \leq V_{Ax} \leq V_{AVCC}$                                                                                                             |     |      | 2000       | $\Omega$ |

- NOTES: 1. The leakage current is defined in the leakage current table with Ax parameter.  
2. The analog input voltage range must be within the selected reference voltage range  $V_{R+}$  to  $V_{R-}$  for valid conversion results.  
3. The internal reference supply current is not included in current consumption parameter  $I_{ADC12}$ .  
4. The internal reference current is supplied via terminal  $AV_{CC}$ . Consumption is independent of the  $ADC12ON$  control bit, unless a conversion is active. The  $REFON$  bit enables to settle the built-in reference before starting an A/D conversion.

#### 12-bit ADC, external reference (see Note 1)

| PARAMETER                                                                        | TEST CONDITIONS                               | MIN | TYP | MAX        | UNIT    |
|----------------------------------------------------------------------------------|-----------------------------------------------|-----|-----|------------|---------|
| $V_{eREF+}$ Positive external reference voltage input                            | $V_{eREF+} > V_{REF-}/V_{eREF-}$ (see Note 2) | 1.4 |     | $V_{AVCC}$ | V       |
| $V_{REF-}/V_{eREF-}$ Negative external reference voltage input                   | $V_{eREF+} > V_{REF-}/V_{eREF-}$ (see Note 3) | 0   |     | 1.2        | V       |
| $(V_{eREF+} - V_{REF-}/V_{eREF-})$ Differential external reference voltage input | $V_{eREF+} > V_{REF-}/V_{eREF-}$ (see Note 4) | 1.4 |     | $V_{AVCC}$ | V       |
| $I_{VeREF+}$ Static input current                                                | $0V \leq V_{eREF+} \leq V_{AVCC}$             |     |     | $\pm 1$    | $\mu A$ |
| $I_{VREF-/VeREF-}$ Static input current                                          | $0V \leq V_{eREF-} \leq V_{AVCC}$             |     |     | $\pm 1$    | $\mu A$ |


- NOTES: 1. The external reference is used during conversion to charge and discharge the capacitance array. The input capacitance,  $C_I$ , is also the dynamic load for an external reference during conversion. The dynamic impedance of the reference supply should follow the recommendations on analog-source impedance to allow the charge to settle for 12-bit accuracy.  
2. The accuracy limits the minimum positive external reference voltage. Lower reference voltage levels may be applied with reduced accuracy requirements.  
3. The accuracy limits the maximum negative external reference voltage. Higher reference voltage levels may be applied with reduced accuracy requirements.  
4. The accuracy limits minimum external differential reference voltage. Lower differential reference voltage levels may be applied with reduced accuracy requirements.

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

**12-bit ADC, built-in reference**

| PARAMETER                                                                        | TEST CONDITIONS                                                                                                                                                                                                                         | MIN  | TYP | MAX       | UNIT                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|-----------|-------------------------|
| $V_{REF+}$ Positive built-in reference voltage output                            | REF2_5V = 1 for 2.5 V<br>$I_{VREF+max} \leq I_{VREF+} \leq I_{VREF+min}$<br>$V_{CC} = 3\text{ V}$                                                                                                                                       | 2.4  | 2.5 | 2.6       | V                       |
|                                                                                  | REF2_5V = 0 for 1.5 V<br>$I_{VREF+max} \leq I_{VREF+} \leq I_{VREF+min}$<br>$V_{CC} = 2.2\text{ V}/3\text{ V}$                                                                                                                          | 1.44 | 1.5 | 1.56      |                         |
| $AV_{CC(min)}$ $AV_{CC}$ minimum voltage, Positive built-in reference active     | REF2_5V = 0, $I_{VREF+max} \leq I_{VREF+} \leq I_{VREF+min}$                                                                                                                                                                            | 2.2  |     |           | V                       |
|                                                                                  | REF2_5V = 1, $I_{VREF+min} \geq I_{VREF+} \geq -0.5\text{ mA}$                                                                                                                                                                          | 2.8  |     |           |                         |
|                                                                                  | REF2_5V = 1, $I_{VREF+min} \geq I_{VREF+} \geq -1\text{ mA}$                                                                                                                                                                            | 2.9  |     |           |                         |
| $I_{VREF+}$ Load current out of $V_{REF+}$ terminal                              | $V_{CC} = 2.2\text{ V}$                                                                                                                                                                                                                 | 0.01 |     | -0.5      | mA                      |
|                                                                                  | $V_{CC} = 3\text{ V}$                                                                                                                                                                                                                   | 0.01 |     | -1        |                         |
| $I_{L(VREF+)}$ Load-current regulation $V_{REF+}$ terminal                       | $I_{VREF+} = 500\text{ }\mu\text{A} \pm 100\text{ }\mu\text{A}$<br>Analog input voltage $\sim 0.75\text{ V}$ ;<br>REF2_5V = 0<br>$V_{CC} = 2.2\text{ V}$                                                                                |      |     | $\pm 2$   | LSB                     |
|                                                                                  | $V_{CC} = 3\text{ V}$                                                                                                                                                                                                                   |      |     | $\pm 2$   |                         |
|                                                                                  | $I_{VREF+} = 500\text{ }\mu\text{A} \pm 100\text{ }\mu\text{A}$<br>Analog input voltage $\sim 1.25\text{ V}$ ;<br>REF2_5V = 1<br>$V_{CC} = 3\text{ V}$                                                                                  |      |     | $\pm 2$   | LSB                     |
| $I_{DL(VREF+)}$ Load current regulation $V_{REF+}$ terminal                      | $I_{VREF+} = 100\text{ }\mu\text{A} \rightarrow 900\text{ }\mu\text{A}$ ,<br>$C_{VREF+} = 5\text{ }\mu\text{F}$ , $\Delta V_{REF+} \sim 0.5 \times V_{REF+}$<br>Error of conversion result $\leq 1\text{ LSB}$<br>$V_{CC} = 3\text{ V}$ |      |     | 20        | ns                      |
| $C_{VREF+}$ Capacitance at pin $V_{REF+}$ (see Note 1)                           | REFON = 1,<br>$0\text{ mA} \leq I_{VREF+} \leq I_{VREF+max}$<br>$V_{CC} = 2.2\text{ V}/3\text{ V}$                                                                                                                                      | 5    | 10  |           | $\mu\text{F}$           |
| $T_{REF+}$ Temperature coefficient of built-in reference                         | $I_{VREF+}$ is a constant in the range of<br>$0\text{ mA} \leq I_{VREF+} \leq 1\text{ mA}$<br>$V_{CC} = 2.2\text{ V}/3\text{ V}$                                                                                                        |      |     | $\pm 100$ | ppm/ $^{\circ}\text{C}$ |
| $t_{REFON}$ Settle time of internal reference voltage (see Figure 18 and Note 2) | $I_{VREF+} = 0.5\text{ mA}$ , $C_{VREF+} = 10\text{ }\mu\text{F}$ ,<br>$V_{REF+} = 1.5\text{ V}$ , $AV_{CC} = 2.2\text{ V}$                                                                                                             |      |     | 17        | ms                      |

- NOTES: 1. The internal buffer operational amplifier and the accuracy specifications require an external capacitor. All INL and DNL tests uses two capacitors between pins  $V_{REF+}$  and  $AV_{SS}$  and  $V_{REF-}/V_{REF-}$  and  $AV_{SS}$ : 10  $\mu\text{F}$  tantalum and 100 nF ceramic.
2. The condition is that the error in a conversion started after  $t_{REFON}$  is less than  $\pm 0.5\text{ LSB}$ . The settling time depends on the external capacitive load.

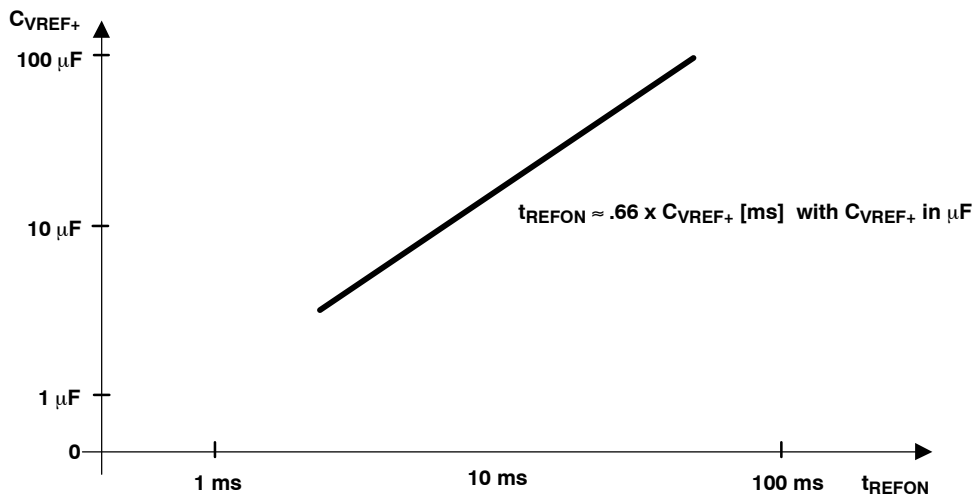

**Figure 18. Typical Settling Time of Internal Reference  $t_{REFON}$  vs External Capacitor on  $V_{REF+}$**

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

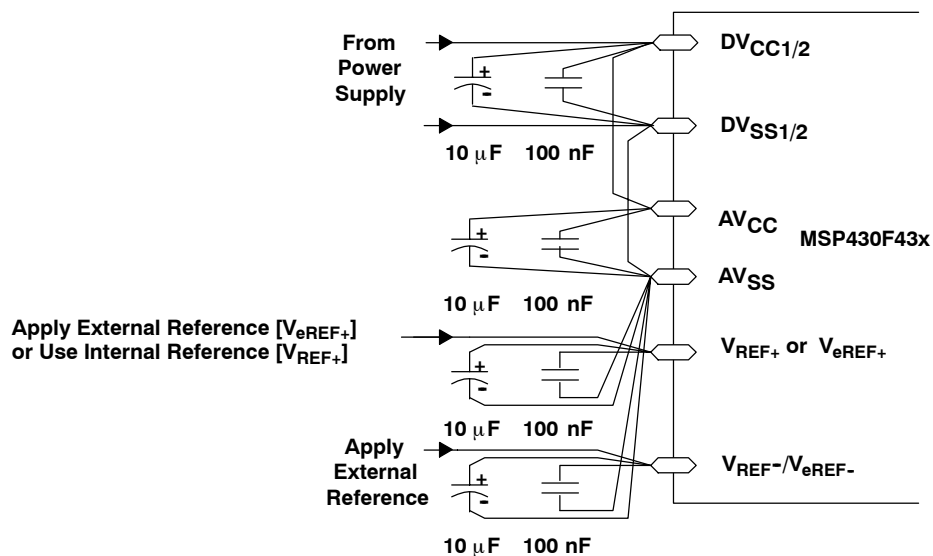


Figure 19. Supply Voltage and Reference Voltage Design  $V_{REF-}/V_{REF+}$  External Supply

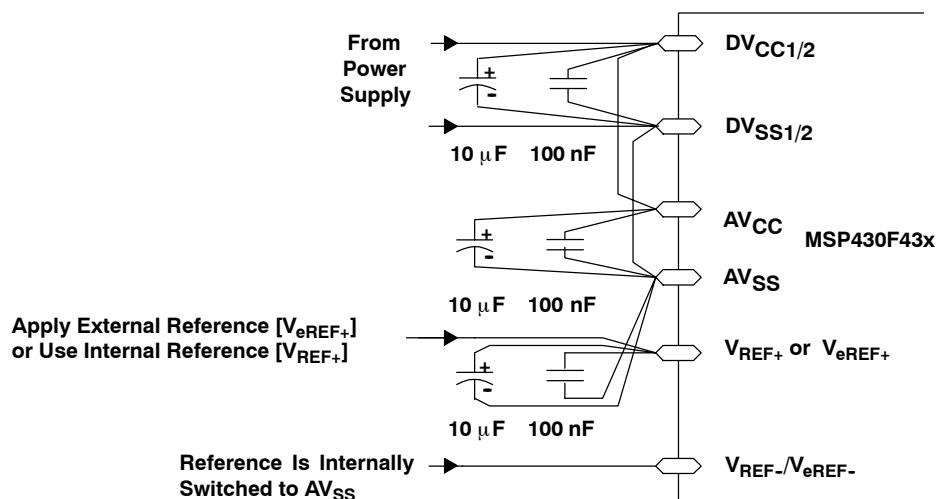


Figure 20. Supply Voltage and Reference Voltage Design  $V_{REF-}/V_{REF+} = AV_{SS}$ , Internally Connected

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

**12-bit ADC, timing parameters**

| PARAMETER             | TEST CONDITIONS                                                                                                                                                                                           | MIN                                                      | TYP  | MAX  | UNIT          |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------|------|---------------|
| $f_{\text{ADC12CLK}}$ | For specified performance of ADC12 linearity parameters<br>$V_{\text{CC}} = 2.2\text{V}/3\text{ V}$                                                                                                       | 0.45                                                     | 5    | 6.3  | MHz           |
| $f_{\text{ADC12OSC}}$ | Internal ADC12 oscillator<br>ADC12DIV=0,<br>$f_{\text{ADC12CLK}}=f_{\text{ADC12OSC}}$<br>$V_{\text{CC}} = 2.2\text{ V}/3\text{ V}$                                                                        | 3.7                                                      | 5    | 6.3  | MHz           |
| $t_{\text{CONVERT}}$  | Conversion time<br>$C_{\text{VREF+}} \geq 5\text{ }\mu\text{F}$ , Internal oscillator,<br>$f_{\text{ADC12OSC}} = 3.7\text{ MHz to }6.3\text{ MHz}$<br>$V_{\text{CC}} = 2.2\text{ V}/3\text{ V}$           | 2.06                                                     |      | 3.51 | $\mu\text{s}$ |
|                       | External $f_{\text{ADC12CLK}}$ from ACLK, MCLK or SMCLK:<br>ADC12SSEL $\neq 0$                                                                                                                            | $13 \times \text{ADC12DIV} \times 1/f_{\text{ADC12CLK}}$ |      |      | $\mu\text{s}$ |
| $t_{\text{ADC12ON}}$  | Turn on settling time of the ADC<br>(see Note 1)                                                                                                                                                          |                                                          |      | 100  | ns            |
| $t_{\text{Sample}}$   | Sampling time<br>$R_{\text{S}} = 400\text{ }\Omega$ , $R_{\text{I}} = 1000\text{ }\Omega$ ,<br>$C_{\text{I}} = 30\text{ pF}$ , $\tau = [R_{\text{S}} + R_{\text{I}}] \times C_{\text{I}}$<br>(see Note 2) | $V_{\text{CC}} = 3\text{ V}$                             | 1220 |      | ns            |
|                       |                                                                                                                                                                                                           | $V_{\text{CC}} = 2.2\text{ V}$                           | 1400 |      |               |

- NOTES: 1. The condition is that the error in a conversion started after  $t_{\text{ADC12ON}}$  is less than  $\pm 0.5$  LSB. The reference and input signal are already settled.  
2. Approximately ten Tau ( $\tau$ ) are needed to get an error of less than  $\pm 0.5$  LSB:  
 $t_{\text{Sample}} = \ln(2^{n+1}) \times (R_{\text{S}} + R_{\text{I}}) \times C_{\text{I}} + 800\text{ ns}$  where  $n = \text{ADC resolution} = 12$ ,  $R_{\text{S}} = \text{external source resistance}$ .

**12-bit ADC, linearity parameters**

| PARAMETER      |                              | TEST CONDITIONS                                                                                                                                                                                                                                                 |                                | MIN  | TYP | MAX | UNIT |     |
|----------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------|-----|-----|------|-----|
| E <sub>I</sub> | Integral linearity error     | 1.4 V ≤ (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) min ≤ 1.6 V                                                                                                                                                                                 | V <sub>CC</sub> =<br>2.2 V/3 V | ±2   |     |     | LSB  |     |
|                |                              | 1.6 V < (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) min ≤ [V <sub>AVCC</sub> ]                                                                                                                                                                  |                                | ±1.7 |     |     |      |     |
| E <sub>D</sub> | Differential linearity error | (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) <sub>min</sub> ≤ (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ),<br>C <sub>VREF+</sub> = 10 μF (tantalum) and 100 nF (ceramic)                                                         | V <sub>CC</sub> =<br>2.2 V/3 V | ±1   |     |     | LSB  |     |
| E <sub>O</sub> | Offset error                 | (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) <sub>min</sub> ≤ (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ),<br>Internal impedance of source R <sub>S</sub> < 100 Ω,<br>C <sub>VREF+</sub> = 10 μF (tantalum) and 100 nF (ceramic) | V <sub>CC</sub> =<br>2.2 V/3 V | ±2   |     | ±4  | LSB  |     |
| E <sub>G</sub> | Gain error                   | (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) <sub>min</sub> ≤ (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ),<br>C <sub>VREF+</sub> = 10 μF (tantalum) and 100 nF (ceramic)                                                         | V <sub>CC</sub> =<br>2.2 V/3 V | ±1.1 |     |     | ±2   | LSB |
| E <sub>T</sub> | Total unadjusted error       | (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ) <sub>min</sub> ≤ (V <sub>eREF+</sub> - V <sub>REF-/V<sub>eREF-</sub></sub> ),<br>C <sub>VREF+</sub> = 10 μF (tantalum) and 100 nF (ceramic)                                                         | V <sub>CC</sub> =<br>2.2 V/3 V | ±2   |     |     | ±5   | LSB |

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted) (continued)**

### 12-bit ADC, temperature sensor and built-in $V_{MID}$

| PARAMETER            | TEST CONDITIONS                                                   | $V_{CC}$                                                            | MIN           | TYP     | MAX       | UNIT    |
|----------------------|-------------------------------------------------------------------|---------------------------------------------------------------------|---------------|---------|-----------|---------|
| $I_{SENSOR}$         | Operating supply current into $AV_{CC}$ terminal (see Note 1)     | REFON = 0, INCH = 0Ah,<br>ADC12ON=NA, $T_A = 25^{\circ}C$           | 2.2 V         | 40      | 120       | $\mu A$ |
|                      |                                                                   |                                                                     | 3 V           | 60      | 160       |         |
| $V_{SENSOR}$         | (see Note 2)                                                      | ADC12ON = 1, INCH = 0Ah,<br>$T_A = 0^{\circ}C$                      | 2.2 V/<br>3 V | 986     |           | mV      |
| $TC_{SENSOR}$        |                                                                   | ADC12ON = 1, INCH = 0Ah                                             | 2.2 V/<br>3 V | 3.55±3% |           | mV/°C   |
| $t_{SENSOR(sample)}$ | Sample time required if<br>channel 10 is selected<br>(see Note 3) | ADC12ON = 1, INCH = 0Ah,<br>Error of conversion result $\leq 1$ LSB | 2.2 V         | 30      |           | $\mu s$ |
|                      |                                                                   |                                                                     | 3 V           | 30      |           |         |
| $I_{VMID}$           | Current into divider at<br>channel 11 (see Note 4)                | ADC12ON = 1, INCH = 0Bh,                                            | 2.2 V         |         | NA        | $\mu A$ |
|                      |                                                                   |                                                                     | 3 V           |         | NA        |         |
| $V_{MID}$            | $AV_{CC}$ divider at channel 11                                   | ADC12ON = 1, INCH = 0Bh,<br>$V_{MID}$ is $\sim 0.5 \times V_{AVCC}$ | 2.2 V         | 1.1     | 1.1±0.04  | V       |
|                      |                                                                   |                                                                     | 3 V           | 1.5     | 1.50±0.04 |         |
| $t_{VMID(sample)}$   | Sample time required if<br>channel 11 is selected<br>(see Note 5) | ADC12ON = 1, INCH = 0Bh,<br>Error of conversion result $\leq 1$ LSB | 2.2 V         | 1400    |           | ns      |
|                      |                                                                   |                                                                     | 3 V           | 1220    |           |         |

- NOTES: 1. The sensor current  $I_{SENSOR}$  is consumed if (ADC12ON = 1 and REFON=1), or (ADC12ON=1 AND INCH=0Ah and sample signal is high). When REFON = 1,  $I_{SENSOR}$  is already included in  $I_{REF+}$ .
2. The temperature sensor offset can be as much as  $\pm 20^{\circ}C$ . A single-point calibration is recommended in order to minimize the offset error of the built-in temperature sensor.
3. The typical equivalent impedance of the sensor is 51 k $\Omega$ . The sample time required includes the sensor-on time  $t_{SENSOR(on)}$ .
4. No additional current is needed. The  $V_{MID}$  is used during sampling.
5. The on-time  $t_{VMID(on)}$  is included in the sampling time  $t_{VMID(sample)}$ ; no additional on time is needed.

**electrical characteristics over recommended operating free-air temperature (unless otherwise noted)**

**flash memory**

| PARAMETER                                                                    | TEST CONDITIONS       | V <sub>CC</sub> | MIN             | TYP             | MAX | UNIT             |
|------------------------------------------------------------------------------|-----------------------|-----------------|-----------------|-----------------|-----|------------------|
| V <sub>CC(PGM/ERASE)</sub> Program and Erase supply voltage                  |                       |                 | 2.7             |                 | 3.6 | V                |
| f <sub>FTG</sub> Flash Timing Generator frequency                            |                       |                 | 257             |                 | 476 | kHz              |
| I <sub>PGM</sub> Supply current from DV <sub>CC</sub> during program         |                       | 2.7 V/ 3.6 V    |                 | 3               | 5   | mA               |
| I <sub>ERASE</sub> Supply current from DV <sub>CC</sub> during erase         |                       | 2.7 V/ 3.6 V    |                 | 3               | 7   | mA               |
| t <sub>CPT</sub> Cumulative program time                                     | see Note 1            | 2.7 V/ 3.6 V    |                 |                 | 10  | ms               |
| t <sub>CMErase</sub> Cumulative mass erase time                              | see Note 2            | 2.7 V/ 3.6 V    | 200             |                 |     | ms               |
| Program/Erase endurance                                                      |                       |                 | 10 <sup>4</sup> | 10 <sup>5</sup> |     | cycles           |
| t <sub>Retention</sub> Data retention duration                               | T <sub>J</sub> = 25°C |                 | 100             |                 |     | years            |
| t <sub>Word</sub> Word or byte program time                                  | see Note 3            |                 |                 | 35              |     | t <sub>FTG</sub> |
| t <sub>Block, 0</sub> Block program time for 1 <sup>st</sup> byte or word    |                       |                 |                 | 30              |     |                  |
| t <sub>Block, 1-63</sub> Block program time for each additional byte or word |                       |                 |                 | 21              |     |                  |
| t <sub>Block, End</sub> Block program end-sequence wait time                 |                       |                 |                 | 6               |     |                  |
| t <sub>Mass Erase</sub> Mass erase time                                      |                       |                 |                 | 5297            |     |                  |
| t <sub>Seg Erase</sub> Segment erase time                                    |                       |                 |                 | 4819            |     |                  |

- NOTES: 1. The cumulative program time must not be exceeded when writing to a 64-byte flash block. This parameter applies to all programming methods: individual word/byte write and block write modes.
2. The mass erase duration generated by the flash timing generator is at least 11.1ms ( = 5297x1/f<sub>FTG,max</sub> = 5297x1/476kHz). To achieve the required cumulative mass erase time the Flash Controller's mass erase operation can be repeated until this time is met. (A worst case minimum of 19 cycles are required).
3. These values are hardwired into the Flash Controller's state machine (t<sub>FTG</sub> = 1/f<sub>FTG</sub>).

**JTAG interface**

| PARAMETER                                                               | TEST CONDITIONS | V <sub>CC</sub> | MIN | TYP | MAX | UNIT |
|-------------------------------------------------------------------------|-----------------|-----------------|-----|-----|-----|------|
| f <sub>TCK</sub> TCK input frequency                                    | see Note 1      | 2.2 V           | 0   |     | 5   | MHz  |
|                                                                         |                 | 3 V             | 0   |     | 10  | MHz  |
| R <sub>Internal</sub> Internal pull-up resistance on TMS, TCK, TDI/TCLK | see Note 2      | 2.2 V/ 3 V      | 25  | 60  | 90  | kΩ   |

- NOTES: 1. f<sub>TCK</sub> may be restricted to meet the timing requirements of the module selected.
2. TMS, TDI/TCLK, and TCK pull-up resistors are implemented in all versions.

**JTAG fuse (see Note 1)**


| PARAMETER                                                           | TEST CONDITIONS       | V <sub>CC</sub> | MIN | TYP | MAX | UNIT |
|---------------------------------------------------------------------|-----------------------|-----------------|-----|-----|-----|------|
| V <sub>CC(FB)</sub> Supply voltage during fuse-blow condition       | T <sub>A</sub> = 25°C |                 | 2.5 |     |     | V    |
| V <sub>FB</sub> Voltage level on TDI/TCLK for fuse-blow: F versions |                       |                 | 6   |     | 7   | V    |
| I <sub>FB</sub> Supply current into TDI/TCLK during fuse blow       |                       |                 |     |     | 100 | mA   |
| t <sub>FB</sub> Time to blow fuse                                   |                       |                 |     |     | 1   | ms   |

- NOTES: 1. Once the fuse is blown, no further access to the MSP430 JTAG/Test and emulation features is possible. The JTAG block is switched to bypass mode.

APPLICATION INFORMATION

input/output schematic

port P1, P1.0 to P1.5, input/output with Schmitt trigger

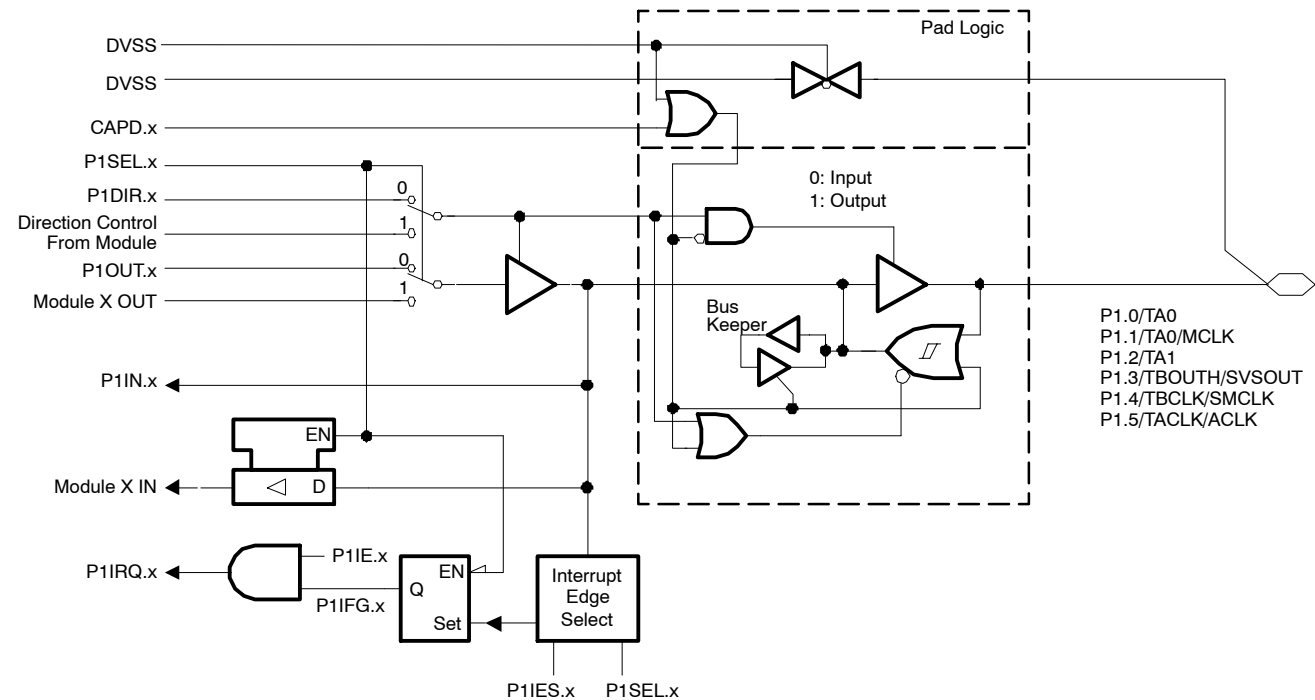


Note:  $0 \leq x \leq 5$   
Note: Port function is active if CAPD.x = 0

| PnSEL.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT           | PnIN.x | Module X IN         | PnIE.x | PnIFG.x | PnIES.x |
|---------|---------|--------------------------|---------|------------------------|--------|---------------------|--------|---------|---------|
| P1SEL.0 | P1DIR.0 | P1DIR.0                  | P1OUT0  | Out0 sig. <sup>†</sup> | P1IN.0 | CCI0A <sup>†</sup>  | P1IE.0 | P1IFG.0 | P1IES.0 |
| P1SEL.1 | P1DIR.1 | P1DIR.1                  | P1OUT.1 | MCLK                   | P1IN.1 | CCI0B <sup>†</sup>  | P1IE.1 | P1IFG.1 | P1IES.1 |
| P1SEL.2 | P1DIR.2 | P1DIR.2                  | P1OUT.2 | Out1 sig. <sup>†</sup> | P1IN.2 | CCI1A <sup>†</sup>  | P1IE.2 | P1IFG.2 | P1IES.2 |
| P1SEL.3 | P1DIR.3 | P1DIR.3                  | P1OUT.3 | SVSOUT                 | P1IN.3 | TBOUTH <sup>‡</sup> | P1IE.3 | P1IFG.3 | P1IES.3 |
| P1SEL.4 | P1DIR.4 | P1DIR.4                  | P1OUT.4 | SMCLK                  | P1IN.4 | TBCLK <sup>‡</sup>  | P1IE.4 | P1IFG.4 | P1IES.4 |
| P1SEL.5 | P1DIR.5 | P1DIR5                   | P1OUT.5 | ACLK                   | P1IN.5 | TACLK <sup>†</sup>  | P1IE.5 | P1IFG.5 | P1IES.5 |

<sup>†</sup> Timer\_A  
<sup>‡</sup> Timer\_B

## input/output schematic (continued)

### port P1, P1.6, P1.7, input/output with Schmitt trigger

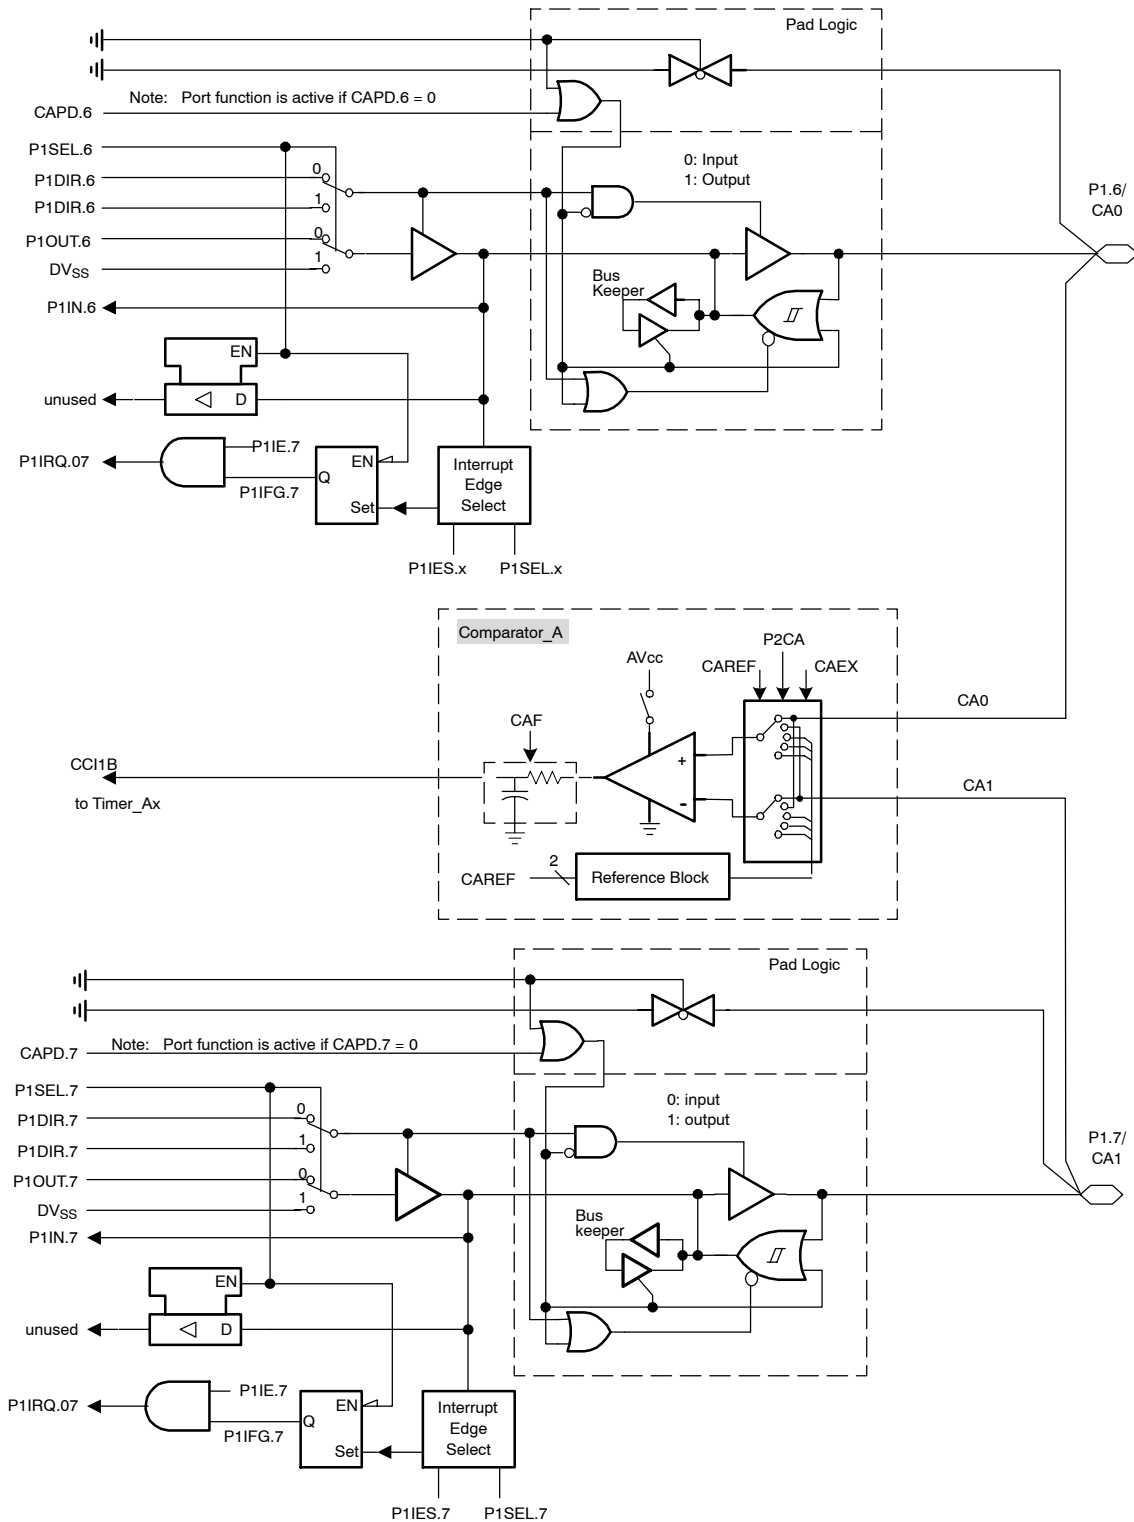


MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P2, P2.0, P2.4 to P2.5, input/output with Schmitt trigger

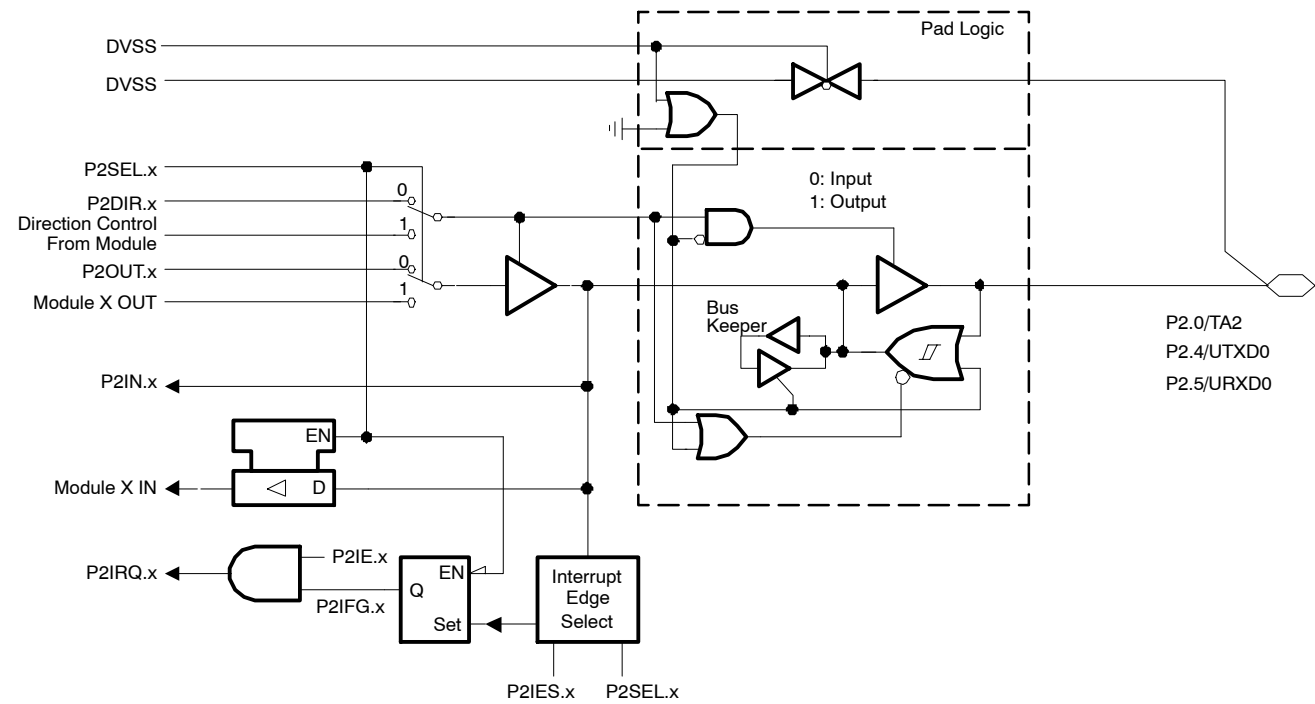

Note: x {0,4,5}


| PnSel.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT | PnIN.x | Module X IN | PnIE.x | PnIFG.x | PnIES.x |
|---------|---------|--------------------------|---------|--------------|--------|-------------|--------|---------|---------|
| P2Sel.0 | P2DIR.0 | P2DIR.0                  | P2OUT.0 | Out2 sig. †  | P2IN.0 | CCI2A †     | P2IE.0 | P2IFG.0 | P2IES.0 |
| P2Sel.4 | P2DIR.4 | DVCC                     | P2OUT.4 | UTXD0 ‡      | P2IN.4 | unused      | P2IE.4 | P2IFG.4 | P2IES.4 |
| P2Sel.5 | P2DIR.5 | DVSS                     | P2OUT.5 | DVSS         | P2IN.5 | URXD0 ‡     | P2IE.5 | P2IFG.5 | P2IES.5 |

†Timer\_A

‡USART0

**input/output schematic (continued)**

**port P2, P2.1 to P2.3, input/output with Schmitt trigger**

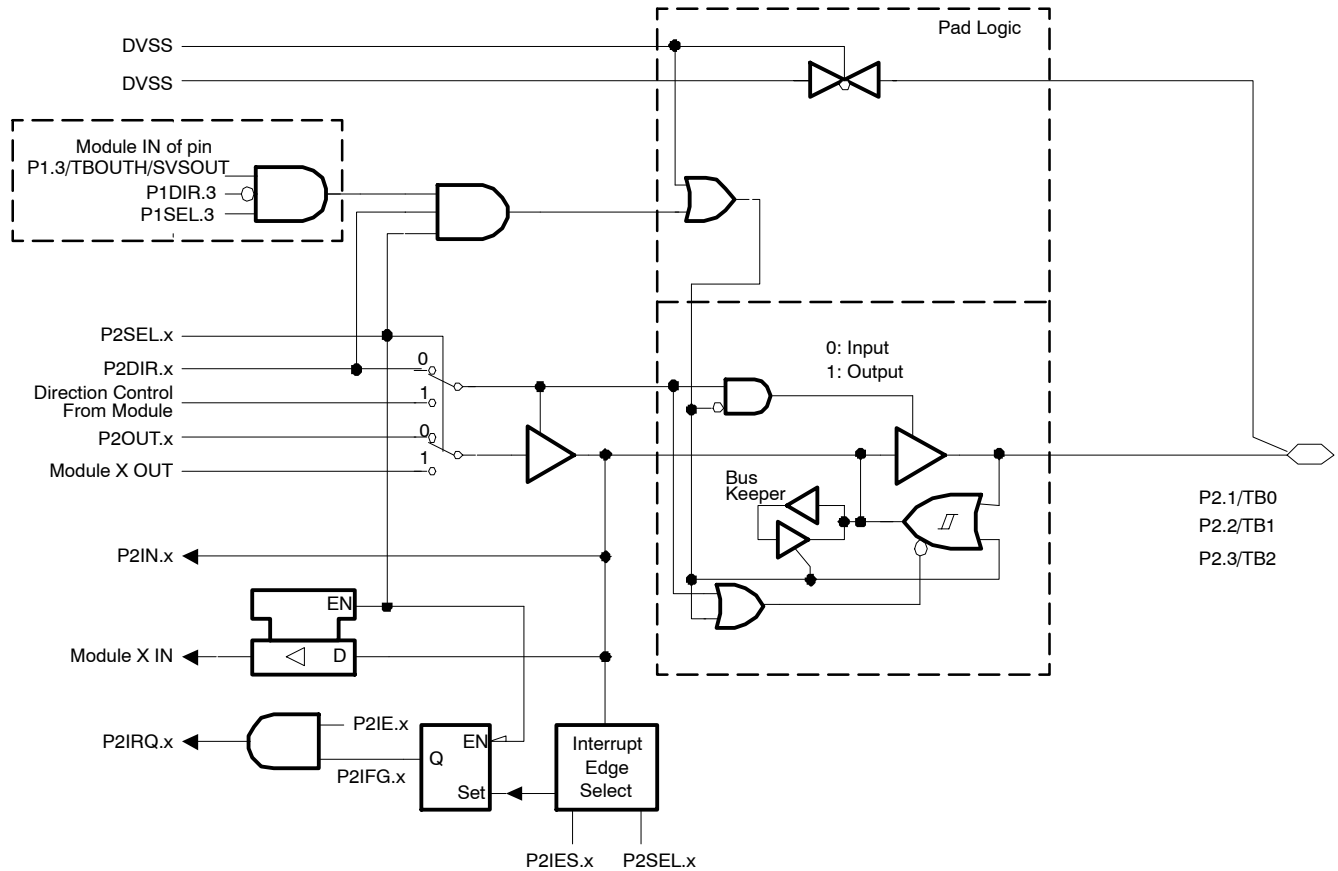

Note:  $1 \leq x \leq 3$

| PnSel.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT | PnIN.x | Module X IN      | PnIE.x | PnIFG.x | PnIES.x |
|---------|---------|--------------------------|---------|--------------|--------|------------------|--------|---------|---------|
| P2Sel.1 | P2DIR.1 | P2DIR.1                  | P2OUT.1 | Out0 sig. †  | P2IN.1 | CCI0A †<br>CCI0B | P2IE.1 | P2IFG.1 | P2IES.1 |
| P2Sel.2 | P2DIR.2 | P2DIR.2                  | P2OUT.2 | Out1 sig. †  | P2IN.2 | CCI1A †<br>CCI1B | P2IE.2 | P2IFG.2 | P2IES.2 |
| P2Sel.3 | P2DIR.3 | P2DIR.3                  | P2OUT.3 | Out2 sig. †  | P2IN.3 | CCI2A †<br>CCI2B | P2IE.3 | P2IFG.3 | P2IES.3 |


†Timer\_B

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P2, P2.6 to P2.7, input/output with Schmitt trigger

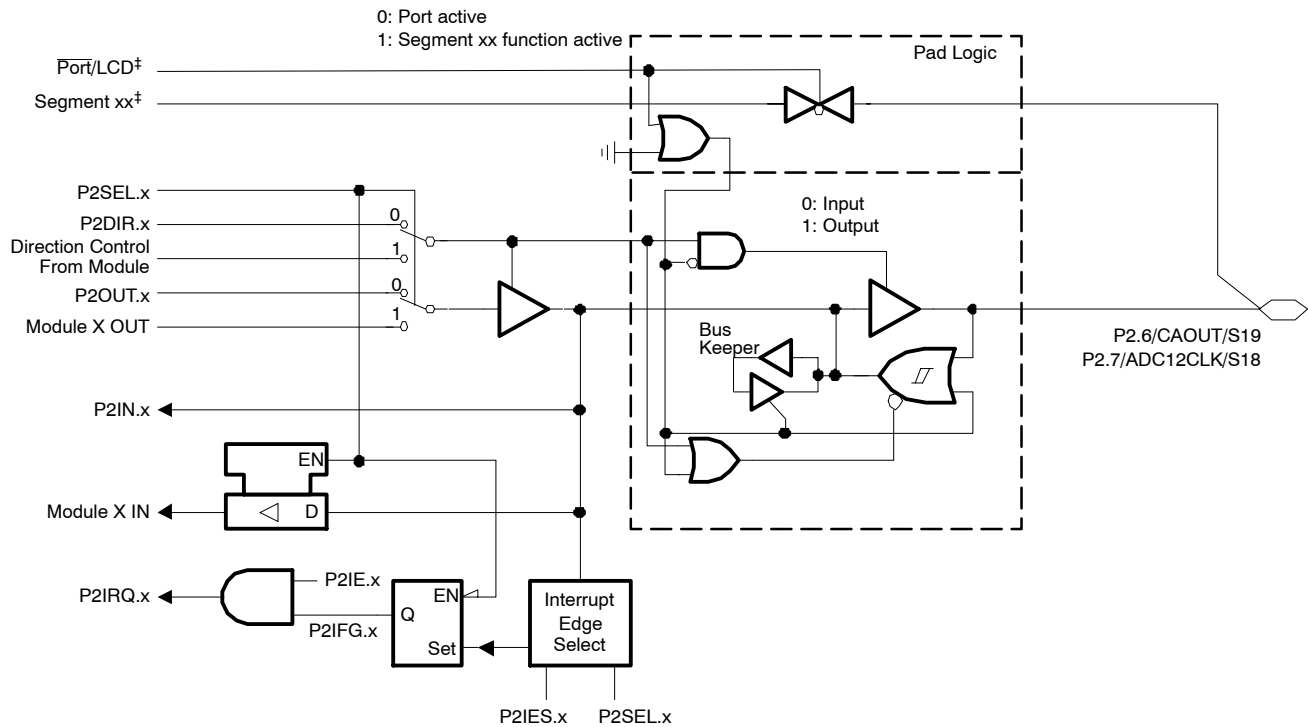


Note: 6 ≤ x ≤ 7

| PnSel.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT | PnIN.x | Module X IN | PnIE.x | PnIFG.x | PnIES.x | Port/LCD    |
|---------|---------|--------------------------|---------|--------------|--------|-------------|--------|---------|---------|-------------|
| P2Sel.6 | P2DIR.6 | P2DIR.6                  | P2OUT.6 | CAOUT†       | P2IN.6 | unused      | P2IE.6 | P2IFG.6 | P2IES.6 | 0: LCDM<40h |
| P2Sel.7 | P2DIR.7 | P2DIR.7                  | P2OUT.7 | ADC12CLK§    | P2IN.7 | unused      | P2IE.7 | P2IFG.7 | P2IES.7 | 0: LCDM<40h |

† Comparator\_A  
§ ADC12



## input/output schematic (continued)

### port P3, P3.0 to P3.3, input/output with Schmitt trigger

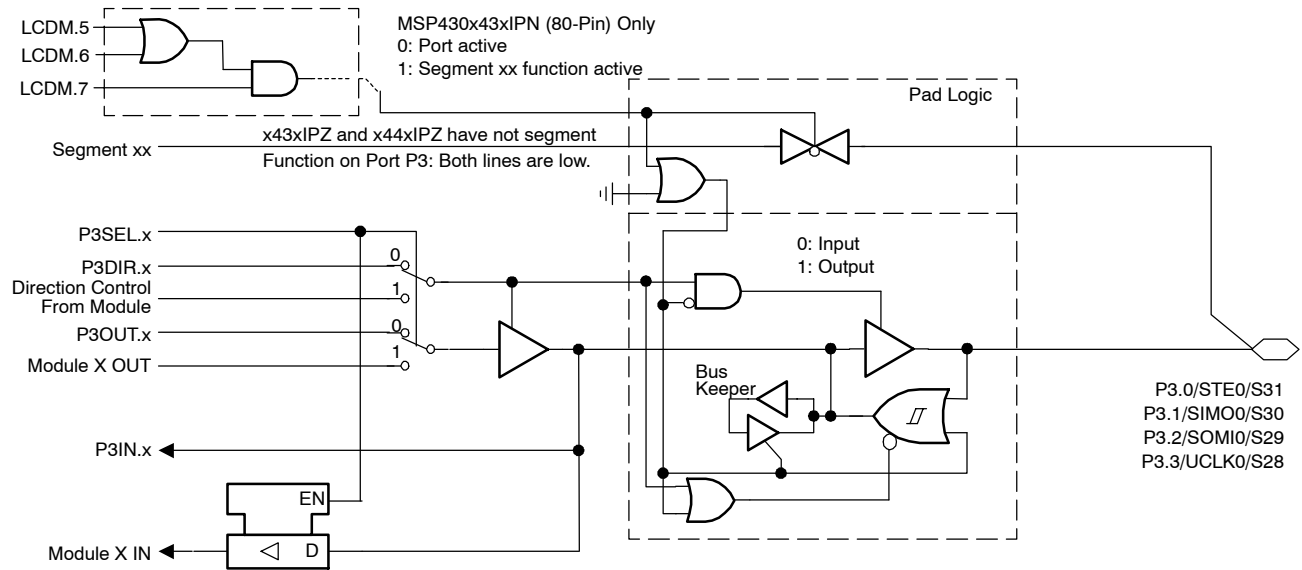

Note:  $0 \leq x \leq 3$

| PnSel.x | PnDIR.x | Direction Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|-------------------------------|---------|------------------|--------|-------------|
| P3Sel.0 | P3DIR.0 | DV <sub>SS</sub>              | P3OUT.0 | DV <sub>SS</sub> | P3IN.0 | STE0(in)    |
| P3Sel.1 | P3DIR.1 | DCM_SIMO0                     | P3OUT.1 | SIMO0(out)       | P3IN.1 | SIMO0(in)   |
| P3Sel.2 | P3DIR.2 | DCM_SOMI0                     | P3OUT.2 | SOMI0(out)       | P3IN.2 | SOMI0(in)   |
| P3Sel.3 | P3DIR.3 | DCM_UCLK0                     | P3OUT.3 | UCLK0(out)       | P3IN.3 | UCLK0(in)   |

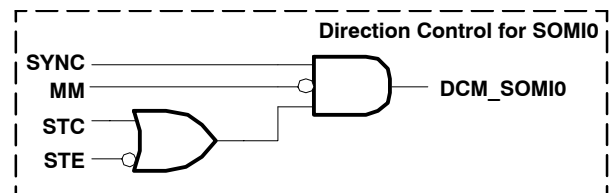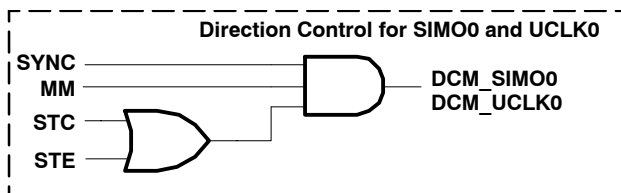


MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)


port P3, P3.4 to P3.7, input/output with Schmitt trigger

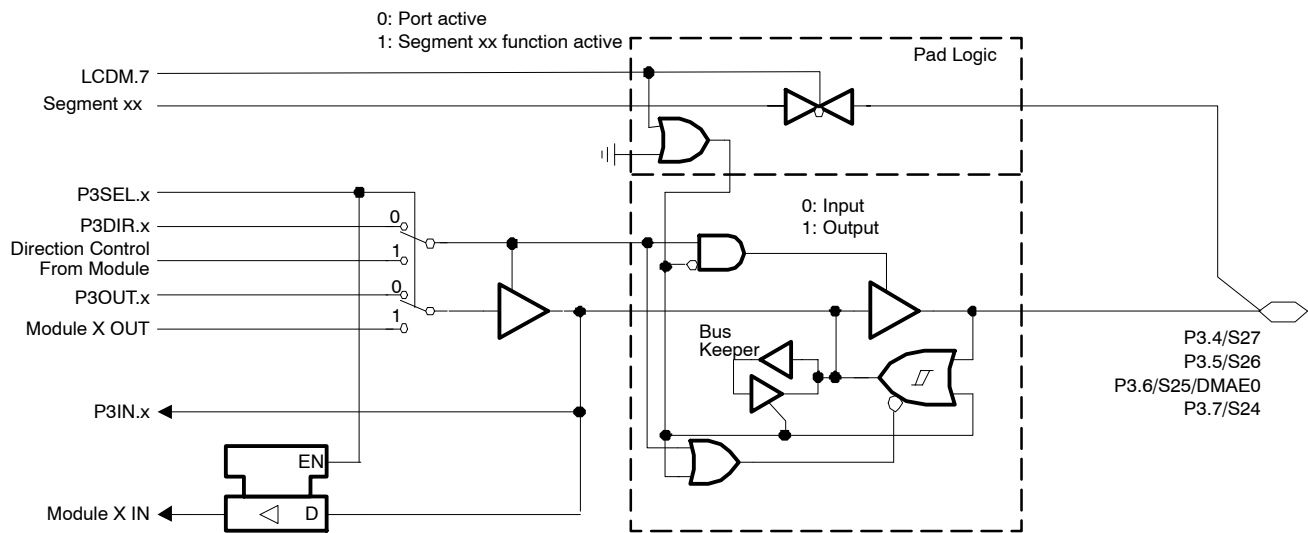

Note:  $4 \leq x \leq 7$

| PnSel.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|--------------|--------|-------------|
| P3SEL.4 | P3DIR.4 | P3DIR.4                  | P3OUT.4 | DVSS         | P3IN.4 | unused      |
| P3SEL.5 | P3DIR.5 | P3DIR.5                  | P3OUT.5 | DVSS         | P3IN.5 | unused      |
| P3SEL.6 | P3DIR.6 | P3DIR.6                  | P3OUT.6 | DVSS         | P3IN.6 | DMAE0       |
| P3SEL.7 | P3DIR.7 | P3DIR.7                  | P3OUT.7 | DVSS         | P3IN.7 | unused      |

input/output schematic (continued)  
port P4, P4.0 to P4.5, input/output with Schmitt trigger

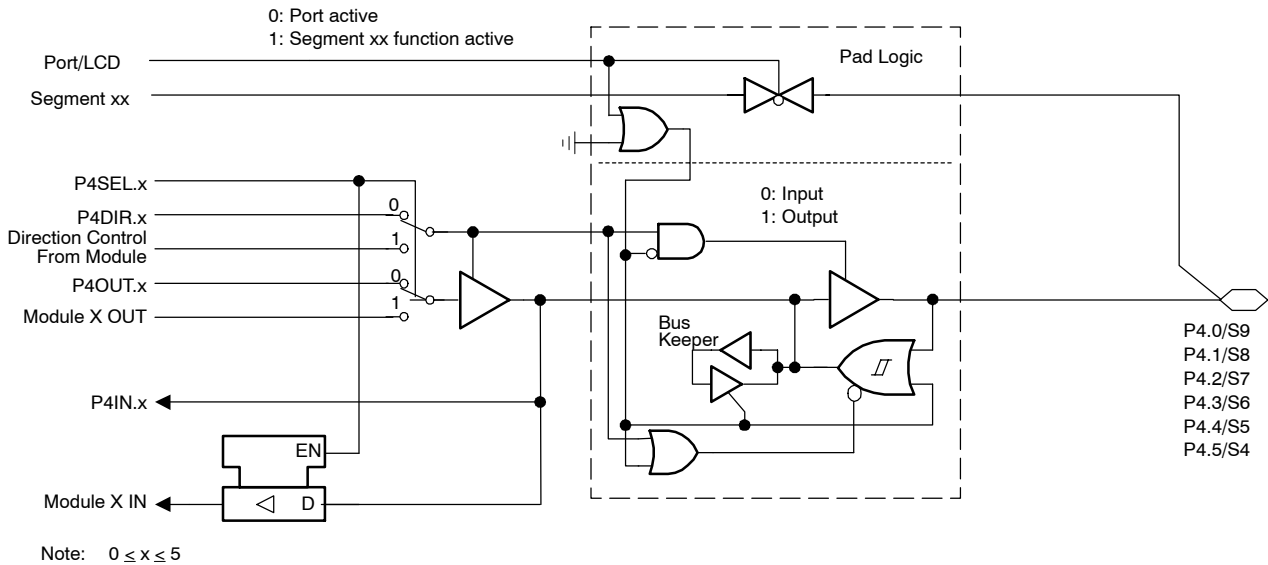


| PnSEL.x | PnDIR.x | Direction Control From Module | PnOUT.x | Module X OUT | PnIN.x | Module X IN |
|---------|---------|-------------------------------|---------|--------------|--------|-------------|
| P4SEL.0 | P4DIR.0 | P4DIR.0                       | P4OUT.0 | DVSS         | P4IN.0 | unused      |
| P4SEL.1 | P4DIR.1 | P4DIR.1                       | P4OUT.1 | DVSS         | P4IN.1 | unused      |
| P4SEL.2 | P4DIR.2 | P4DIR.2                       | P4OUT.2 | DVSS         | P4IN.2 | unused      |
| P4SEL.3 | P4DIR.3 | P4DIR.3                       | P4OUT.3 | DVSS         | P4IN.3 | unused      |
| P4SEL.4 | P4DIR.4 | P4DIR.4                       | P4OUT.4 | DVSS         | P4IN.4 | unused      |
| P4SEL.5 | P4DIR.5 | P4DIR.5                       | P4OUT.5 | DVSS         | P4IN.5 | unused      |

| DEVICE             | PORT BITS    | PORT FUNCTION | LCD SEG. FUNCTION |
|--------------------|--------------|---------------|-------------------|
| F43xIPN 80-pin QFP | P4.0 to P4.5 | LCDM < 020h   | LCDM ≥ 020h       |

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)  
port P4, P4.6, input/output with Schmitt trigger

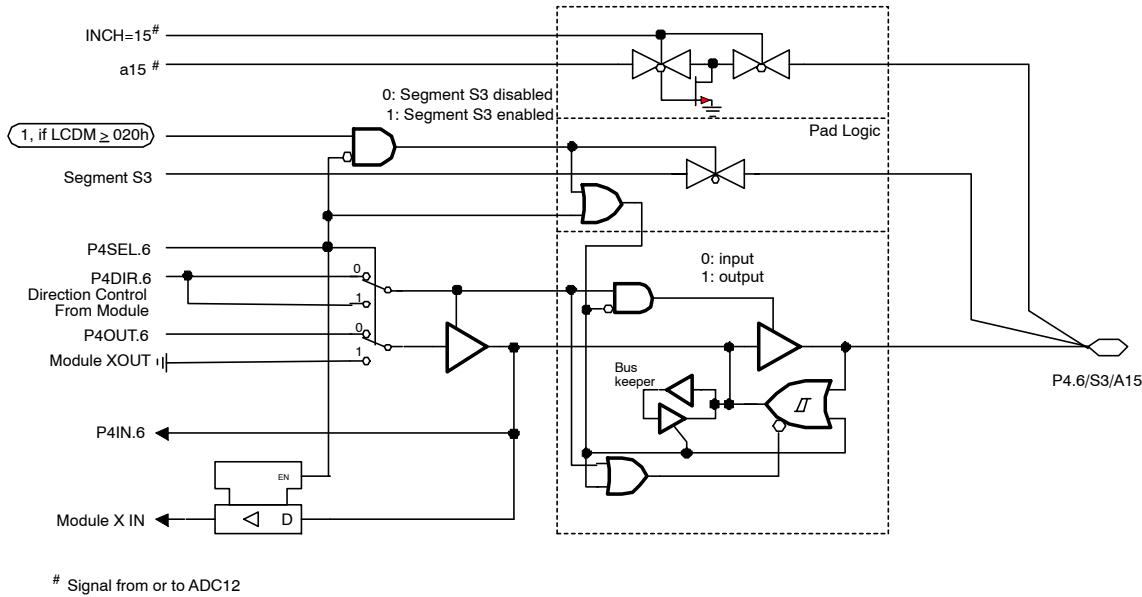


| PnSEL.x | PnDIR.x | Direction Control From Module | PnOUT.x | Module X OUT | PnIN.x | Module X IN |
|---------|---------|-------------------------------|---------|--------------|--------|-------------|
| P4SEL.6 | P4DIR.6 | P4DIR.6                       | P4OUT.6 | DVSS         | P4IN.6 | unused      |

| DEVICE             | PORT BITS | PORT FUNCTION | LCD SEG. FUNCTION |
|--------------------|-----------|---------------|-------------------|
| F43xIPN 80-pin QFP | P4.6      | LCDM < 020h   | LCDM ≥ 020h       |

input/output schematic (continued)

port P4, P4.7, input/output with Schmitt trigger

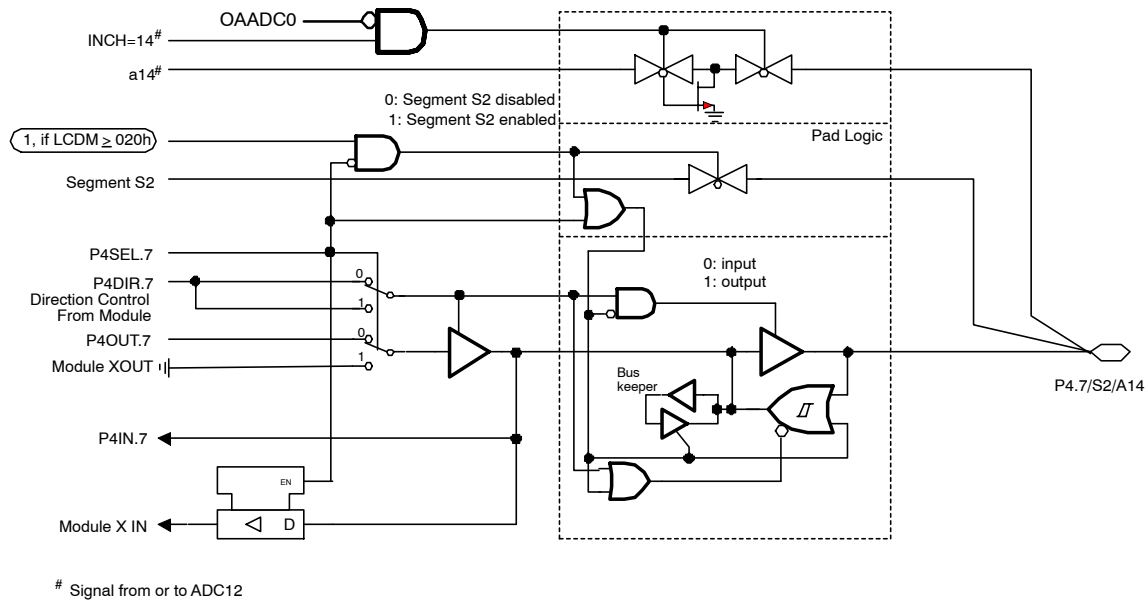

| PnSel.x | PnDIR.x | Direction<br>Control<br>From Module | PnOUT.x | Module X<br>OUT  | PnIN.x | Module X IN |
|---------|---------|-------------------------------------|---------|------------------|--------|-------------|
| P4Sel.7 | P4DIR.7 | P4DIR.7                             | P4OUT.7 | DV <sub>SS</sub> | P4IN.7 | Unused      |


| DEVICE             | PORT BITS | PORT FUNCTION | LCD SEG. FUNCTION |
|--------------------|-----------|---------------|-------------------|
| F43xIPN 80-pin QFP | P4.7      | LCDM < 020h   | LCDM ≥ 020h       |

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P5, P5.0, input/output with Schmitt trigger

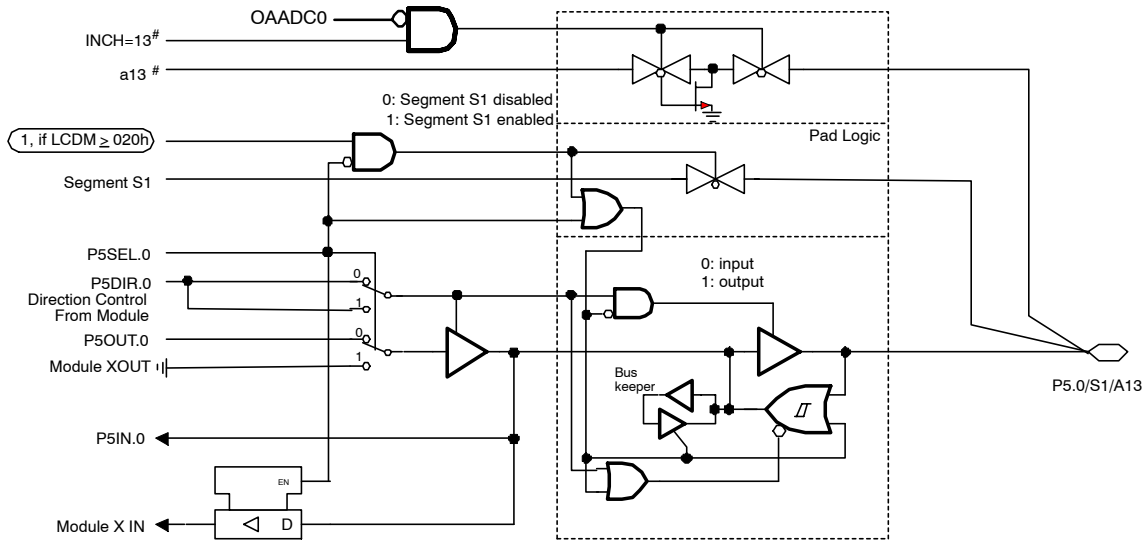


# Signal from or to ADC12

| PnSEL.x | PnDIR.x | Direction Control From Module | PnOUT.x | Module X OUT | PnIN.x | Module X IN |
|---------|---------|-------------------------------|---------|--------------|--------|-------------|
| P5SEL.0 | P5DIR.0 | P5DIR.0                       | P5OUT.0 | DVSS         | P5IN.0 | unused      |

| DEVICE             | PORT BITS | PORT FUNCTION | LCD SEG. FUNCTION |
|--------------------|-----------|---------------|-------------------|
| F43xIPN 80-pin QFP | P5.0      | LCDM < 020h   | LCDM ≥ 020h       |

input/output schematic (continued)

port P5, P5.1, input/output with Schmitt trigger

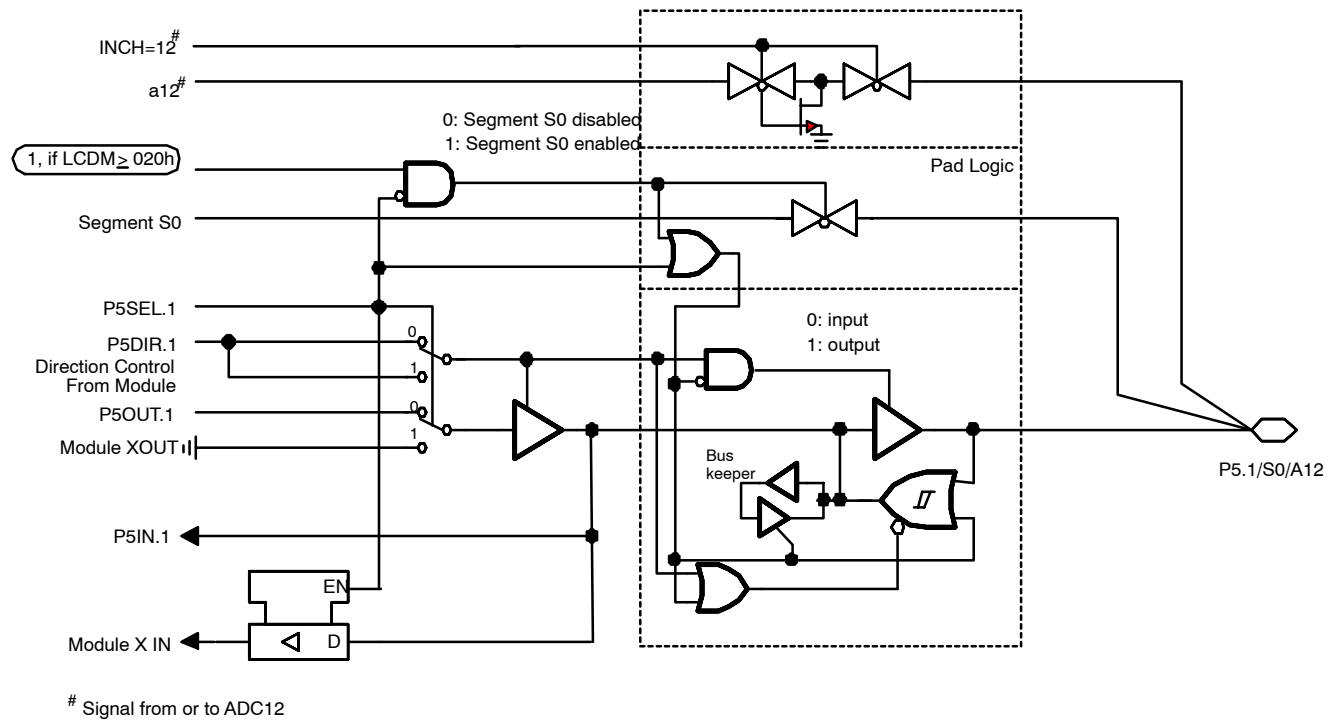

| Function | Description               | P5SEL.1 | LCDM       |
|----------|---------------------------|---------|------------|
| ADC12    | Channel 12, A12           | 1       | X          |
| LCD      | Segment S0, initial state | 0       | $\geq 20h$ |
| Port     | P5.1                      | 0       | $< 20h$    |


| PnSEL.x | PnDIR.x | Dir. Control from Module | PnOUT.x | Module X OUT | PnIN.x | Module X IN | Segment | Port/LCD       |
|---------|---------|--------------------------|---------|--------------|--------|-------------|---------|----------------|
| P5SEL.1 | P5DIR.1 | P5DIR.1                  | P5OUT.1 | DVSS         | P5IN.1 | Unused      | S0      | 0: LCDM $<20h$ |

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P5, P5.2 to P5.4, input/output with Schmitt trigger

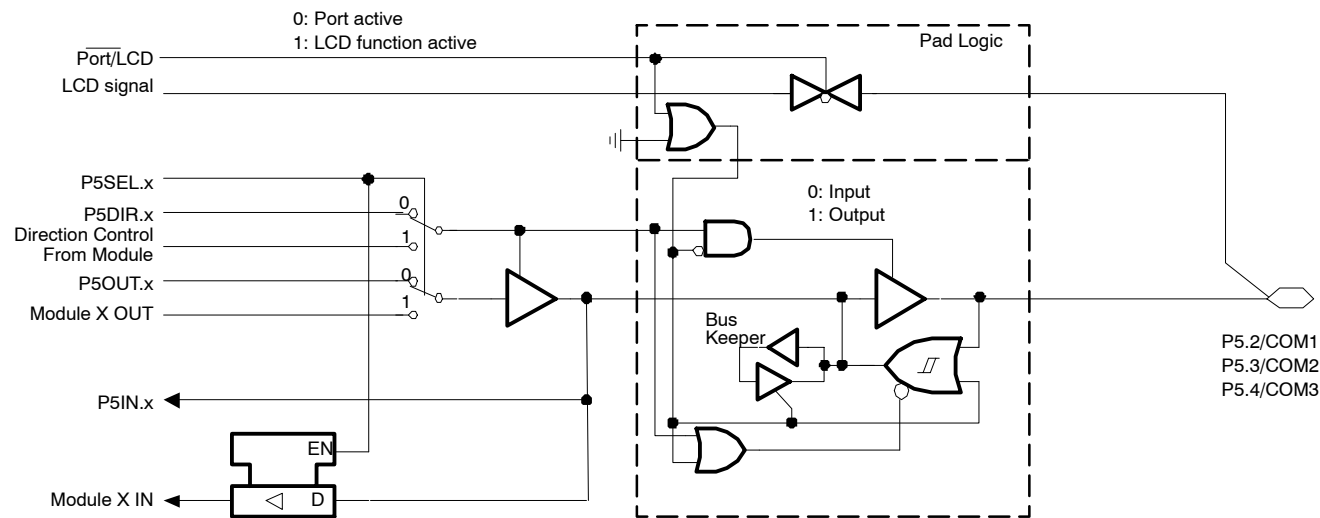


Note:  $2 \leq x \leq 4$

| PnSel.x | PnDIR.x | Dir. Control<br>from module | PnOUT.x | Module X<br>OUT | PnIN.x | Module X IN | LCD signal | Port/LCD |
|---------|---------|-----------------------------|---------|-----------------|--------|-------------|------------|----------|
| P5Sel.2 | P5DIR.2 | P5DIR.2                     | P5OUT.2 | DVSS            | P5IN.2 | Unused      | COM1       | P5SEL.2  |
| P5Sel.3 | P5DIR.3 | P5DIR.3                     | P5OUT.3 | DVSS            | P5IN.3 | Unused      | COM2       | P5SEL.3  |
| P5Sel.4 | P5DIR.4 | P5DIR.4                     | P5OUT.4 | DVSS            | P5IN.4 | Unused      | COM3       | P5SEL.4  |

input/output schematic (continued)

port P5, P5.5 to P5.7, input/output with Schmitt trigger

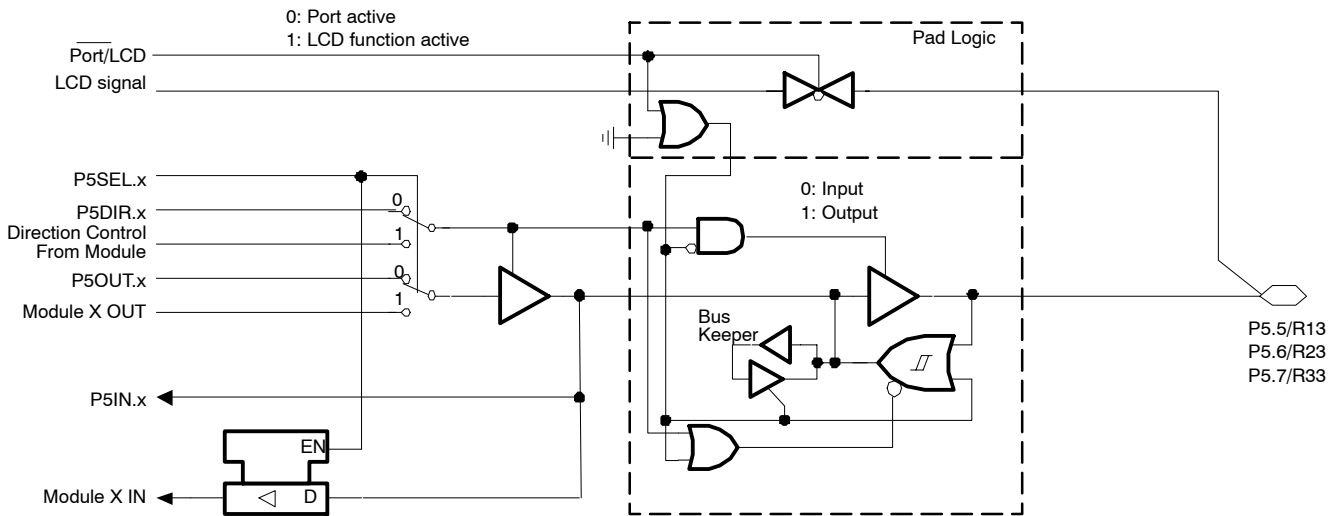

Note:  $5 \leq x \leq 7$


| PnSel.x | PnDIR.x | Dir. Control from module | PnOUT.x | Module X OUT | PnIN.x | Module X IN | LCD signal | Port/LCD |
|---------|---------|--------------------------|---------|--------------|--------|-------------|------------|----------|
| P5Sel.5 | P5DIR.5 | P5DIR.5                  | P5OUT.5 | DVSS         | P5IN.5 | Unused      | R13        | P5SEL.5  |
| P5Sel.6 | P5DIR.6 | P5DIR.6                  | P5OUT.6 | DVSS         | P5IN.6 | Unused      | R23        | P5SEL.6  |
| P5Sel.7 | P5DIR.7 | P5DIR.7                  | P5OUT.7 | DVSS         | P5IN.7 | Unused      | R33        | P5SEL.7  |

MSP430F43x  
MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P6, P6.0, P6.2, and P6.4, input/output with Schmitt trigger

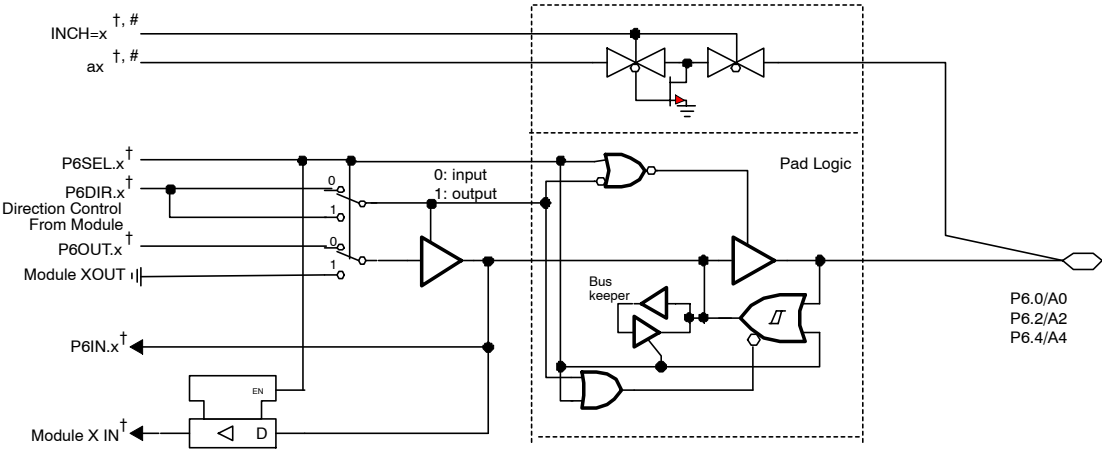


† x = {0, 2, 4}  
# Signal from or to ADC12

| PnSel.x | PnDIR.x | Dir. Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|------------------|--------|-------------|
| P6Sel.0 | P6DIR.0 | P6DIR.0                  | P6OUT.0 | DV <sub>SS</sub> | P6IN.0 | unused      |
| P6Sel.2 | P6DIR.2 | P6DIR.2                  | P6OUT.2 | DV <sub>SS</sub> | P6IN.2 | unused      |
| P6Sel.4 | P6DIR.4 | P6DIR.4                  | P6OUT.4 | DV <sub>SS</sub> | P6IN.4 | unused      |

NOTE: The signal at pins P6.x/Ax is used by the 12-bit ADC module.

**input/output schematic (continued)**

**port P6, P6.1, input/output with Schmitt trigger**

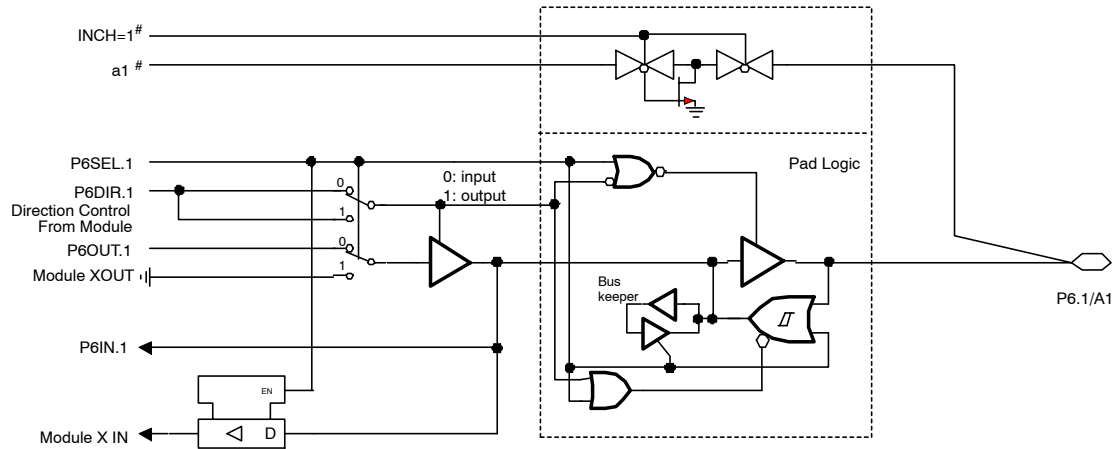

# Signal from or to ADC12

| PnSel.x | PnDIR.x | Dir. Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|------------------|--------|-------------|
| P6Sel.1 | P6DIR.1 | P6DIR.1                  | P6OUT.1 | DV <sub>SS</sub> | P6IN.1 | unused      |


NOTE: The signal at pins P6.x/Ax is used by the 12-bit ADC module.

# MSP430F43x

SLAS713 - JUNE 2010

**input/output schematic (continued)**

### port P6, P6.3, input/output with Schmitt trigger

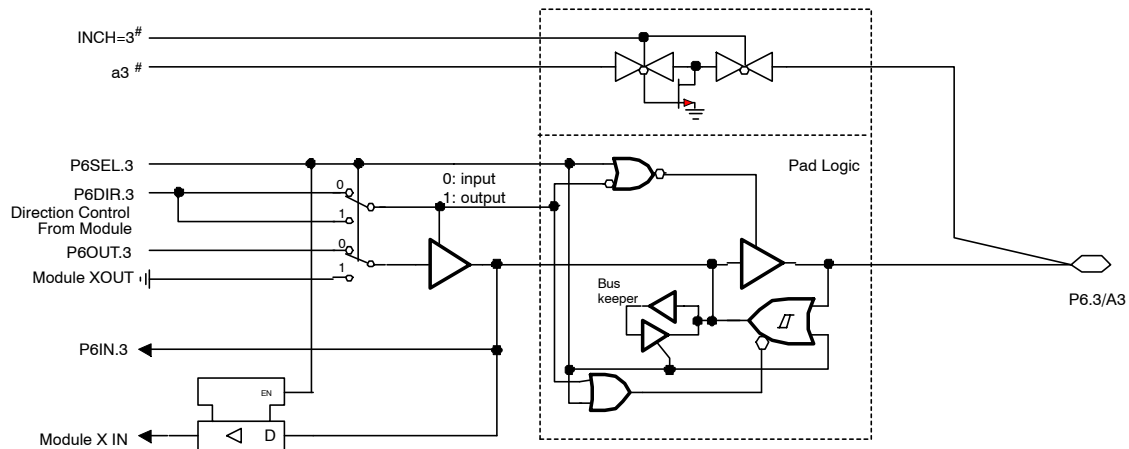


# Signal from or to ADC12

| PnSel.x | PnDIR.x | Dir. Control<br>From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|-----------------------------|---------|------------------|--------|-------------|
| P6Sel.3 | P6DIR.3 | P6DIR.3                     | P6OUT.3 | DV <sub>SS</sub> | P6IN.3 | unused      |

**NOTE:** The signal at pins P6.x/Ax is used by the 12-bit ADC module.

**input/output schematic (continued)**

**port P6, P6.5, input/output with Schmitt trigger**

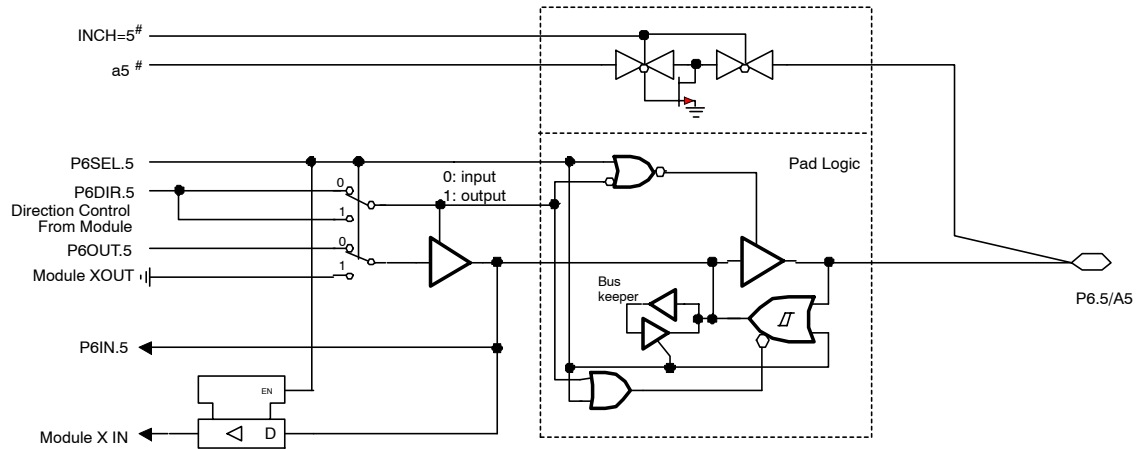

# Signal from or to ADC12

| PnSel.x | PnDIR.x | Dir. Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|------------------|--------|-------------|
| P6Sel.5 | P6DIR.5 | P6DIR.5                  | P6OUT.5 | DV <sub>SS</sub> | P6IN.5 | unused      |

NOTE: The signal at pins P6.x/Ax is used by the 12-bit ADC module.


MSP430F43x

MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

input/output schematic (continued)

port P6, P6.6, input/output with Schmitt trigger

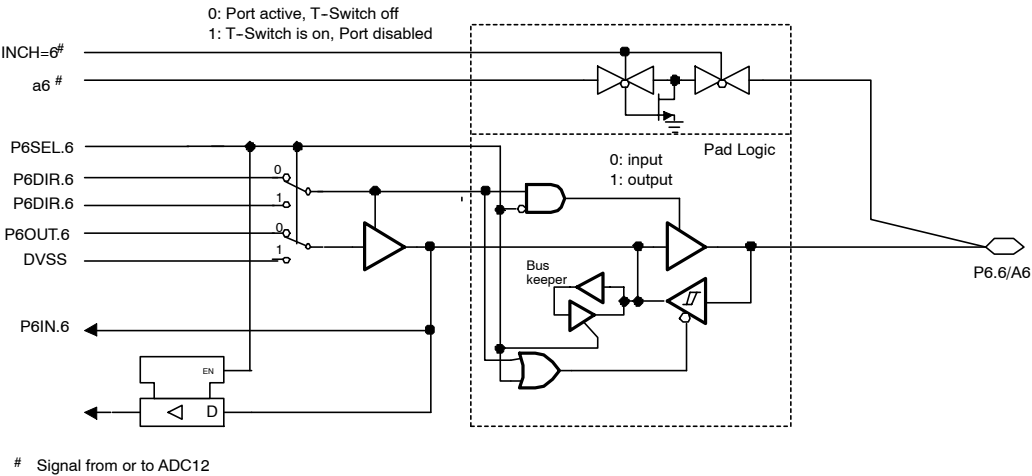


| PnSel.x | PnDIR.x | Dir. Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|------------------|--------|-------------|
| P6Sel.6 | P6DIR.6 | P6DIR.6                  | P6OUT.6 | DV <sub>SS</sub> | P6IN.6 | unused      |

NOTE: The signal at pins P6.x/Ax is used by the 12-bit ADC module.

input/output schematic (continued)

port P6, P6.7, input/output with Schmitt trigger

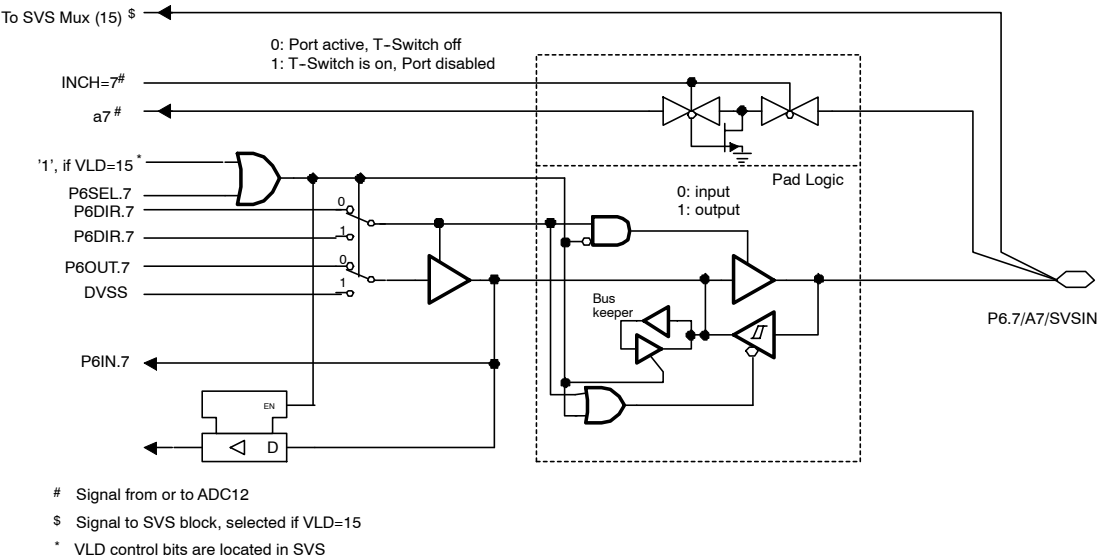

| PnSel.x | PnDIR.x | Dir. Control From Module | PnOUT.x | Module X OUT     | PnIN.x | Module X IN |
|---------|---------|--------------------------|---------|------------------|--------|-------------|
| P6Sel.7 | P6DIR.7 | P6DIR.7                  | P6OUT.7 | DV <sub>SS</sub> | P6IN.7 | unused      |


NOTE: The signal at pins P6.x/Ax is used by the 12-bit ADC module.  
The signal at pin P6.7/A7/SVSIN is also connected to the input multiplexer in the module brownout/supply voltage supervisor.

# MSP430F43x MIXED SIGNAL MICROCONTROLLER

SLAS713 – JUNE 2010

## input/output schematic (continued)

JTAG pins TMS, TCK, TDI/TCLK, TDO/TDI, input/output with Schmitt trigger or output

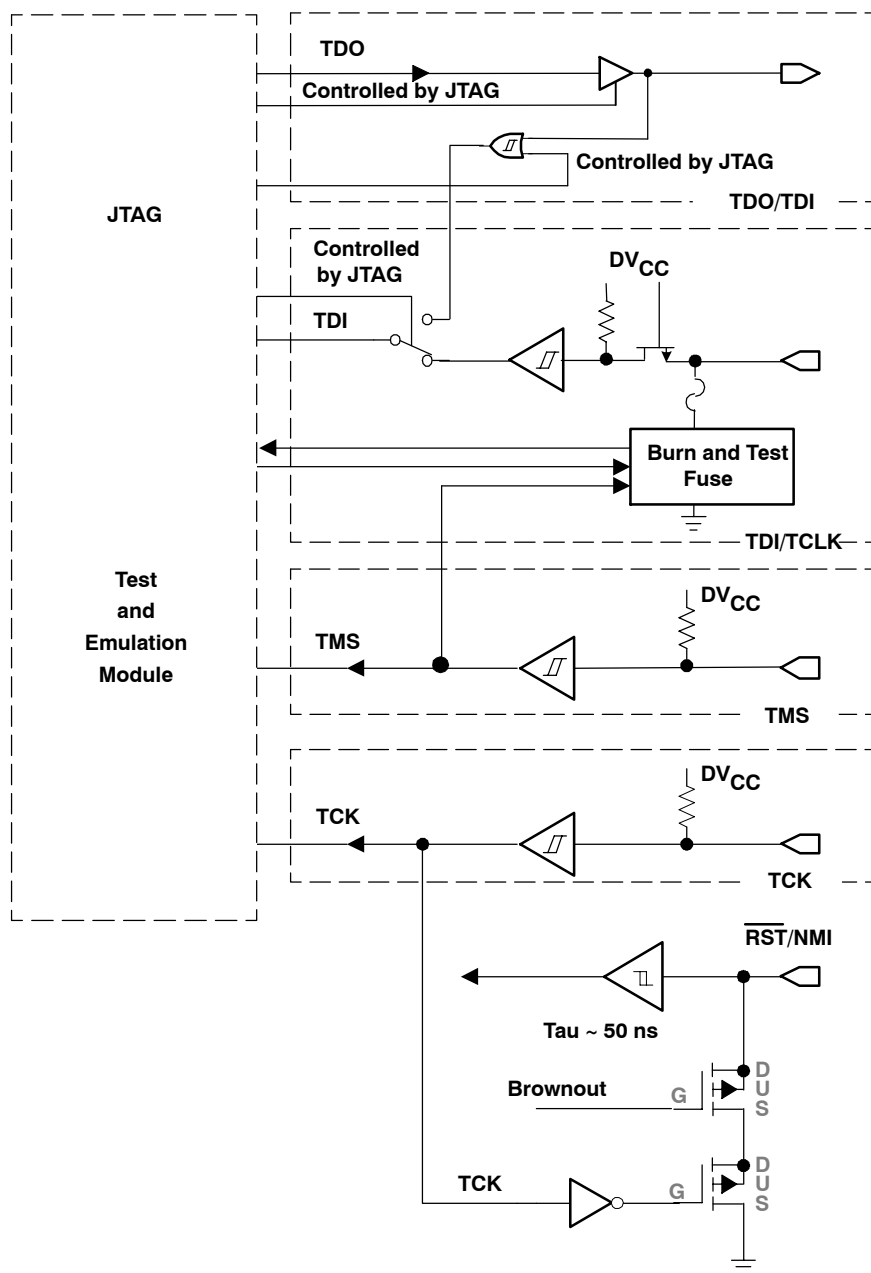


## JTAG fuse check mode

MSP430 devices that have the fuse on the TDI/TCLK terminal have a fuse check mode that tests the continuity of the fuse the first time the JTAG port is accessed after a power-on reset (POR). When activated, a fuse check current ( $I_{(TF)}$ ) of 1 mA at 3 V can flow from the TDI/TCLK pin to ground if the fuse is not burned. Care must be taken to avoid accidentally activating the fuse check mode and increasing overall system power consumption.

Activation of the fuse check mode occurs with the first negative edge on the TMS pin after power up or if the TMS is being held low during power up. The second positive edge on the TMS pin deactivates the fuse check mode. After deactivation, the fuse check mode remains inactive until another POR occurs. After each POR the fuse check mode has the potential to be activated.

The fuse check current only flows when the fuse check mode is active and the TMS pin is in a low state (see Figure 21). Therefore, the additional current flow can be prevented by holding the TMS pin high (default condition). The JTAG pins are terminated internally and therefore do not require external termination.

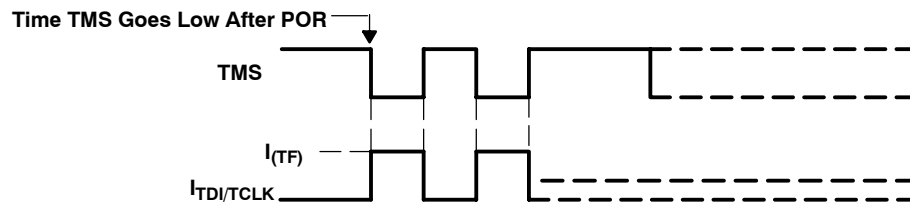

**Figure 21. Fuse Check Mode Current**

# MSP430F43x

## MIXED SIGNAL MICROCONTROLLER

SLAS713 - JUNE 2010

---

### Revision History

| Literature Number | Summary                 |
|-------------------|-------------------------|
| SLAS713           | Production Data release |

NOTE: Page and figure numbers refer to the respective document revision.



## Corrections to MSP430F438, MSP430F439 Data Sheet (SLAS713)

Document Being Updated: MSP430F438, MSP430F439 Mixed Signal Microcontroller

Literature Number Being Updated: SLAS713

| Page | Change or Add                                                                                                                                                                                                                                                                                                                                                                                                               |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 44   | In both entries in the "Port/LCD" column of the table:<br>0: LCDM < 40h should be changed to <b>0: LCDPx &lt; 02h</b> .                                                                                                                                                                                                                                                                                                     |
| 45   | In the top left of the figure:<br>LCDM.5 should be changed to <b>bit 0 of LCDPx</b> , which is bit 5 of the LCDCTL register.<br>LCDM.6 should be changed to <b>bit 1 of LCDPx</b> , which is bit 6 of the LCDCTL register.<br>LCDM.7 should be changed to <b>bit 2 of LCDPx</b> , which is bit 7 of the LCDCTL register.                                                                                                    |
| 46   | In the top left of the figure:<br>LCDM.7 should be changed to <b>bit 2 of LCDPx</b> , which is bit 7 of the LCDCTL register.                                                                                                                                                                                                                                                                                                |
| 47   | In the table at the bottom of the page:<br>LCDM < 020h should be changed to <b>LCDPx &lt; 01h</b> .<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .                                                                                                                                                                                                                                                                |
| 48   | In the top left of the figure:<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .<br>In the table at the bottom of the page:<br>LCDM < 020h should be changed to <b>LCDPx &lt; 01h</b> .<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .                                                                                                                                                                     |
| 49   | In the top left of the figure:<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .<br>In the table at the bottom of the page:<br>LCDM < 020h should be changed to <b>LCDPx &lt; 01h</b> .<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .                                                                                                                                                                     |
| 50   | In the top left of the figure:<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .<br>In the table at the bottom of the page:<br>LCDM < 020h should be changed to <b>LCDPx &lt; 01h</b> .<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .                                                                                                                                                                     |
| 51   | In the top left of the figure:<br>LCDM ≥ 020h should be changed to <b>LCDPx ≥ 01h</b> .<br>In the first table on the page:<br>The LCDM column heading should be changed to <b>LCDPx</b> .<br>≥ 20h should be changed to <b>≥ 01h</b> .<br>< 20h should be changed to <b>&lt; 01h</b> .<br>In the "Port/LCD" column of the table on the bottom of the page:<br>0: LCDM < 20h should be changed to <b>0: LCDPx &lt; 01h</b> . |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| MSP430F438IPN    | ACTIVE        | LQFP         | PN                 | 80   | 119            | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | M430F438                | <a href="#">Samples</a> |
| MSP430F438IPNR   | ACTIVE        | LQFP         | PN                 | 80   | 1000           | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | M430F438                | <a href="#">Samples</a> |
| MSP430F439IPN    | ACTIVE        | LQFP         | PN                 | 80   | 119            | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | M430F439                | <a href="#">Samples</a> |
| MSP430F439IPNR   | ACTIVE        | LQFP         | PN                 | 80   | 1000           | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | M430F439                | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.


<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and

continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

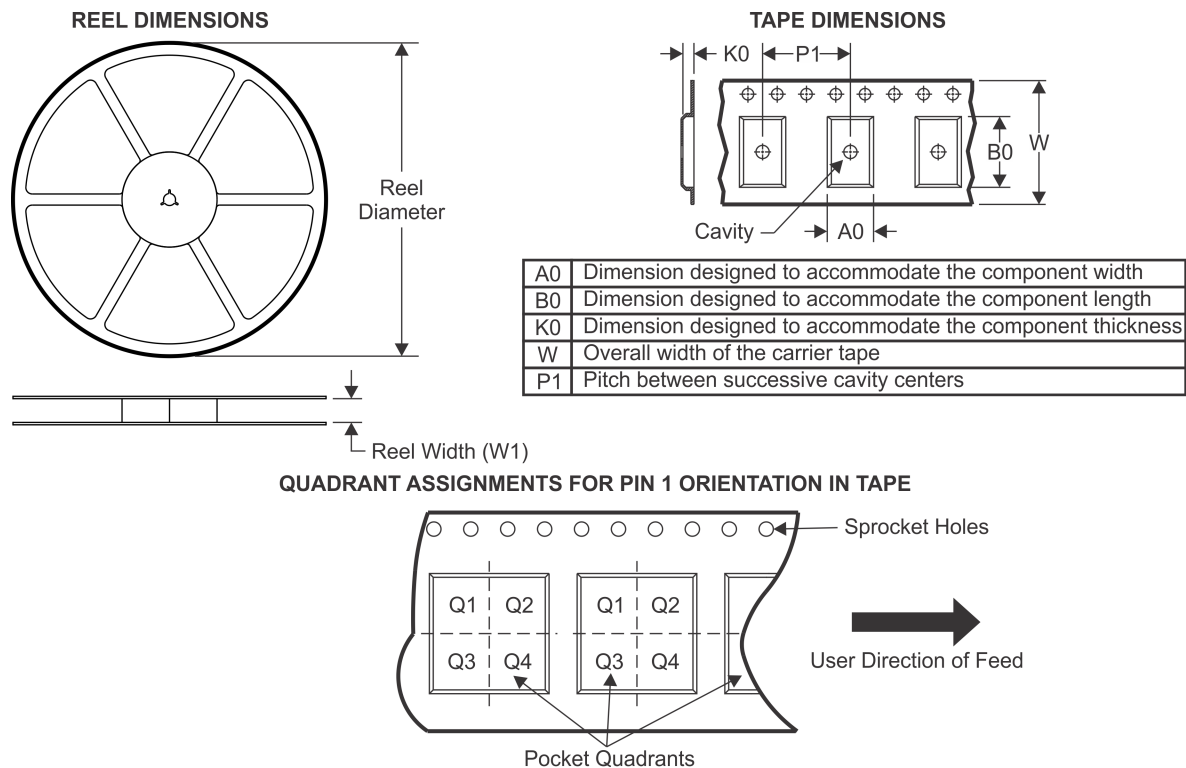**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| MSP430F438IPNR | LQFP         | PN              | 80   | 1000 | 330.0              | 24.4               | 15.0    | 15.0    | 2.1     | 20.0    | 24.0   | Q2            |
| MSP430F439IPNR | LQFP         | PN              | 80   | 1000 | 330.0              | 24.4               | 15.0    | 15.0    | 2.1     | 20.0    | 24.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS

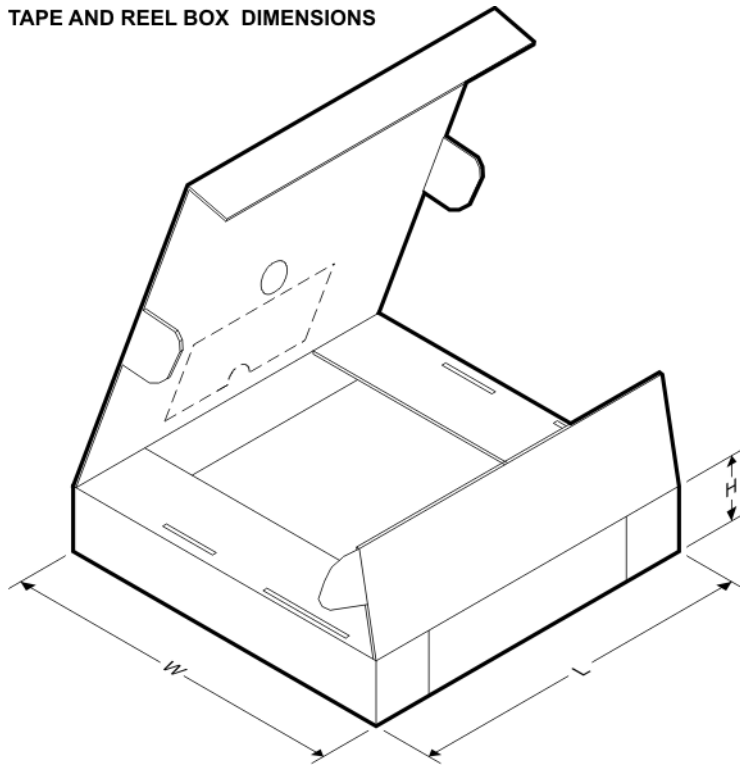


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| MSP430F438IPNR | LQFP         | PN              | 80   | 1000 | 367.0       | 367.0      | 45.0        |
| MSP430F439IPNR | LQFP         | PN              | 80   | 1000 | 367.0       | 367.0      | 45.0        |

## PN (S-PQFP-G80)

## PLASTIC QUAD FLATPACK

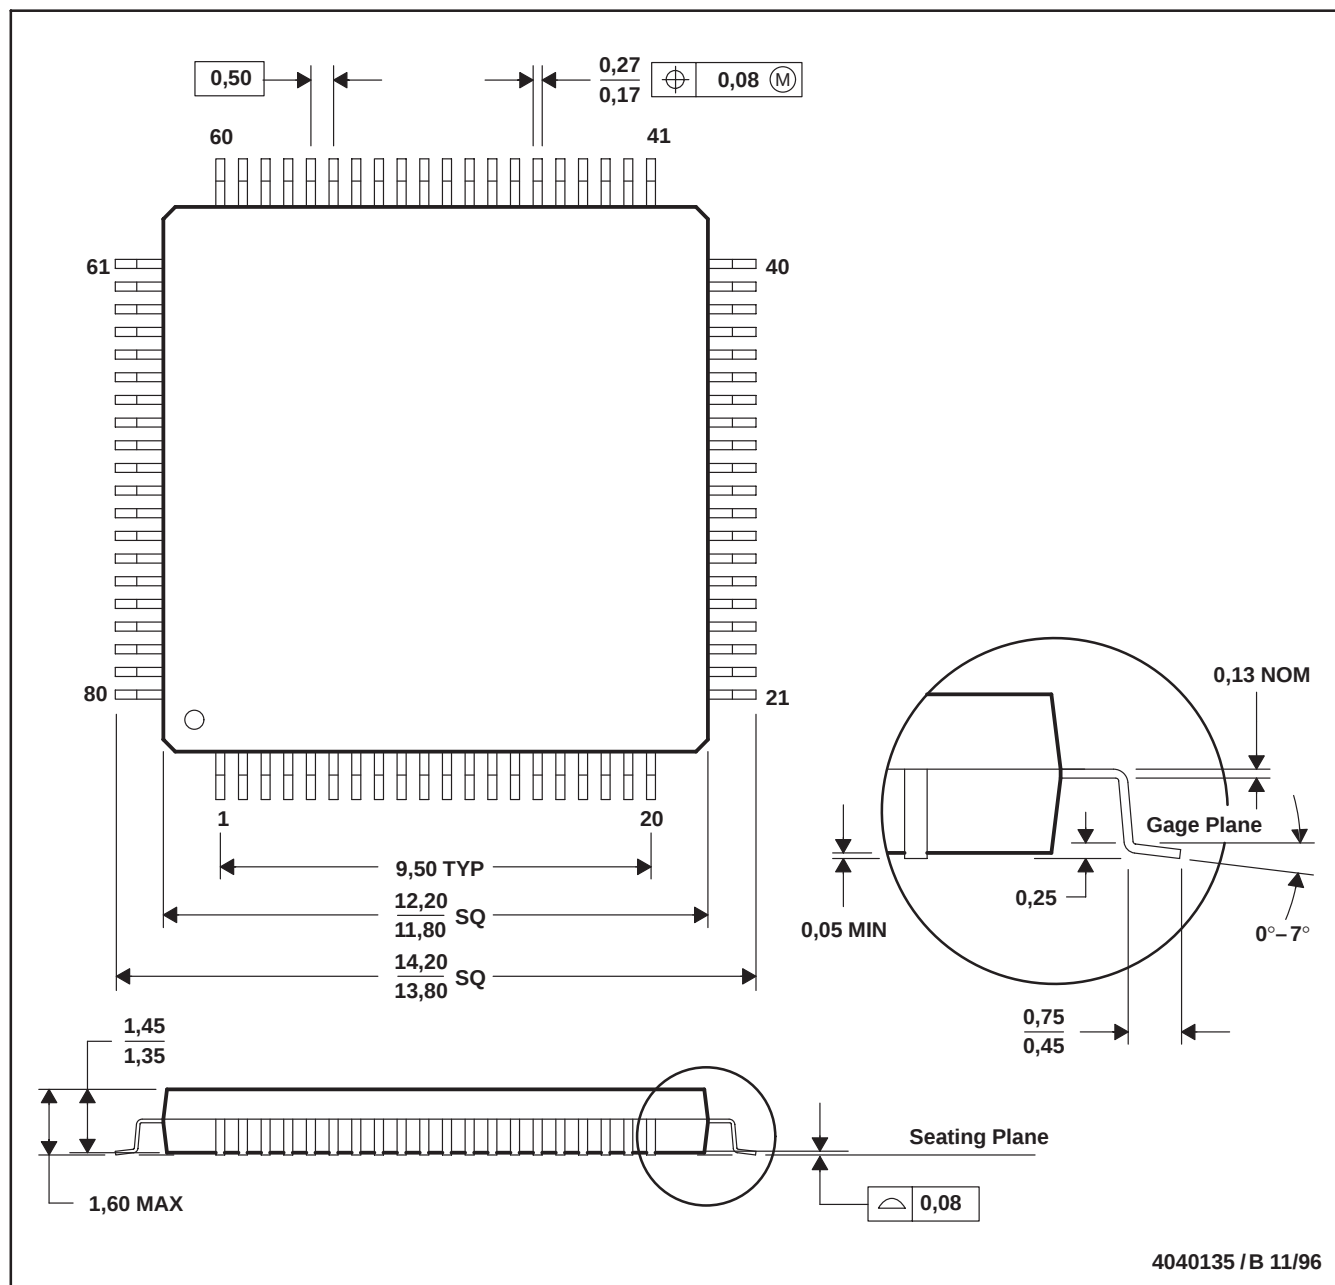

NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-026

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated