

片间 USB 电压电平转换器

查询样品: **TXS0202**

特性

- 无需方向控制信号
- V_{CCA} , V_{CCB} 电源电源: **1.65V 至 3.6V**
- 满足 **IC-USB** 标准的所有要求
- 小外形封装: **WCSP**
- 锁断性能超过 **100mA** (符合 **JESD 78 Class II** 规范的要求)
- I_{off} 支持部分断电模式工作
- **ESD** 性能
 - **A** 端口 (主机端)
 - **2000V** 人体模型
 - **100V** 机器模型
 - **500V** 充电器件模型
 - **B** 端口 (外设端)
 - **>4kV HBM**




表 1. **YZP** 终端分配
(顶视图)

	1	2
A	D+(B)	D-(B)
B	GND	V_{CCB}
C	V_{CCA}	OE
D	D+(A)	D-(A)

说明

TXS0202 是 2 位电压电平转换器, 针对在片间 USB (IC-USB) 应用的使用进行了优化。 V_{CCA} 和 V_{CCB} 均可跨 1.65V 至 3.6V 的整个范围运行。 该器件的设计将交叉歪斜限制在 1ns 以内。 该器件采用集成上拉和下拉电阻, 可帮助主机和外设之间的协议通信。 该转换器是一款自动方向感应型缓冲转换器。 当输出使能 (OE) 输入为低时, 所有输出均处于高阻抗状态。

该器件的技术规格针对采用 I_{off} 的部分断电应用而全面拟订。 I_{off} 电路负责停用输出, 从而可防止破坏性的电流在其断电时通过器件回流。 为了确保上电或断电期间的高阻抗状态, OE 应通过一个下拉电阻器连接至 GND; 该电阻器的最小值由驱动器的电流源能力来决定。

ORDERING INFORMATION⁽¹⁾

T_A	PACKAGE ⁽²⁾		ORDERABLE PART NUMBER	TOP-SIDE MARKING
-40°C to 85°C	WCSP – YZP	Tape and reel	TXS0202YZPR	___7PS_ ⁽³⁾

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.
- (2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.
- (3) YZP: The actual top-side marking has three preceding characters to denote year, month, and sequence code, and one following character to designate the wafer fab/assembly site.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

TYPICAL APPLICATION BLOCK DIAGRAM

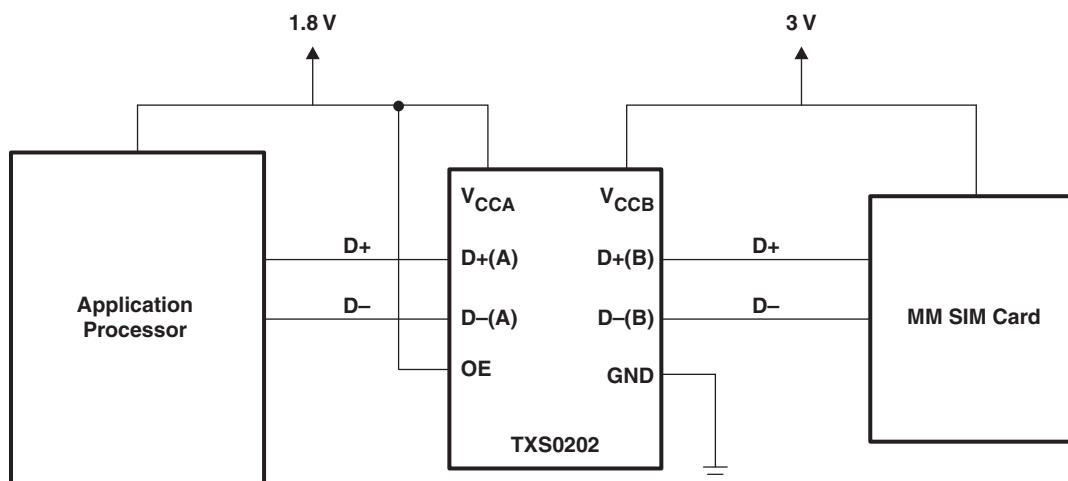

PIN FUNCTIONS

PIN		DESCRIPTION
WSCP (YFP) BALL NO.	NAME	
A1	D+(B)	USB data signal connected to peripheral
A2	D-(B)	USB data signal connected to peripheral
B1	GND	Ground
B2	V _{CCB}	B-side supply voltage (1.65 V to 3.6 V)
C1	V _{CCA}	A-side supply voltage (1.65 V to 3.6 V)
C2	OE	Output enable input control
D1	D+(A)	USB data signal connected to host
D2	D-(A)	USB data signal connected to host

FUNCTIONAL TABLE

CONTROL INPUT	OUTPUT CIRCUIT	OPERATION
OE	B PORT	
L	Hi-Z	Isolation
H	Enabled	Bi-directional communications between host and peripheral

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{CCA} V_{CCB}	Supply voltage rang		–0.5	4.6	V
V_I	Input voltage range	A port, B port, control inputs	–0.5	$V_{CCx} + 0.5$	V
V_O	Voltage range applied to any output in the high-impedance or power-off state	A port, B port	–0.5	$V_{CCx} + 0.5$	V
I_{IK}	Input clamp current	$V_I < 0$		–50	mA
I_{OK}	Output clamp current	$V_O < 0$		–50	mA
I_{CC} I_{GND}	Continuous current through V_{CCA} , V_{CCB} , or GND			±100	mA
T_{stg}	Storage temperature range		–65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

THERMAL INFORMATION

THERMAL METRIC ⁽¹⁾		TXS0202	UNITS
		YZP	
		8 PINS	
θ_{JA}	Junction-to-ambient thermal resistance	102	°C/W

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

RECOMMENDED OPERATING CONDITIONS

			MIN	MAX	UNIT
V_{CCA} , V_{CCB}	Supply voltage		1.65	3.6	V
V_{IH}	High-level input voltage	A port I/Os	$V_{CCA} - 0.2$	V_{CCA}	V
		B port I/Os	$V_{CCB} - 0.2$	V_{CCB}	
		OE	$V_{CCA} \times 0.65$	3.6	
V_{IL}	Low-level input voltage	A port I/Os	0	0.15	V
		B port I/Os	0	0.15	
		OE	0	$V_{CCA} \times 0.35$	
$\Delta t/\Delta v$	Input transition rise or fall rate			10	ns/V
T_A	Operating free-air temperature		–40	85	°C

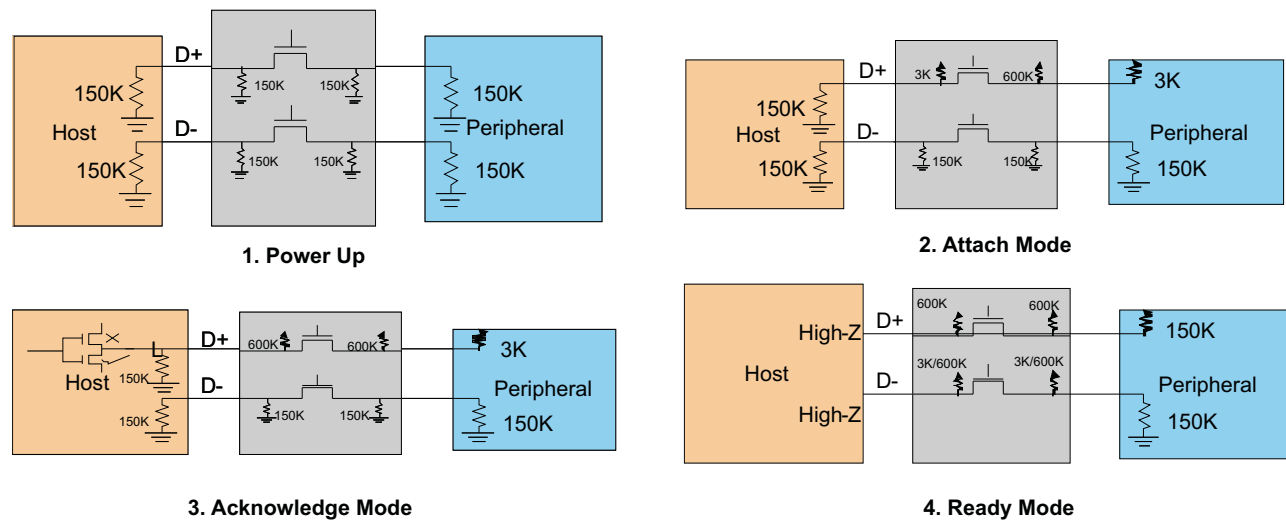


Figure 1. Block Diagram Showing Different Modes in the TXS0202

ELECTRICAL CHARACTERISTICS


PARAMETER	TEST CONDITIONS	V _{CCA}	V _{CCBx}	T _A = 25°C	T _A = –40°C to 85°C		UNIT
				TYP	MIN	MAX	
V _{OH(D–)} (D– A or B port)	I _{OH} = –20 μA, V _{Ix} ≥ V _{CCx} – 0.2 V	1.65 V	1.65 V		V _{CCO} × 0.67		V
		2.3 V	2.3 V		V _{CCO} × 0.67		
		3.3 V	3.3 V		V _{CCO} × 0.67		
V _{OL(D–)} (D– A or B port)	I _{OL} = 220 μA, V _{Ix} ≤ 0.15 V	1.65 V	1.65 V		0.45		V
	I _{OL} = 180 μA, V _{Ix} ≤ 0.15 V	2.3 V	2.3 V		0.55		
	I _{OL} = 220 μA, V _{Ix} ≤ 0.15 V	3.3 V	3.3 V		0.7		
V _{OH(D+)} (D+ A or B port)	I _{OH} = –20 μA, V _{Ix} ≥ V _{CCx} – 0.2 V	1.65 V	1.65 V		V _{CCO} × 0.67		V
		2.3 V	2.3 V		V _{CCO} × 0.67		
		3.3 V	3.3 V		V _{CCO} × 0.67		
V _{OL(D+)} (D– A or B port)	I _{OL} = 220 μA, V _{Ix} ≤ 0.15 V	1.65 V	1.65 V		0.45		V
	I _{OL} = 300 μA, V _{Ix} ≤ 0.15 V	2.3 V	2.3 V		0.55		
	I _{OL} = 620 μA, V _{Ix} ≤ 0.15 V	3.3 V	3.3 V		0.7		
I _I	OE	1.65 V to 3.6 V	1.65 V to 3.6 V	±2	±2		μA
	D–/D+ A or B port, OE = OPEN			±2	±2		
	I _{BOFF} , D+, D– B port	1.65 V to 3.6 V	0 V		±2		
	I _{AOFF} , D+, D– A port	0 V	1.65 V to 3.6 V		±2		
I _{CCA}	V _I = V _O = Open, OE = High	1.65 V to 3.6 V	1.65 V to 3.6 V	2.2	12		μA
		3.6 V	0 V	2.3	12		
		0 V	3.6 V	0.026	–1		
I _{CCB}	V _I = V _O = Open, OE = High	1.65 V to 3.6 V	1.65 V to 3.6 V	2.7	24		μA
		3.6 V	0 V	0.031	–12		
		0 V	3.6 V	2.7	24		
C _i	OE	3.6 V	3.6 V	2.5	3.5		pF
C _{io}	A port	3.6 V	3.6 V	7	7.5		pF
	B port			9.5	10		

SWITCHING CHARACTERISTICS


over recommended operating free-air temperature range, $V_{CCA} = 1.8 \text{ V} \pm 0.15 \text{ V}$ (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CCB} = 1.8 \text{ V} \pm 0.15 \text{ V}$	$V_{CCB} = 3.3 \text{ V} \pm 0.3 \text{ V}$	UNIT
			TYP	TYP	
t_{pd}	A	B	5	5	ns
	B	A	5	5	
t_{rA}	A port rise times		2	2	ns
t_{fA}	A port fall times		2	2	ns
t_{rB}	B port rise times		2	2	ns
t_{fB}	B port fall times		2	2	ns
$t_{sk(o)}$	Channel-to-channel		0.5	0.5	ns
Max data rate			15	15	Mbps

PARAMETER MEASUREMENT INFORMATION

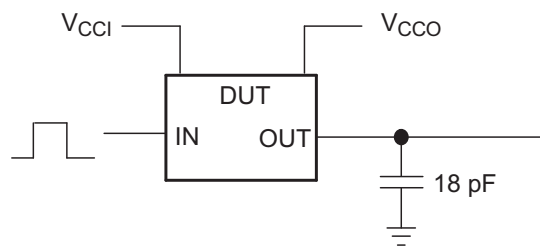

DATA RATE, SKEW, PROPAGATION DELAY,
OUTPUT RISE AND FALL TIME MEASUREMENT

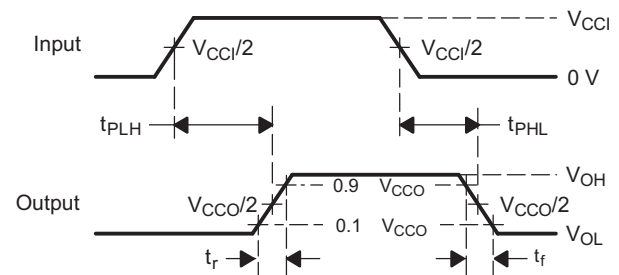

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES

- A. C_L includes probe and jig capacitance.
- B. The outputs are measured one at a time, with one transition per measurement.
- C. t_{PLH} and t_{PHL} are the same as t_{pd} .

重要声明

德州仪器(TI) 及其下属子公司有权在不事先通知的情况下, 随时对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权随时中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的硬件产品的性能符合TI 标准保修的适用规范。仅在TI 保证的范围内, 且TI 认为有必要时才会使用测试或其它质量控制技术。除非政府做出了硬性规定, 否则没有必要对每种产品的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何TI 专利权、版权、屏蔽作品权或其它与使用了TI 产品或服务的组合设备、机器、流程相关的TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是TI 的专利权或其它知识产权方面的许可。

对于TI 的产品手册或数据表, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。在复制信息的过程中对内容的篡改属于非法的、欺诈性商业行为。TI 对此类篡改过的文件不承担任何责任。

在转售TI 产品或服务时, 如果存在对产品或服务参数的虚假陈述, 则会失去相关TI 产品或服务的明示或暗示授权, 且这是非法的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

TI 产品未获得用于关键的安全应用中的授权, 例如生命支持应用(在该类应用中一旦TI 产品故障将预计造成重大的人员伤亡), 除非各方官员已经达成了专门管控此类使用的协议。购买者的购买行为即表示, 他们具备有关其应用安全以及规章衍生所需的所有专业技术和知识, 并且认可和同意, 尽管任何应用相关信息或支持仍可能由TI 提供, 但他们将独力负责满足在关键安全应用中使用其产品及TI 产品所需的所有法律、法规和安全相关要求。此外, 购买者必须全额赔偿因在此类关键安全应用中使用TI 产品而对TI 及其代表造成的损失。

TI 产品并非设计或专门用于军事/航空应用, 以及环境方面的产品, 除非TI 特别注明该产品属于“军用”或“增强型塑料”产品。只有TI 指定的军用产品才满足军用规格。购买者认可并同意, 对TI 未指定军用的产品进行军事方面的应用, 风险由购买者单独承担, 并且独力负责在此类相关使用中满足所有法律和法规要求。

TI 产品并非设计或专门用于汽车应用以及环境方面的产品, 除非TI 特别注明该产品符合ISO/TS 16949 要求。购买者认可并同意, 如果他们在汽车应用中使用任何未被指定的产品, TI 对未能满足应用所需要求不承担任何责任。

可访问以下URL 地址以获取有关其它TI 产品和应用解决方案的信息:

产品	应用		
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	http://www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	http://www.ti.com.cn/dataconverters	消费电子	www.ti.com.cn/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com.cn/energy
DSP - 数字信号处理器	http://www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	http://www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	http://www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	http://www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	http://www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	http://www.ti.com.cn/microcontrollers	无线通信	www.ti.com.cn/wireless
RFID 系统	http://www.ti.com.cn/rfidsys		
RF/IF 和 ZigBee® 解决方案	www.ti.com.cn/radiofre		
TI E2E 工程师社区	http://e2e.ti.com/cn/		

邮寄地址: 上海市浦东新区世纪大道 1568 号, 中建大厦 32 楼 邮政编码: 200122
Copyright © 2011 德州仪器 半导体技术(上海)有限公司

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TXS0202YZPR	ACTIVE	DSBGA	YZP	8	3000	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	7P	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

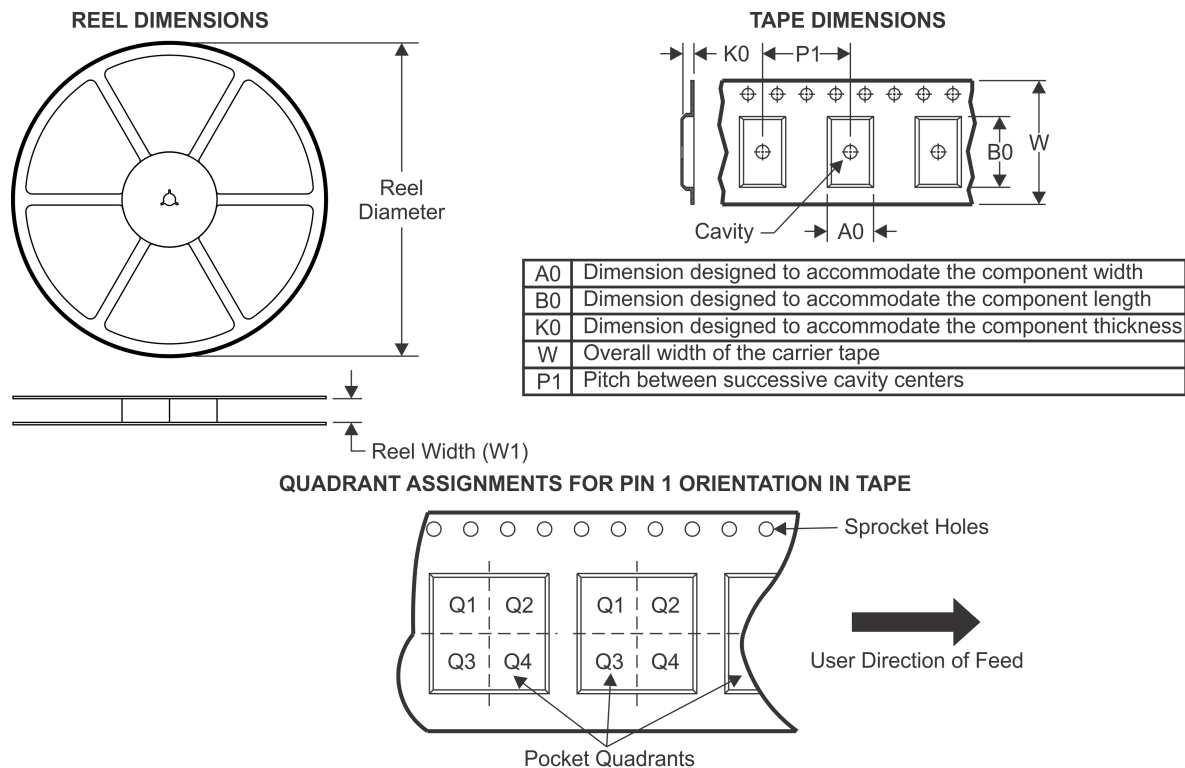TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TXS0202YZPR	DSBGA	YZP	8	3000	180.0	8.4	1.02	2.02	0.63	4.0	8.0	Q1


TAPE AND REEL BOX DIMENSIONS

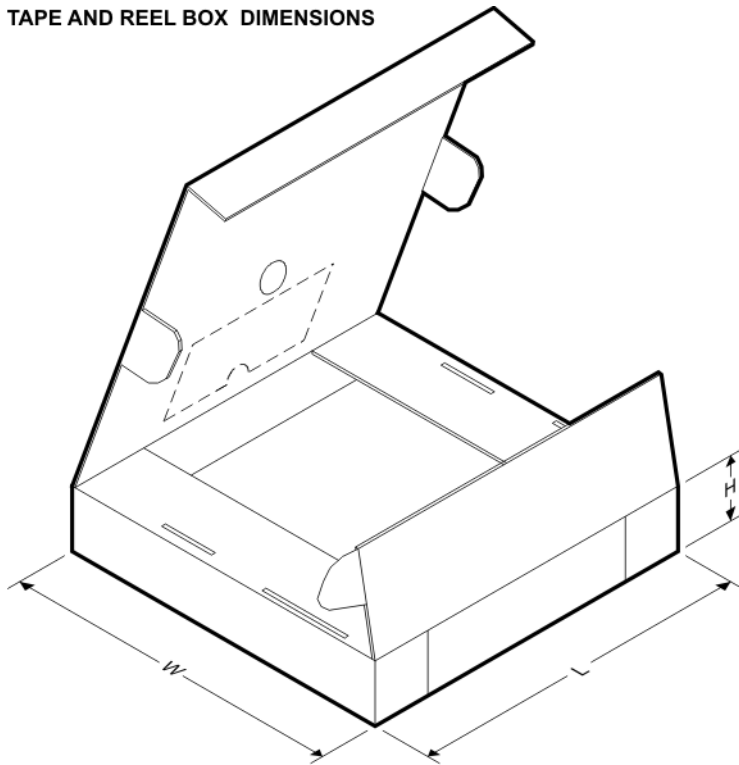

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TXS0202YZPR	DSBGA	YZP	8	3000	182.0	182.0	20.0


YZP0008



PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

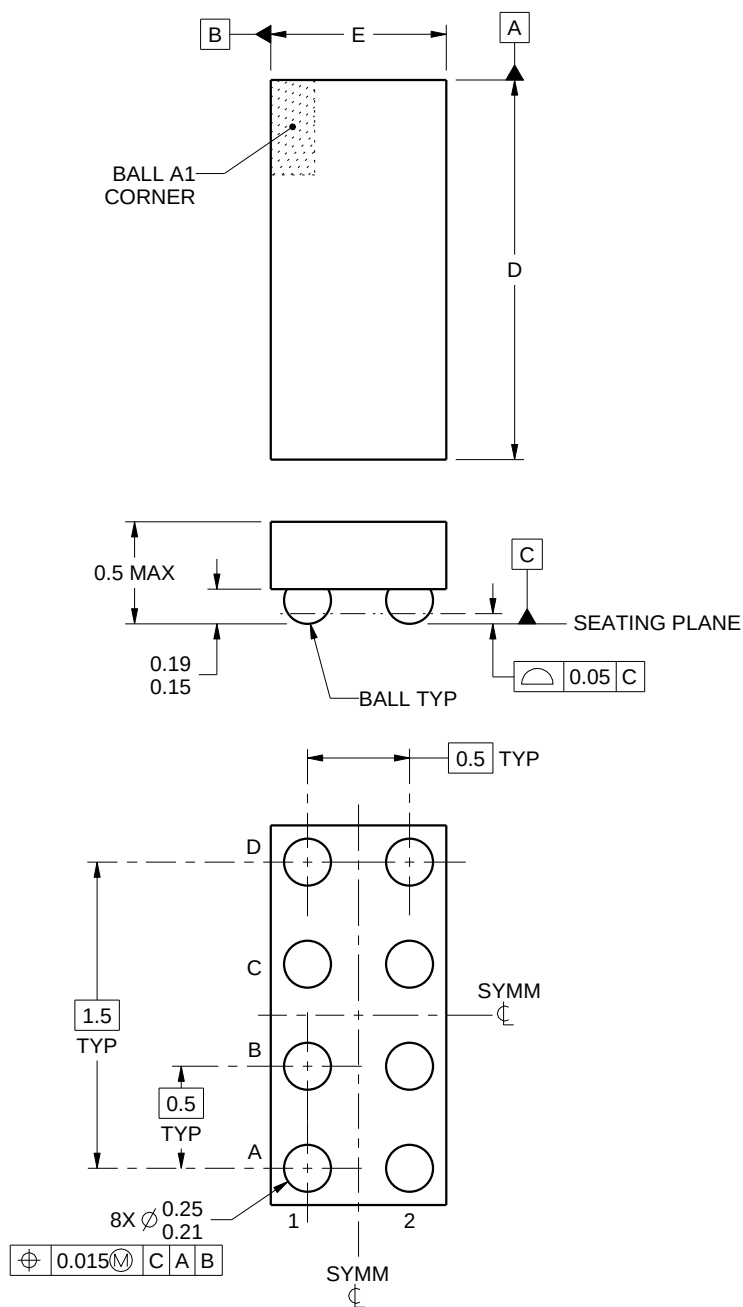

4223082/A 07/2016

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


YZP0008

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

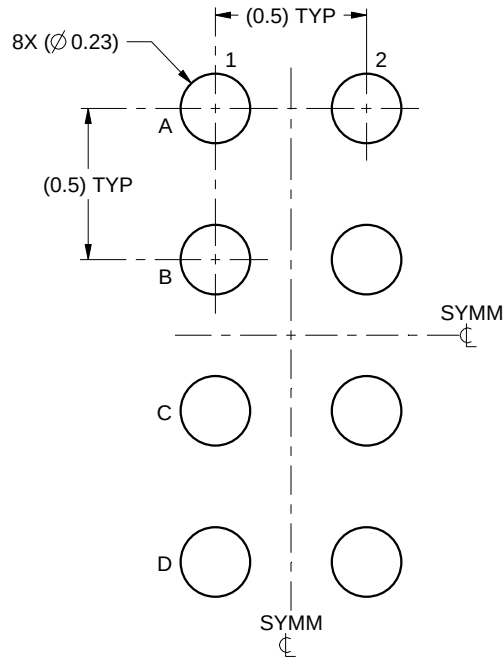

LAND PATTERN EXAMPLE
SCALE:40X

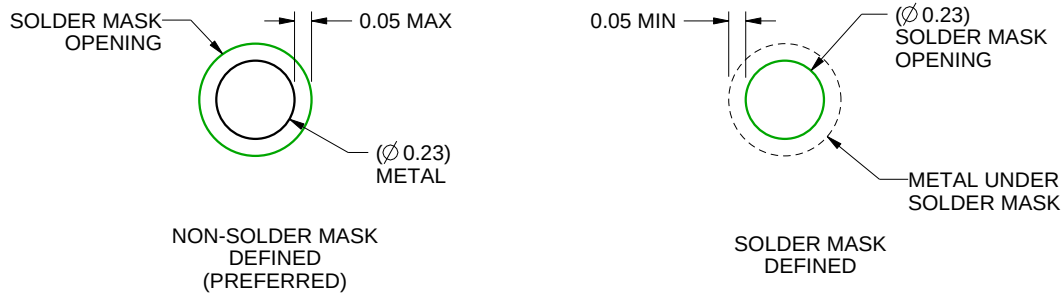


SOLDER MASK DETAILS
NOT TO SCALE

4223082/A 07/2016

NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 (www.ti.com/lit/snva009).

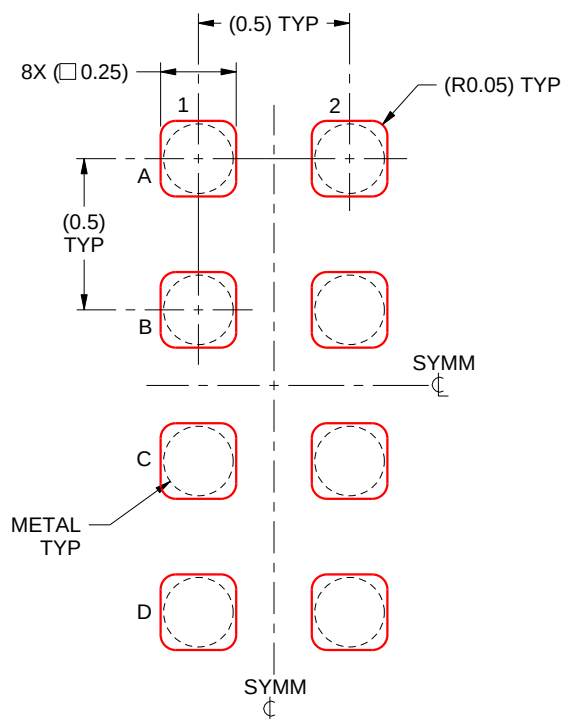

SOLDER PASTE EXAMPLE
 BASED ON 0.1 mm THICK STENCIL
 SCALE:40X

4223082/A 07/2016

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要声明和免责声明

TI 均以“原样”提供技术性 & 可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用 TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的 TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及 TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它 TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对 TI 及其代表造成的损害。

TI 所提供产品均受 TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及 [ti.com.cn](http://www.ti.com.cn) 上或随附 TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改 TI 针对 TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2020 德州仪器半导体技术（上海）有限公司