


## TMAG511x-Q1 2D 双通道、高灵敏度、霍尔效应锁存器

### 1 特性

- 具有符合 AEC-Q100 标准的下列特性：
  - 器件温度等级 1：-40°C 至 125°C 环境温度工作温度范围
  - 器件 HBM ESD 分类等级 H3A
  - 器件 CDM ESD 分类等级 C6
- 带有平面和垂直霍尔效应传感器的 2D 感应
- 与磁铁对齐方式或磁极间距无关的固有正交
- 提供了两个功能选项：
  - TMAG5110-Q1：独立 2D 输出
  - TMAG5111-Q1：速度和方向输出
- 超高磁性灵敏度：
  - TMAG511xx2-Q1：±1.4mT（典型值）
  - TMAG511xx4-Q1：±3mT（典型值）
- 40kHz 高速感应带宽
- 2.5V 至 38V 工作  $V_{CC}$  范围
- 开漏输出（10mA 灌电流）
- 宽工作环境温度范围：
  - 40°C 至 +125°C
- 保护特性**
  - 反向电源保护（高达 -20V）
  - 器件最高支持 40V
  - 输出短路保护
  - 输出电流限制

### 2 应用

- 增量旋转编码
- 线性速度和方向控制
  - 天窗和后备箱电机控制
  - 车窗和车门电机控制
- 角度位置感应
  - 旋钮控制（无线电和空调）
  - 电子助力转向
  - 流体测量
- 角速度和方向
  - 电子泵
  - 风扇
  - 轮和电机速度



器件轴极

### 3 说明

TMAG5110-Q1 和 TMAG5111-Q1 是二维双通道霍尔效应锁存器，通过 2.5V 至 38V 电源供电。由于专为高速和高温电机应用设计，这些器件针对利用旋转磁体的应用进行了优化。通过集成两个传感器和两个单独的信号链，TMAG511x-Q1 可提供两个独立的数字输出用于速度和方向计算 (TMAG5111-Q1)，或直接为每个独立锁存器提供数字输出 (TMAG5110-Q1)。这种高度集成允许使用一个 TMAG511x-Q1 器件，而不是两个单独的锁存器。


该器件提供标准的 3mT 工作点以及高灵敏度 1.4mT 工作点。更高的磁性灵敏度可实现灵活的低成本磁体选型和机械部件放置。TMAG511x-Q1 还提供了三个 2 轴组合选项 (X-Y、Z-X、Z-Y)，以允许传感器相对于磁体灵活放置。

该器件在 -40°C 至 +125°C 的宽环境温度范围内能够保持稳定一致的优异性能。

#### 器件信息

| 器件型号        | 封装 <sup>(1)</sup> | 封装尺寸（标称值）     |
|-------------|-------------------|---------------|
| TMAG5110-Q1 | SOT-23 (5)        | 2.9mm × 1.6mm |
| TMAG5111-Q1 |                   |               |

(1) 如需了解所有可用封装，请参阅数据表末尾的封装选项附录。

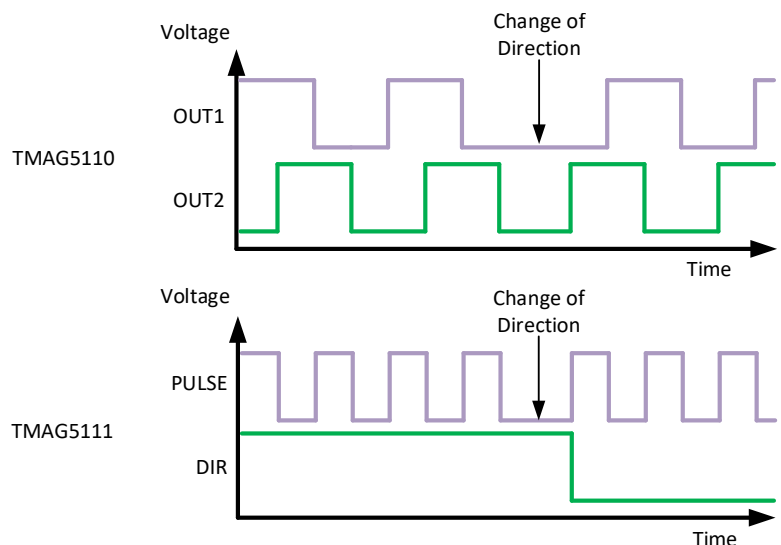

器件输出



## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | 8.3 Feature Description.....                                     | <b>21</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | 8.4 Device Functional Modes.....                                 | <b>30</b> |
| <b>3 说明</b> .....                              | <b>1</b>  | <b>9 Application and Implementation</b> .....                    | <b>31</b> |
| <b>4 Revision History</b> .....                | <b>2</b>  | 9.1 Application Information.....                                 | <b>31</b> |
| <b>5 Device Comparison</b> .....               | <b>3</b>  | 9.2 Typical Applications.....                                    | <b>31</b> |
| <b>6 Pin Configuration and Functions</b> ..... | <b>4</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>33</b> |
| <b>7 Specifications</b> .....                  | <b>5</b>  | <b>11 Layout</b> .....                                           | <b>33</b> |
| 7.1 Absolute Maximum Ratings .....             | <b>5</b>  | 11.1 Layout Guidelines.....                                      | <b>33</b> |
| 7.2 ESD Ratings .....                          | <b>5</b>  | 11.2 Layout Example.....                                         | <b>33</b> |
| 7.3 Recommended Operating Conditions .....     | <b>5</b>  | <b>12 Device and Documentation Support</b> .....                 | <b>34</b> |
| 7.4 Thermal Information .....                  | <b>5</b>  | 12.1 接收文档更新通知.....                                               | <b>34</b> |
| 7.5 Electrical Characteristics .....           | <b>6</b>  | 12.2 支持资源.....                                                   | <b>34</b> |
| 7.6 Magnetic Characteristics .....             | <b>6</b>  | 12.3 Trademarks.....                                             | <b>34</b> |
| 7.7 Typical Characteristics.....               | <b>7</b>  | 12.4 Electrostatic Discharge Caution.....                        | <b>34</b> |
| <b>8 Detailed Description</b> .....            | <b>21</b> | 12.5 术语表.....                                                    | <b>34</b> |
| 8.1 Overview.....                              | <b>21</b> | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>34</b> |
| 8.2 Functional Block Diagram.....              | <b>21</b> |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同


| Changes from Revision * (July 2021) to Revision A (September 2021)       | Page     |
|--------------------------------------------------------------------------|----------|
| • Removed the preview notes from the <i>Device Comparison</i> table..... | <b>3</b> |
| • Added operating supply current for the TMAG511xx4-Q1.....              | <b>6</b> |
| • Added graphs to the <i>Typical Characteristics</i> section.....        | <b>7</b> |

## 5 Device Comparison

**表 5-1. Device Comparison**

| DEVICE      | DEVICE OPTION | SENSITIVITY<br>(BOP TYP) | AXIS OF<br>SENSITIVITY | OUT1  | OUT2      |
|-------------|---------------|--------------------------|------------------------|-------|-----------|
| TMAG5110-Q1 | A2            | 1.4 mT                   | XY                     | X     | Y         |
|             | A4            | 3 mT                     |                        |       |           |
|             | B2            | 1.4 mT                   | ZX                     | Z     | X         |
|             | B4            | 3 mT                     |                        |       |           |
|             | C2            | 1.4 mT                   | ZY                     | Z     | Y         |
|             | C4            | 3 mT                     |                        |       |           |
| TMAG5111-Q1 | A2            | 1.4 mT                   | XY                     | Speed | Direction |
|             | A4            | 3 mT                     |                        |       |           |
|             | B2            | 1.4 mT                   | ZX                     |       |           |
|             | B4            | 3 mT                     |                        |       |           |
|             | C2            | 1.4 mT                   | ZY                     |       |           |
|             | C4            | 3 mT                     |                        |       |           |

## 6 Pin Configuration and Functions

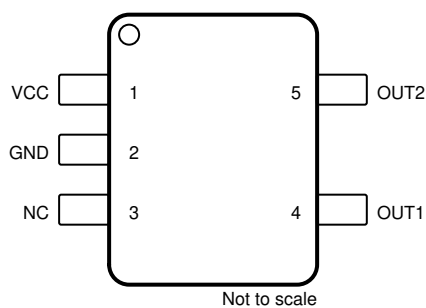

**图 6-1. DBV Package 5-Pin SOT-23 Top View**

**表 6-1. Pin Functions**

| PIN |                 | TYPE         | DESCRIPTION                                                                                                                                |
|-----|-----------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| NO. | NAME            |              |                                                                                                                                            |
| 1   | V <sub>CC</sub> | Power supply | 2.5-V to 38-V power supply. Connect a ceramic capacitor with a value of at least 0.01 $\mu$ F between V <sub>CC</sub> and ground.          |
| 2   | GND             | Ground       | Ground reference.                                                                                                                          |
| 3   | NC              | —            | Not internally connected. Connection to the ground pin is recommended.                                                                     |
| 4   | OUT1            | Output       | Open-drain output 1.<br>For TMAG5110A-Q1: X axis.<br>For TMAG5110B-Q1: Z axis.<br>For TMAG5110C-Q1: Z axis.<br>For TMAG5111-Q1: Speed.     |
| 5   | OUT2            | Output       | Open-drain output 2.<br>For TMAG5110A-Q1: Y axis.<br>For TMAG5110B-Q1: X axis.<br>For TMAG5110C-Q1: Y axis.<br>For TMAG5111-Q1: Direction. |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                            |                                          | MIN       | MAX | UNIT |
|------------------------------------------------------------|------------------------------------------|-----------|-----|------|
| Power Supply Voltage                                       | V <sub>CC</sub>                          | –20       | 40  | V    |
|                                                            | Voltage ramp rate (V <sub>CC</sub> < 5V) | Unlimited |     | V/μs |
|                                                            | Voltage ramp rate (V <sub>CC</sub> > 5V) | 0         | 2   |      |
| Output Pin Voltage                                         | V <sub>OUT1</sub> , V <sub>OUT2</sub>    | GND – 0.5 | 40  | V    |
| Output pin reverse current during reverse supply condition |                                          | 0         | 100 | mA   |
| Magnetic flux density, B <sub>MAX</sub>                    |                                          | Unlimited |     | T    |
| Junction temperature, T <sub>J</sub>                       | Junction temperature, T <sub>J</sub>     | –40       | 150 | °C   |
| Storage temperature, T <sub>stg</sub>                      |                                          | –65       | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         |                                                                                        | VALUE | UNIT |
|--------------------|-------------------------|----------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 <sup>(1)</sup> HBM ESD Classification Level 2 | ±2000 | V    |
|                    |                         | Charged device model (CDM), per AEC Q100-011 CDM ESD Classification Level C4A          | ± 500 | V    |

- (1) AECQ 100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                   |                                                     | MIN | MAX | UNIT |
|-------------------|-----------------------------------------------------|-----|-----|------|
| V <sub>CC</sub>   | Power supply voltage                                | 2.5 | 38  | V    |
| V <sub>O</sub>    | Output pin voltage (OUT1, OUT2)                     | 0   | 38  | V    |
| I <sub>SINK</sub> | Output pin current sink (OUT1, OUT2) <sup>(1)</sup> | 0   | 10  | mA   |
| T <sub>A</sub>    | Ambient temperature                                 | –40 | 125 | °C   |

- (1) Power dissipation and thermal limits must be observed

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TMA5110      | UNIT |
|-------------------------------|----------------------------------------------|--------------|------|
|                               |                                              | DBV (SOT-23) |      |
|                               |                                              | 5 PINS       |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 166.5        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 86.0         |      |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 37.6         |      |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 14.1         |      |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 37.3         |      |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | —            | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER          |                                            | TEST CONDITIONS                                                  | MIN  | TYP  | MAX | UNIT |
|--------------------|--------------------------------------------|------------------------------------------------------------------|------|------|-----|------|
| POWER SUPPLY       |                                            |                                                                  |      |      |     |      |
| I <sub>CC</sub>    | Operating supply current for TMAG511xx2-Q1 | V <sub>CC</sub> = 2.5 V to 38 V, T <sub>A</sub> = −40°C to 125°C |      | 6    | 8   | mA   |
| I <sub>CC</sub>    | Operating supply current for TMAG511xx4-Q1 | V <sub>CC</sub> = 2.5 V to 38 V, T <sub>A</sub> = −40°C to 125°C |      | 6    | 8.5 | mA   |
| I <sub>RCC</sub>   | Reverse-battery current                    | V <sub>CC</sub> = −20 V                                          | −100 |      |     | μA   |
| t <sub>ON</sub>    | Power-on-time                              |                                                                  |      | 52.5 |     | μs   |
| OUTPUT             |                                            |                                                                  |      |      |     |      |
| V <sub>OL</sub>    | Low-level output voltage                   | I <sub>OL</sub> = 10mA                                           | 0    |      | 0.5 | V    |
| I <sub>OH</sub>    | Output leakage current                     | V <sub>CC</sub> = 5V                                             |      | 0.1  | 1   | μA   |
| I <sub>SC</sub>    | Output short-circuit current               |                                                                  |      | 65   | 110 | mA   |
| t <sub>PD</sub>    | Propagation delay time                     | Change in B <sub>OP</sub> or B <sub>RP</sub> to change in output |      | 12.5 |     | μs   |
| t <sub>R</sub>     | Output rise time                           | R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 50pF                      |      | 0.2  |     |      |
| t <sub>F</sub>     | Output fall time                           | R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 50pF                      |      | 0.2  |     |      |
| FREQUENCY RESPONSE |                                            |                                                                  |      |      |     |      |
| f <sub>CHOP</sub>  | Chopping frequency                         |                                                                  |      | 320  |     | kHz  |
| f <sub>BW</sub>    | Signal bandwidth                           |                                                                  |      | 40   |     | kHz  |

## 7.6 Magnetic Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                 |                                                       | TEST CONDITIONS                                                                   | MIN  | TYP  | MAX  | UNIT |
|-------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------|------|------|------|------|
| TMAG5110x2-Q1                             |                                                       |                                                                                   |      |      |      |      |
| B <sub>OP(1)</sub> , B <sub>OP(2)</sub>   | Magnetic field operating point                        | VCC = 2.5 V to 38 V, TA = − 40 °C to 125 °C                                       | 0.2  | 1.4  | 2.6  | mT   |
| B <sub>RP(1)</sub> , B <sub>RP(2)</sub>   | Magnetic field release point                          |                                                                                   | −2.6 | −1.4 | -0.2 |      |
| B <sub>HYS(1)</sub> , B <sub>HYS(2)</sub> | Magnetic hysteresis B <sub>OP</sub> - B <sub>RP</sub> |                                                                                   | 0.9  | 2.75 | 4.6  |      |
| B <sub>SYM(1)</sub> , B <sub>SYM(2)</sub> | Symmetry                                              | B <sub>OP(1)</sub> + B <sub>RP(1)</sub> , B <sub>OP(2)</sub> + B <sub>RP(2)</sub> | −2   |      | 2    | mT   |
| B <sub>SYM_OP</sub>                       | Operating point symmetry                              | B <sub>OP(1)</sub> - B <sub>OP(2)</sub>                                           | −1.5 |      | 1.5  |      |
| B <sub>SYM_RP</sub>                       | Release point symmetry                                | B <sub>RP(1)</sub> - B <sub>RP(2)</sub>                                           | −1.5 |      | 1.5  |      |
| TMAG5110x4-Q1                             |                                                       |                                                                                   |      |      |      |      |
| B <sub>OP(1)</sub> , B <sub>OP(2)</sub>   | Magnetic field operating point                        | VCC = 2.5 V to 38 V, TA = − 40 °C to 125 °C                                       | 0.8  | 3    | 5.3  | mT   |
| B <sub>RP(1)</sub> , B <sub>RP(2)</sub>   | Magnetic field release point                          |                                                                                   | −5.3 | −3   | −0.8 |      |
| B <sub>HYS(1)</sub> , B <sub>HYS(2)</sub> | Magnetic hysteresis B <sub>OP</sub> - B <sub>RP</sub> |                                                                                   | 3    | 6    | 9    |      |
| B <sub>SYM(1)</sub> , B <sub>SYM(2)</sub> | Symmetry                                              | B <sub>OP(1)</sub> + B <sub>RP(1)</sub> , B <sub>OP(2)</sub> + B <sub>RP(2)</sub> | −2   |      | 2    | mT   |
| B <sub>SYM_OP</sub>                       | Operating point symmetry                              | B <sub>OP(1)</sub> - B <sub>OP(2)</sub>                                           | −1.5 |      | 1.5  |      |
| B <sub>SYM_RP</sub>                       | Release point symmetry                                | B <sub>RP(1)</sub> - B <sub>RP(2)</sub>                                           | −1.5 |      | 1.5  |      |

## 7.7 Typical Characteristics

### TMA511xx2-Q1 versions

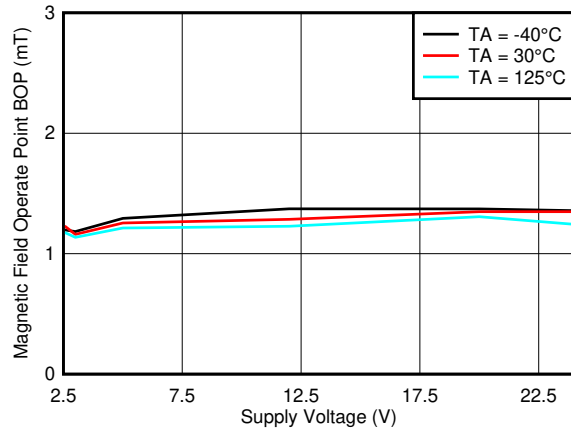


图 7-1. BOP\_Z Threshold vs. V<sub>CC</sub>

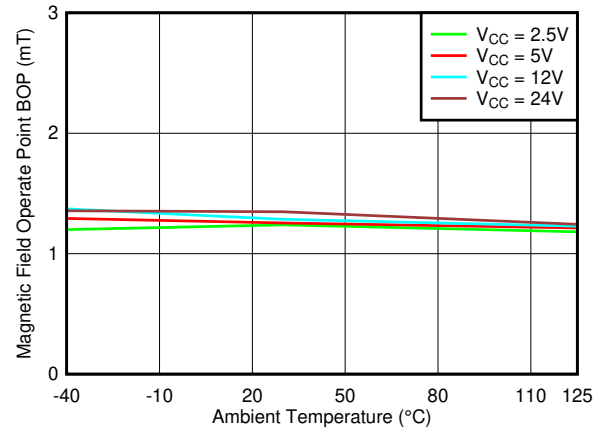


图 7-2. BOP\_Z Threshold vs. Temperature

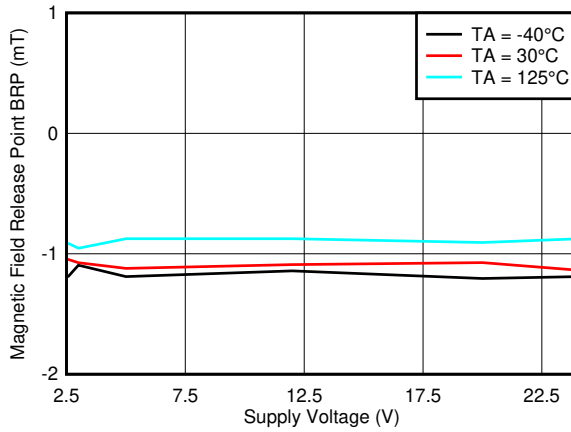


图 7-3. BRP\_Z Threshold vs. V<sub>CC</sub>

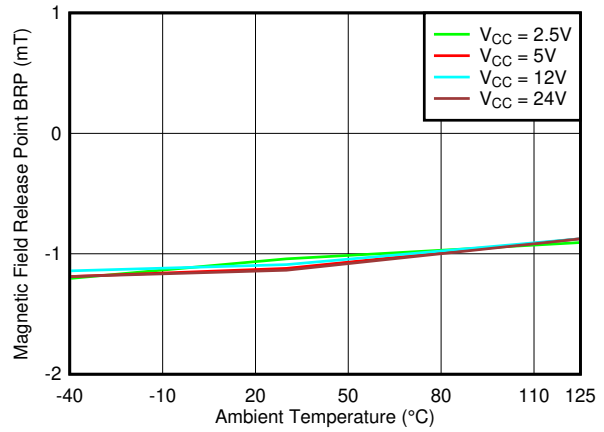


图 7-4. BRP\_Z Threshold vs. Temperature

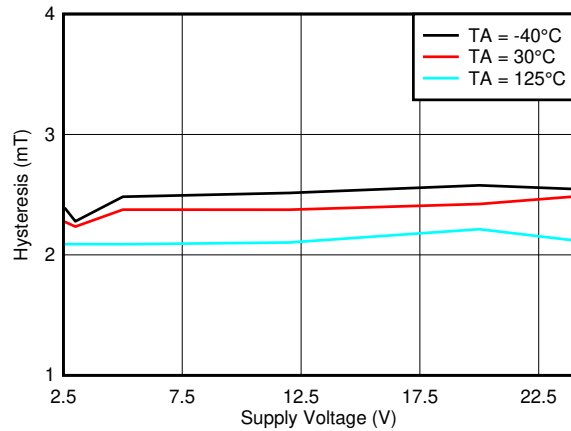


图 7-5. Hysteresis\_Z vs. V<sub>CC</sub>

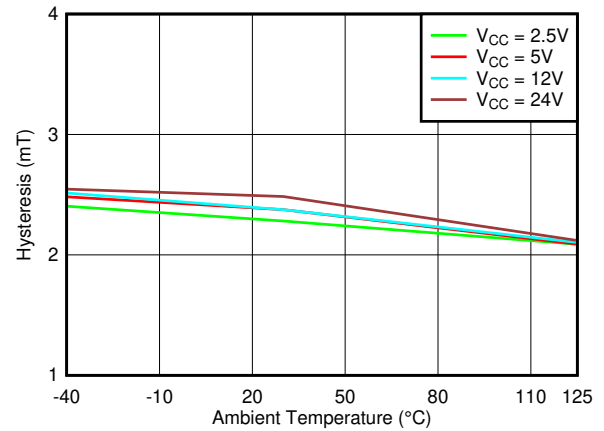


图 7-6. Hysteresis\_Z vs. Temperature

## 7.7 Typical Characteristics (continued)






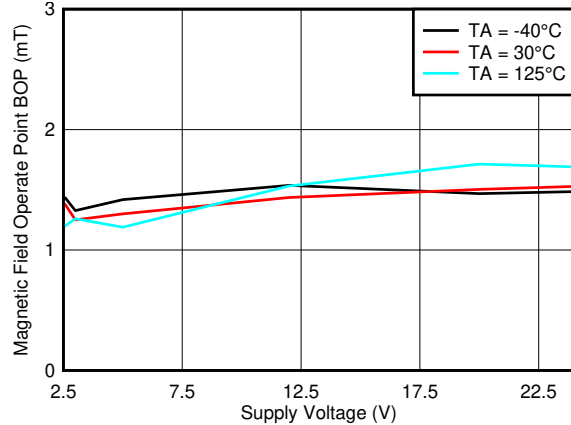
图 7-7.  $B_{OP\_X}$  Threshold vs.  $V_{CC}$ 图 7-8.  $B_{OP\_X}$  Threshold vs. Temperature图 7-9.  $B_{RP\_X}$  Threshold vs.  $V_{CC}$ 图 7-10.  $B_{RP\_X}$  Threshold vs. Temperature图 7-11. Hysteresis\_X vs.  $V_{CC}$ 

图 7-12. Hysteresis\_X vs. Temperature

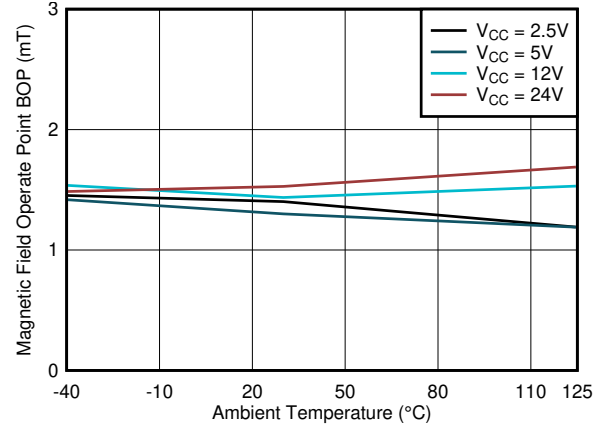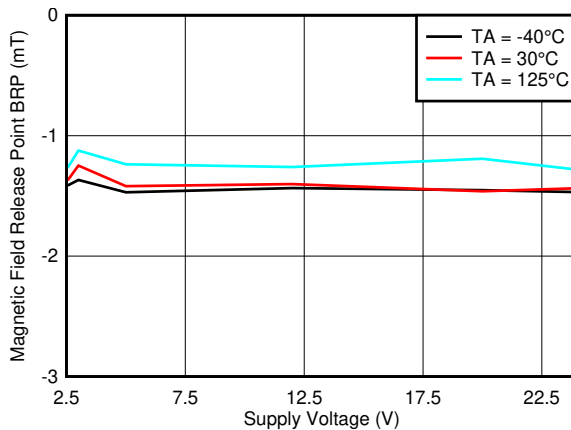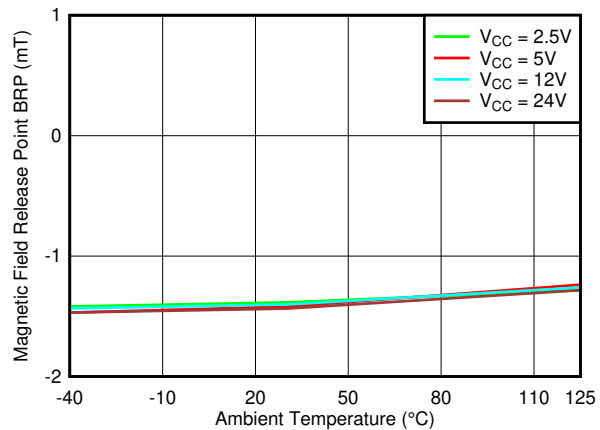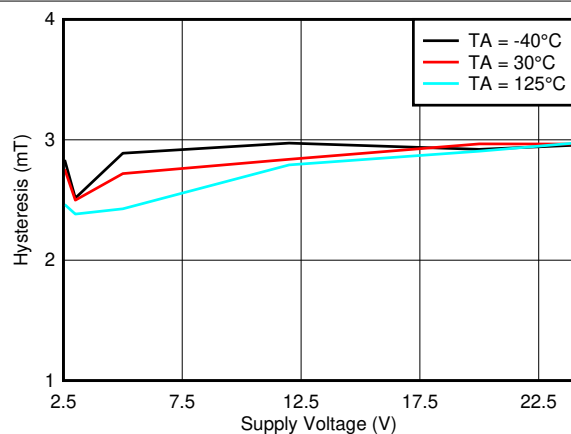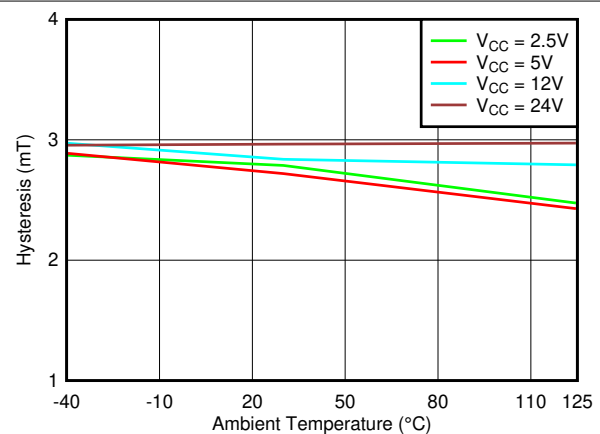

## 7.7 Typical Characteristics (continued)

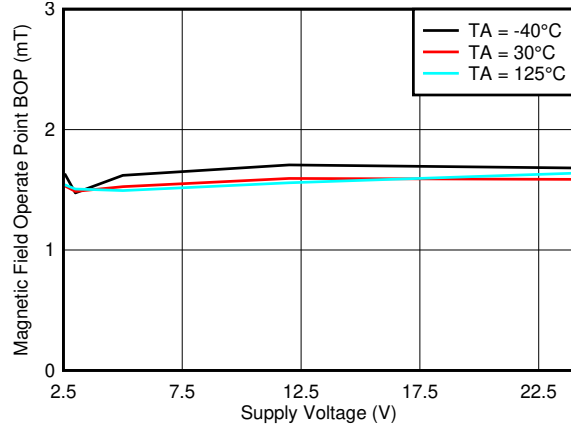


图 7-13. B<sub>OP\_Y</sub> Threshold vs. V<sub>CC</sub>

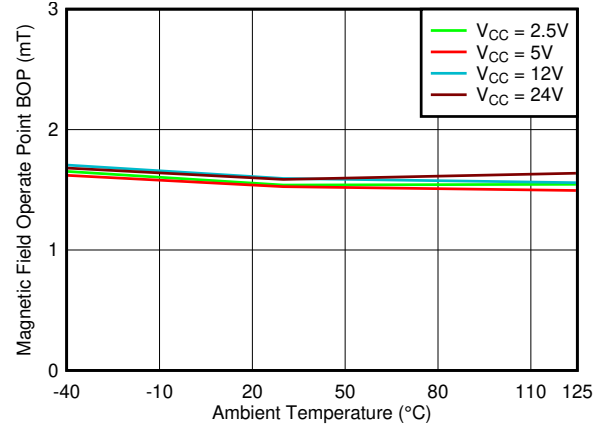


图 7-14. B<sub>OP\_Y</sub> Threshold vs. Temperature

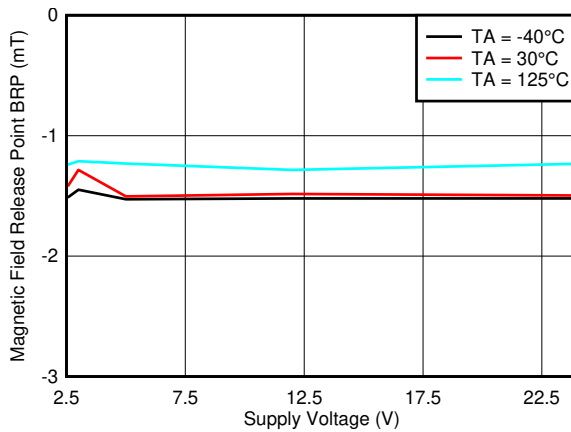


图 7-15. B<sub>RP\_Y</sub> Threshold vs. V<sub>CC</sub>

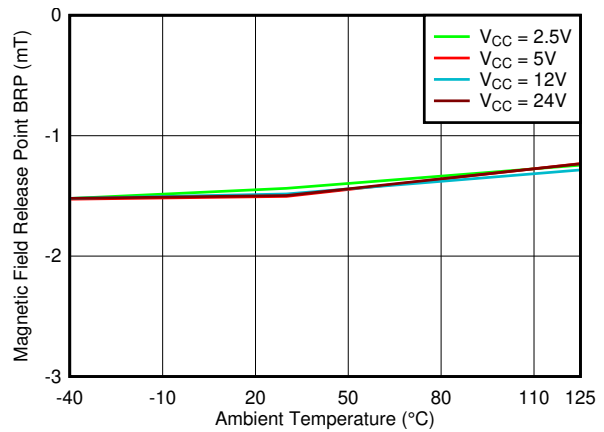


图 7-16. B<sub>RP\_Y</sub> Threshold vs. Temperature

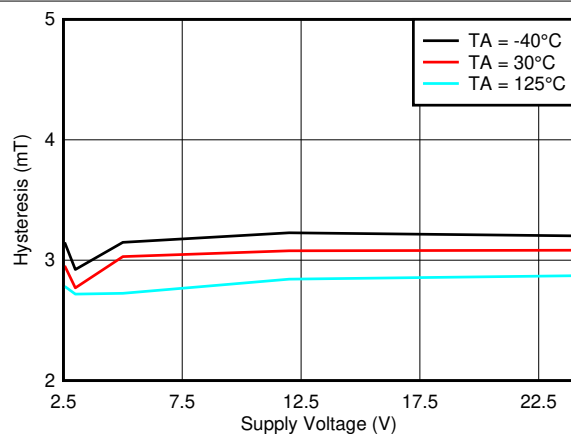


图 7-17. Hysteresis\_Y vs. V<sub>CC</sub>

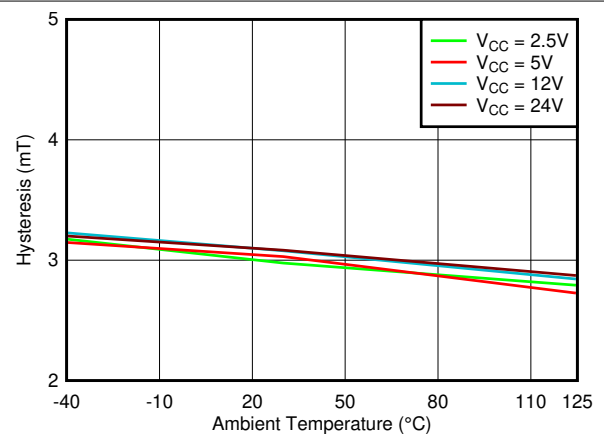


图 7-18. Hysteresis\_Y vs. Temperature

## 7.7 Typical Characteristics (continued)

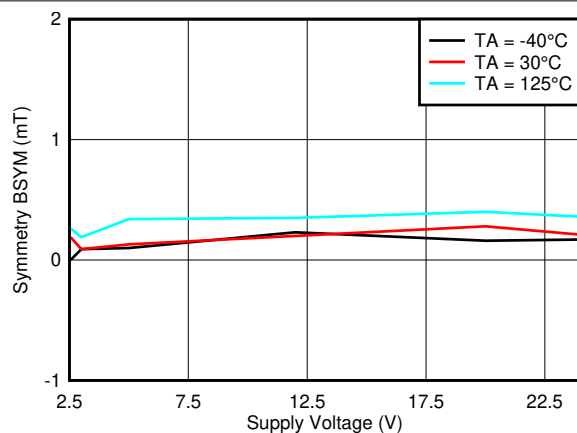


图 7-19.  $B_{SYM(Z)}$  vs.  $V_{CC}$

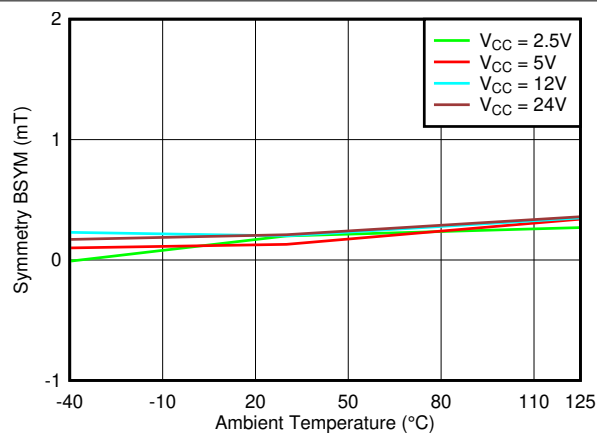


图 7-20.  $B_{SYM(Z)}$  vs. Temperature

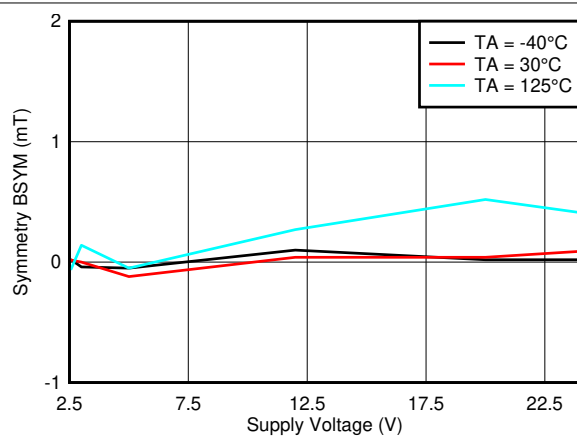


图 7-21.  $B_{SYM(X)}$  vs.  $V_{CC}$

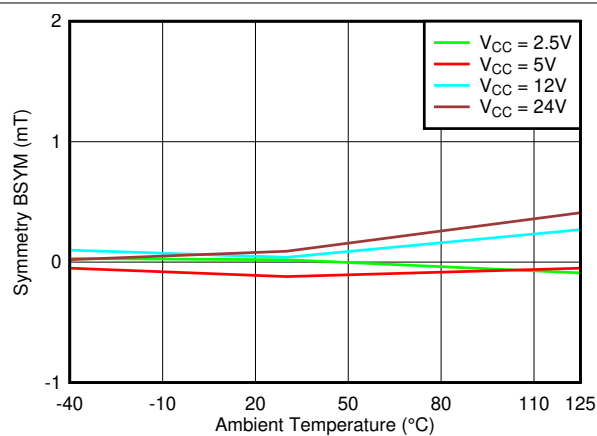


图 7-22.  $B_{SYM(X)}$  vs. Temperature

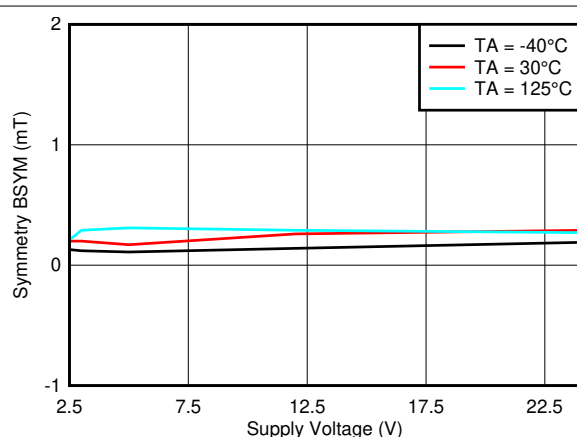


图 7-23.  $B_{SYM(Y)}$  vs.  $V_{CC}$

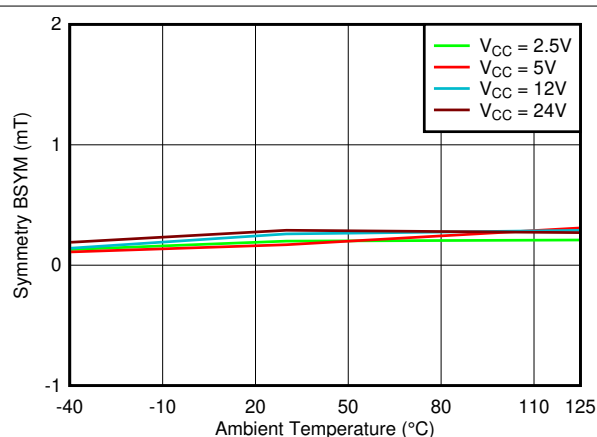


图 7-24.  $B_{SYM(Y)}$  vs. Temperature

## 7.7 Typical Characteristics (continued)

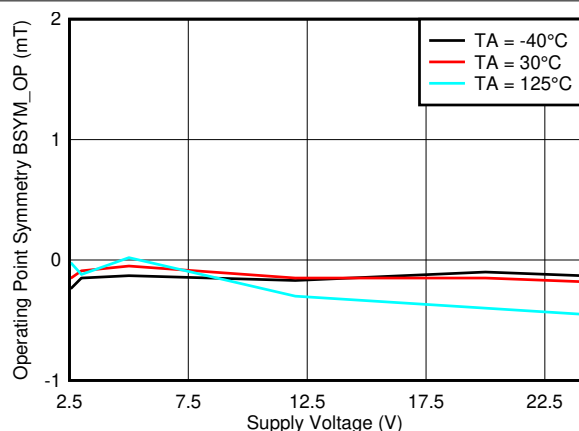


图 7-25.  $B_{SYM\_OP(ZX)}$  vs.  $V_{CC}$

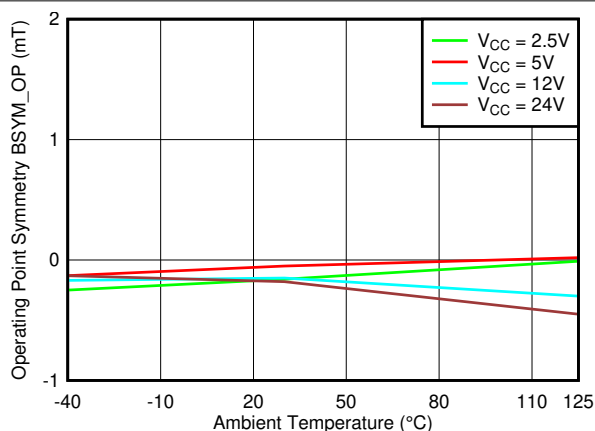


图 7-26.  $B_{SYM\_OP(ZX)}$  vs. Temperature

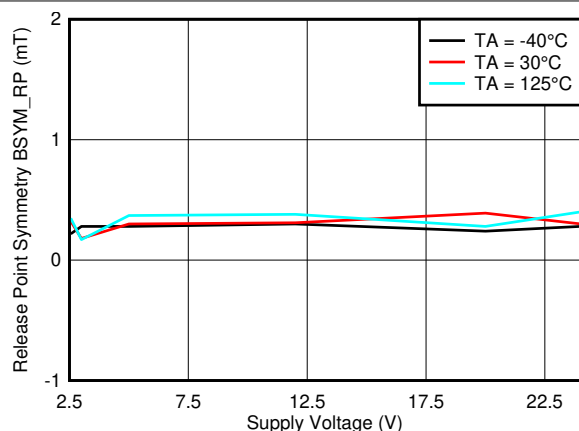


图 7-27.  $B_{SYM\_RP(ZX)}$  vs.  $V_{CC}$

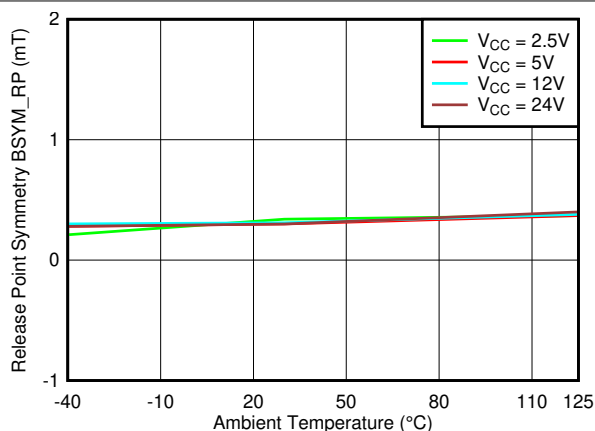


图 7-28.  $B_{SYM\_RP(ZX)}$  vs. Temperature

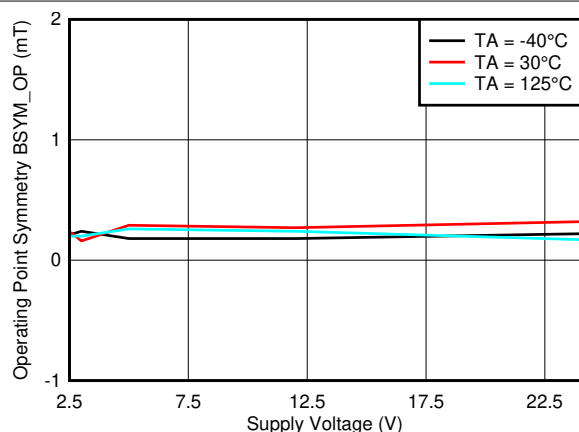


图 7-29.  $B_{SYM\_OP(ZY)}$  vs.  $V_{CC}$

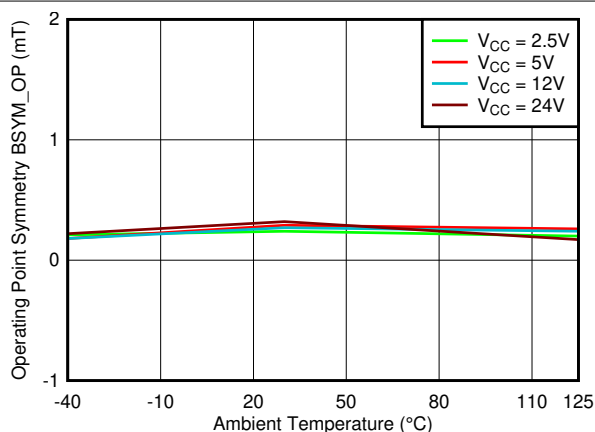


图 7-30.  $B_{SYM\_OP(ZY)}$  vs. Temperature

## 7.7 Typical Characteristics

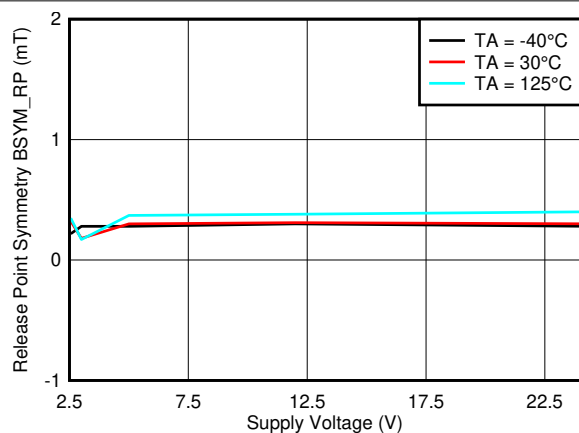


图 7-31.  $B_{SYM\_RP(ZY)}$  vs.  $V_{CC}$

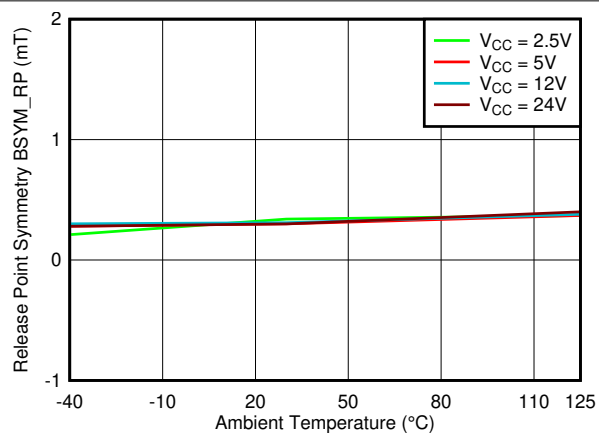


图 7-32.  $B_{SYM\_RP(ZY)}$  vs. Temperature

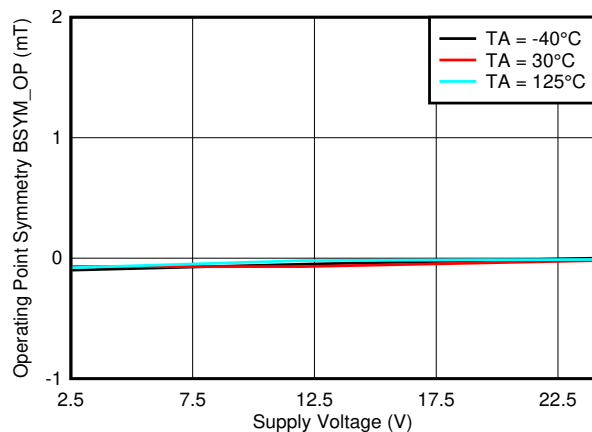


图 7-33.  $B_{SYM\_OP(XY)}$  vs.  $V_{CC}$

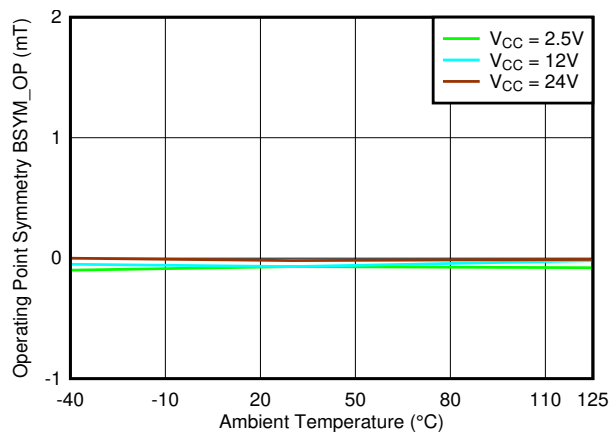


图 7-34.  $B_{SYM\_OP(XY)}$  vs. Temperature

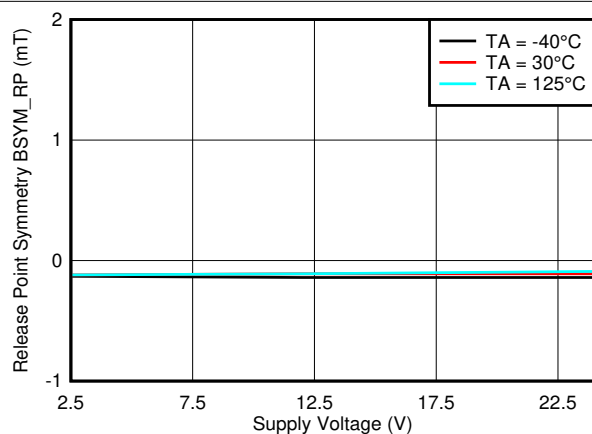


图 7-35.  $B_{SYM\_RP(XY)}$  vs.  $V_{CC}$

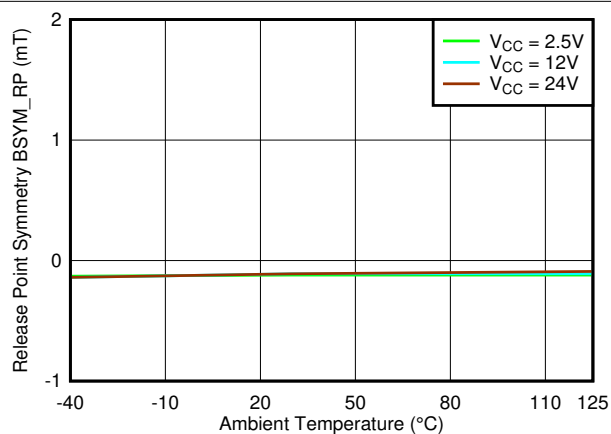


图 7-36.  $B_{SYM\_RP(XY)}$  vs. Temperature

## 7.7 Typical Characteristics (continued)

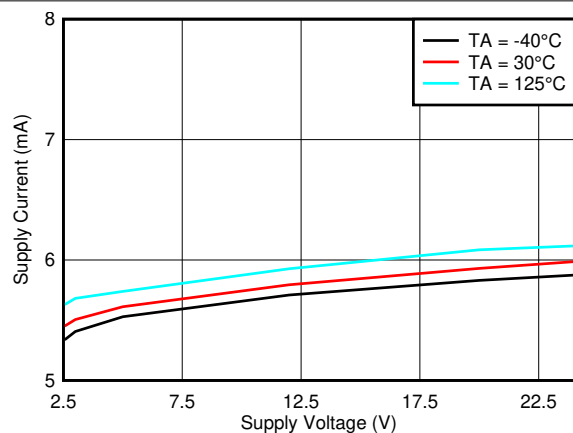


图 7-37. Supply Current vs.  $V_{CC}$

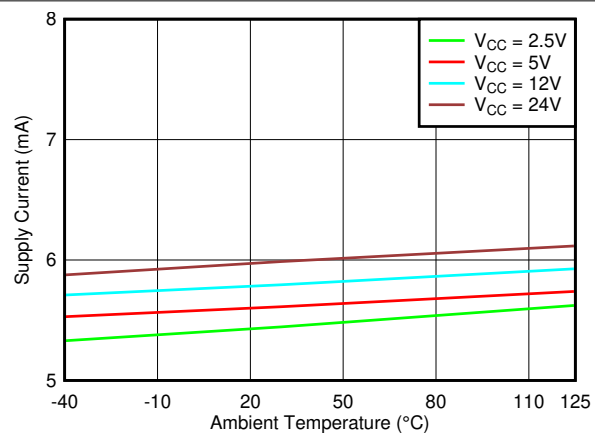


图 7-38. Supply Current vs. Temperature

## 7.7 Typical Characteristics

### TMAG511xx4-Q1 versions

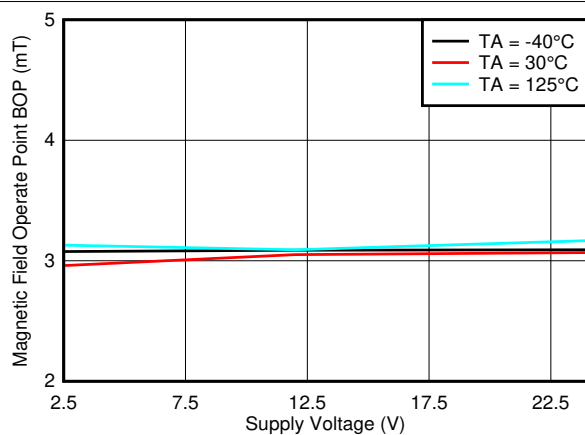


图 7-39. BOP\_Z Threshold vs. V<sub>CC</sub>

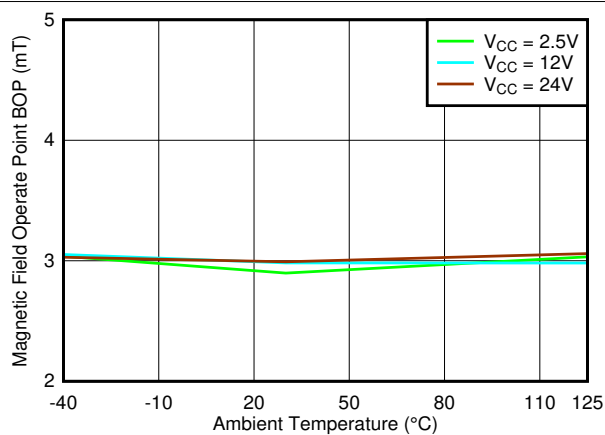


图 7-40. BOP\_Z Threshold vs. Temperature

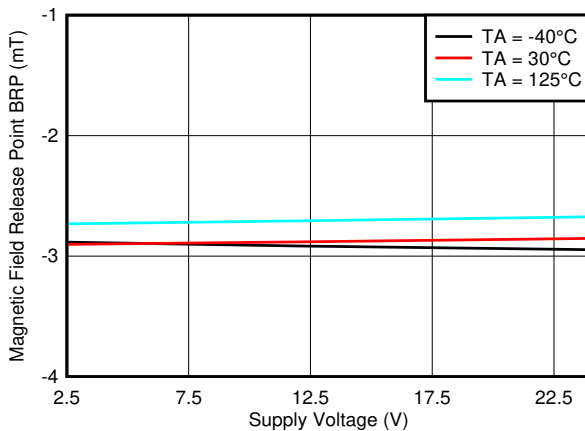


图 7-41. BRP\_Z Threshold vs. V<sub>CC</sub>

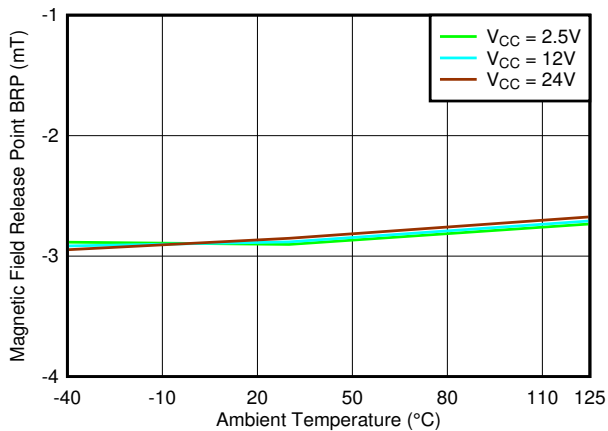


图 7-42. BRP\_Z Threshold vs. Temperature

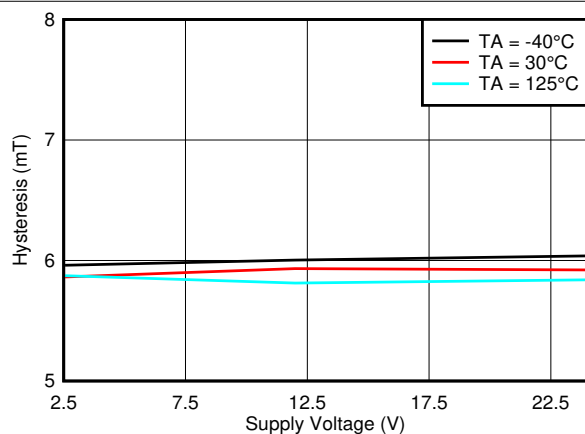


图 7-43. Hysteresis\_Z vs. V<sub>CC</sub>

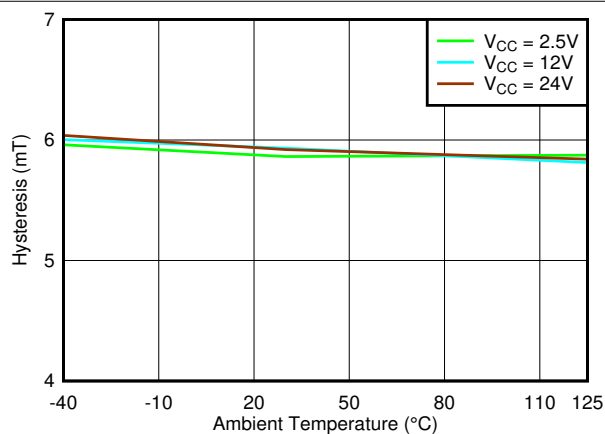


图 7-44. Hysteresis\_Z vs. Temperature

## 7.7 Typical Characteristics (continued)

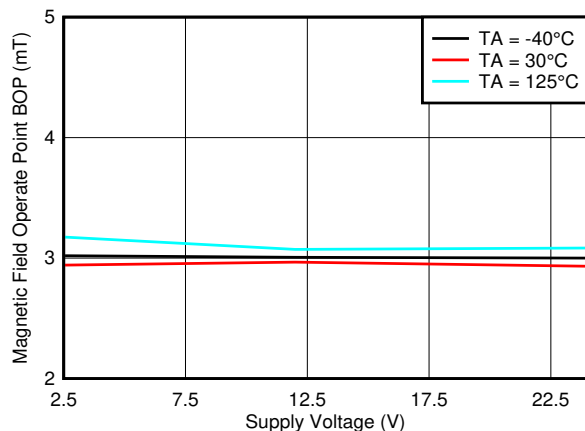


图 7-45. B<sub>OP\_X</sub> Threshold vs. V<sub>CC</sub>

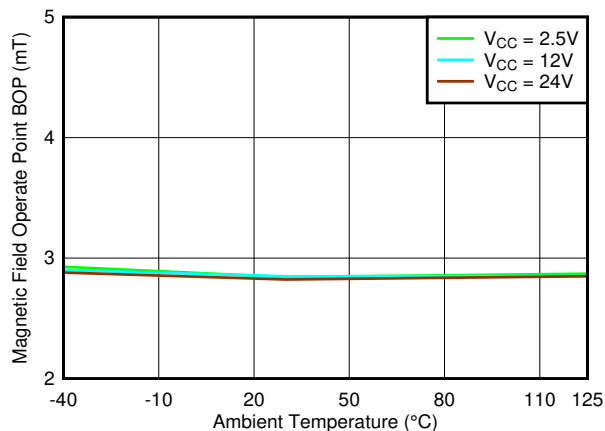


图 7-46. B<sub>OP\_X</sub> Threshold vs. Temperature

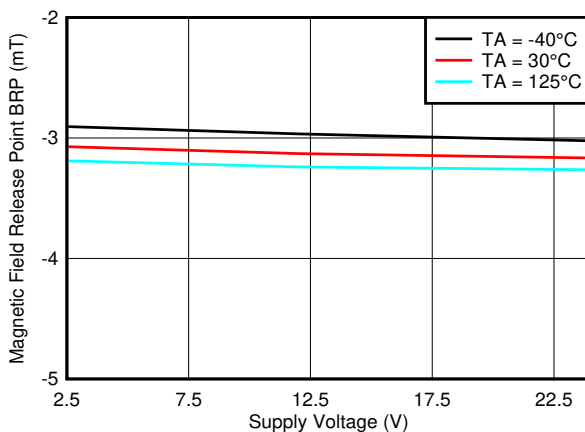


图 7-47. B<sub>RP\_X</sub> Threshold vs. V<sub>CC</sub>

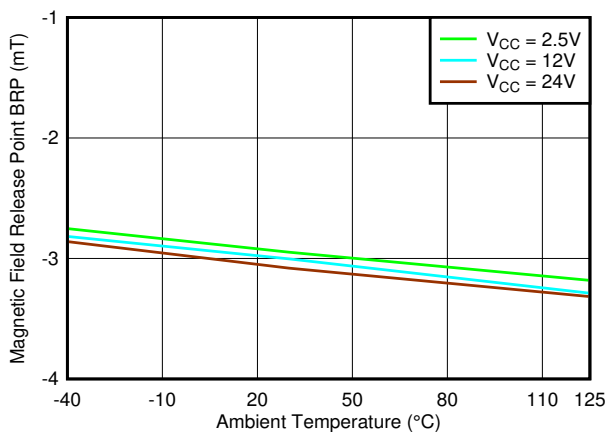


图 7-48. B<sub>RP\_X</sub> Threshold vs. Temperature

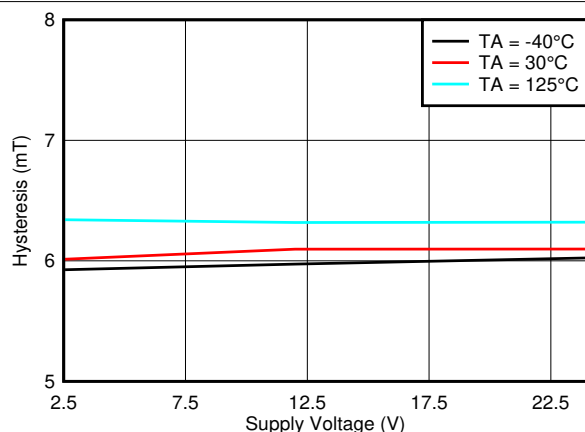


图 7-49. Hysteresis\_X vs. V<sub>CC</sub>

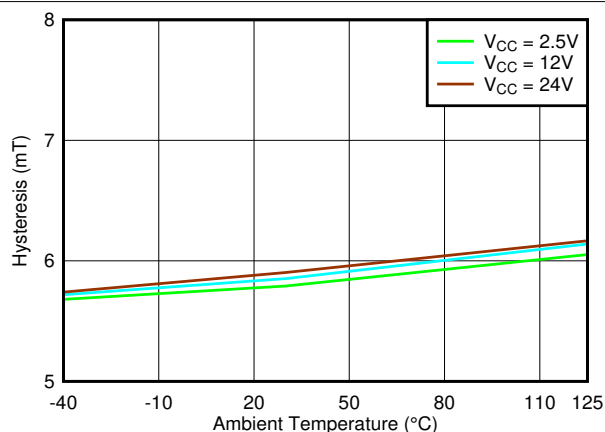


图 7-50. Hysteresis\_X vs. Temperature

## 7.7 Typical Characteristics (continued)






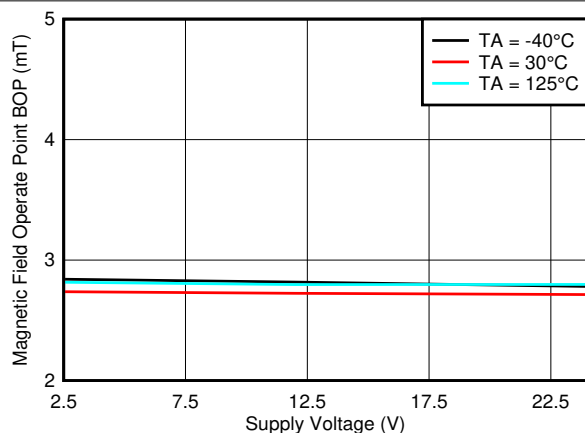
图 7-51. B<sub>OP\_Y</sub> Threshold vs. V<sub>CC</sub>图 7-52. B<sub>OP\_Y</sub> Threshold vs. Temperature图 7-53. B<sub>RP\_Y</sub> Threshold vs. V<sub>CC</sub>图 7-54. B<sub>RP\_Y</sub> Threshold vs. Temperature图 7-55. Hysteresis\_Y vs. V<sub>CC</sub>

图 7-56. Hysteresis\_Y vs. Temperature

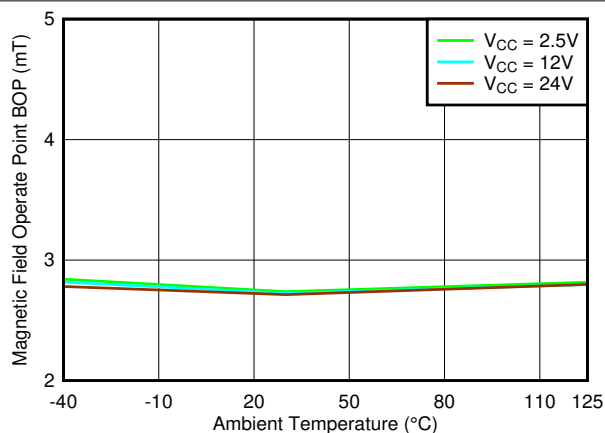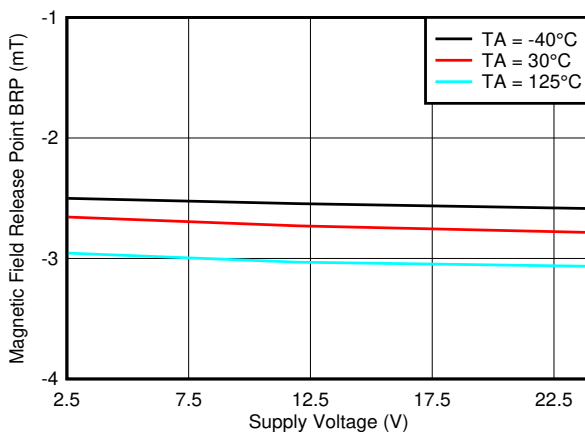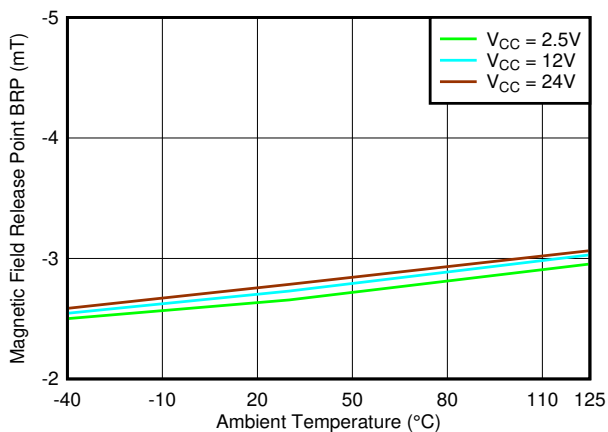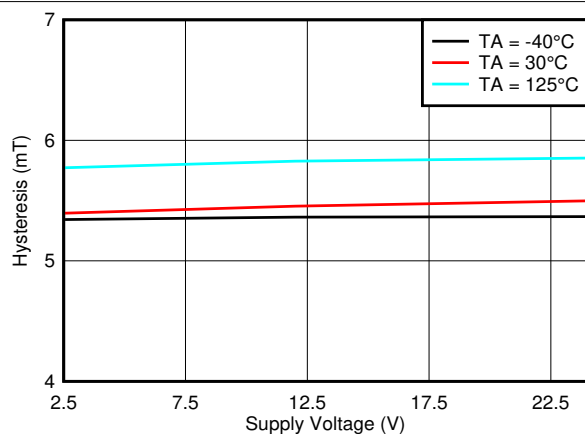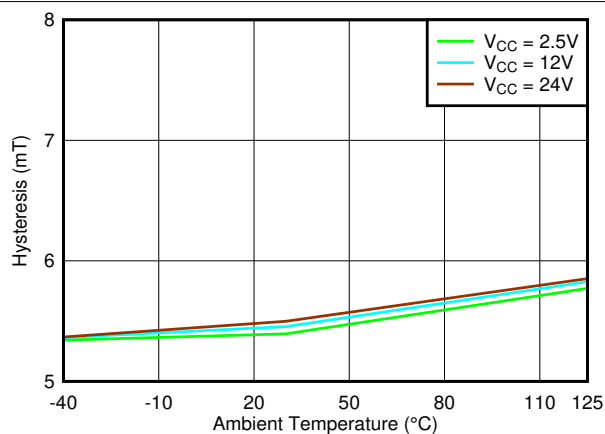

## 7.7 Typical Characteristics (continued)

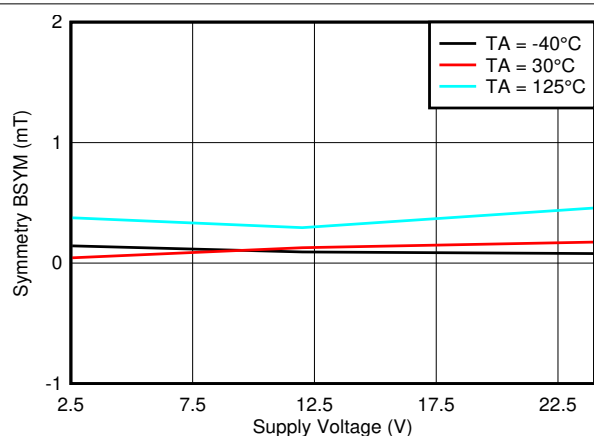


图 7-57.  $B_{SYM(Z)}$  vs.  $V_{CC}$

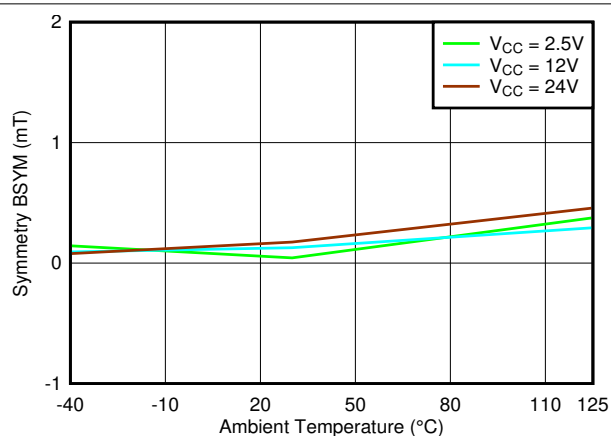


图 7-58.  $B_{SYM(Z)}$  vs. Temperature

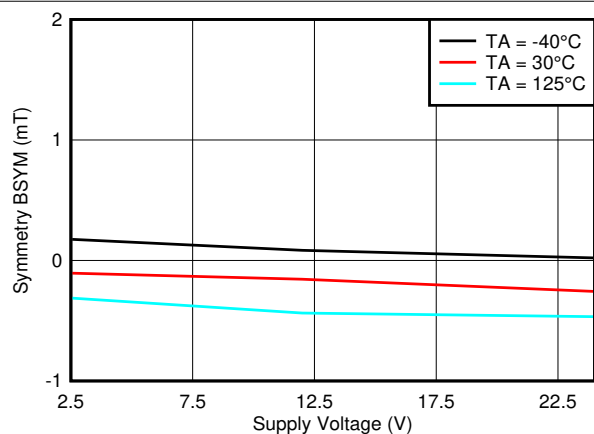


图 7-59.  $B_{SYM(X)}$  vs.  $V_{CC}$

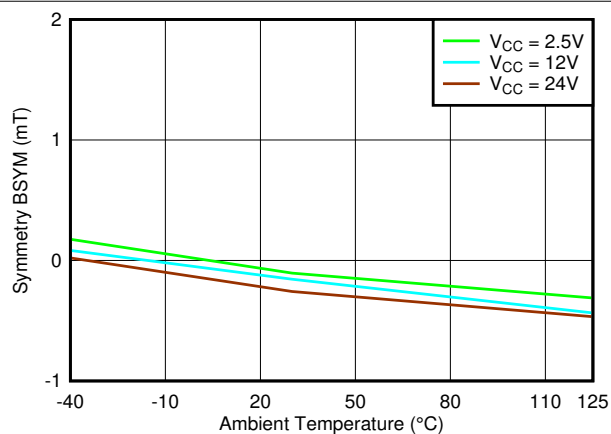


图 7-60.  $B_{SYM(X)}$  vs. Temperature

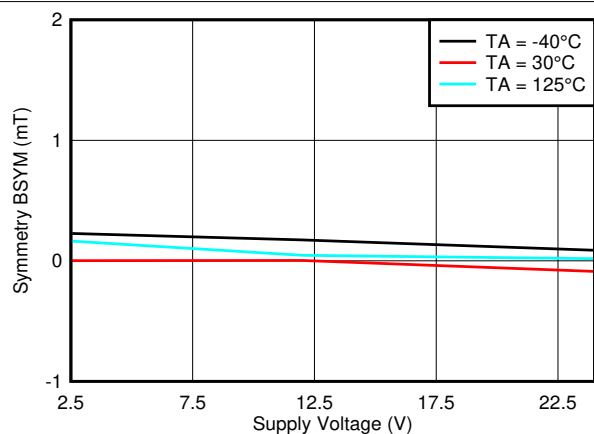


图 7-61.  $B_{SYM(Y)}$  vs.  $V_{CC}$

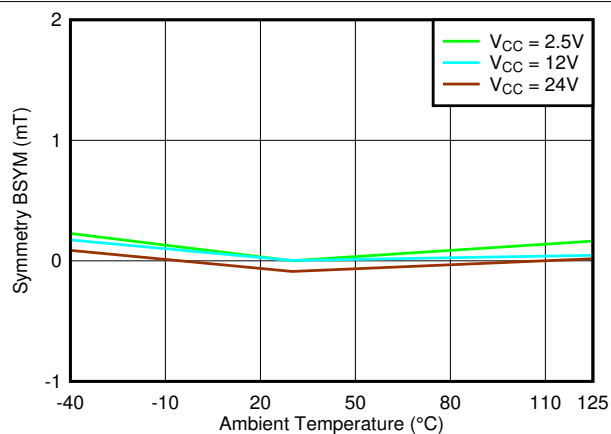


图 7-62.  $B_{SYM(Y)}$  vs. Temperature

## 7.7 Typical Characteristics (continued)

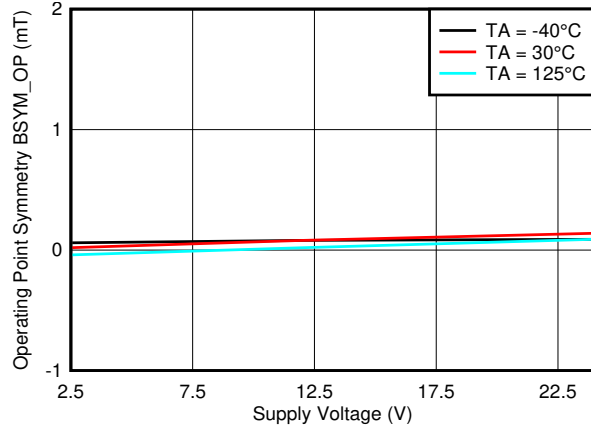


图 7-63.  $B_{SYM\_OP(ZX)}$  vs.  $V_{CC}$

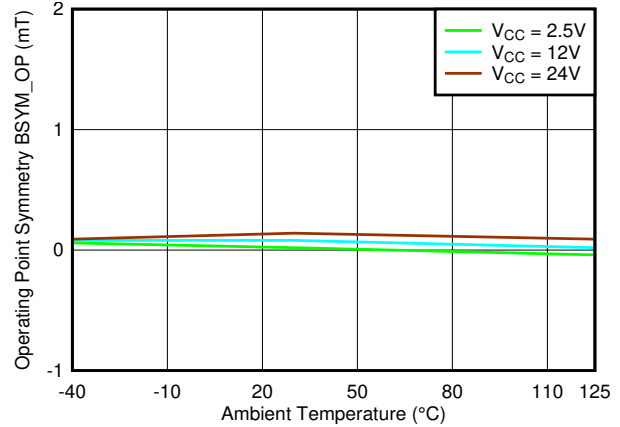


图 7-64.  $B_{SYM\_OP(ZX)}$  vs. Temperature

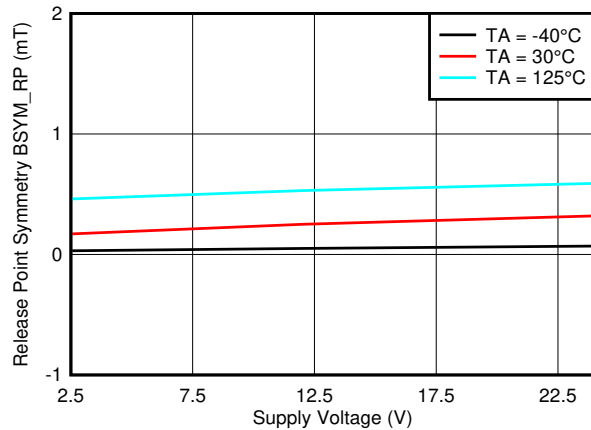


图 7-65.  $B_{SYM\_RP(ZX)}$  vs.  $V_{CC}$

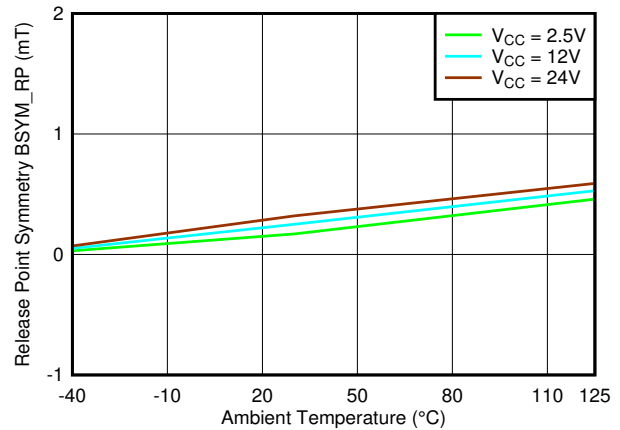


图 7-66.  $B_{SYM\_RP(ZX)}$  vs. Temperature

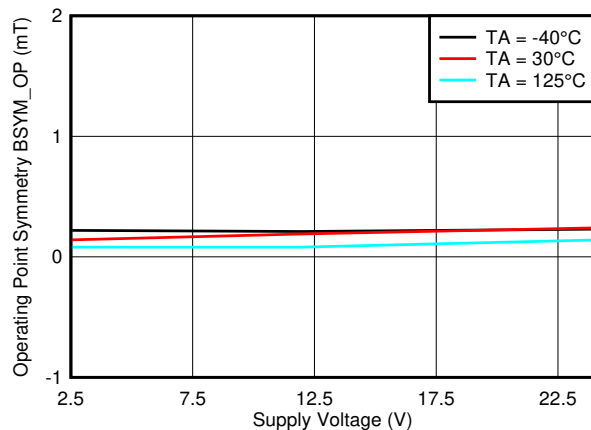


图 7-67.  $B_{SYM\_OP(ZY)}$  vs.  $V_{CC}$

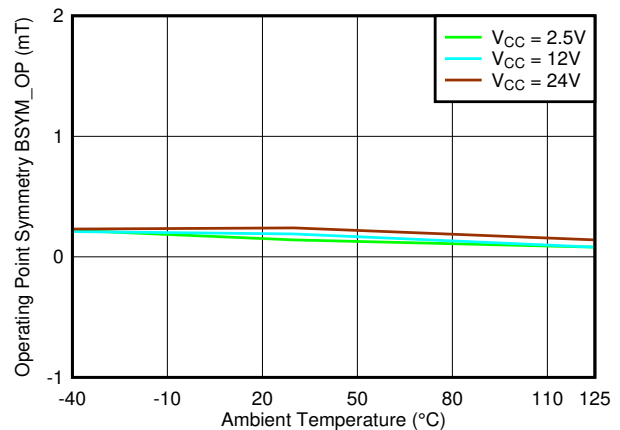


图 7-68.  $B_{SYM\_OP(ZY)}$  vs. Temperature

## 7.7 Typical Characteristics

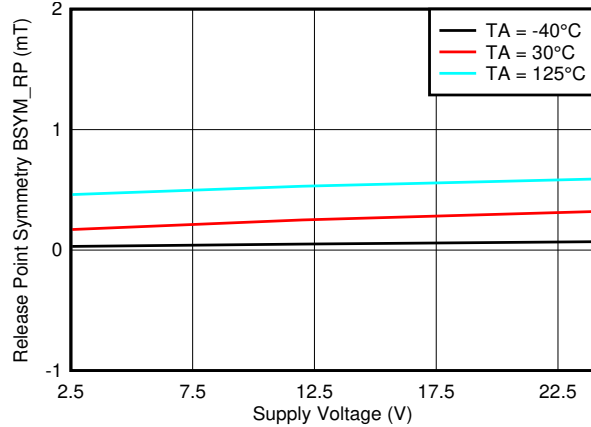


图 7-69.  $B_{SYM\_RP(ZY)}$  vs.  $V_{CC}$

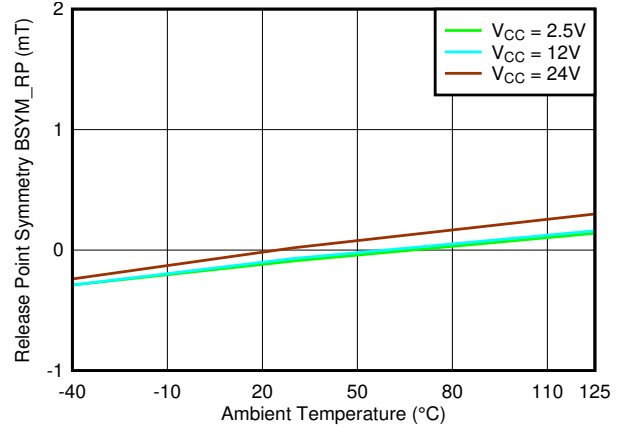


图 7-70.  $B_{SYM\_RP(ZY)}$  vs. Temperature

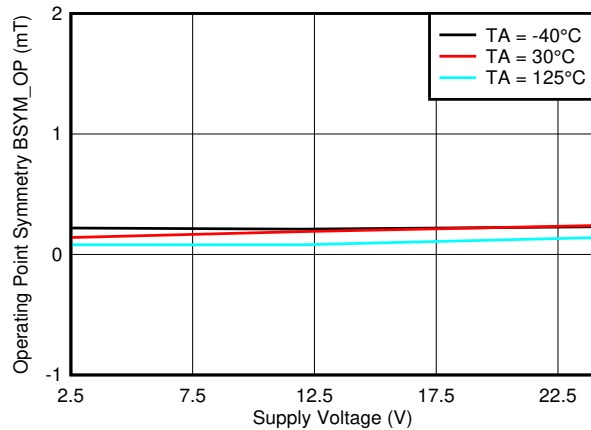


图 7-71.  $B_{SYM\_OP(XY)}$  vs.  $V_{CC}$

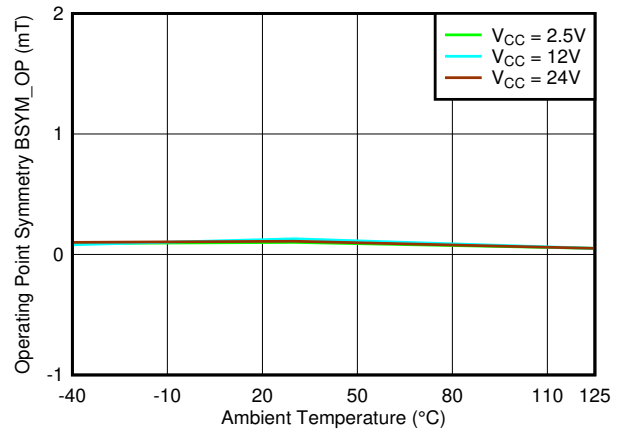


图 7-72.  $B_{SYM\_OP(XY)}$  vs. Temperature

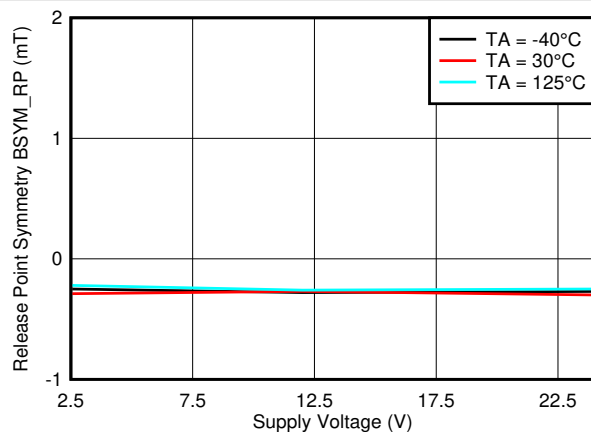


图 7-73.  $B_{SYM\_RP(XY)}$  vs.  $V_{CC}$

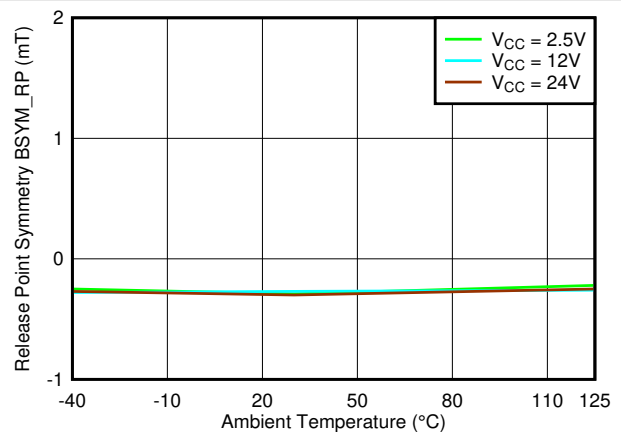


图 7-74.  $B_{SYM\_RP(XY)}$  vs. Temperature

## 7.7 Typical Characteristics (continued)

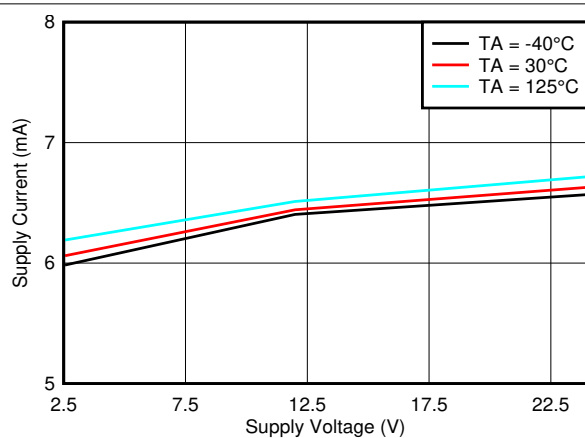
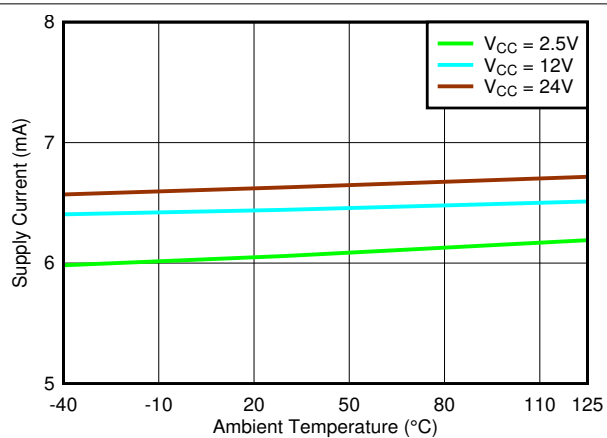
图 7-75. Supply Current vs.  $V_{CC}$ 

图 7-76. Supply Current vs. Temperature

## 8 Detailed Description


### 8.1 Overview

The TMAG5110-Q1 and TMAG5111-Q1 are dual chopper-stabilized Hall effect sensors with two digital latched outputs for rotational magnetic sensing applications. The TMAG511x-Q1 device can be powered with a supply voltage between 2.5 V and 38 V, and survives continuous –20 V reverse-battery conditions. The TMAG511x-Q1 device only operates when a voltage of 2.5 V to 38 V applied to the V<sub>CC</sub> pin (with respect to the GND pin). In addition, the device can withstand voltages up to 40 V for transient durations.

Alternating north and south magnetic poles are required to toggle the outputs of each Hall-effect latch.

The device is offered in a standard 3 mT typical operating point, as well as a high-sensitivity 1.4 mT typical operating point. The higher magnetic sensitivity provides flexibility in low-cost magnet selection and mechanical component placement. The TMAG511x-Q1 is also available in three 2-axis combination options (X-Y, Z-X, Z-Y) to support flexible multiple installation orientations relative to the magnet.

### 8.2 Functional Block Diagram

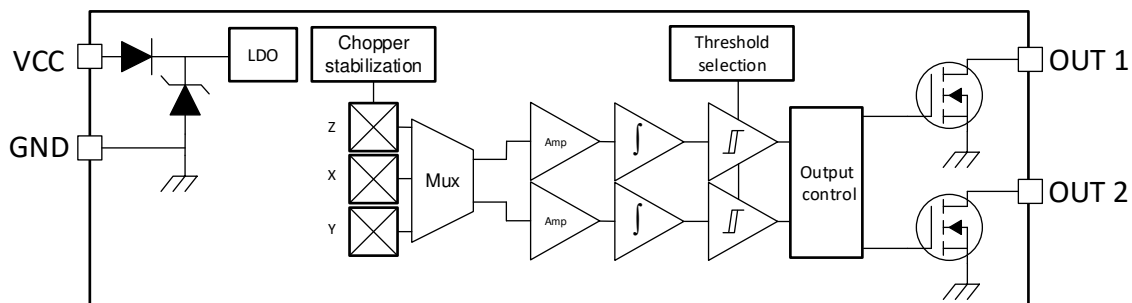


### 8.3 Feature Description

#### 8.3.1 2D Description

##### 8.3.1.1 2D General Description and Advantages

The best way to understand the advantage of a 2D dual latch hall sensor is to compare its behavior with others solutions used in the market. The two most common methods are: dual planar hall latch sensors or two single hall latch sensors. Those methods are used in applications such as rotary encoding or speed and direction sensing. The principle is to set two sensors apart at a certain angle such that they will sense the same magnetic field but with a fixed phase difference. The frequency of the signal will give the speed or incremental information while the phase will give the direction of rotation. For an easy read, the signals should be as close to a quadrature signal as possible, meaning there is a 90° phase shift between the two signals. To create those two signals in quadrature, the two latches must be placed at a distance of  $\frac{1}{2}$  pole + n pole from one another.

The TMAG511x-Q1 can be used instead of a dual planar hall latch or two single hall latch sensors. The TMAG511x-Q1 has two integrated hall latch sensors spaced at a 90° angle from each other, which allows each sensor to detect a quadrature component of the same magnetic field. For A, B, and C device variants, the magnetic direction detected will be XY, ZX, and ZY, respectively. Each of those components are placed at 90° from each other by design, therefore the output signals will also be separated with the same angle value. Wherever the sensor is placed to catch the right two components of the field, the output will be in quadrature from one another. 图 8-1 shows the result of two different type of sensors when the devices are placed close to a ring magnet.

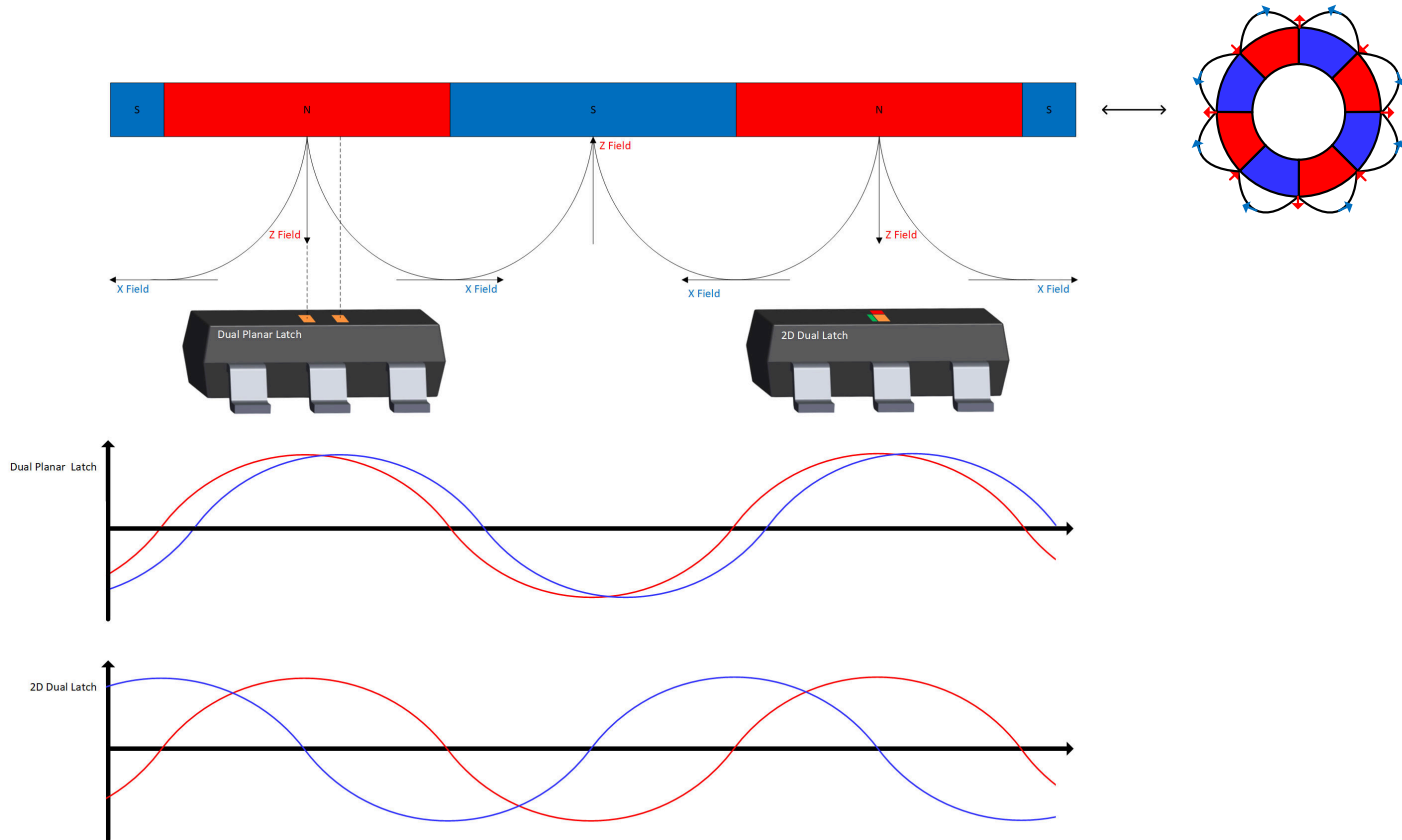


**图 8-1. Dual Planar Latch vs. 2D Dual Latch**

### 8.3.1.2 2D Magnetic Sensor Response

The TMAG5110-Q1 has two integrated latches that update their results to the OUT1 and OUT2 pins. Each one of these outputs will then have a latch functionality. 图 8-2 shows the response to different magnetic poles for each output.

The TMAG5111-Q1 outputs are not directly connected to the two integrated latches. Additional processing is available to generate the speed and direction outputs.

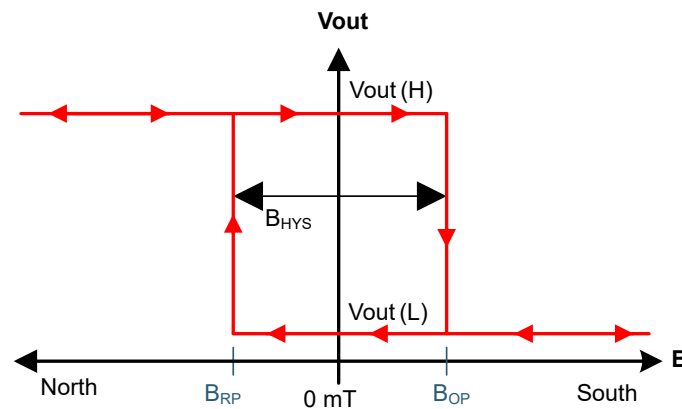

**图 8-2. Latch Functionality**

Figure 8-3 shows the magnetic response of both the TMAG5110-Q1 and TMAG5111-Q1 to a sinusoidal field. The sinusoidal curves represent the evaluation of the magnetic field seen by both integrated hall sensors.

The TMAG5110-Q1 response shows both outputs reacting to this signal by going low once the field is higher than  $B_{OP}$  and going high when the field is lower than  $B_{RP}$ .

The TMAG5111-Q1 response shows how those two signals are processed to create a speed output and a direction output.

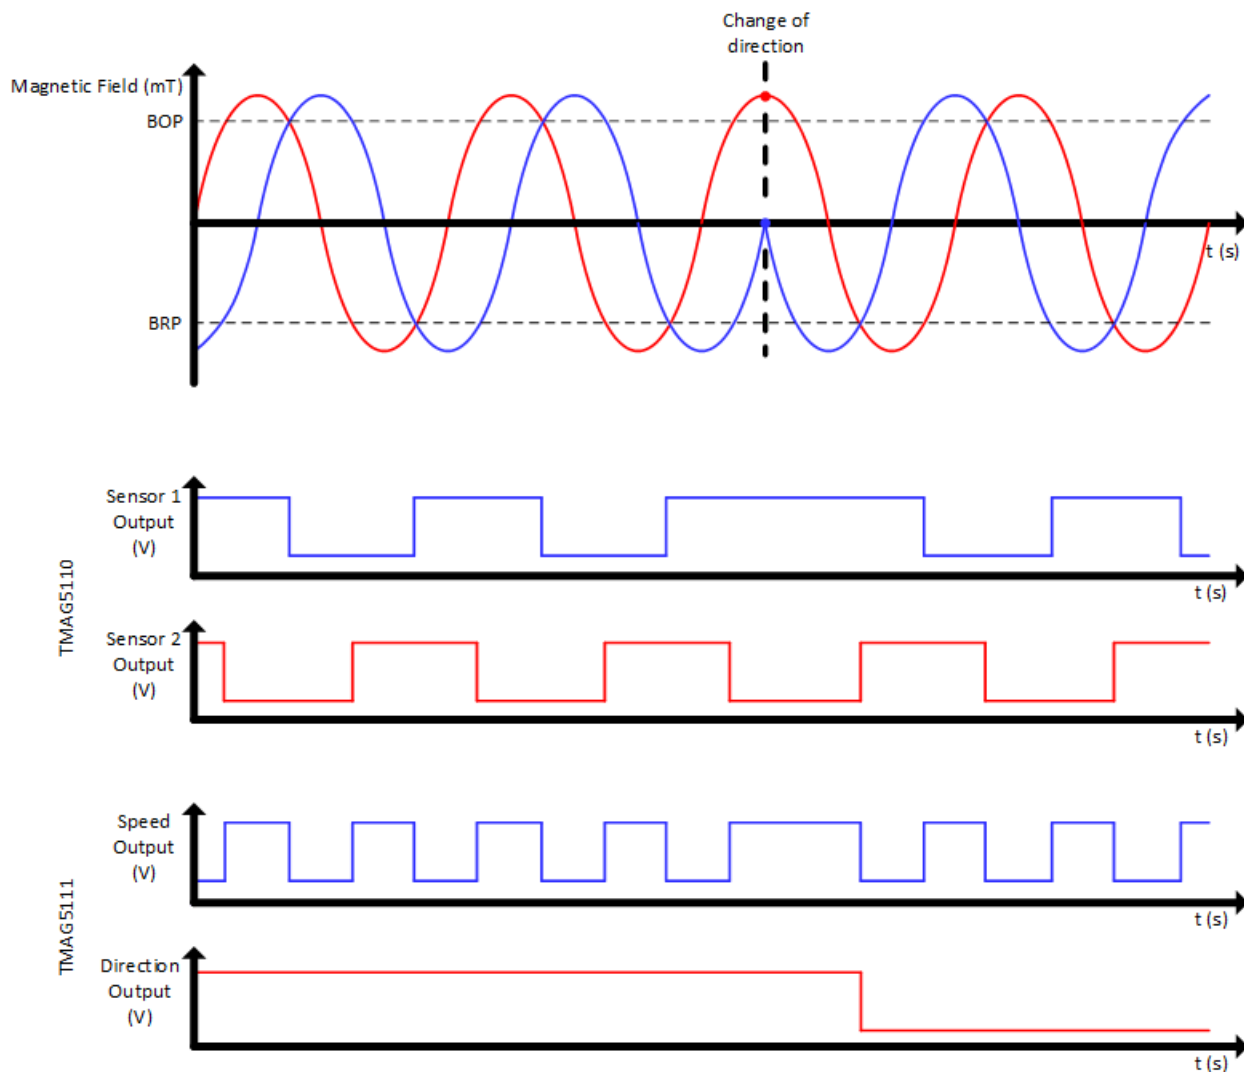


图 8-3. TMAG511x-Q1 Output Behavior

### 8.3.1.3 Axis Polarities

The Figure 8-4 shows the directions from where each axis is sensitive to a south pole. This also shows that the opposite directions are sensitive to the north pole.

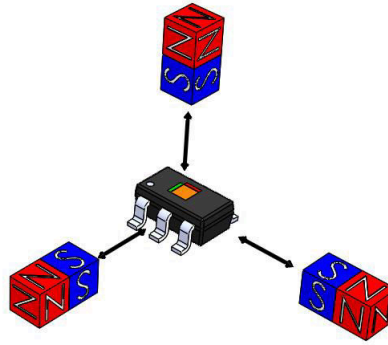


图 8-4. Axis Polarities

### 8.3.2 Axis Options

#### 8.3.2.1 Device Placed In-Plane to Magnet

The outer edge of the magnet is the area where the magnetic field is the strongest. Placing the sensor on the outer edge of the magnet enables the sensor to get the best flexibility in terms of distance and sensitivity selection. The different figures below show how to use the different versions of the TMAG511x-Q1 in regards to the magnet and sensor placement.

The options shown in 图 8-5 and 图 8-6 composed of the X and Y axes enable the sensor to be placed in the same plane as the ring magnet. The sensor can be placed facing the magnet or on the side of the magnet. The part can also be turned at 180 degrees along the Z axis.




图 8-5. XY Outer Edge 1




图 8-6. XY Outer Edge 2

The options shown in 图 8-7 and 图 8-8 composed of Z and X axes enable the sensor to be placed below the magnet, or facing the magnet with the front side of the device. The part can also be turned at 180 degrees along the Z axis.



图 8-7. ZX Outer Edge 1



图 8-8. ZX Outer Edge 2

The options shown in 图 8-9 and 图 8-10 composed of Z and Y axes also enable the sensor to be placed below the magnet in a different position, as well as facing the ring magnet with the side of the device. The part can also be turned at 180 degrees along the Z axis.



图 8-9. ZY Outer Edge 1



图 8-10. ZY Outer Edge 1



### 8.3.2.2 Device Placed on the Side Edge of the Magnet

The side edge of the magnet still provides a magnetic field, but the field is much weaker than the field on the outer edge. Placing the sensor on the side edge minimizes the flexibility as of how far the device can be placed from the ring magnet. The 2 mT version enables high sensitivity, allowing the application to work as well as when the device is placed on the outer edge. Nevertheless this option can be helpful in application where the sensor has to fit within the magnet diameter.

The options shown in [图 8-11](#) and [图 8-12](#) composed of X and Y axes enable the sensor to be placed facing the side edge of the magnet. The side of the sensor can also be placed next to the side edge of the magnet. The part can also be turned at 180 degrees along the Z axis.




图 8-11. XY Side Edge 1




图 8-12. XY Side Edge 2

The options shown in [图 8-13](#) and [图 8-14](#) composed of Z and X axis enable another way to place the sensor facing the side edge of the magnet. The top of the sensor can also be placed facing the side edge of the magnet. The part can also be turned at 180 degrees along the Z axis.



图 8-13. ZX Side Edge 1




图 8-14. ZX Side Edge 2

The options shown in [图 8-15](#) and [图 8-16](#) composed of Z and Y axes enable the placement of the sensor on the side edge of a magnet with the pins facing the magnet, or with top of the sensor facing the side edge of the magnet. The part can also be turned at 180 degrees along the Z axis.



图 8-15. ZY Side Edge 1




图 8-16. ZY Side Edge 1

### 8.3.3 Power-On Time

图 8-17 shows the behavior of the device after the  $V_{CC}$  voltage is applied and when the field is below the  $B_{OP}$  threshold. Once the minimum value for  $V_{CC}$  is reached, the TMAG5110-Q1 will take time  $t_{ON}$  to power up and then time  $t_{PD}$  to update the output to a level High.

图 8-18 shows the behavior of the device after the  $V_{CC}$  voltage is applied and when the field is above the  $B_{OP}$  threshold. Once the minimum value for  $V_{CC}$  is reached, the TMAG5110-Q1 will take time  $t_{ON}$  to power up and then time  $t_{PD}$  to update the output to a level High.

For the TMAG5111-Q1 the power-on behavior is similar but OUT1 will be updated to Low during the  $t_{PD}$  time. OUT2 will be updated to High during the  $t_{PD}$  time. The output value following the power-on sequence will then depend on the magnet placement, the sense of rotation and the device variant.

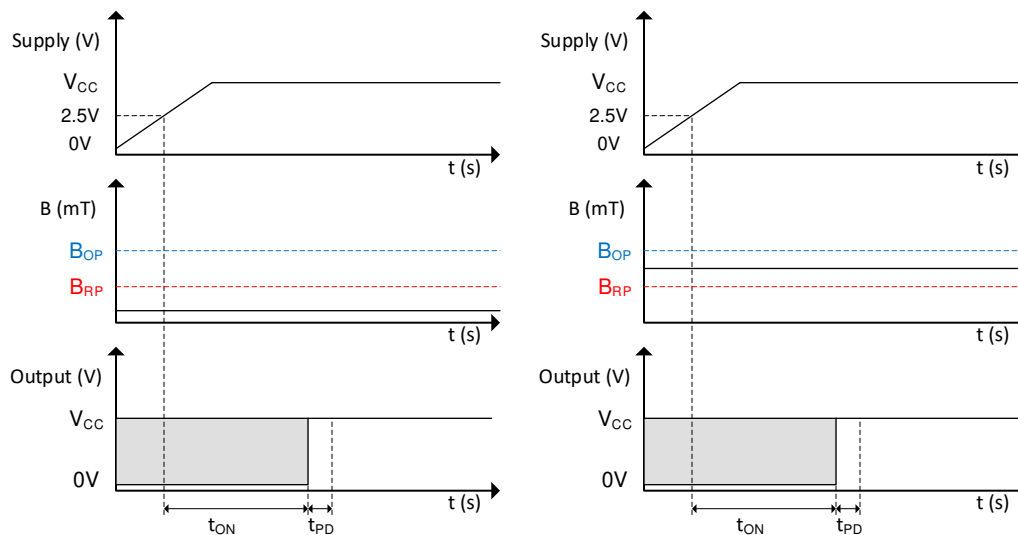


图 8-17. Power-On Time When  $B < B_{OP}$


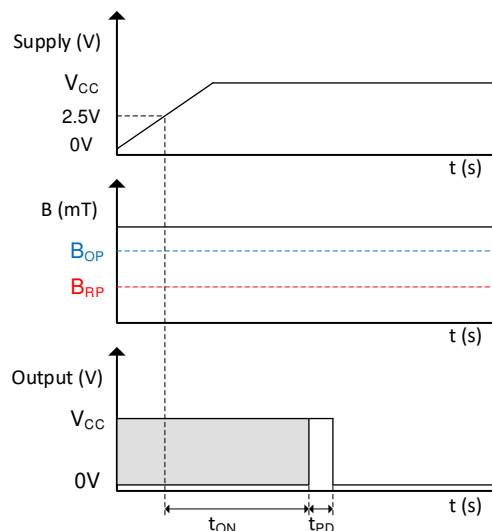


图 8-18. Power-On Time When  $B > B_{OP}$

### 8.3.4 Propagation Delay

The TMAG511x-Q1 samples the Hall element at a nominal sampling interval of  $t_{PD}$  to detect the presence of a magnetic south pole. Between each sampling interval, the device calculates the average magnetic field applied to the device. As defined in 图 8-20, if this average value crosses the  $B_{OP}$  or  $B_{RP}$  threshold, the device changes the corresponding level. Because the system, Hall sensor + magnet is by nature asynchronous, the propagation delay  $t_d$  will vary depending on when the magnetic field goes above the  $B_{OP}$  value. As shown in 图 8-19 the output delay will then depend on when the magnetic field will get higher than the  $B_{OP}$  value. The first graph shows the typical case.

The magnetic field goes above the  $B_{OP}$  value at the moment where the output is updated. The part will then only need one cycle of  $t_{PD}$  to update the output. The second graph shows a magnetic field going above the  $B_{OP}$  value just right before half of the sampling period. This is the best case possible where the output will be updated in just half of the sampling period. Finally, the third graph shows the worst possible case where the magnetic field goes above the BOP value just after half of the sampling period. At the next output update, the value will still see a value under the threshold and will need a whole new period to update the output

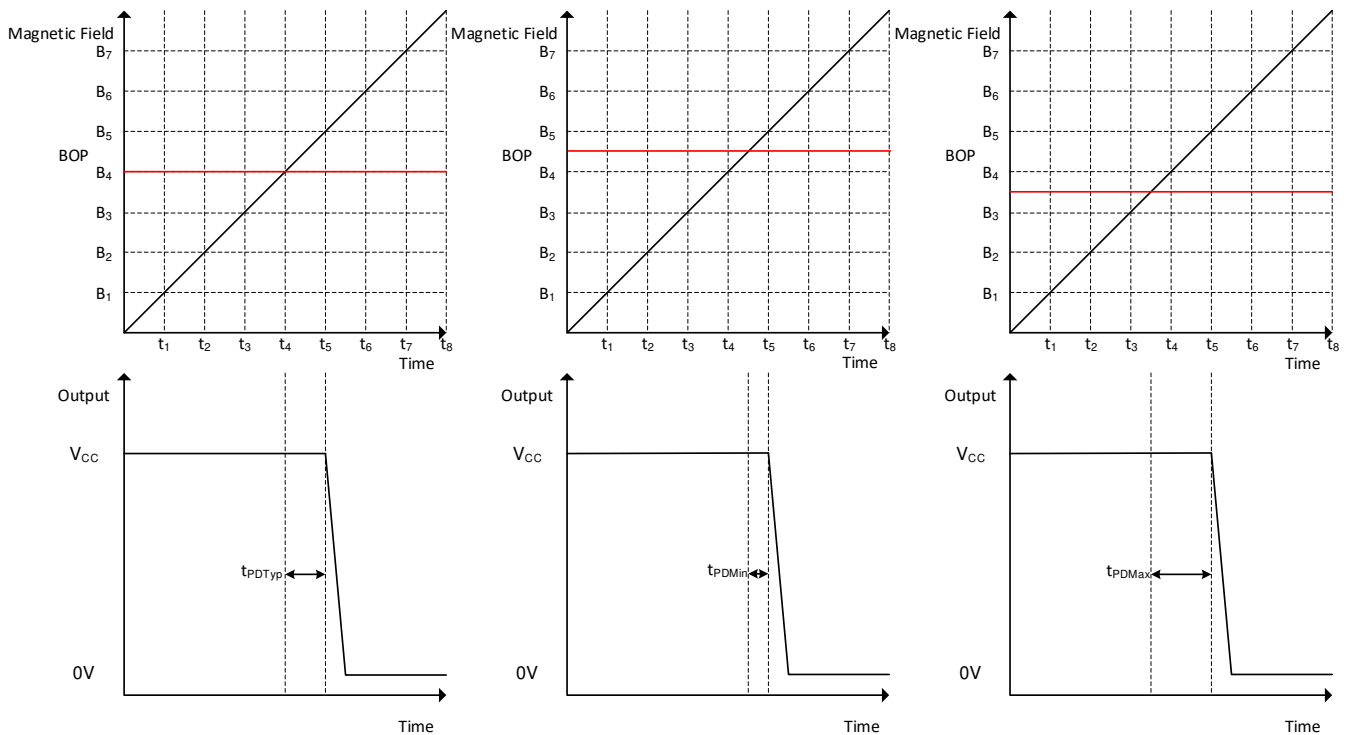

**图 8-19. Field Sampling Timing**

图 8-20 shows TMAG511x-Q1 propagation delay analysis when a magnetic south pole is applied. The Hall element of the TMAG511x-Q1 experiences an increasing magnetic field as a magnetic south pole approaches near the device as well as a decreasing magnetic field as a magnetic south pole leaves away. At time  $t_1$  the magnetic field goes above the  $B_{OP}$  threshold. The output will then start to move after the time  $t_{PD}$ . As shown in 图 8-20, this time will vary depending on when the sampling period is. At  $t_2$  the output start pulling to the low voltage value. At  $t_3$  the output is completely pulled down to the lower voltage value. The same process happen on the other way when the magnetic value is going under the  $B_{OP}$  threshold.

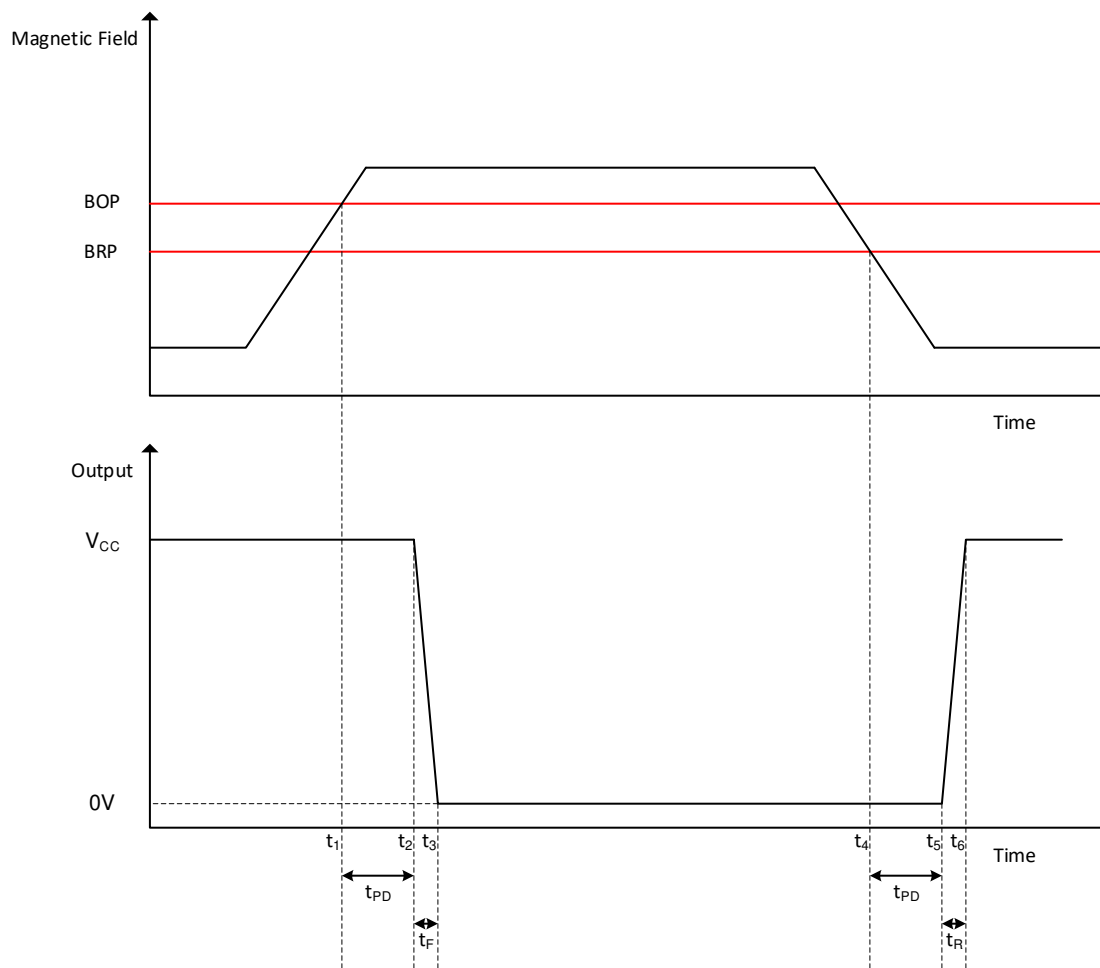


图 8-20. Propagation Delay

### 8.3.5 Hall Element Location

The sensing element inside the device is in the center when viewed from the top. 图 8-21 shows the exact position of the sensors in regard of the package.

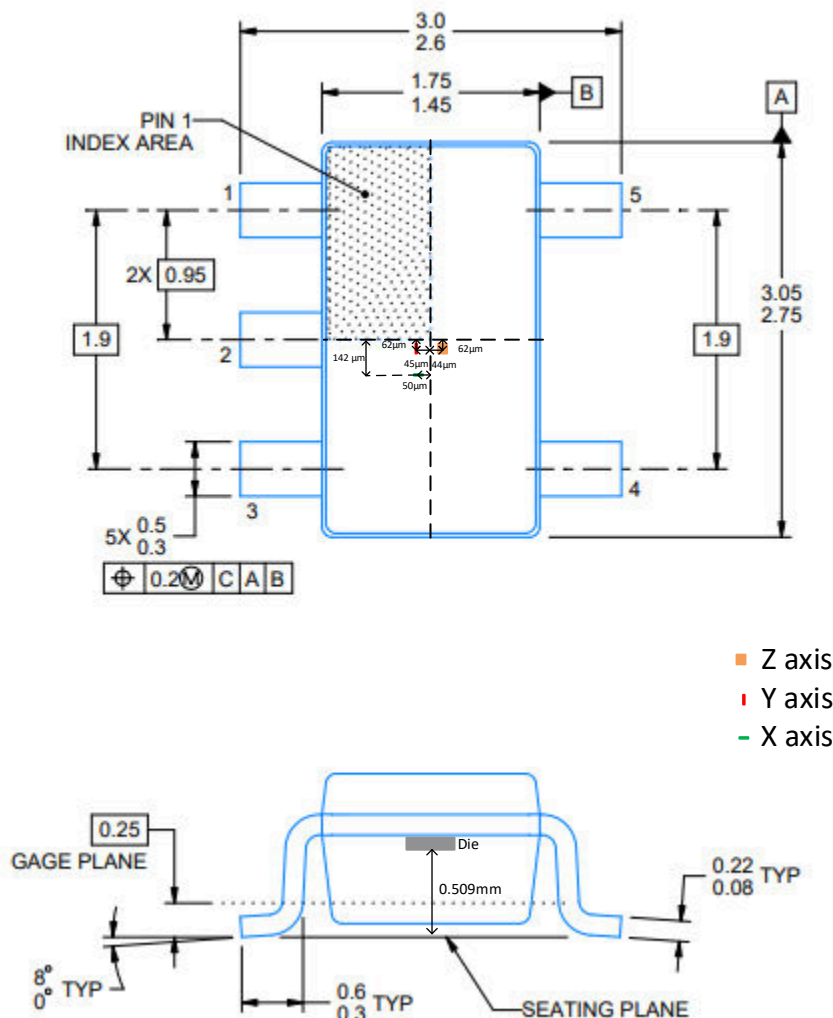


图 8-21. Hall Element Location

### 8.3.6 Power Derating

The device is specified from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  for a voltage rating of 2.5 V to 38 V. Because the part is draining at its maximum a current of 17 mA the maximum voltage that can be applied will depend on what is the maximum ambient temperature acceptable for the application. The curve in 图 8-22 shows the maximum acceptable power supply voltage versus the maximum acceptable ambient temperature.

The 图 8-22 can also be calculated using the following formulas:

$$T_J = T_A + \Delta T \quad (1)$$

where

- $T_J$  is the junction temperature
- $T_A$  is the ambient temperature
- $\Delta T$  is the difference between the junction temperature and the ambient temperature

$$\Delta T = P_D \times R_{\theta JA} \quad (2)$$

where

- $P_D$  is the power dissipated by the part
- $R_{\theta JA}$  is the junction to ambient thermal resistance

$$P_D = V_{CC} \times I_{CC} \quad (3)$$

where

- $V_{CC}$  is the voltage supply of the device
- $I_{CC}$  is the current consumption of the device

Combining the three equations above gives 方程式 4 below:

$$V_{CC \max} = \frac{T_{J \max} - T_A}{I_{CC \max} \times R_{\theta JA}} \quad (4)$$

This equation gives the maximum voltage the part can handle in regards of the ambient temperature.

For example, with an the application required to work within a ambient temperature of maximum 85 °C, and  $T_{J \max}$ ,  $R_{\theta JA}$  and  $I_{CC \max}$  are defined in the data sheet, the maximum voltage allowed for this application is determined in 方程式 5:

$$V_{CC \max} = \frac{170^\circ\text{C} - 140^\circ\text{C}}{6.5 \text{ mA} \times 166.5^\circ\text{C} / \text{W}} = 27.72 \text{ V}$$

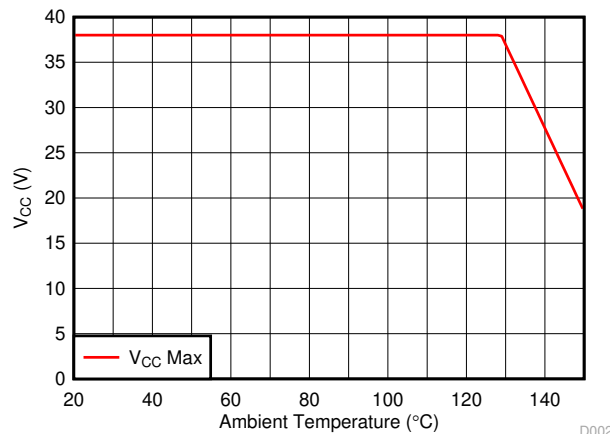


图 8-22. Power Derating Curve

## 8.4 Device Functional Modes

The TMAG511x-Q1 device has one mode of operation that applies when the *Recommended Operating Conditions* are met.

## 9 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 9.1 Application Information

The TMAG511x-Q1 is designed for rotary applications for DC motor sensors or incremental rotary encoding.

For reliable functionality, the magnet must apply a flux density at the sensor greater than the corresponding maximum  $B_{OP}$  or  $B_{RP}$  numbers specified in the [Magnetic Characteristics](#) table. Add additional margin to account for mechanical tolerance, temperature effects, and magnet variation. Magnets generally produce weaker fields as temperature increases.

### 9.2 Typical Applications

#### 9.2.1 Incremental Rotary Encoding Application

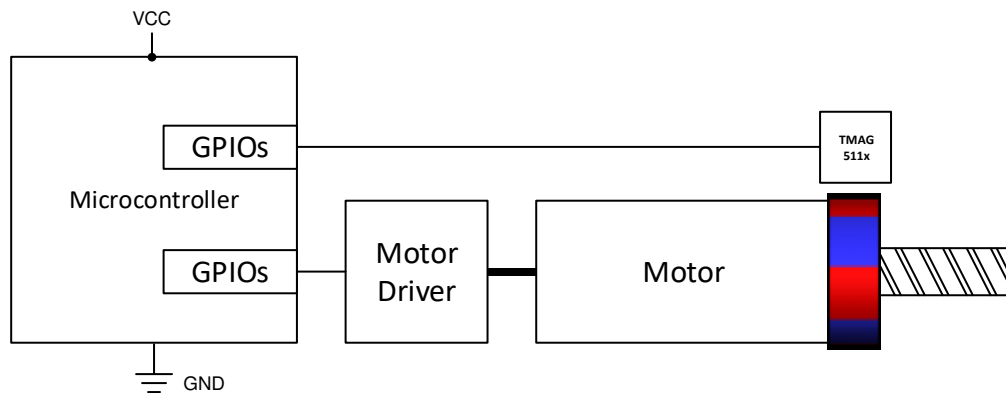


图 9-1. Incremental Encoding

##### 9.2.1.1 Design Requirements

表 9-1 lists the use the parameters for this design.

表 9-1. Design Parameters

| DESIGN PARAMETER                      | EXAMPLE VALUE                |
|---------------------------------------|------------------------------|
| Motor speed                           | 22.5 kRPM                    |
| Number of magnet poles                | 8                            |
| Dimensions                            | 9.7 mm diameter × 2 mm thick |
| Magnetic material                     | Ceramic 8D                   |
| Air gap above the Hall sensors        | 2.5 mm                       |
| Radial magnetic flux density peak     | ±12.5 mT                     |
| Tangential magnetic flux density peak | ±9.5 mT                      |

### 9.2.1.2 Detailed Design Procedure

Incremental encoders are used on knobs, wheels, motors, and flow meters to measure relative rotary movement. By attaching a ring magnet to the rotating component and placing the TMAG511x-Q1 nearby, the sensor will generate voltage pulses as the magnet turns. The TMAG511x-Q1 integrates two sensors and two signal chains. This means each channel can go up to the maximum speed independently from each other.

When the magnet rotates, the TMAG5110-Q1 will generate alternate pulses on each output. One input will be the result of what is sensed from one specific axis, while the other output will sense from another specific axis. In 表 9-1, this is also referred as Radial and Tangential magnetic flux. Those two signals are the result of two different components of the same magnetic field resulting in the two signals being 90° from one another. Also called quadrature output, this type of signal is ideal to measure a rotational count as well as a change in direction of the ring magnet.

The TMAG5111-Q1 directly generates the speed and direction outputs. This eliminates the need for external processing.

The maximum rotational speed that can be measured is limited by the sensor bandwidth and the magnetic strength of the magnet.

Generally, the bandwidth must be faster than two times the number of poles per second. In this design example, the maximum speed is 22500 RPM, which involves a rotation of 3000 poles per second when using an 8-pole magnet. The TMAG511x-Q1 sensing bandwidth is typically 40 kHz, which is more than thirteen times the pole frequency.

The strength of the magnet also has an impact on how fast the magnet can turn. A weaker magnet with a maximum strength very close to the threshold value will limit the maximum speed by limiting the amount of time where this field will be higher than the  $B_{OP}$ . The time spent above the  $B_{OP}$  value will be longer for a magnet with stronger field.

When the magnet strength is significantly higher than  $B_{OP}$ , 方程式 5 can be used to calculate the allowed speed.

$$\text{Speed (RPM)} \leq \frac{\text{Bandwidth (Hz)} \times 60}{\text{Number of poles}} \quad (5)$$

### 9.2.1.3 Application Curve

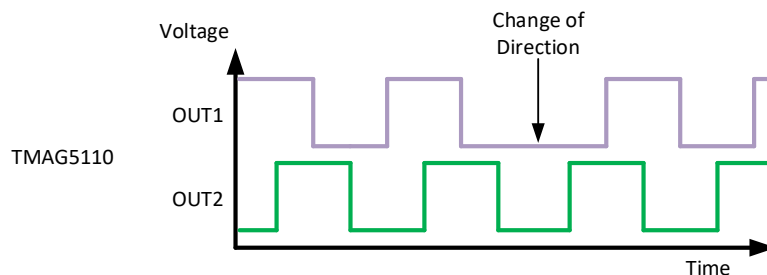


图 9-2. TMAG5110-Q1 Output Response

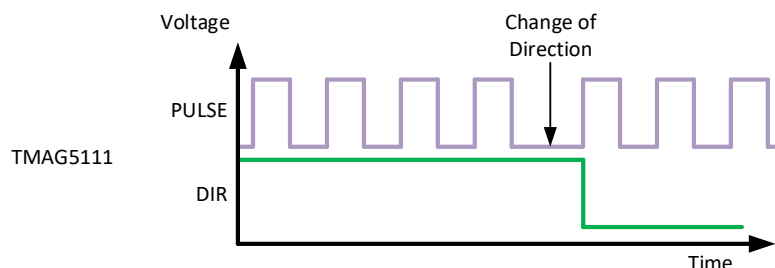


图 9-3. TMAG5111-Q1 Output Response



## 10 Power Supply Recommendations

The TMAG511x-Q1 is powered by 2.5-V to 38-V DC power supplies. A decoupling capacitor placed close to the device must be used to provide local energy with minimal inductance. TI recommends using a ceramic capacitor with a value of at least 0.01  $\mu$ F.

## 11 Layout

### 11.1 Layout Guidelines

Magnetic fields pass through most non-ferromagnetic materials with no significant disturbance. Embedding Hall effect sensors within plastic or aluminum enclosures and sensing magnets on the outside is common practice. Magnetic fields also easily pass through most printed-circuit boards (PCBs), which makes placing the magnet on the opposite side of the PCB possible.

### 11.2 Layout Example

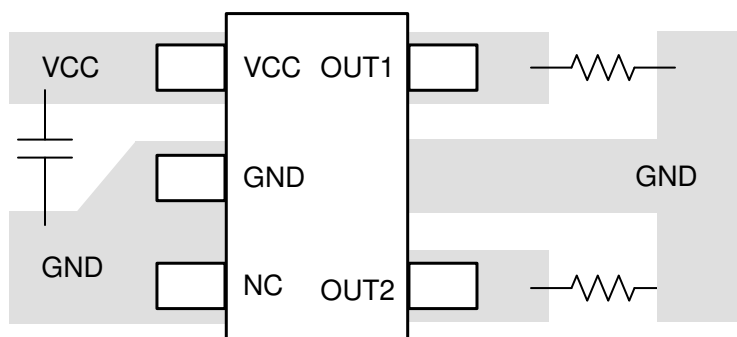


图 11-1. Layout Example

## 12 Device and Documentation Support

### 12.1 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://ti.com) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.2 支持资源

TI E2E™ [支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

### 12.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 12.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 13 Mechanical, Packaging, and Orderable Information


The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



**DBV0005A-C01**

**PACKAGE OUTLINE**  
**SOT-23 - 1.25 mm max height**

SMALL OUTLINE TRANSISTOR

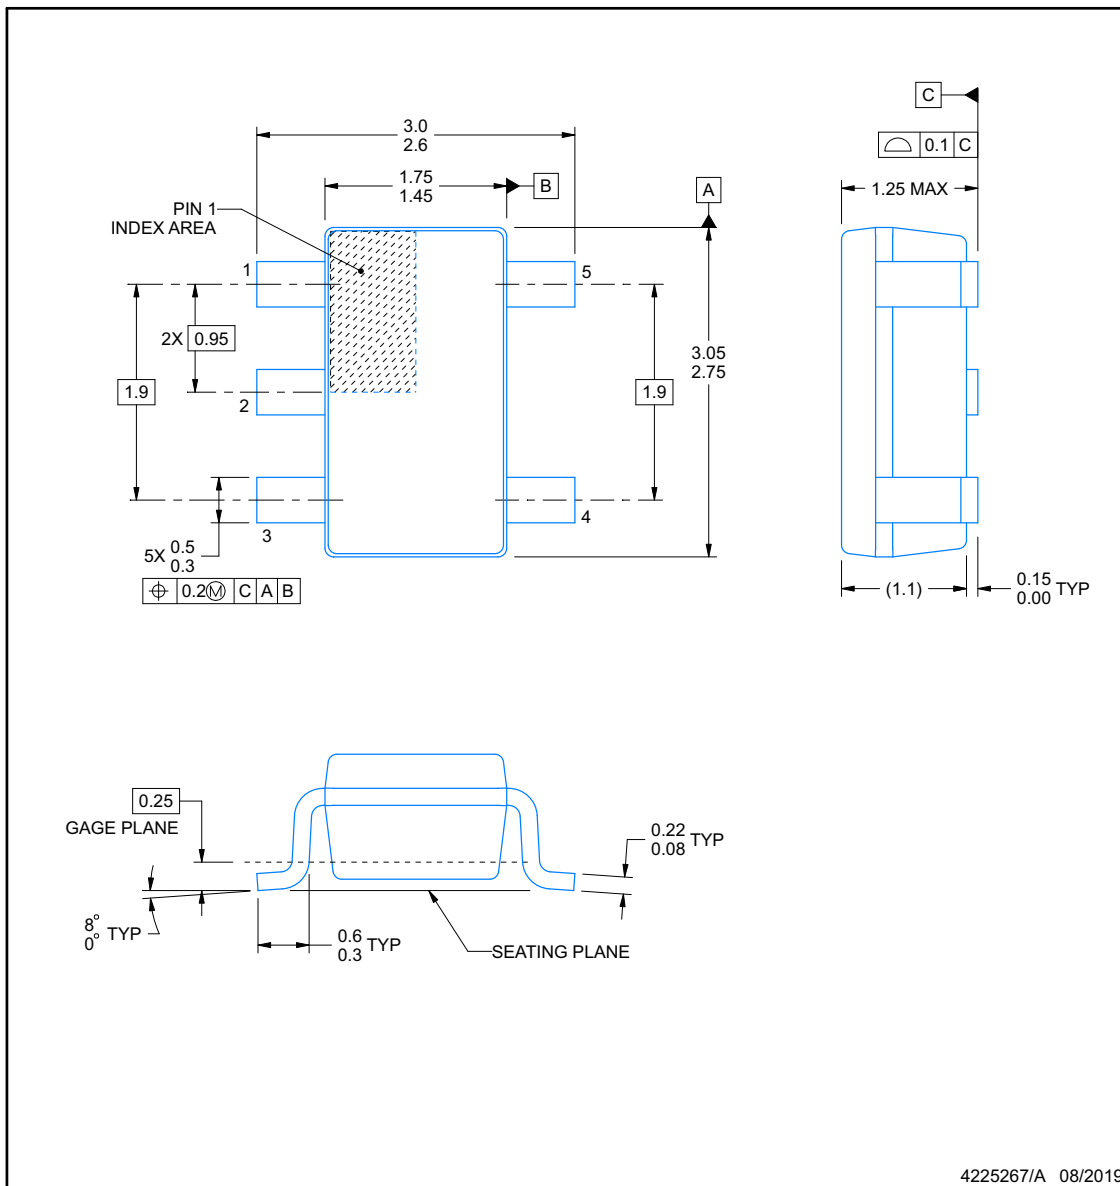

**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

## EXAMPLE BOARD LAYOUT


**DBV0005A-C01**

**SOT-23 - 1.25 mm max height**

SMALL OUTLINE TRANSISTOR

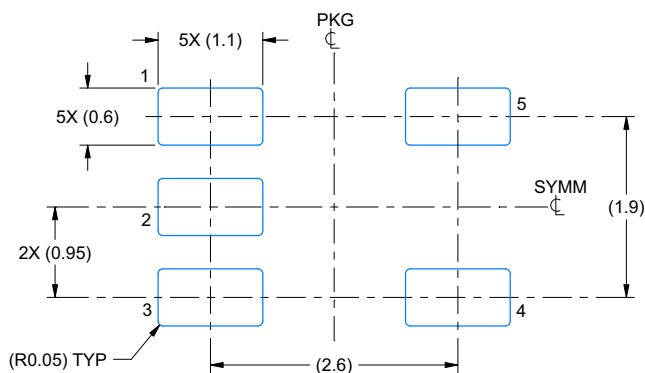

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

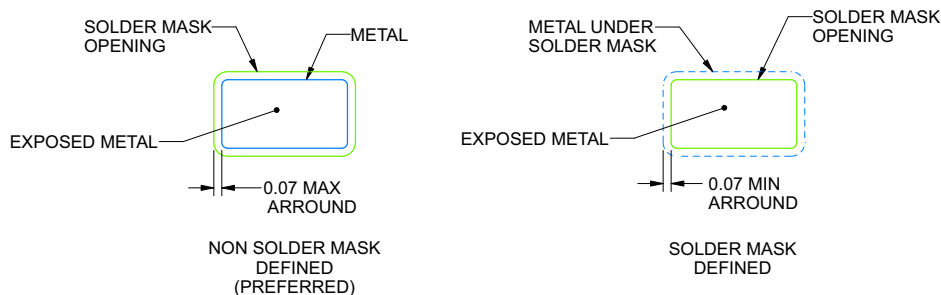

SOLDER MASK DETAILS

4225267/A 08/2019

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

**DBV0005A-C01**

**SOT-23 - 1.25 mm max height**

SMALL OUTLINE TRANSISTOR

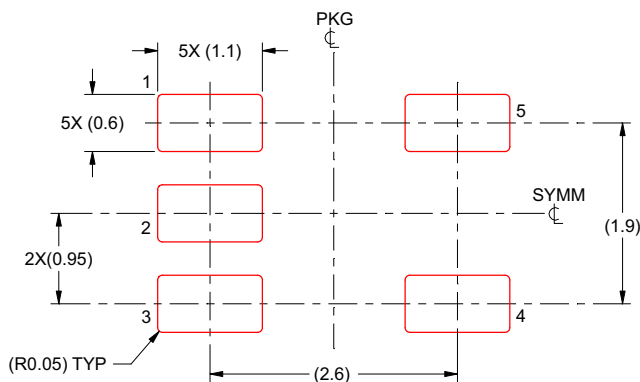

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4225267/A 08/2019

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## 重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com/legal/termsofsale.html>) 或 [ti.com](https://www.ti.com) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2021，德州仪器 (TI) 公司

## PACKAGING INFORMATION

| Orderable Device   | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|--------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TMAG5110A2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5110A4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5110B2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5110B4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5110C2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5110C4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111A2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111A4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111B2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111B4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111C2AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |
| TMAG5111C4AQDBVRQ1 | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | SN                                   | Level-3-260C-168 HR  | -40 to 125   |                         | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- <sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- <sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- <sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- <sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF TMAG5110-Q1, TMAG5111-Q1 :**

- Catalog : [TMAG5110](#), [TMAG5111](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

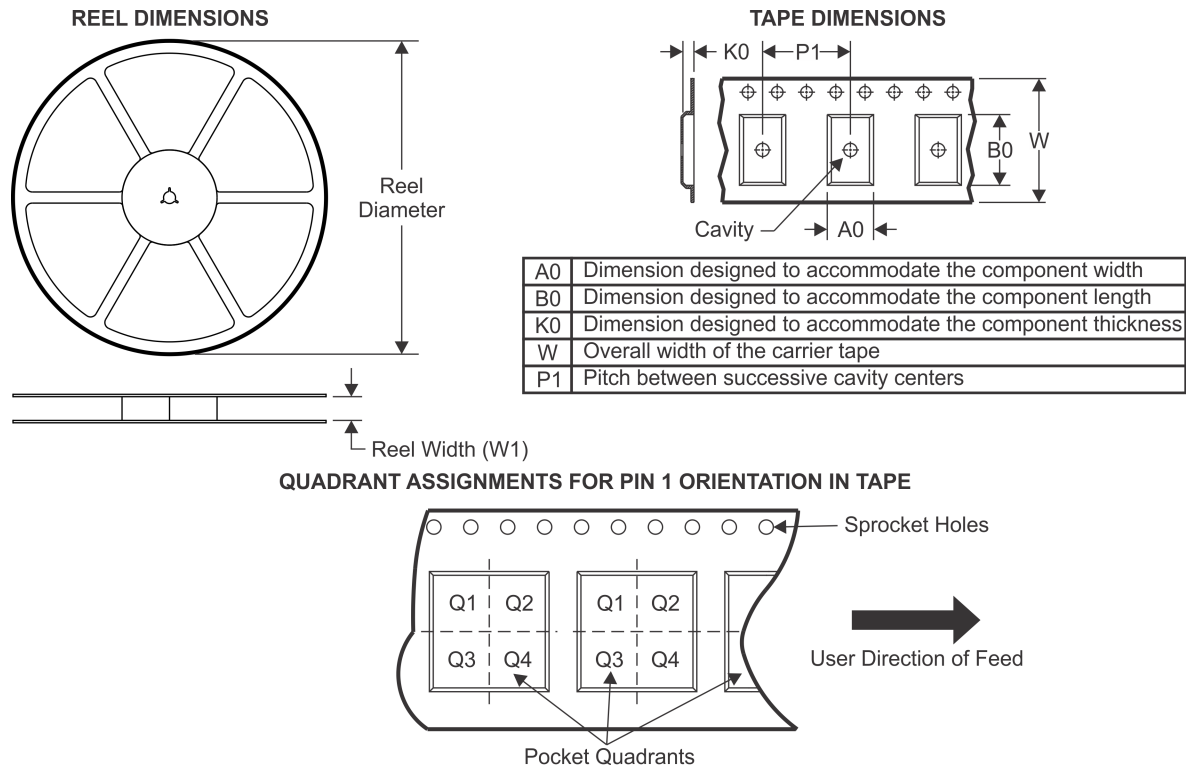


**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TMAG5110A2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5110A4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5110B2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5110B4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5110C2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5110C4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111A2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111A4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111B2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111B4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111C2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TMAG5111C4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS

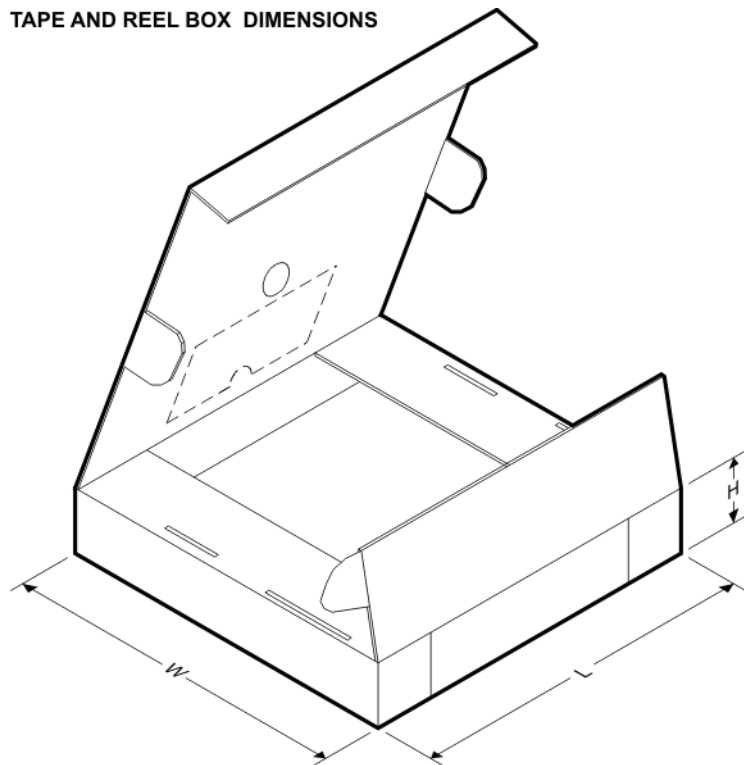

\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TMAG5110A2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5110A4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5110B2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5110B4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5110C2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5110C4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111A2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111A4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111B2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111B4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111C2AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TMAG5111C4AQDBVRQ1 | SOT-23       | DBV             | 5    | 3000 | 190.0       | 190.0      | 30.0        |

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265

Copyright © 2022，德州仪器 (TI) 公司