

LOW-POWER RS-485 LINE DRIVER AND RECEIVER PAIRS


FEATURES

- Designed for High-Speed Multipoint Data Transmission Over Long Cables
- Operate With Pulse Durations as Low as 30 ns
- Low Supply Current . . . 5 mA Max
- Meet or Exceed the Requirements of ANSI Standard RS-485 and ISO 8482:1987(E)
- 3-State Outputs for Party-Line Buses
- Common-Mode Voltage Range of -7 V to 12 V
- Thermal Shutdown Protection Prevents Driver Damage From Bus Contention
- Positive and Negative Output Current Limiting
- Pin Compatible With the SN75ALS180


DESCRIPTION

The SN55LBC180, SN65LBC180 and SN75LBC180 differential driver and receiver pairs are monolithic integrated circuits designed for bidirectional data communication over long cables that take on the characteristics of transmission lines. They are balanced, or differential, voltage mode devices that meet or exceed the requirements of industry standards ANSI RS-485 and ISO 8482:1987(E). These devices are designed using TI's proprietary LinBiCMOS™ with the low-power consumption of CMOS and the precision and robustness of bipolar transistors in the same circuit.

D OR N PACKAGE
(TOP VIEW)



RSA PACKAGE
(TOP VIEW)




NC – No internal connection

Pins 6 and 7 are connected together internally

Pins 13 and 14 are connected together internally

logic diagram (positive logic)



ORDERING INFORMATION

| T _A | PACKAGE | PART NUMBER | PART MARKING |
|----------------|---------|---------------|--------------|
| 0°C to 70°C | PDIP | SN75LBC180N | SN75LBC180N |
| | SOIC | SN75LBC180D | 7LB180 |
| | QFN | SN75LBC180RSA | LB180 |
| -40°C to 85°C | PDIP | SN65LBC180N | 65LBC180N |
| | SOIC | SN65LBC180D | 6LB180 |
| | QFN | SN65LBC180RSA | BL180 |
| -55°C to 125°C | QFN | SN55LBC180RSA | SN55LBC180 |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

LinBiCMOS is a trademark of Texas Instruments.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

DESCRIPTION (CONTINUED)

The SN55LBC180, SN65LBC180 and SN75LBC180 combine a differential line driver and receiver with 3-state outputs and operate from a single 5-V supply. The driver and receiver have active-high and active-low enables, respectively, which can be externally connected to function as a direction control. The driver differential outputs and the receiver differential inputs are connected to separate terminals for full-duplex operation and are designed to present minimum loading to the bus whether disabled or powered off ($V_{CC} = 0$). These parts feature a wide common-mode voltage range making them suitable for point-to-point or multipoint data-bus applications.

The devices also provide positive and negative output-current limiting and thermal shutdown for protection from line fault conditions. The line driver shuts down at a junction temperature of approximately 172°C.

The SN75LBC180 is characterized for operation over the commercial temperature range of 0°C to 70°C. The SN65LBC180 is characterized over the industrial temperature range of -40°C to 85°C.

The SN55LBC180 is characterized for operation over the military temperature range of -55°C to 125°C.

FUNCTION TABLES⁽¹⁾

| DRIVER | | | |
|------------|--------------|---------|---|
| INPUT D | ENABLE DE | OUTPUTS | |
| | | Y | Z |
| H | H | H | L |
| L | H | L | H |
| X | L | Z | Z |

| RECEIVER | | |
|-----------------------------|--------------|-------------|
| DIFFERENTIAL INPUTS A-B | ENABLE RE | OUTPUT R |
| $V_{ID} \geq 0.2$ V | L | H |
| -0.2 V < V_{ID} < 0.2 V | L | ? |
| $V_{ID} \leq -0.2$ V | L | L |
| X | H | Z |
| Open circuit | L | H |

(1) H = high level, L = low level, ? = Indeterminate, X = irrelevant,
Z = high impedance (off)

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

| | | | UNIT |
|-----------|---|------------------------------|------|
| V_{CC} | Supply voltage range ⁽²⁾ | –0.3 to 7 | V |
| V_{BUS} | Bus voltage range (A, B, Y, Z) ⁽²⁾ | –10 to 15 | V |
| | Voltage range at D, R, DE, \overline{RE} ⁽²⁾ | –0.3 to V_{CC} + 0.5 | V |
| | Continuous total power dissipation ⁽³⁾ | Internally limited | |
| | Total power dissipation | See Dissipation Rating Table | |
| T_{stg} | Storage temperature range | –65 to 150 | °C |
| I_O | Receiver output current range | –50 to 50 | mA |
| ESD | HBM (Human Body Model) EIA/JESD22-A114 | ±4 | kV |
| | MM (Machine Model) EIA/JESD22-A115 | 400 | V |
| | CDM (Charge Device Model) EIA/JESD22-C101 | 1.5 | kV |

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values are with respect to GND.

(3) The maximum operating junction temperature is internally limited. Use the dissipation rating table to operate below this temperature.

DISSIPATION RATING TABLE

| PACKAGE ⁽¹⁾ | $T_A \leq 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING | $T_A = 85^\circ\text{C}$ POWER RATING | $T_A = 125^\circ\text{C}$ POWER RATING |
|------------------------|---|---|--|--|---|
| D | 950 mW | 7.6 mW/°C | 608 mW | 494 mW | — |
| N | 1150 mW | 9.2 mW/°C | 736 mW | 598 mW | — |
| RSA | 3333 mW | 26.67 mW/°C | 2133 mW | 1733 mW | 400 mW |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI Web site at www.ti.com.

RECOMMENDED OPERATING CONDITIONS

| | | MIN | NOM | MAX | UNIT |
|-----------------------------|---|----------------------------|-------------------|------|------|
| V_{CC} | Supply voltage | 4.75 | 5 | 5.25 | V |
| V_{IH} | High-level input voltage | D, DE, and \overline{RE} | 2 | | V |
| V_{IL} | Low-level input voltage | D, DE, and \overline{RE} | | 0.8 | V |
| V_{ID} | Differential input voltage | | –6 ⁽¹⁾ | 6 | V |
| V_O , V_I , or V_{IC} | Voltage at any bus terminal (separately or common mode) | A, B, Y, or Z | –7 ⁽¹⁾ | 12 | V |
| I_{OH} | High-level output current | Y or Z | | –60 | mA |
| | | R | | –8 | |
| I_{OL} | Low-level output current | Y or Z | | 60 | mA |
| | | R | | 8 | |
| T_A | Operating free-air temperature | SN55LBC180 | –55 | 125 | °C |
| | | SN65LBC180 | –40 | 85 | |
| | | SN75LBC180 | 0 | 70 | |

(1) The algebraic convention where the least positive (more negative) limit is designated minimum, is used in this data sheet for the differential input voltage, voltage at any bus terminal, operating temperature, input threshold voltage, and common-mode output voltage.

DRIVER SECTION

ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|---|---|---|------------------|-----|--------------------|-----------|---------------|
| V_{IK} | Input clamp voltage | $I_I = -18 \text{ mA}$ | | | | -1.5 | V |
| $ V_{OD} $ Differential output voltage magnitude ⁽²⁾ | $R_L = 54 \Omega$, See Figure 1 | SN55LBC180 | | 1 | 2.5 | 5 | V |
| | | SN65LBC180 | | 1.1 | 2.5 | 5 | |
| | | SN75LBC180 | | 1.5 | 2.5 | 5 | |
| | $R_L = 60 \Omega$, See Figure 2 | SN55LBC180 | | 1 | 2.5 | 5 | V |
| | | SN65LBC180 | | 1.1 | 2 | 5 | |
| | | SN75LBC180 | | 1.5 | 2 | 5 | |
| $\Delta V_{OD} $ | Change in magnitude of differential output voltage ⁽³⁾ | See Figure 1 and Figure 2 | | | | ± 0.2 | V |
| V_{OC} | Common-mode output voltage | $R_L = 54 \Omega$, See Figure 1 | | 1 | 2.5 | 3 | V |
| $\Delta V_{OC} $ | Change in magnitude of common-mode output voltage ⁽³⁾ | | | | | ± 0.2 | V |
| I_O | Output current with power off | $V_{CC} = 0$, $V_O = -7 \text{ V to } 12 \text{ V}$ | | | | ± 100 | μA |
| I_{OZ} | High-impedance-state output current | $V_O = -7 \text{ V to } 12 \text{ V}$ | | | | ± 100 | μA |
| I_{IH} | High-level input current | $V_I = 2.4 \text{ V}$ | | | | 100 | μA |
| I_{IL} | Low-level input current | $V_I = 0.4 \text{ V}$ | | | | 100 | μA |
| I_{OS} | Short-circuit output current | $-7 \text{ V} \leq V_O \leq 12 \text{ V}$ | | | | ± 250 | mA |
| I_{CC} | Supply current | Receiver disabled | Outputs enabled | | | 5 | mA |
| | | | Outputs disabled | | | 3 | |

(1) All typical values are at $V_{CC} = 5 \text{ V}$ and $T_A = 25^\circ\text{C}$.

(2) The minimum V_{OD} specification may not fully comply with ANSI RS-485 at operating temperatures below 0°C . System designers should take the possibly lower output signal into account in determining the maximum signal-transmission distance.

(3) $\Delta|V_{OD}|$ and $\Delta|V_{OC}|$ are the changes in the steady-state magnitude of V_{OD} and V_{OC} , respectively, that occur when the input is changed from a high level to a low level.

SWITCHING CHARACTERISTICS

$V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------|-------------------------------------|--|--|-----|-----|-----|------|
| $t_{d(OD)}$ | Differential output delay time | $R_L = 54 \Omega$, See Figure 3 | | 7 | 12 | 18 | ns |
| $t_{t(OD)}$ | Differential output transition time | | | 5 | 10 | 20 | ns |
| t_{PZH} | Output enable time to high level | $R_L = 110 \Omega$, See Figure 4 | | | | 35 | ns |
| t_{PZL} | Output enable time to low level | $R_L = 110 \Omega$, See Figure 5 | | | | 35 | ns |
| t_{PHZ} | Output disable time from high level | $R_L = 110 \Omega$, See Figure 4 | | | | 50 | ns |
| t_{PLZ} | Output disable time from low level | $R_L = 110 \Omega$, See Figure 5 | | | | 35 | ns |

SWITCHING CHARACTERISTICS (SN55LBC180)

$V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------|-------------------------------------|--|--|-----|-----|-----|------|
| $t_{d(OD)}$ | Differential output delay time | $R_L = 54 \Omega$, See Figure 3 | | | 15 | | ns |
| $t_{t(OD)}$ | Differential output transition time | | | | 21 | | ns |
| t_{PZH} | Output enable time to high level | $R_L = 110 \Omega$, See Figure 4 | | | 32 | | ns |
| t_{PHZ} | Output disable time from high level | | | | 55 | | |
| t_{PZL} | Output enable time to low level | $R_L = 110 \Omega$, See Figure 5 | | | 32 | | ns |
| t_{PLZ} | Output disable time from low level | | | | 20 | | |

RECEIVER SECTION

ELECTRICAL CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--|--|------------------|------|----------|---------------|
| V_{IT+} Positive-going input threshold voltage | $I_O = -8 \text{ mA}$ | | | 0.2 | V |
| V_{IT-} Negative-going input threshold voltage | $I_O = 8 \text{ mA}$ | | | -0.2 | V |
| V_{hys} Hysteresis voltage ($V_{IT+} - V_{IT-}$) | | | | 45 | mV |
| V_{IK} Enable-input clamp voltage | $I_I = -18 \text{ mA}$ | | | -1.5 | V |
| V_{OH} High-level output voltage | $V_{ID} = 200 \text{ mV}$, $I_{OH} = -8 \text{ mA}$ | 3.5 | 4.5 | | V |
| V_{OL} Low-level output voltage | $V_{ID} = -200 \text{ mV}$, $I_{OL} = 8 \text{ mA}$ | | 0.3 | 0.5 | V |
| I_{OZ} High-impedance-state output current | $V_O = 0 \text{ V to } V_{CC}$ | | | ± 20 | μA |
| I_{IH} High-level enable-input current | $V_{IH} = 2.4 \text{ V}$ | | | -50 | A |
| I_{IL} Low-level enable-input current | $V_{IL} = 0.4 \text{ V}$ | | | -100 | μA |
| I_I Bus input current | $V_I = 12 \text{ V}$, $V_{CC} = 5 \text{ V}$, Other input at 0 V | 0.7 | 1 | | mA |
| | $V_I = 12 \text{ V}$, $V_{CC} = 0 \text{ V}$, Other input at 0 V | 0.8 | 1 | | |
| | $V_I = -7 \text{ V}$, $V_{CC} = 5 \text{ V}$, Other input at 0 V | -0.8 | -0.5 | | |
| | $V_I = -7 \text{ V}$, $V_{CC} = 0 \text{ V}$, Other input at 0 V | -0.8 | -0.5 | | |
| I_{CC} Supply current | Driver disabled | Outputs enabled | | 5 | mA |
| | | Outputs disabled | | 3 | |

SWITCHING CHARACTERISTICS

$V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|-----|-----|-----|------|
| t_{PHL} Propagation delay time, high- to low-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$, See Figure 6 | 11 | 22 | 33 | ns |
| t_{PLH} Propagation delay time, low- to high-level output | | 11 | 22 | 33 | ns |
| $t_{sk(p)}$ Pulse skew ($ t_{PHL} - t_{PLH} $) | | 3 | 6 | | ns |
| t_t Transition time | | 5 | 8 | | ns |
| t_{PZH} Output enable time to high level | See Figure 7 | | | 35 | ns |
| t_{PZL} Output enable time to low level | | | | 30 | ns |
| t_{PHZ} Output disable time from high level | | | | 35 | ns |
| t_{PLZ} Output disable time from low level | | | | 30 | ns |

SWITCHING CHARACTERISTICS (SN55LBC180)

$V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|--|-----|-----|-----|------|
| t_{PHL} Propagation delay time, high- to low-level output | $V_{ID} = -1.5 \text{ V to } 1.5 \text{ V}$, See Figure 6 | 26 | | | ns |
| t_{PLH} Propagation delay time, low- to high-level output | | 23 | | | ns |
| $t_{sk(p)}$ Pulse skew ($ t_{PHL} - t_{PLH} $) | | 3 | | | ns |
| $t_{sk(p)t}$ Transition time | | 4 | | | ns |
| t_{PZH} Output enable time to high level | See Figure 4 | 30 | | | ns |
| t_{PHZ} Output disable time from high level | | 26 | | | ns |
| t_{PZL} Output enable time to low level | | 30 | | | ns |
| t_{PLZ} Output disable time from low level | | 30 | | | ns |

PARAMETER MEASUREMENT INFORMATION

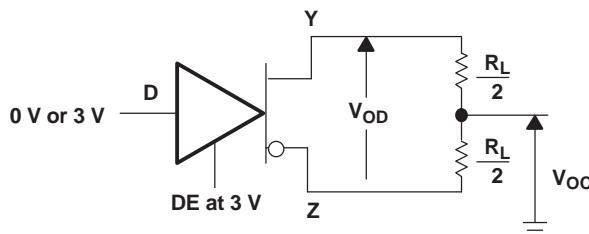


Figure 1. Differential and Common-Mode Output Voltages



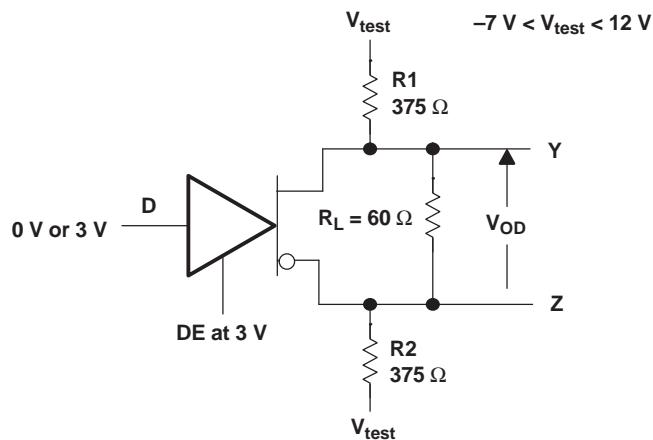


Figure 2. Driver V_{OD} Test Circuit

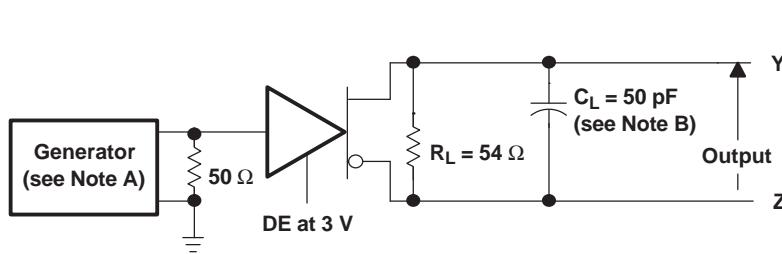




TEST CIRCUIT

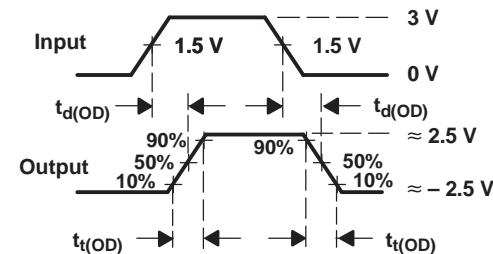

VOLTAGE WAVEFORMS

NOTES: A. The input pulse is supplied by a generator having the following characteristics: PRR > 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.
 B. C_L includes probe and jig capacitance.



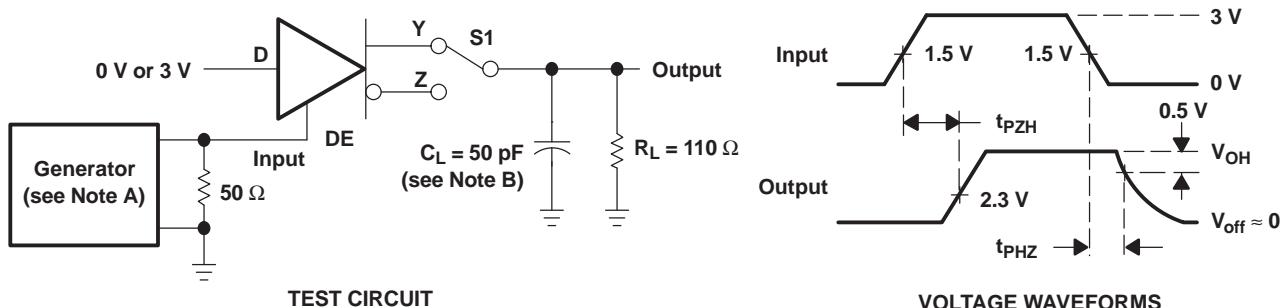
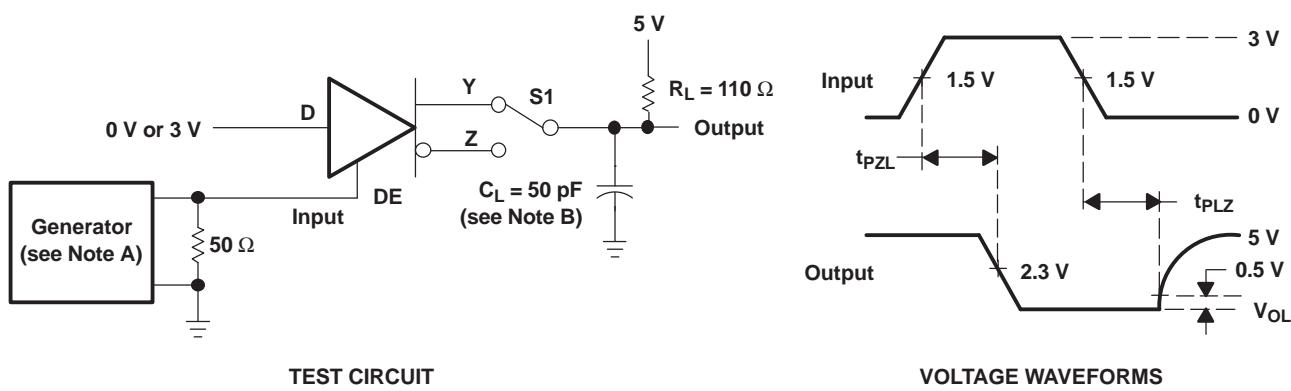
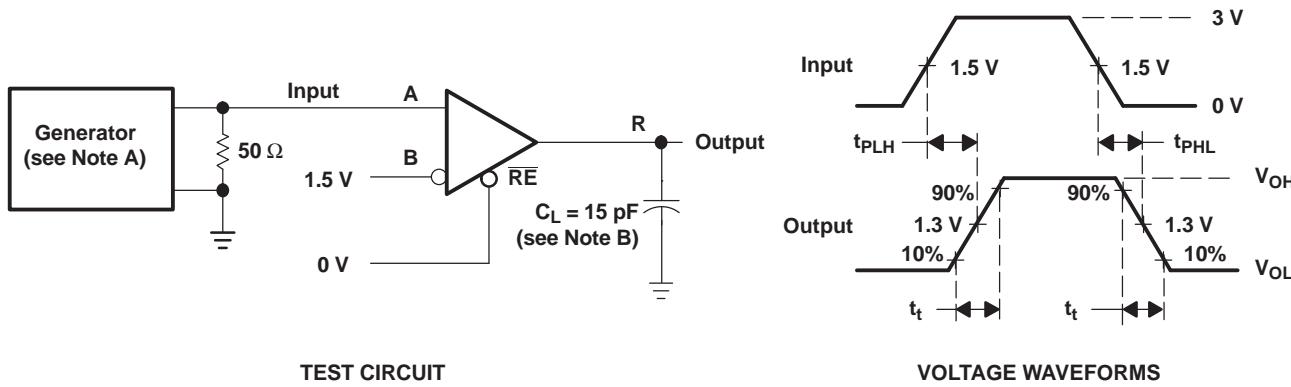
Figure 3. Driver Test Circuit and Differential Output Delay and Transition Time Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION (continued)

Figure 4. Driver Test Circuit and Enable and Disable Time Waveforms

Figure 5. Driver Test Circuit and Enable and Disable Time Voltage Waveforms


NOTES: A. The input pulse is supplied by a generator having the following characteristics: PRR \leq 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.
B. C_L includes probe and jig capacitance.

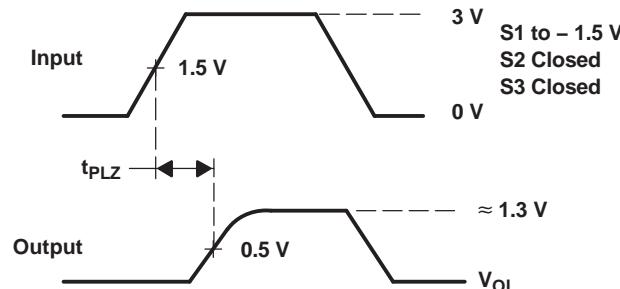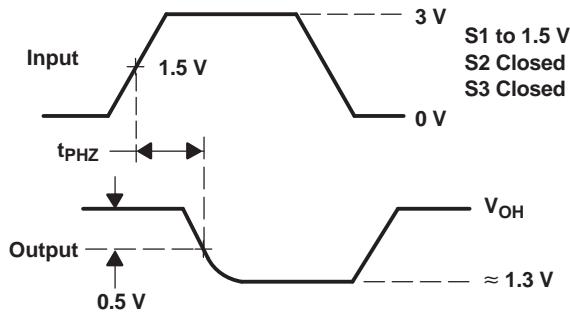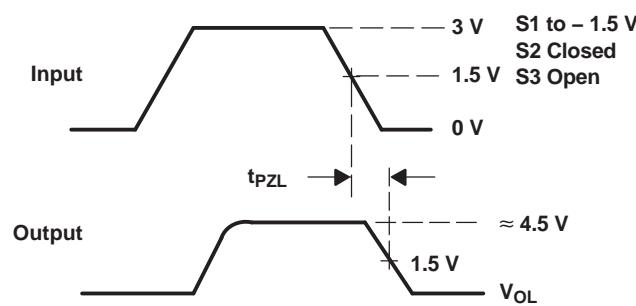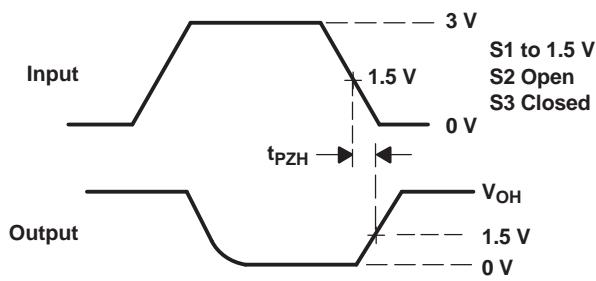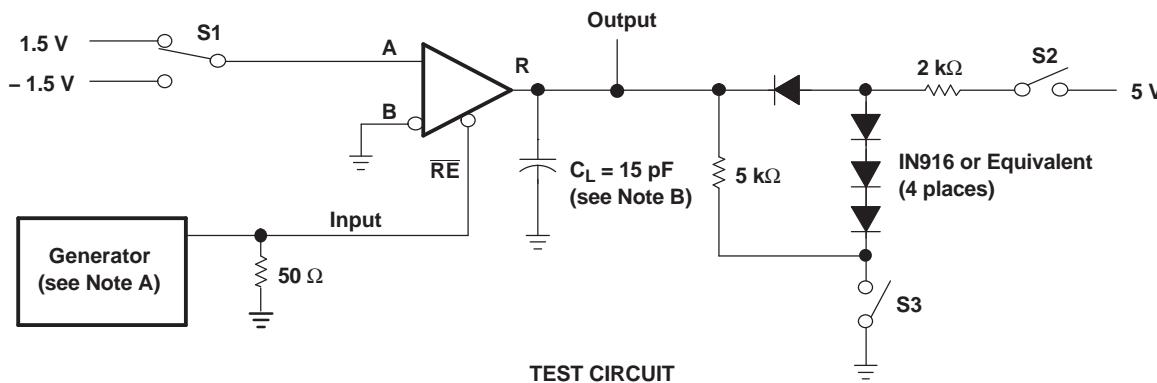Figure 6. Receiver Test Circuit and Propagation Delay Time Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION (continued)




VOLTAGE WAVEFORMS

NOTES: A. The input pulse is supplied by a generator having the following characteristics: PRR \leq 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.
B. C_L includes probe and jig capacitance.

Figure 7. Receiver Output Enable and Disable Times

TYPICAL CHARACTERISTICS

SCHEMATICS OF INPUTS AND OUTPUTS

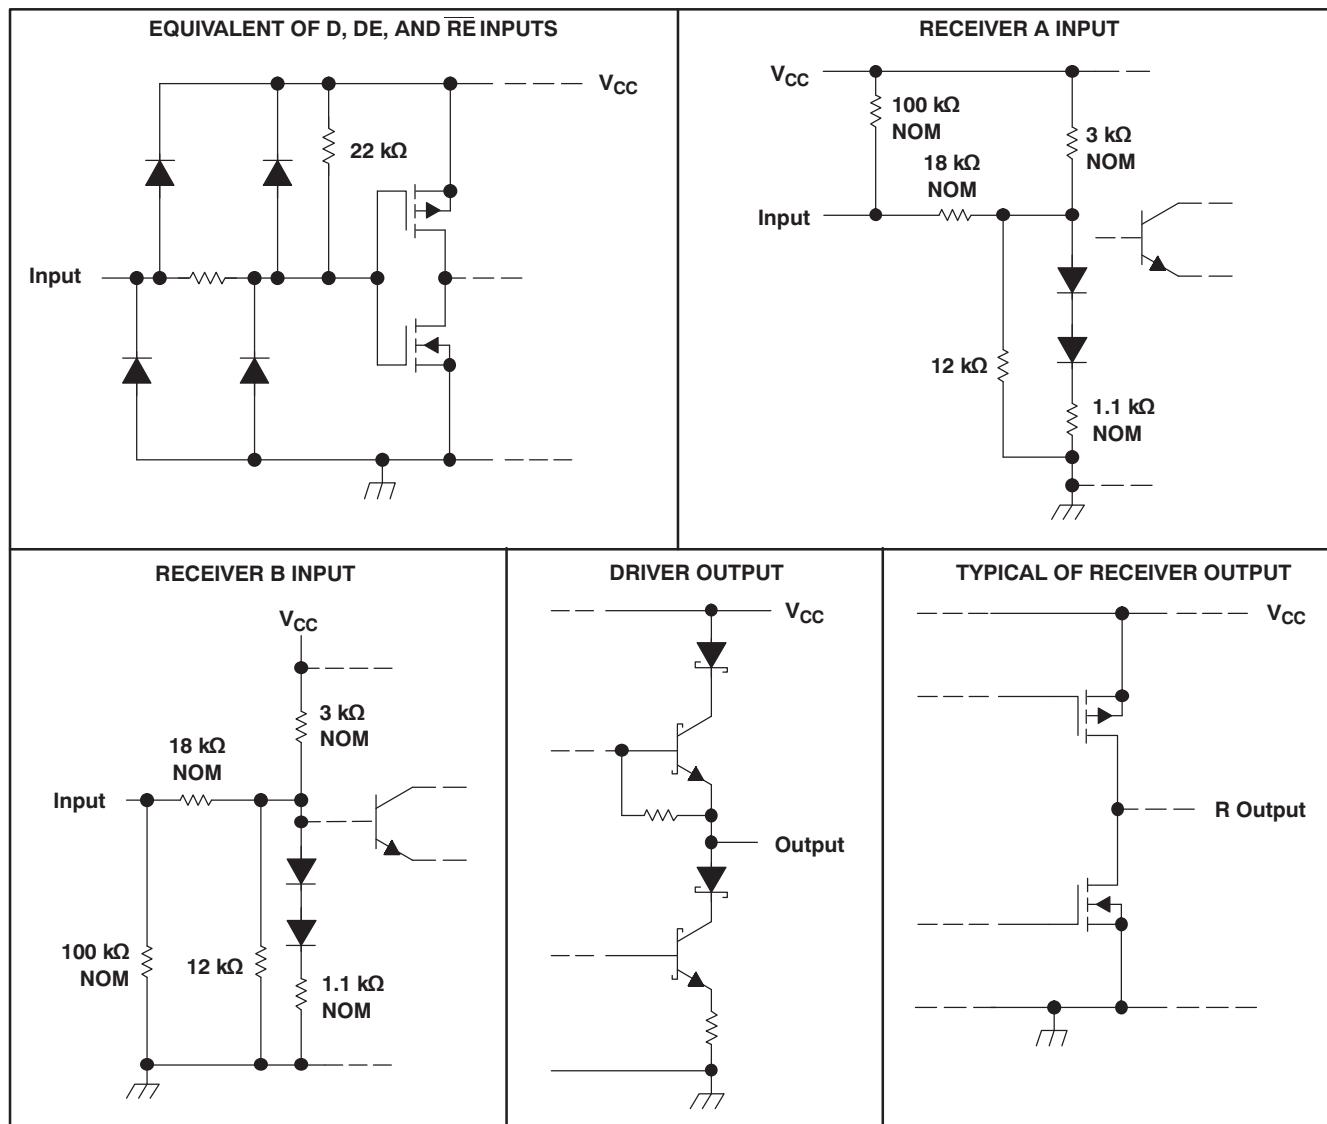

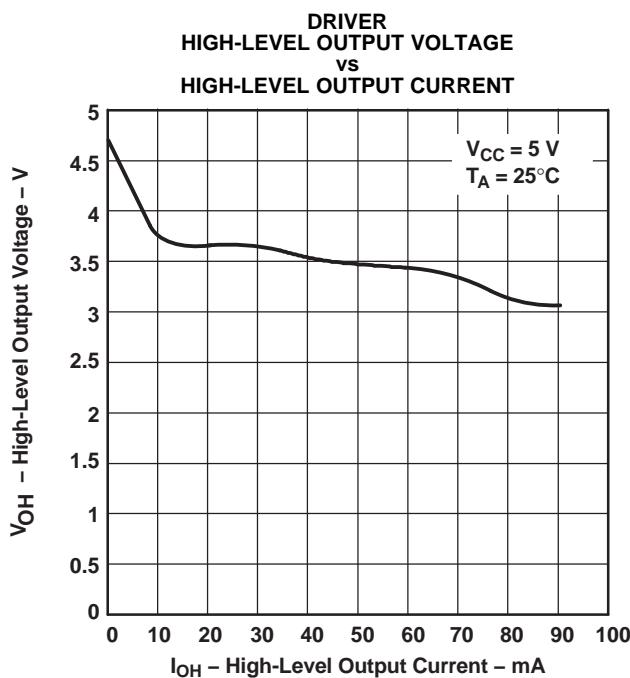


Figure 8.

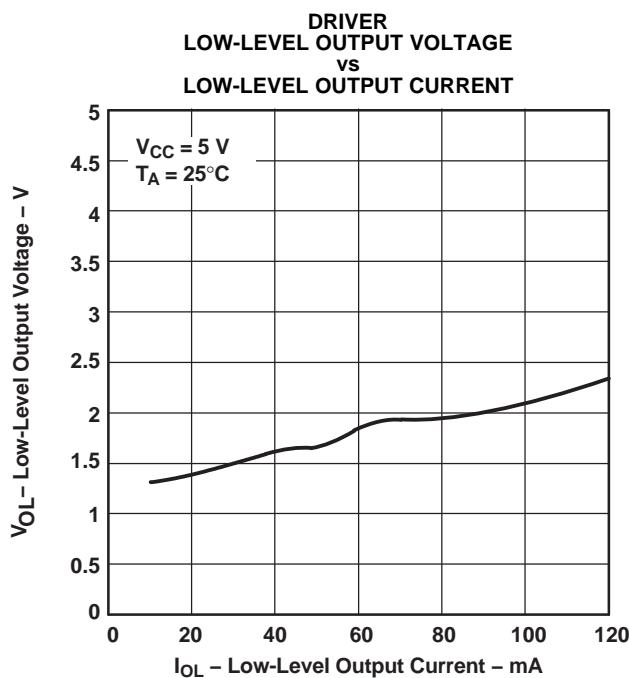


Figure 9.

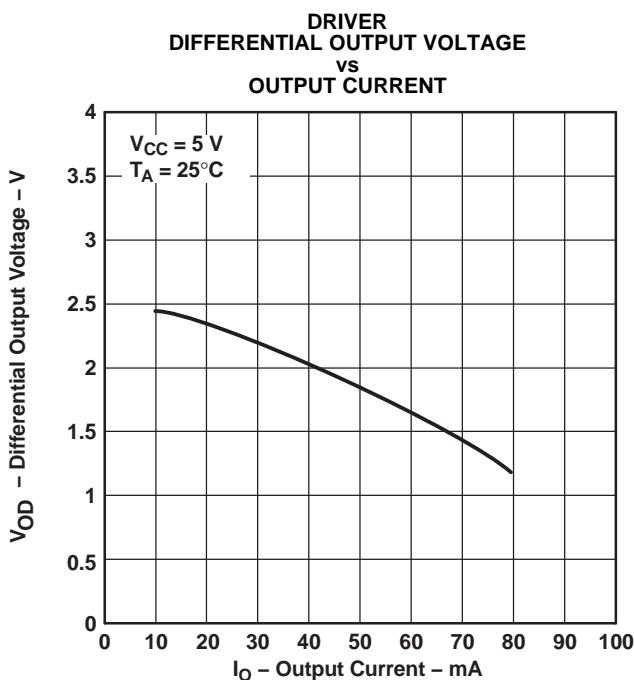


Figure 10.

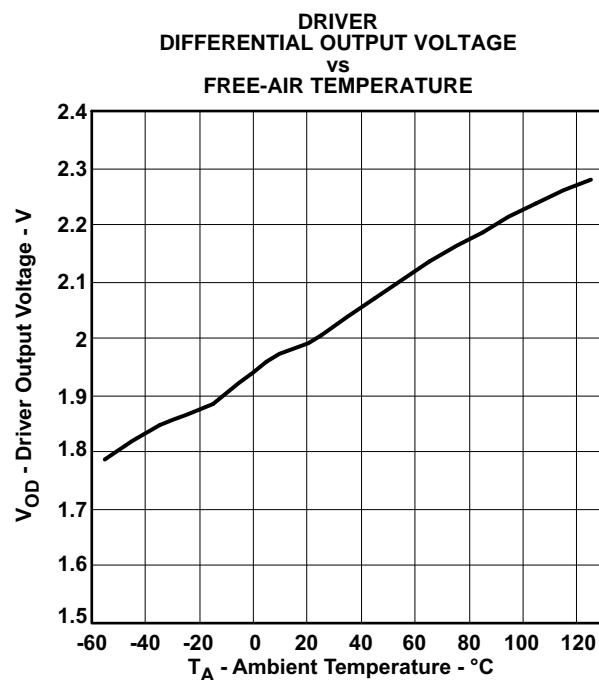


Figure 11.

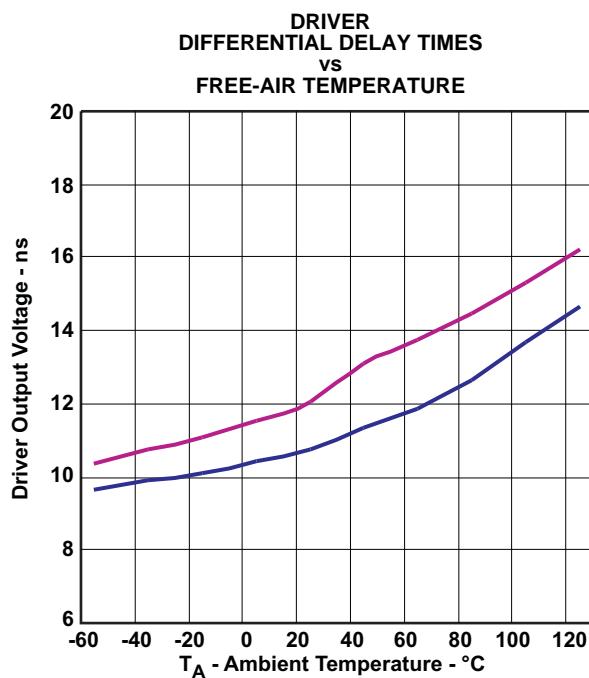


Figure 12.

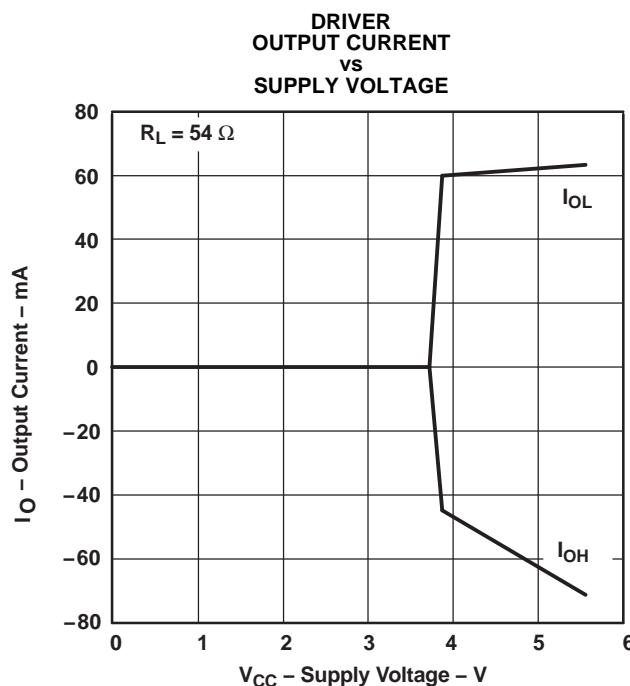


Figure 13.

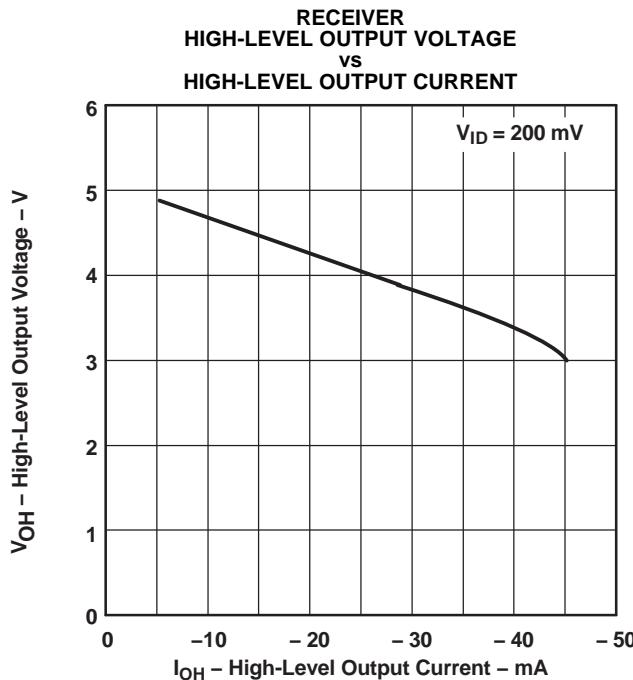


Figure 14.


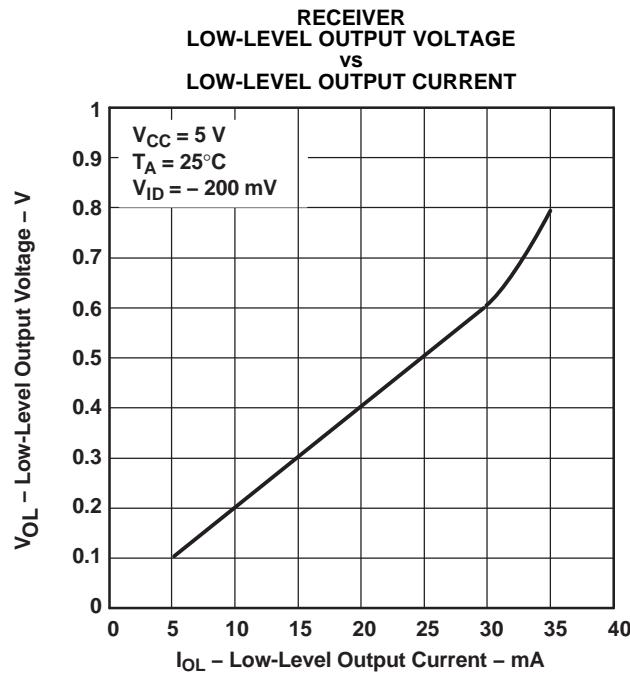
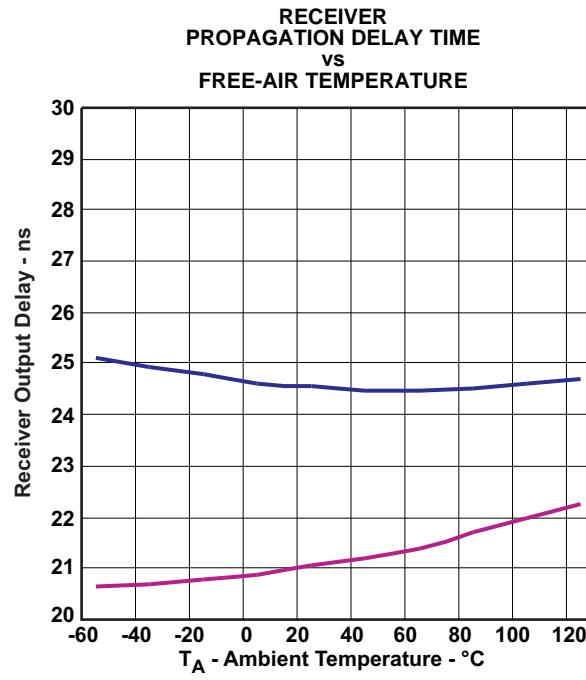
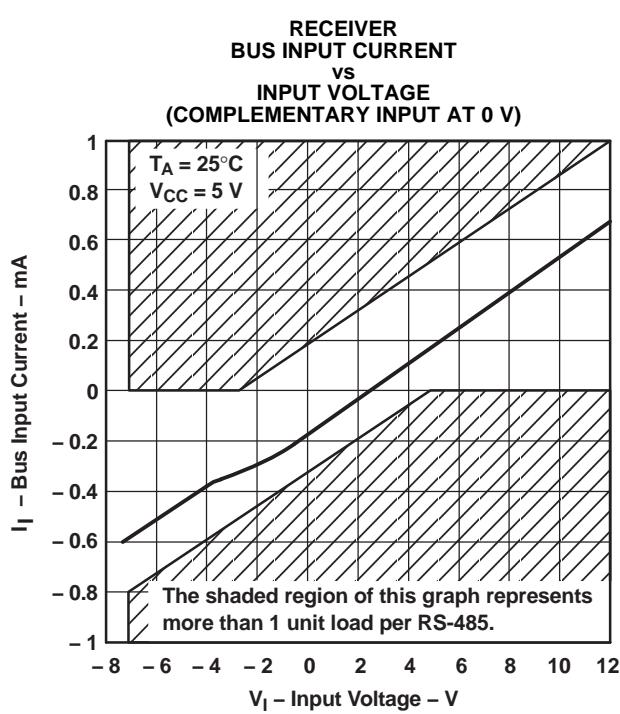
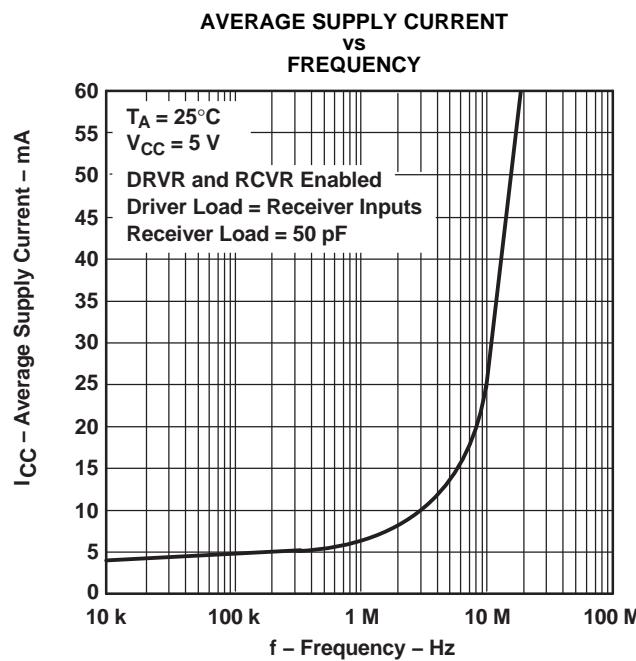


Figure 15.

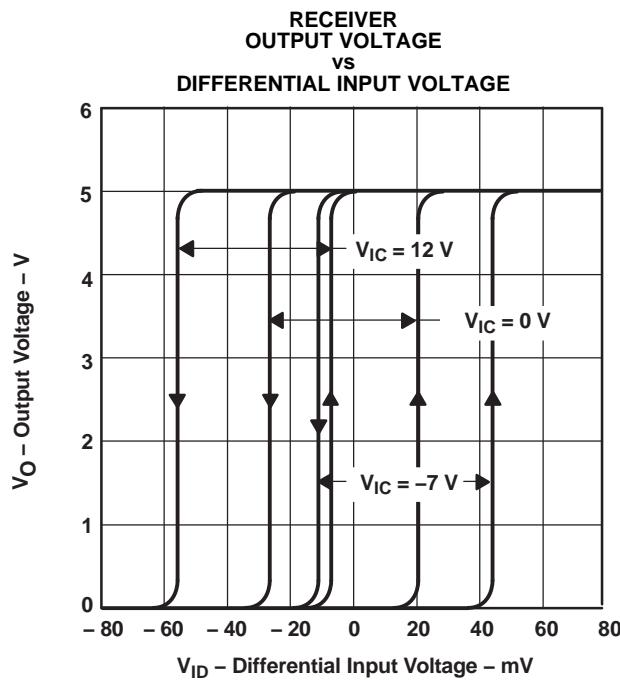

APPLICATION INFORMATION

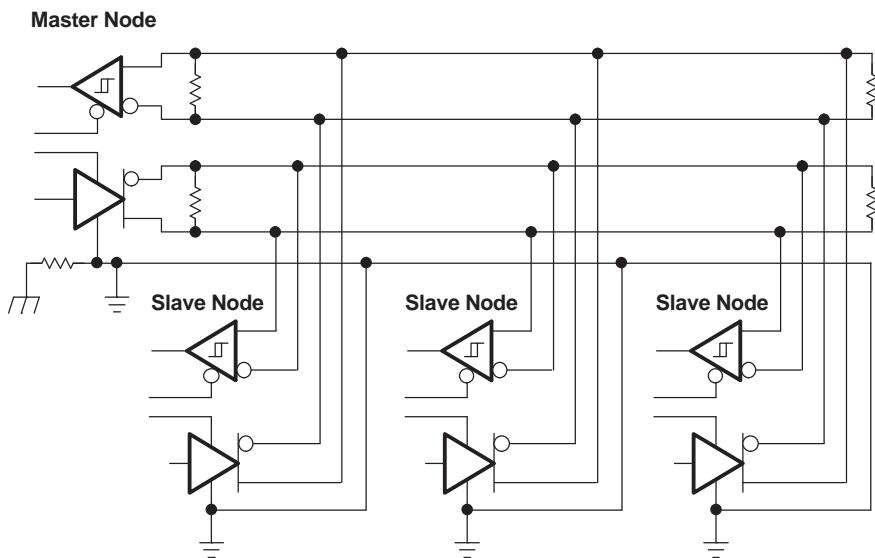


Figure 20. Full Duplex Application Circuit

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead finish/ Ball material (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|---|
| SN55LBC180RSAR | ACTIVE | QFN | RSA | 16 | 3000 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | SN55 LBC180 | Samples |
| SN55LBC180RSAT | ACTIVE | QFN | RSA | 16 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -55 to 125 | SN55 LBC180 | Samples |
| SN65LBC180D | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | 6LB180 | Samples |
| SN65LBC180DR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | 6LB180 | Samples |
| SN65LBC180DRG4 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | -40 to 85 | 6LB180 | Samples |
| SN65LBC180N | ACTIVE | PDIP | N | 14 | 25 | RoHS & Green | NIPDAU | N / A for Pkg Type | -40 to 85 | SN65LBC180N | Samples |
| SN65LBC180RSAR | ACTIVE | QFN | RSA | 16 | 3000 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | BL180 | Samples |
| SN65LBC180RSAT | ACTIVE | QFN | RSA | 16 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | BL180 | Samples |
| SN65LBC180RSATG4 | ACTIVE | QFN | RSA | 16 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | BL180 | Samples |
| SN75LBC180D | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | 7LB180 | Samples |
| SN75LBC180DG4 | ACTIVE | SOIC | D | 14 | 50 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | 7LB180 | Samples |
| SN75LBC180DR | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | 7LB180 | Samples |
| SN75LBC180DRG4 | ACTIVE | SOIC | D | 14 | 2500 | RoHS & Green | NIPDAU | Level-1-260C-UNLIM | 0 to 70 | 7LB180 | Samples |
| SN75LBC180N | ACTIVE | PDIP | N | 14 | 25 | RoHS & Green | NIPDAU | N / A for Pkg Type | 0 to 70 | SN75LBC180N | Samples |
| SN75LBC180RSAT | ACTIVE | QFN | RSA | 16 | 250 | RoHS & Green | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | LB180 | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

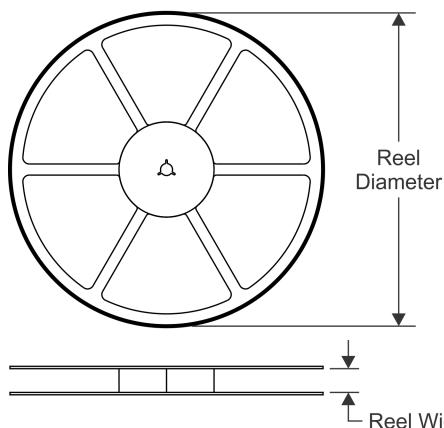
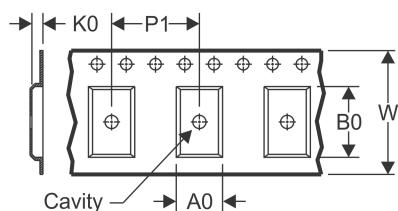
OTHER QUALIFIED VERSIONS OF SN55LBC180, SN65LBC180, SN75LBC180 :

- Catalog : [SN75LBC180](#)
- Automotive : [SN65LBC180-Q1](#)
- Military : [SN55LBC180](#)


NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

- Military - QML certified for Military and Defense Applications


TAPE AND REEL INFORMATION
REEL DIMENSIONS

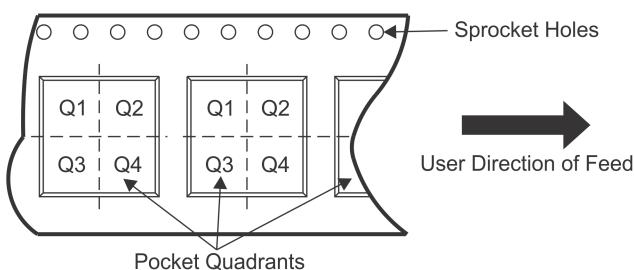TAPE DIMENSIONS


| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

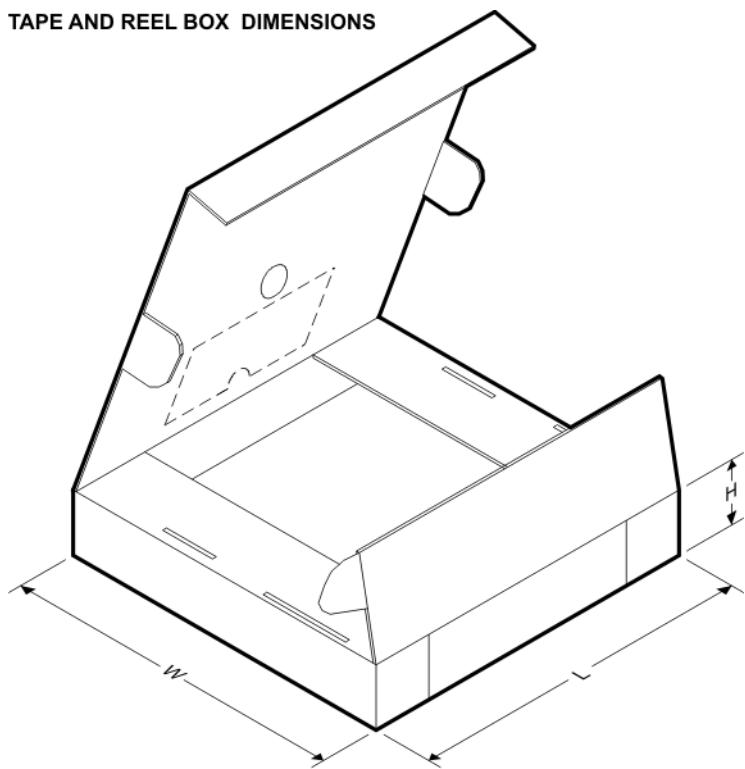QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


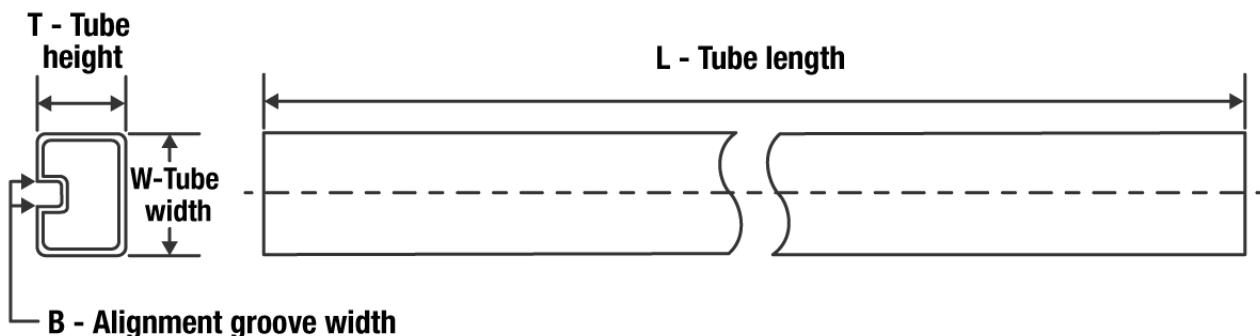
*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN55LBC180RSAR | QFN | RSA | 16 | 3000 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| SN55LBC180RSAT | QFN | RSA | 16 | 250 | 180.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| SN65LBC180DR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| SN65LBC180RSAR | QFN | RSA | 16 | 3000 | 330.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| SN65LBC180RSAR | QFN | RSA | 16 | 3000 | 330.0 | 12.4 | 4.35 | 4.35 | 1.1 | 8.0 | 12.0 | Q2 |
| SN65LBC180RSAT | QFN | RSA | 16 | 250 | 180.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |
| SN65LBC180RSAT | QFN | RSA | 16 | 250 | 330.0 | 12.5 | 4.35 | 4.35 | 1.1 | 8.0 | 12.0 | Q2 |
| SN75LBC180DR | SOIC | D | 14 | 2500 | 330.0 | 16.4 | 6.5 | 9.0 | 2.1 | 8.0 | 16.0 | Q1 |
| SN75LBC180RSAT | QFN | RSA | 16 | 250 | 180.0 | 12.4 | 4.25 | 4.25 | 1.15 | 8.0 | 12.0 | Q2 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN55LBC180RSAR | QFN | RSA | 16 | 3000 | 853.0 | 449.0 | 35.0 |
| SN55LBC180RSAT | QFN | RSA | 16 | 250 | 210.0 | 185.0 | 35.0 |
| SN65LBC180DR | SOIC | D | 14 | 2500 | 340.5 | 336.1 | 32.0 |
| SN65LBC180RSAR | QFN | RSA | 16 | 3000 | 853.0 | 449.0 | 35.0 |
| SN65LBC180RSAR | QFN | RSA | 16 | 3000 | 338.0 | 355.0 | 50.0 |
| SN65LBC180RSAT | QFN | RSA | 16 | 250 | 210.0 | 185.0 | 35.0 |
| SN65LBC180RSAT | QFN | RSA | 16 | 250 | 338.0 | 355.0 | 50.0 |
| SN75LBC180DR | SOIC | D | 14 | 2500 | 340.5 | 336.1 | 32.0 |
| SN75LBC180SAT | QFN | RSA | 16 | 250 | 210.0 | 185.0 | 35.0 |


TUBE


*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|---------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| SN65LBC180D | D | SOIC | 14 | 50 | 507 | 8 | 3940 | 4.32 |
| SN65LBC180N | N | PDIP | 14 | 25 | 506 | 13.97 | 11230 | 4.32 |
| SN75LBC180D | D | SOIC | 14 | 50 | 507 | 8 | 3940 | 4.32 |
| SN75LBC180DG4 | D | SOIC | 14 | 50 | 507 | 8 | 3940 | 4.32 |
| SN75LBC180N | N | PDIP | 14 | 25 | 506 | 13.97 | 11230 | 4.32 |

RSA (S-PVQFN-N16)

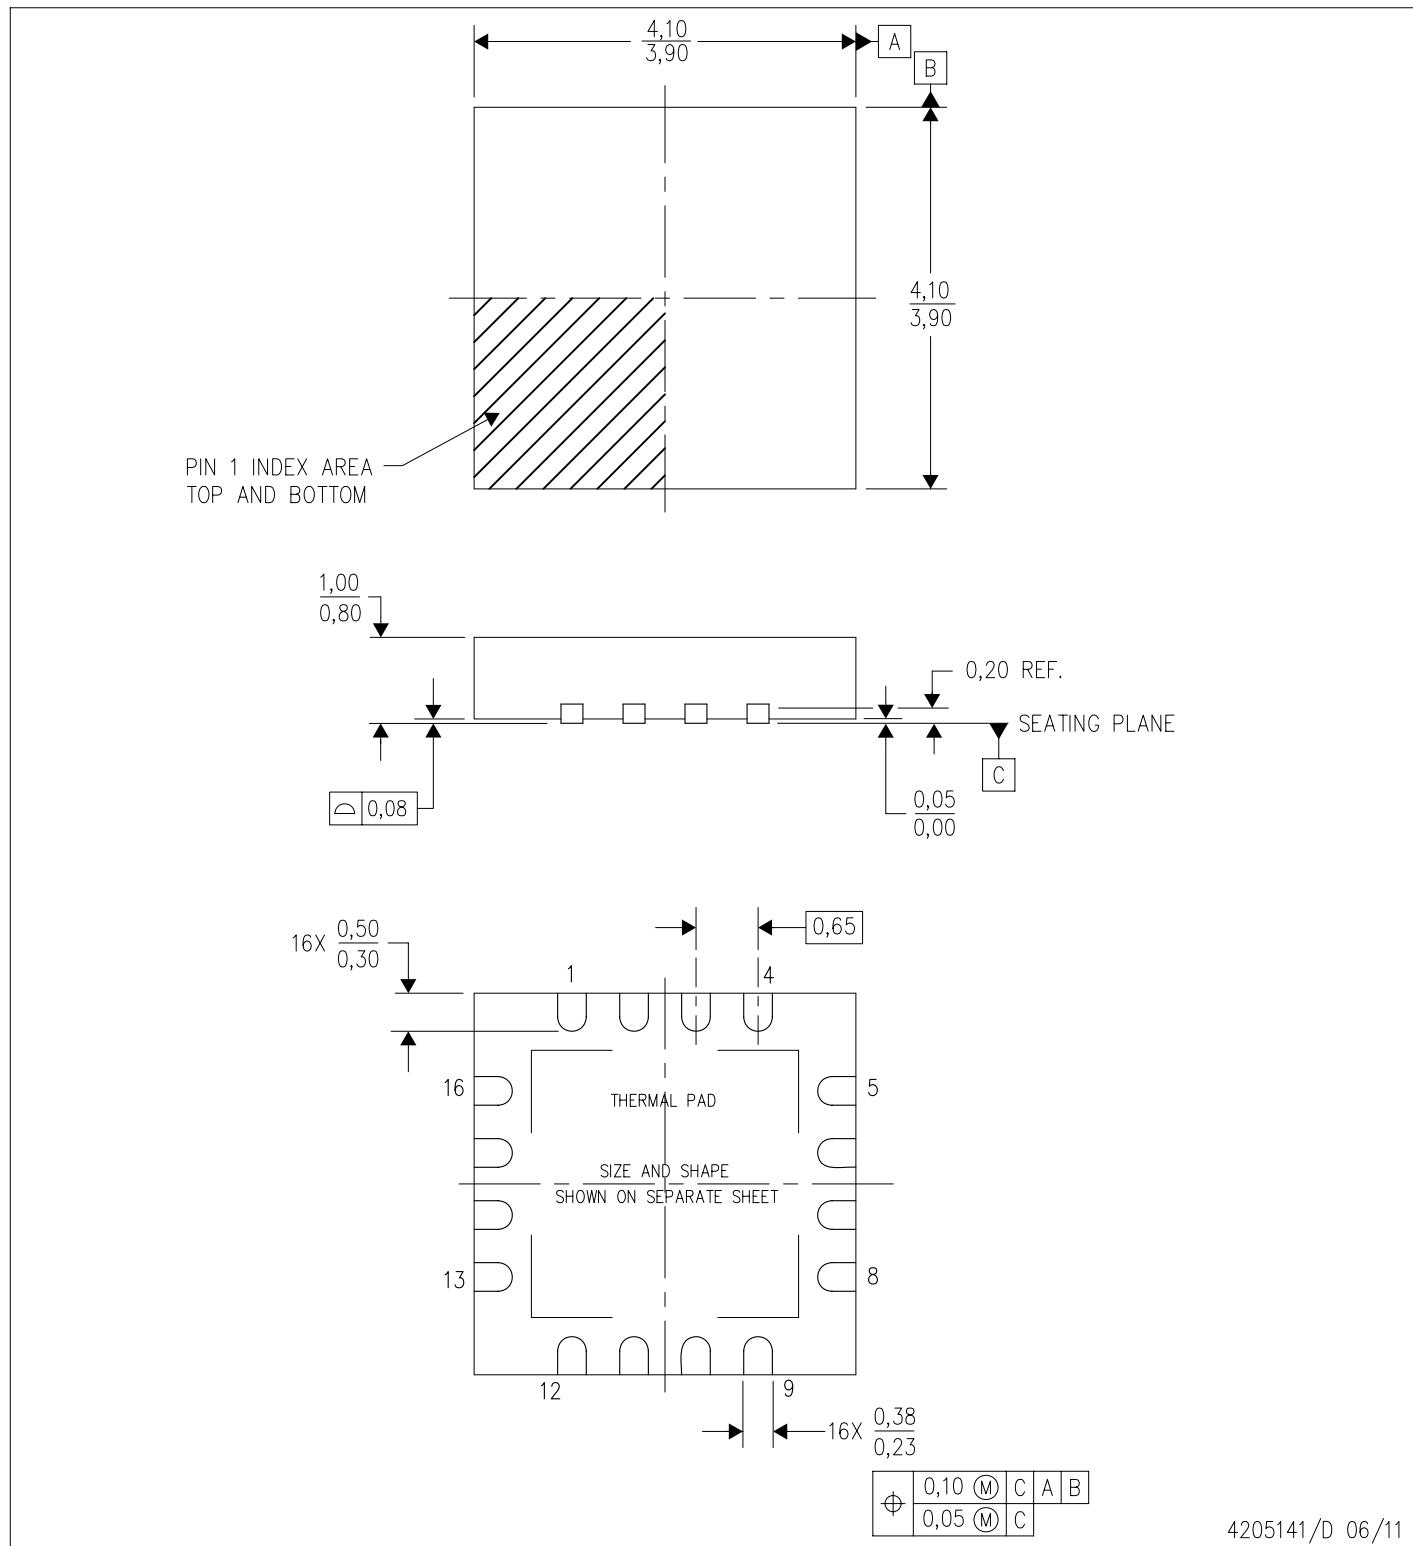PLASTIC QUAD FLATPACK NO-LEAD



NOTES:

- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
- B. This drawing is subject to change without notice.
- C. Quad Flatpack, No-leads (QFN) package configuration.
- D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
- E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- F. Falls within JEDEC MO-220.

THERMAL PAD MECHANICAL DATA

RSA (S-PVQFN-N16)

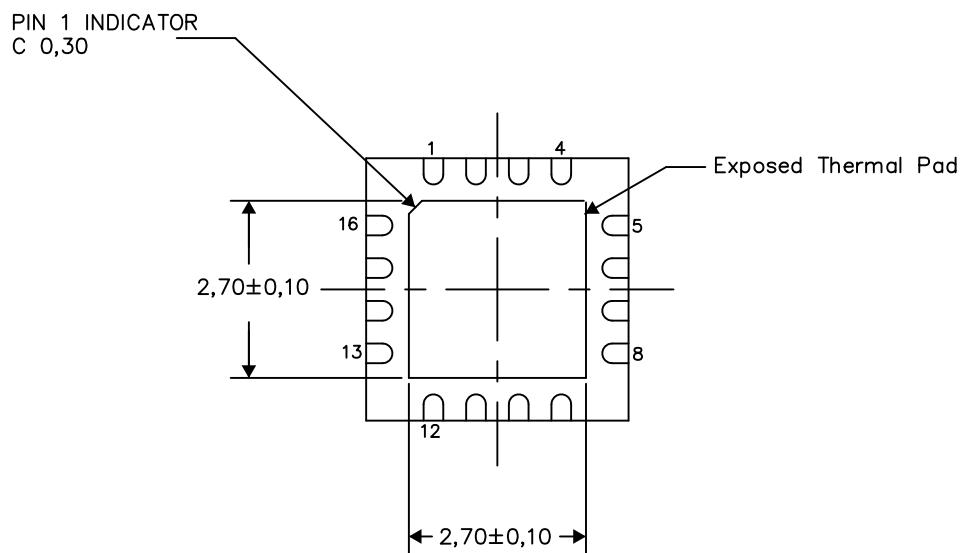
PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



Bottom View

Exposed Thermal Pad Dimensions

4206364-2/0 09/15

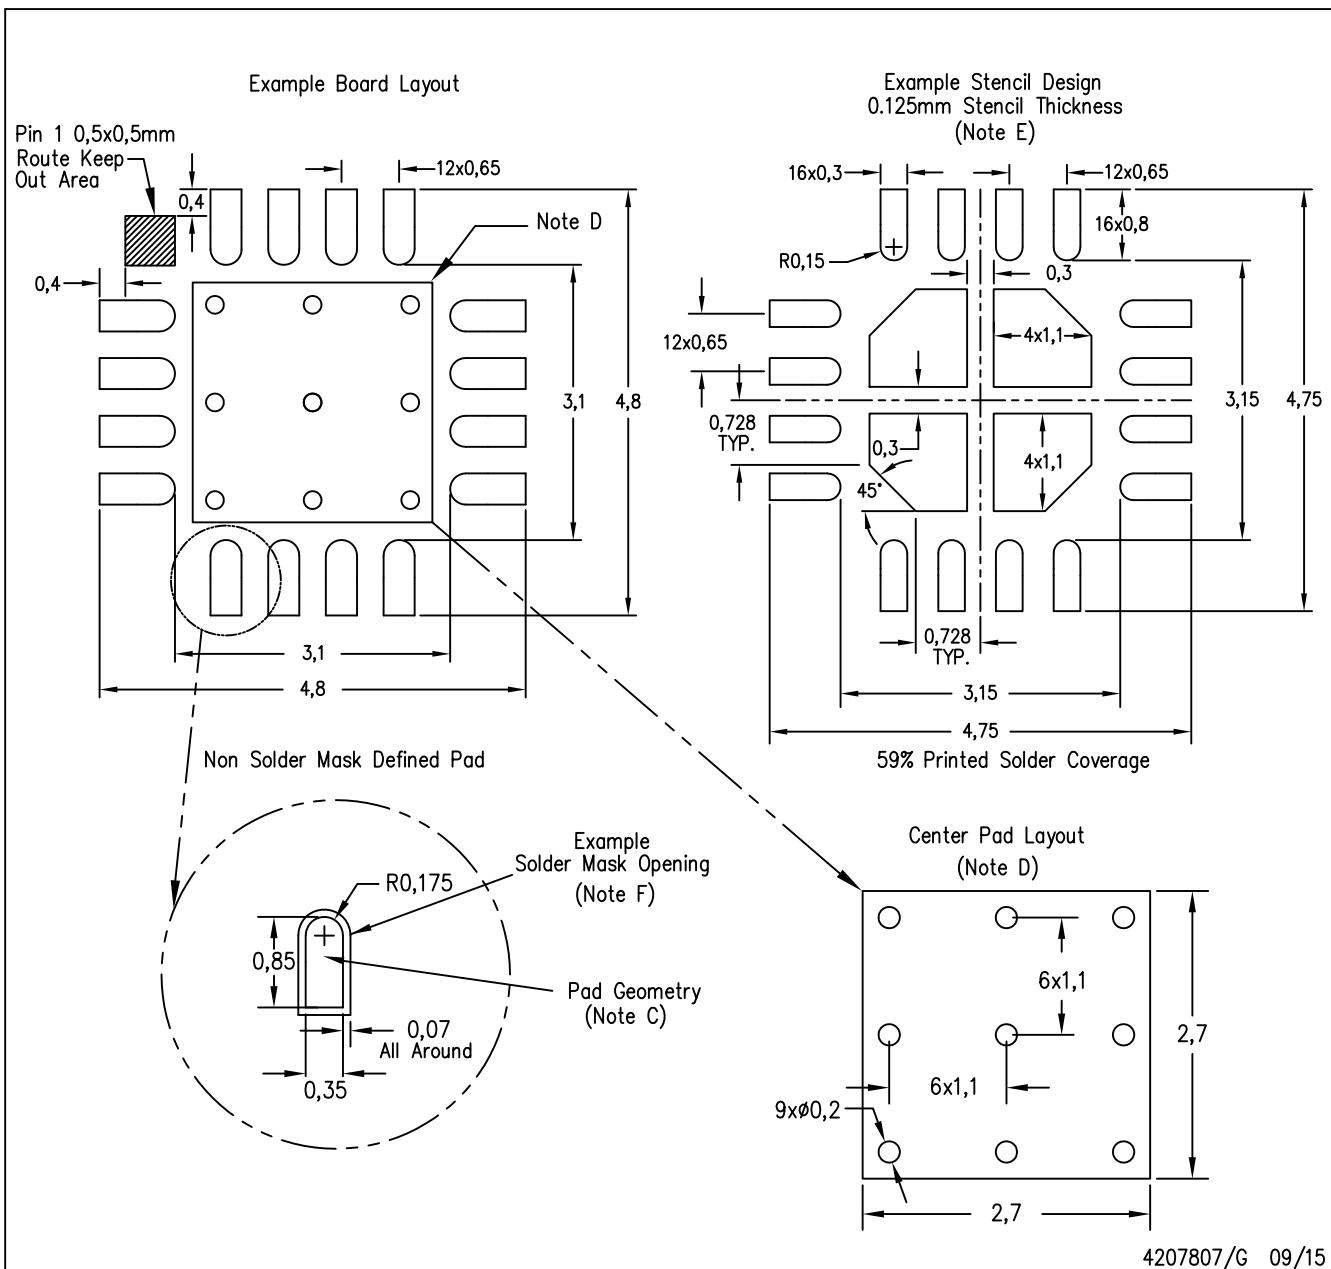
NOTES:

A. All linear dimensions are in millimeters

LAND PATTERN DATA

RSA (S-PVQFN-N16)

PLASTIC QUAD FLATPACK NO-LEAD




NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Publication IPC-7351 is recommended for alternate designs.
- This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
- Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- Customers should contact their board fabrication site for solder mask tolerances.

D (R-PDSO-G14)

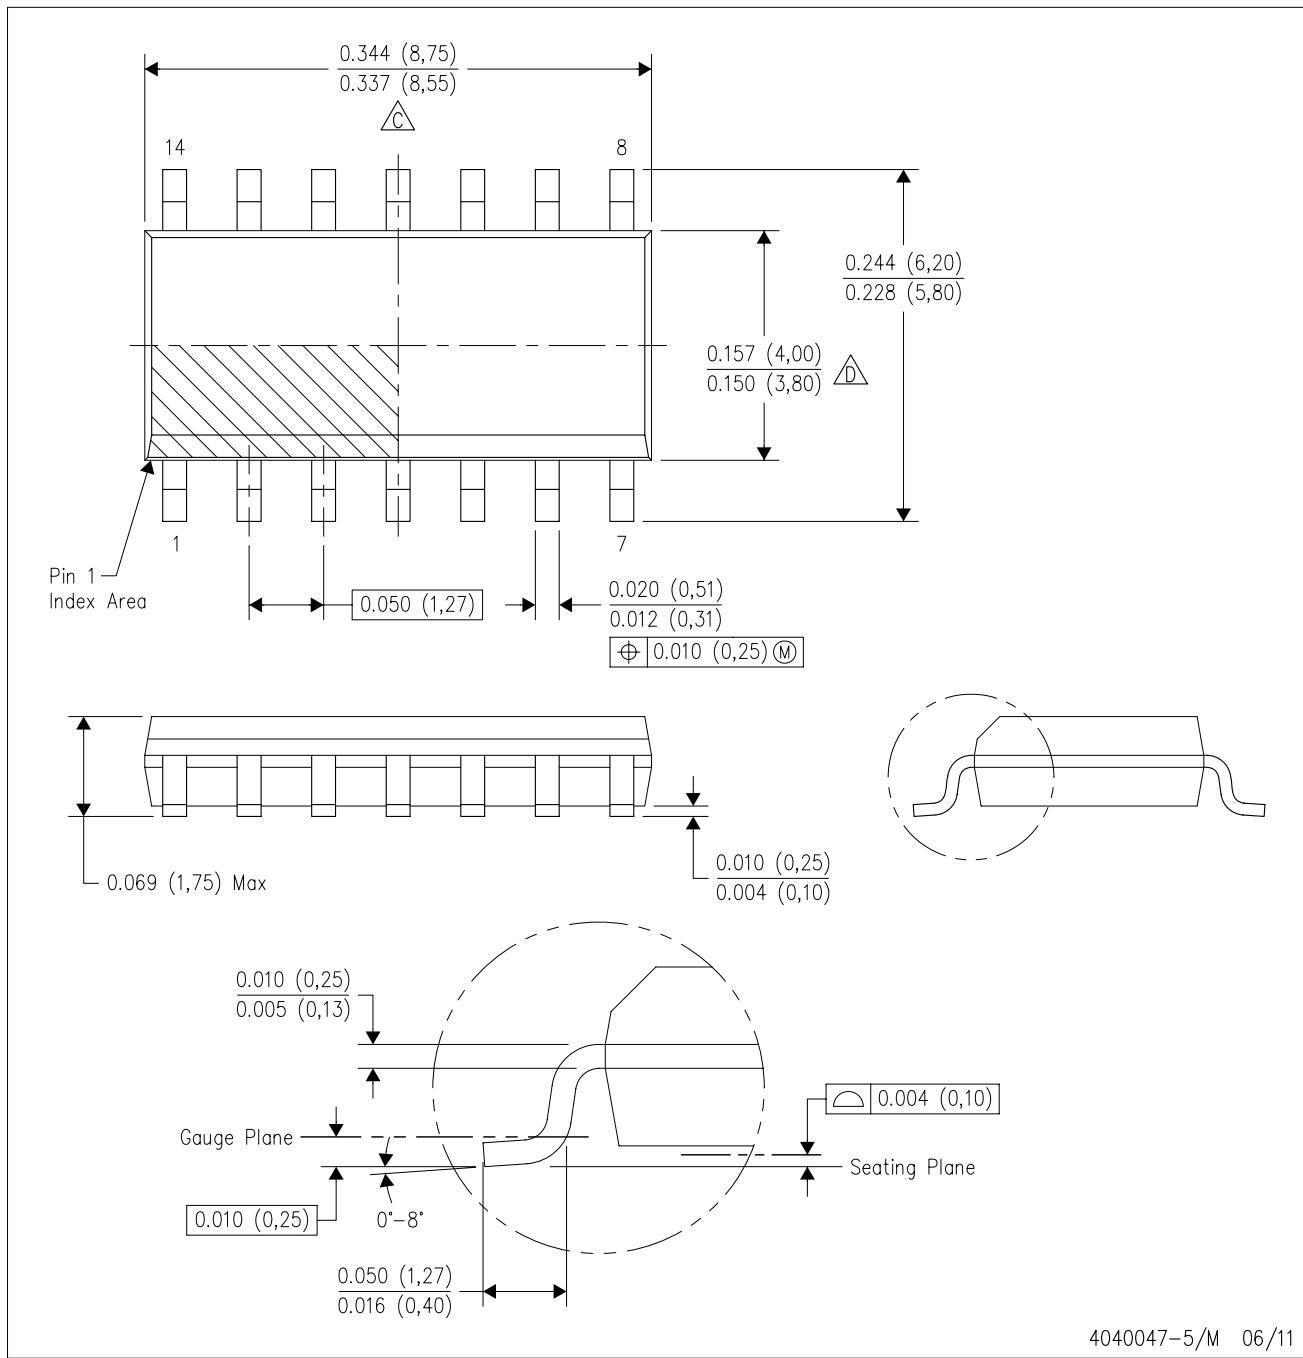PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.

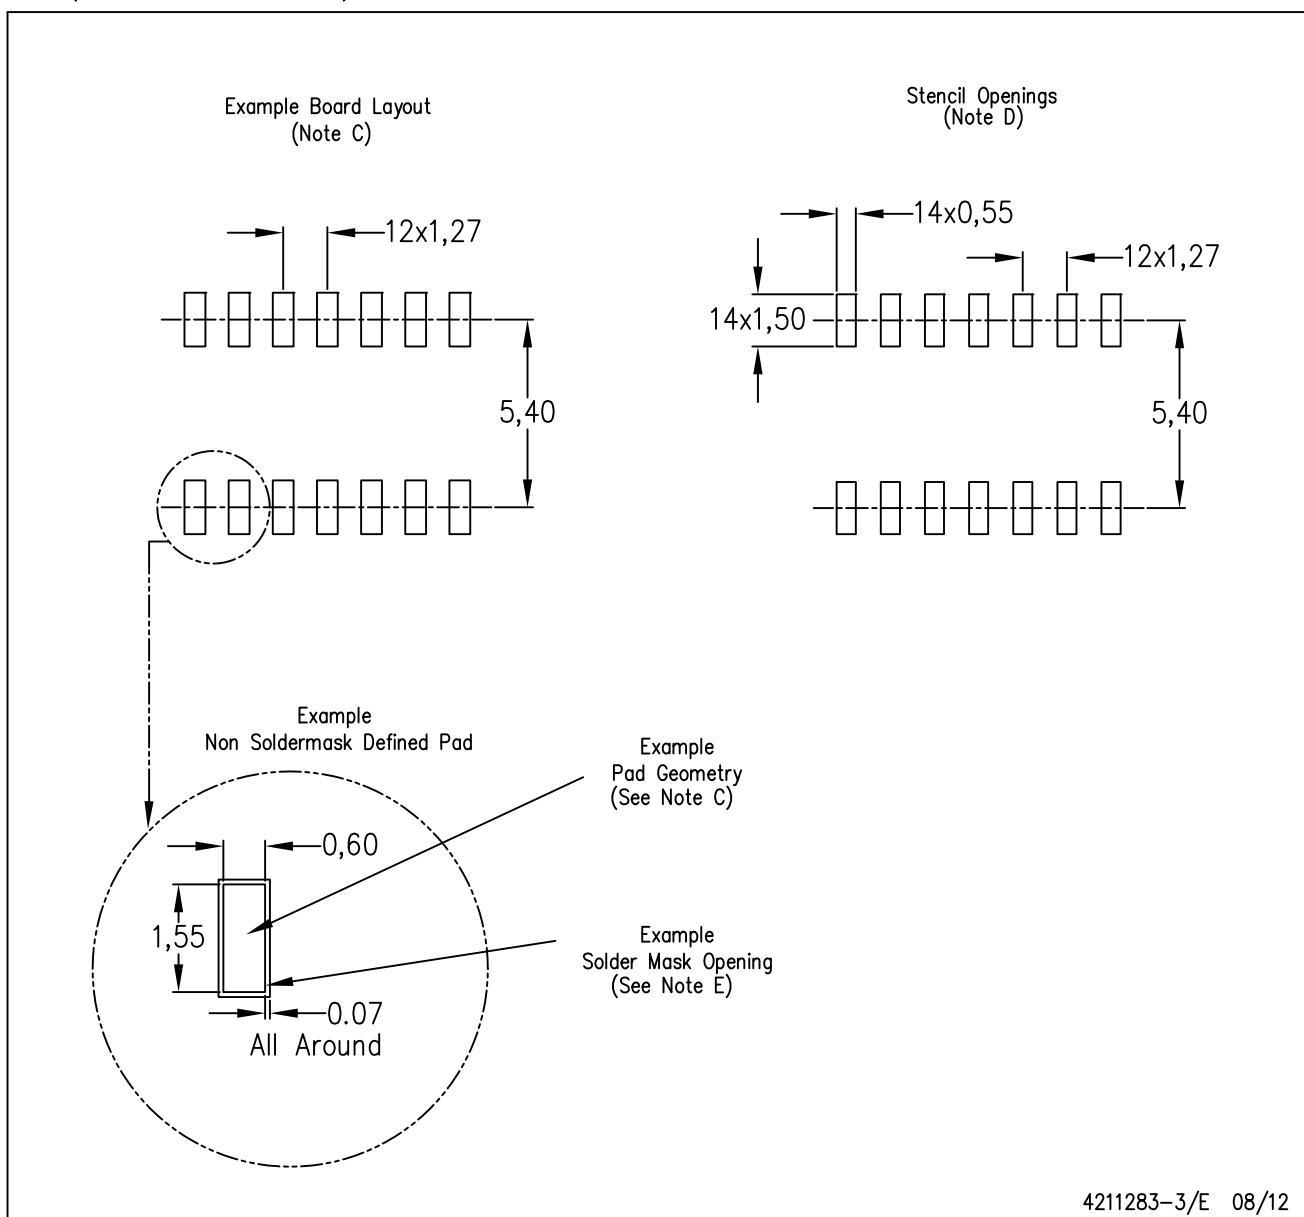
C Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.

D Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.

E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE



4211283-3/E 08/12

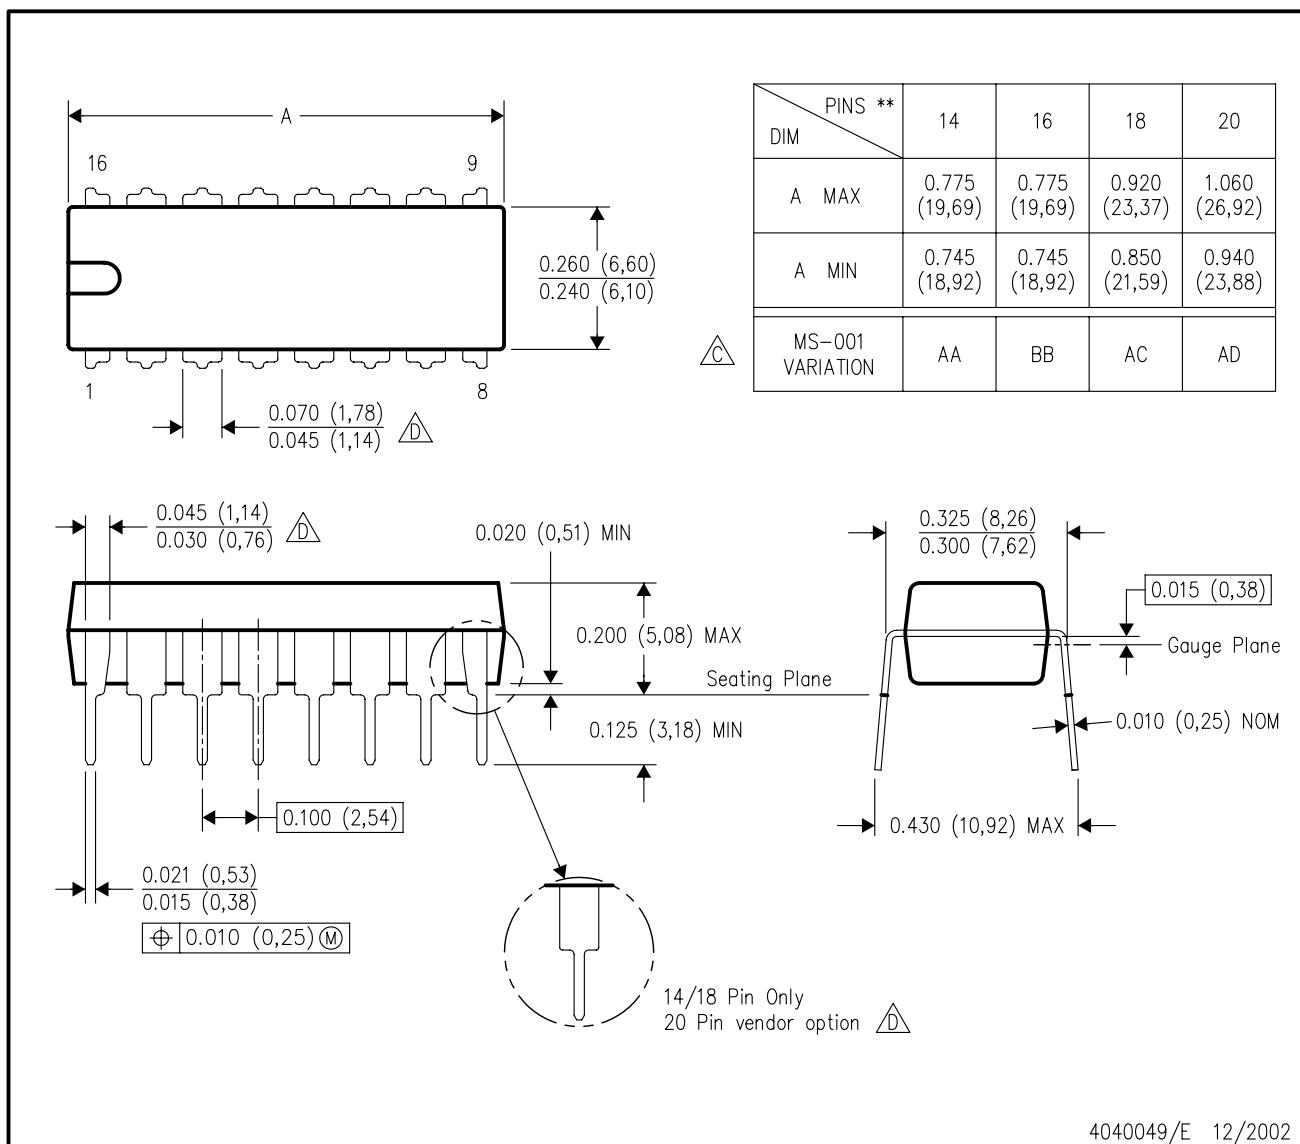
NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Publication IPC-7351 is recommended for alternate designs.
- Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

N (R-PDIP-T**)

16 PINS SHOWN

PLASTIC DUAL-IN-LINE PACKAGE



NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.

△ Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).

△ The 20 pin end lead shoulder width is a vendor option, either half or full width.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2022, Texas Instruments Incorporated