

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

- NC – No internal connection

1

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### DEVICE FEATURES

| PARAMETER† | BIAS-SELECT MODE |        |      | UNIT            |
|------------|------------------|--------|------|-----------------|
|            | HIGH             | MEDIUM | LOW  |                 |
| $P_D$      | 3375             | 525    | 50   | $\mu W$         |
| SR         | 3.6              | 0.4    | 0.03 | V/ $\mu s$      |
| $V_n$      | 25               | 32     | 68   | nV/ $\sqrt{Hz}$ |
| $B_1$      | 1.7              | 0.5    | 0.09 | MHz             |
| $A_{VD}$   | 23               | 170    | 480  | V/mV            |

† Typical at  $V_{DD} = 5 V$ ,  $T_A = 25^\circ C$

### description (continued)

Using the bias-select option, these cost-effective devices can be programmed to span a wide range of applications that previously required BiFET, NFET, or bipolar technology. Three offset voltage grades are available (C-suffix and I-suffix types), ranging from the low-cost TLC271 (10 mV) to the TLC271B (2 mV) low-offset version. The extremely high input impedance and low bias currents, in conjunction with good common-mode rejection and supply voltage rejection, make these devices a good choice for new state-of-the-art designs as well as for upgrading existing designs.

In general, many features associated with bipolar technology are available in LinCMOS™ operational amplifiers, without the power penalties of bipolar technology. General applications such as transducer interfacing, analog calculations, amplifier blocks, active filters, and signal buffering are all easily designed with the TLC271. The devices also exhibit low-voltage single-supply operation, making them ideally suited for remote and inaccessible battery-powered applications. The common-mode input voltage range includes the negative rail.

A wide range of packaging options is available, including small-outline and chip-carrier versions for high-density system applications.

The device inputs and output are designed to withstand –100-mA surge currents without sustaining latch-up.

The TLC271 incorporates internal ESD-protection circuits that prevent functional failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.2; however, care should be exercised in handling these devices as exposure to ESD may result in the degradation of the device parametric performance.

The C-suffix devices are characterized for operation from  $0^\circ C$  to  $70^\circ C$ . The I-suffix devices are characterized for operation from  $-40^\circ C$  to  $85^\circ C$ . The M-suffix devices are characterized for operation over the full military temperature range of  $-55^\circ C$  to  $125^\circ C$ .

### bias-select feature

The TLC271 offers a bias-select feature that allows the user to select any one of three bias levels depending on the level of performance desired. The tradeoffs between bias levels involve ac performance and power dissipation (see Table 1).

**Table 1. Effect of Bias Selection on Performance**

| TYPICAL PARAMETER VALUES<br>$T_A = 25^\circ C$ , $V_{DD} = 5 V$ |                                                 | MODE                            |                                    |                               | UNIT            |
|-----------------------------------------------------------------|-------------------------------------------------|---------------------------------|------------------------------------|-------------------------------|-----------------|
|                                                                 |                                                 | HIGH BIAS<br>$R_L = 10 k\Omega$ | MEDIUM BIAS<br>$R_L = 100 k\Omega$ | LOW BIAS<br>$R_L = 1 M\Omega$ |                 |
| $P_D$                                                           | Power dissipation                               | 3.4                             | 0.5                                | 0.05                          | mW              |
| SR                                                              | Slew rate                                       | 3.6                             | 0.4                                | 0.03                          | V/ $\mu s$      |
| $V_n$                                                           | Equivalent input noise voltage at $f = 1 kHz$   | 25                              | 32                                 | 68                            | nV/ $\sqrt{Hz}$ |
| $B_1$                                                           | Unity-gain bandwidth                            | 1.7                             | 0.5                                | 0.09                          | MHz             |
| $\phi_m$                                                        | Phase margin                                    | $46^\circ$                      | $40^\circ$                         | $34^\circ$                    |                 |
| $A_{VD}$                                                        | Large-signal differential voltage amplification | 23                              | 170                                | 480                           | V/mV            |



## bias selection

Bias selection is achieved by connecting the bias select pin to one of three voltage levels (see Figure 1). For medium-bias applications, it is recommended that the bias select pin be connected to the midpoint between the supply rails. This procedure is simple in split-supply applications, since this point is ground. In single-supply applications, the medium-bias mode necessitates using a voltage divider as indicated in Figure 1. The use of large-value resistors in the voltage divider reduces the current drain of the divider from the supply line. However, large-value resistors used in conjunction with a large-value capacitor require significant time to charge up to the supply midpoint after the supply is switched on. A voltage other than the midpoint can be used if it is within the voltages specified in Figure 1.

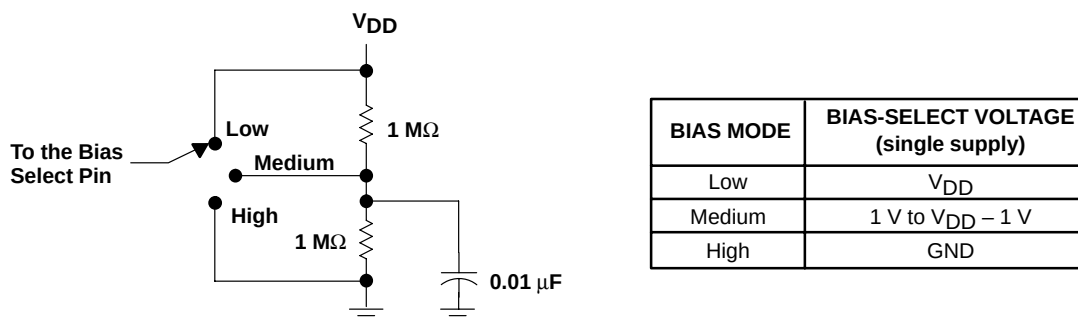


**Figure 1. Bias Selection for Single-Supply Applications**

## high-bias mode

In the high-bias mode, the TLC271 series features low offset voltage drift, high input impedance, and low noise. Speed in this mode approaches that of BiFET devices but at only a fraction of the power dissipation. Unity-gain bandwidth is typically greater than 1 MHz.

## medium-bias mode

The TLC271 in the medium-bias mode features low offset voltage drift, high input impedance, and low noise. Speed in this mode is similar to general-purpose bipolar devices but power dissipation is only a fraction of that consumed by bipolar devices.

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

In the low-bias mode, the TLC271 features low offset voltage drift, high input impedance, extremely low power consumption, and high differential voltage gain.

| TOPIC                                                                              | BIAS MODE                   |
|------------------------------------------------------------------------------------|-----------------------------|
| schematic                                                                          | all                         |
| absolute maximum ratings                                                           | all                         |
| recommended operating conditions                                                   | all                         |
| electrical characteristics<br>operating characteristics<br>typical characteristics | high<br>(Figures 2 – 33)    |
| electrical characteristics<br>operating characteristics<br>typical characteristics | medium<br>(Figures 34 – 65) |
| electrical characteristics<br>operating characteristics<br>typical characteristics | low<br>(Figures 66 – 97)    |
| parameter measurement information                                                  | all                         |
| application information                                                            | all                         |

**absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>†</sup>**

|                                                                              |                              |
|------------------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                                        | 18 V                         |
| Differential input voltage, $V_{ID}$ (see Note 2)                            | $\pm V_{DD}$                 |
| Input voltage range, $V_I$ (any input)                                       | –0.3 V to $V_{DD}$           |
| Input current, $I_I$                                                         | $\pm 5$ mA                   |
| Output current, $I_O$                                                        | $\pm 30$ mA                  |
| Duration of short-circuit current at (or below) 25°C (see Note 3)            | Unlimited                    |
| Continuous total dissipation                                                 | See Dissipation Rating Table |
| Operating free-air temperature, $T_A$ : C suffix                             | 0°C to 70°C                  |
| I suffix                                                                     | –40°C to 85°C                |
| M suffix                                                                     | –55°C to 125°C               |
| Storage temperature range                                                    | –65°C to 150°C               |
| Case temperature for 60 seconds: FK package                                  | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or P package | 260°C                        |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds: JG package     | 300°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES:
1. All voltage values, except differential voltages, are with respect to network ground.
  2. Differential voltages are at  $IN+$  with respect to  $IN-$ .
  3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded (see application section).

**DISSIPATION RATING TABLE**

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   | 520 mW                                   | 200 mW                                    |

**recommended operating conditions**

|                                       |                 | C SUFFIX |     | I SUFFIX |     | M SUFFIX |     | UNIT |
|---------------------------------------|-----------------|----------|-----|----------|-----|----------|-----|------|
|                                       |                 | MIN      | MAX | MIN      | MAX | MIN      | MAX |      |
| Supply voltage, $V_{DD}$              |                 | 3        | 16  | 4        | 16  | 5        | 16  | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD} = 5$ V  | –0.2     | 3.5 | –0.2     | 3.5 | 0        | 3.5 | V    |
|                                       | $V_{DD} = 10$ V | –0.2     | 8.5 | –0.2     | 8.5 | 0        | 8.5 |      |
| Operating free-air temperature, $T_A$ |                 | 0        | 70  | –40      | 85  | –55      | 125 | °C   |

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### HIGH-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                       | T <sub>A</sub> <sup>†</sup> | TLC271C, TLC271AC, TLC271BC |             |      |                        |             |       | UNIT |
|---------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|------|------------------------|-------------|-------|------|
|                     |                                                                      |                                                                                                       |                             | V <sub>DD</sub> = 5 V       |             |      | V <sub>DD</sub> = 10 V |             |       |      |
|                     |                                                                      |                                                                                                       |                             | MIN                         | TYP         | MAX  | MIN                    | TYP         | MAX   |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 10 kΩ | 25°C                        | 1.1                         |             | 10   | 1.1                    |             | 10    | mV   |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 12   |                        |             | 12    |      |
|                     |                                                                      |                                                                                                       | 25°C                        | 0.9                         |             | 5    | 0.9                    |             | 5     |      |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 6.5  |                        |             | 6.5   |      |
|                     |                                                                      |                                                                                                       | 25°C                        | 0.34                        |             | 2    | 0.39                   |             | 2     |      |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 3    |                        |             | 3     |      |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                       |                             | 25°C to 70°C                | 1.8         |      | 2                      |             | μV/°C |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.1                         |             | 60   | 0.1                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                       | 70°C                        | 7                           |             | 300  | 7                      |             | 300   |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.6                         |             | 60   | 0.7                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                       | 70°C                        | 40                          |             | 600  | 50                     |             | 600   |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                       | 25°C                        | −0.2 to 4                   | −0.3 to 4.2 |      | −0.2 to 9              | −0.3 to 9.2 | V     |      |
|                     |                                                                      |                                                                                                       | Full range                  | −0.2 to 3.5                 |             |      | −0.2 to 8.5            |             | V     |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 10 kΩ                                                   | 25°C                        | 3.2                         | 3.8         |      | 8                      | 8.5         | V     |      |
|                     |                                                                      |                                                                                                       | 0°C                         | 3                           | 3.8         |      | 7.8                    | 8.5         |       |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 3                           | 3.8         |      | 7.8                    | 8.4         |       |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                                     | 25°C                        | 0                           |             | 50   | 0                      |             | 50    | mV   |
|                     |                                                                      |                                                                                                       | 0°C                         | 0                           |             | 50   | 0                      |             | 50    |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 0                           |             | 50   | 0                      |             | 50    |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 10 kΩ,<br>See Note 6                                                                 | 25°C                        | 5                           | 23          |      | 10                     | 36          | V/mV  |      |
|                     |                                                                      |                                                                                                       | 0°C                         | 4                           | 27          |      | 7.5                    | 42          |       |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 4                           | 20          |      | 7.5                    | 32          |       |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                 | 25°C                        | 65                          | 80          |      | 65                     | 85          | dB    |      |
|                     |                                                                      |                                                                                                       | 0°C                         | 60                          | 84          |      | 60                     | 88          |       |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 60                          | 85          |      | 60                     | 88          |       |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                               | 25°C                        | 65                          | 95          |      | 65                     | 95          | dB    |      |
|                     |                                                                      |                                                                                                       | 0°C                         | 60                          | 94          |      | 60                     | 94          |       |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 60                          | 96          |      | 60                     | 96          |       |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = 0                                                                               | 25°C                        | −1.4                        |             | −1.9 |                        | μA          |       |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load              | 25°C                        | 675                         | 1600        |      | 950                    | 2000        | μA    |      |
|                     |                                                                      |                                                                                                       | 0°C                         | 775                         | 1800        |      | 1125                   | 2200        |       |      |
|                     |                                                                      |                                                                                                       | 70°C                        | 575                         | 1300        |      | 750                    | 1700        |       |      |

<sup>†</sup> Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



## HIGH-BIAS MODE

**electrical characteristics at specified free-air temperature (unless otherwise noted)**

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                       | T <sub>A</sub> <sup>†</sup> | TLC271I, TLC271AI, TLC271BI |             |      |                        |             |       | UNIT |
|---------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|------|------------------------|-------------|-------|------|
|                     |                                                                      |                                                                                                       |                             | V <sub>DD</sub> = 5 V       |             |      | V <sub>DD</sub> = 10 V |             |       |      |
|                     |                                                                      |                                                                                                       |                             | MIN                         | TYP         | MAX  | MIN                    | TYP         | MAX   |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 10 kΩ | 25°C                        | 1.1                         |             | 10   | 1.1                    |             | 10    | mV   |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 13   |                        |             | 13    |      |
|                     |                                                                      |                                                                                                       | 25°C                        | 0.9                         |             | 5    | 0.9                    |             | 5     |      |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 7    |                        |             | 7     |      |
|                     |                                                                      |                                                                                                       | 25°C                        | 0.34                        |             | 2    | 0.39                   |             | 2     |      |
|                     |                                                                      |                                                                                                       | Full range                  |                             |             | 3.5  |                        |             | 3.5   |      |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                       |                             | 25°C to 85°C                | 1.8         |      | 2                      |             | μV/°C |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.1                         |             | 60   | 0.1                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                       | 85°C                        | 24                          |             | 1000 | 26                     |             | 1000  |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.6                         |             | 60   | 0.7                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                       | 85°C                        | 200                         |             | 2000 | 220                    |             | 2000  |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                       | 25°C                        | −0.2 to 4                   | −0.3 to 4.2 |      | −0.2 to 9              | −0.3 to 9.2 | V     |      |
|                     |                                                                      |                                                                                                       | Full range                  | −0.2 to 3.5                 |             |      | −0.2 to 8.5            |             | V     |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 10 kΩ                                                   | 25°C                        | 3.2                         |             | 3.8  | 8                      |             | 8.5   | V    |
|                     |                                                                      |                                                                                                       | −40°C                       | 3                           |             | 3.8  | 7.8                    |             | 8.5   |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 3                           |             | 3.8  | 7.8                    |             | 8.5   |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                                     | 25°C                        | 0                           |             | 50   | 0                      |             | 50    | mV   |
|                     |                                                                      |                                                                                                       | −40°C                       | 0                           |             | 50   | 0                      |             | 50    |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 0                           |             | 50   | 0                      |             | 50    |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 10 kΩ,<br>See Note 6                                                                 | 25°C                        | 5                           |             | 23   | 10                     |             | 36    | V/mV |
|                     |                                                                      |                                                                                                       | −40°C                       | 3.5                         |             | 32   | 7                      |             | 46    |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 3.5                         |             | 19   | 7                      |             | 31    |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                 | 25°C                        | 65                          |             | 80   | 65                     |             | 85    | dB   |
|                     |                                                                      |                                                                                                       | −40°C                       | 60                          |             | 81   | 60                     |             | 87    |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 60                          |             | 86   | 60                     |             | 88    |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                               | 25°C                        | 65                          |             | 95   | 65                     |             | 95    | dB   |
|                     |                                                                      |                                                                                                       | −40°C                       | 60                          |             | 92   | 60                     |             | 92    |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 60                          |             | 96   | 60                     |             | 96    |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = 0                                                                               | 25°C                        | −1.4                        |             |      | −1.9                   |             | μA    |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load              | 25°C                        | 675                         |             | 1600 | 950                    |             | 2000  | μA   |
|                     |                                                                      |                                                                                                       | −40°C                       | 950                         |             | 2200 | 1375                   |             | 2500  |      |
|                     |                                                                      |                                                                                                       | 85°C                        | 525                         |             | 1200 | 725                    |             | 1600  |      |

<sup>†</sup> Full range is –40°C to 85°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER

### OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

#### HIGH-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                       | T <sub>A</sub> <sup>†</sup> | TLC271M               |             |          |                        |             |     | UNIT  |
|---------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------|-------------|----------|------------------------|-------------|-----|-------|
|                     |                                                                      |                                                                                                       |                             | V <sub>DD</sub> = 5 V |             |          | V <sub>DD</sub> = 10 V |             |     |       |
|                     |                                                                      |                                                                                                       |                             | MIN                   | TYP         | MAX      | MIN                    | TYP         | MAX |       |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 10 kΩ | 25°C                        | 1.1                   | 10          |          | 1.1                    | 10          |     | mV    |
|                     |                                                                      |                                                                                                       | Full range                  |                       | 12          |          |                        | 12          |     |       |
| αV <sub>IO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                       | 25°C to 125°C               | 2.1                   |             |          | 2.2                    |             |     | μV/°C |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.1                   | 60          |          | 0.1                    | 60          |     | pA    |
|                     |                                                                      |                                                                                                       | 125°C                       | 1.4                   | 15          |          | 1.8                    | 15          |     | nA    |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                          | 25°C                        | 0.6                   | 60          |          | 0.7                    | 60          |     | pA    |
|                     |                                                                      |                                                                                                       | 125°C                       | 9                     | 35          |          | 10                     | 35          |     | nA    |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                       | 25°C                        | 0 to 4                | –0.3 to 4.2 |          | 0 to 9                 | –0.3 to 9.2 |     | V     |
|                     |                                                                      |                                                                                                       | Full range                  | 0 to 3.5              |             | 0 to 8.5 |                        | V           |     |       |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 10 kΩ                                                   | 25°C                        | 3.2                   | 3.8         |          | 8                      | 8.5         |     | V     |
|                     |                                                                      |                                                                                                       | –55°C                       | 3                     | 3.8         |          | 7.8                    | 8.5         |     |       |
|                     |                                                                      |                                                                                                       | 125°C                       | 3                     | 3.8         |          | 7.8                    | 8.4         |     |       |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = –100 mV,<br>I <sub>OL</sub> = 0                                                     | 25°C                        |                       | 0           | 50       |                        | 0           | 50  | mV    |
|                     |                                                                      |                                                                                                       | –55°C                       |                       | 0           | 50       |                        | 0           | 50  |       |
|                     |                                                                      |                                                                                                       | 125°C                       |                       | 0           | 50       |                        | 0           | 50  |       |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 10 kΩ,<br>See Note 6                                                                 | 25°C                        | 5                     | 23          |          | 10                     | 36          |     | V/mV  |
|                     |                                                                      |                                                                                                       | –55°C                       | 3.5                   | 35          |          | 7                      | 50          |     |       |
|                     |                                                                      |                                                                                                       | 125°C                       | 3.5                   | 16          |          | 7                      | 27          |     |       |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                 | 25°C                        | 65                    | 80          |          | 65                     | 85          |     | dB    |
|                     |                                                                      |                                                                                                       | –55°C                       | 60                    | 81          |          | 60                     | 87          |     |       |
|                     |                                                                      |                                                                                                       | 125°C                       | 60                    | 84          |          | 60                     | 86          |     |       |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                               | 25°C                        | 65                    | 95          |          | 65                     | 95          |     | dB    |
|                     |                                                                      |                                                                                                       | –55°C                       | 60                    | 90          |          | 60                     | 90          |     |       |
|                     |                                                                      |                                                                                                       | 125°C                       | 60                    | 97          |          | 60                     | 97          |     |       |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = 0                                                                               | 25°C                        | –1.4                  |             |          | –1.9                   |             | μA  |       |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load              | 25°C                        | 675                   | 1600        |          | 950                    | 2000        |     | μA    |
|                     |                                                                      |                                                                                                       | –55°C                       | 1000                  | 2500        |          | 1475                   | 3000        |     |       |
|                     |                                                                      |                                                                                                       | 125°C                       | 475                   | 1100        |          | 625                    | 1400        |     |       |

<sup>†</sup> Full range is –55°C to 125°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## HIGH-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271C, TLC271AC, TLC271BC |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|-----------------------------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN                         | TYP | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                        | 3.6 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | 0°C                         | 4   |     |                        |
|                                         |                                                                                            |                                    | 70°C                        | 3   |     |                        |
|                                         |                                                                                            | $V_{I(PP)} = 2.5\text{ V}$         | 25°C                        | 2.9 |     |                        |
|                                         |                                                                                            |                                    | 0°C                         | 3.1 |     |                        |
|                                         |                                                                                            |                                    | 70°C                        | 2.5 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |                             | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                             | 320 |     | kHz                    |
|                                         |                                                                                            | 0°C                                |                             | 340 |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 260 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |                             | 1.7 |     | MHz                    |
|                                         |                                                                                            | 0°C                                |                             | 2   |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 1.3 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100          | 25°C                               |                             | 46° |     |                        |
|                                         |                                                                                            | 0°C                                |                             | 47° |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 44° |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271C, TLC271AC, TLC271BC |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|-----------------------------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN                         | TYP | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                        | 5.3 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | 0°C                         | 5.9 |     |                        |
|                                         |                                                                                            |                                    | 70°C                        | 4.3 |     |                        |
|                                         |                                                                                            | $V_{I(PP)} = 5.5\text{ V}$         | 25°C                        | 4.6 |     |                        |
|                                         |                                                                                            |                                    | 0°C                         | 5.1 |     |                        |
|                                         |                                                                                            |                                    | 70°C                        | 3.8 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |                             | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                             | 200 |     | kHz                    |
|                                         |                                                                                            | 0°C                                |                             | 220 |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 140 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |                             | 2.2 |     | MHz                    |
|                                         |                                                                                            | 0°C                                |                             | 2.5 |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 1.8 |     |                        |
| $\phi_m$ Phase margin                   | $f = B_1$ ,<br>$C_L = 20\text{ pF}$ ,<br>$V_I = 10\text{ mV}$ ,<br>See Figure 100          | 25°C                               |                             | 49° |     |                        |
|                                         |                                                                                            | 0°C                                |                             | 50° |     |                        |
|                                         |                                                                                            | 70°C                               |                             | 46° |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**HIGH-BIAS MODE**

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271I, TLC271AI,<br>TLC271BI |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN                            | TYP | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 3.6 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | -40°C                          | 4.5 |     |                        |
|                                         |                                                                                            |                                    | 85°C                           | 2.8 |     |                        |
|                                         | $V_{I(PP)} = 2.5\text{ V}$                                                                 | 25°C                               |                                | 2.9 |     |                        |
|                                         |                                                                                            | -40°C                              |                                | 3.5 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 2.3 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 320 |     | kHz                    |
|                                         |                                                                                            | -40°C                              |                                | 380 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 250 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 1.7 |     | MHz                    |
|                                         |                                                                                            | -40°C                              |                                | 2.6 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 1.2 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100          | 25°C                               |                                | 46° |     |                        |
|                                         |                                                                                            | -40°C                              |                                | 49° |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 43° |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271I, TLC271AI,<br>TLC271BI |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN                            | TYP | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 5.3 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | -40°C                          | 6.8 |     |                        |
|                                         |                                                                                            |                                    | 85°C                           | 4   |     |                        |
|                                         | $V_{I(PP)} = 5.5\text{ V}$                                                                 | 25°C                               |                                | 4.6 |     |                        |
|                                         |                                                                                            | -40°C                              |                                | 5.8 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 3.5 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 200 |     | kHz                    |
|                                         |                                                                                            | -40°C                              |                                | 260 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 130 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 2.2 |     | MHz                    |
|                                         |                                                                                            | -40°C                              |                                | 3.1 |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 1.7 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100          | 25°C                               |                                | 49° |     |                        |
|                                         |                                                                                            | -40°C                              |                                | 52° |     |                        |
|                                         |                                                                                            | 85°C                               |                                | 46° |     |                        |



## HIGH-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271M |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|---------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN     | TYP | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 3.6 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | -55°C   | 4.7 |     |                        |
|                                         |                                                                                            |                                    | 125°C   | 2.3 |     |                        |
|                                         |                                                                                            | $V_{I(PP)} = 2.5\text{ V}$         | 25°C    | 2.9 |     |                        |
|                                         |                                                                                            |                                    | -55°C   | 3.7 |     |                        |
|                                         |                                                                                            |                                    | 125°C   | 2   |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 320 |     | kHz                    |
|                                         |                                                                                            | -55°C                              |         | 400 |     |                        |
|                                         |                                                                                            | 125°C                              |         | 230 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 1.7 |     | MHz                    |
|                                         |                                                                                            | -55°C                              |         | 2.9 |     |                        |
|                                         |                                                                                            | 125°C                              |         | 1.1 |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100          | 25°C                               |         | 46° |     |                        |
|                                         |                                                                                            | -55°C                              |         | 49° |     |                        |
|                                         |                                                                                            | 125°C                              |         | 41° |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                            | $T_A$                              | TLC271M |     |     | UNIT                   |
|-----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|---------|-----|-----|------------------------|
|                                         |                                                                                            |                                    | MIN     | TYP | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 5.3 |     | V/ $\mu$ s             |
|                                         |                                                                                            |                                    | -55°C   | 7.1 |     |                        |
|                                         |                                                                                            |                                    | 125°C   | 3.1 |     |                        |
|                                         |                                                                                            | $V_{I(PP)} = 5.5\text{ V}$         | 25°C    | 4.6 |     |                        |
|                                         |                                                                                            |                                    | -55°C   | 6.1 |     |                        |
|                                         |                                                                                            |                                    | 125°C   | 2.7 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                      | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 25  |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 10\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 200 |     | kHz                    |
|                                         |                                                                                            | -55°C                              |         | 280 |     |                        |
|                                         |                                                                                            | 125°C                              |         | 110 |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                   | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 2.2 |     | MHz                    |
|                                         |                                                                                            | -55°C                              |         | 3.4 |     |                        |
|                                         |                                                                                            | 125°C                              |         | 1.6 |     |                        |
| $\phi_m$ Phase margin                   | $f = B_1$ ,<br>$C_L = 20\text{ pF}$ ,<br>$V_I = 10\text{ mV}$ ,<br>See Figure 100          | 25°C                               |         | 49° |     |                        |
|                                         |                                                                                            | -55°C                              |         | 52° |     |                        |
|                                         |                                                                                            | 125°C                              |         | 44° |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)**

**Table of Graphs**

|                |                                                 |                                                                                                                         | <b>FIGURE</b>                |
|----------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------|
| $V_{IO}$       | Input offset voltage                            | Distribution                                                                                                            | 2, 3                         |
| $\alpha_{VIO}$ | Temperature coefficient                         | Distribution                                                                                                            | 4, 5                         |
| $V_{OH}$       | High-level output voltage                       | vs High-level output current<br>vs Supply voltage<br>vs Free-air temperature                                            | 6, 7<br>8<br>9               |
| $V_{OL}$       | Low-level output voltage                        | vs Common-mode input voltage<br>vs Differential input voltage<br>vs Free-air temperature<br>vs Low-level output current | 10, 11<br>12<br>13<br>14, 15 |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Supply voltage<br>vs Free-air temperature<br>vs Frequency                                                            | 16<br>17<br>28, 29           |
| $I_{IB}$       | Input bias current                              | vs Free-air temperature                                                                                                 | 18                           |
| $I_{IO}$       | Input offset current                            | vs Free-air temperature                                                                                                 | 18                           |
| $V_{IC}$       | Common-mode input voltage                       | vs Supply voltage                                                                                                       | 19                           |
| $I_{DD}$       | Supply current                                  | vs Supply voltage<br>vs Free-air temperature                                                                            | 20<br>21                     |
| $SR$           | Slew rate                                       | vs Supply voltage<br>vs Free-air temperature                                                                            | 22<br>23                     |
|                | Bias-select current                             | vs Supply voltage                                                                                                       | 24                           |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                                                                                                            | 25                           |
| $B_1$          | Unity-gain bandwidth                            | vs Free-air temperature<br>vs Supply voltage                                                                            | 26<br>27                     |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Frequency                                                                                                            | 28, 29                       |
| $\phi_m$       | Phase margin                                    | vs Supply voltage<br>vs Free-air temperature<br>vs Capacitive load                                                      | 30<br>31<br>32               |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                                                                                                            | 33                           |
|                | Phase shift                                     | vs Frequency                                                                                                            | 28, 29                       |



**TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>**

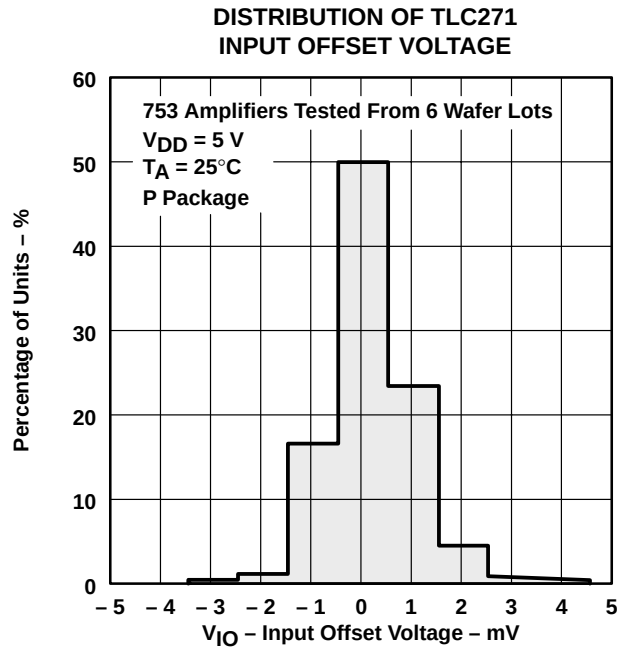


**Figure 2**

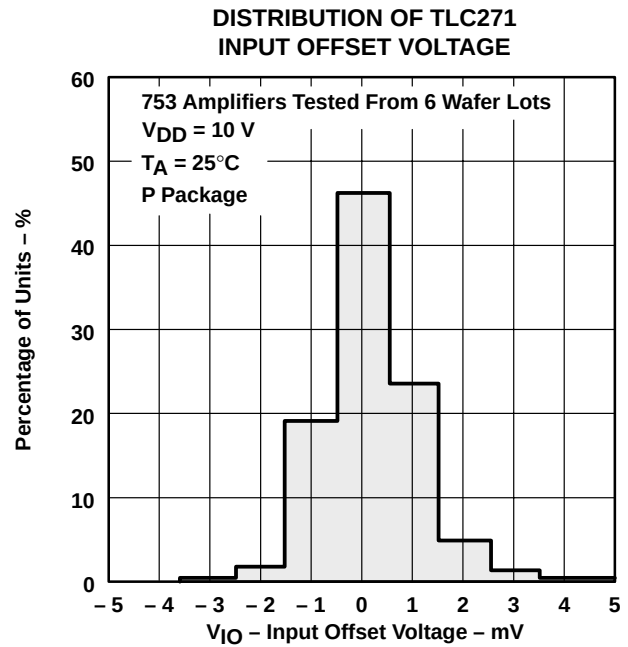


**Figure 3**

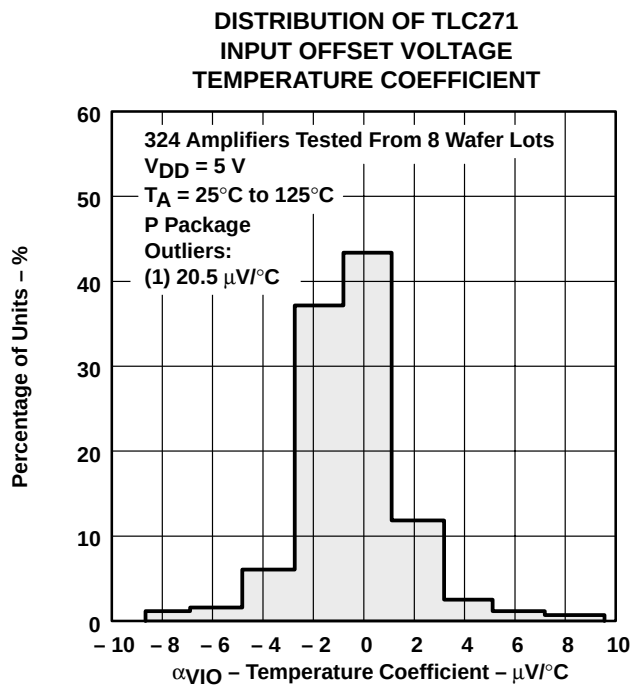


**Figure 4**

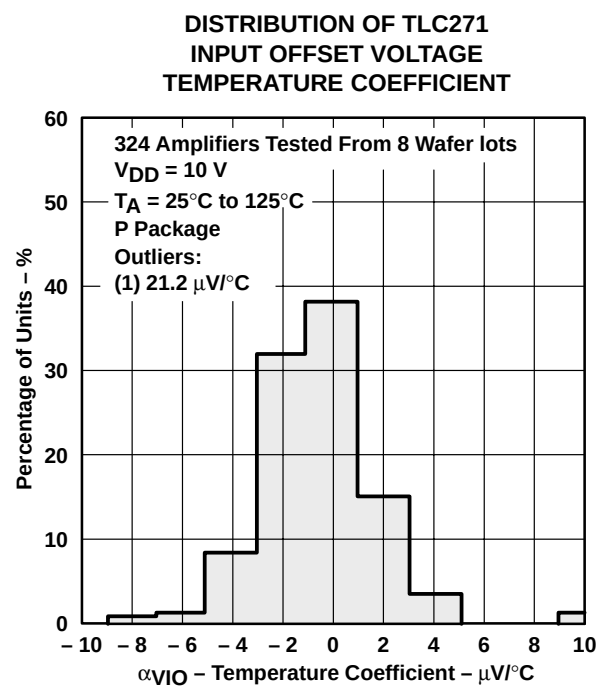


**Figure 5**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>

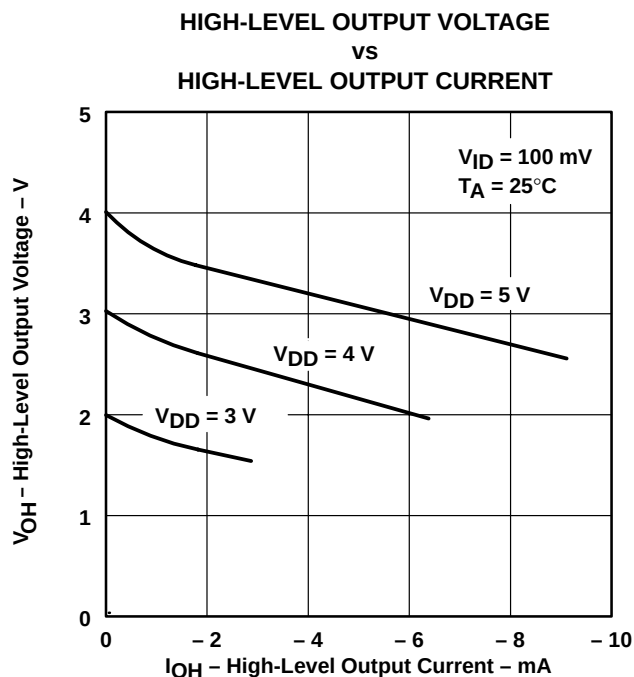


Figure 6

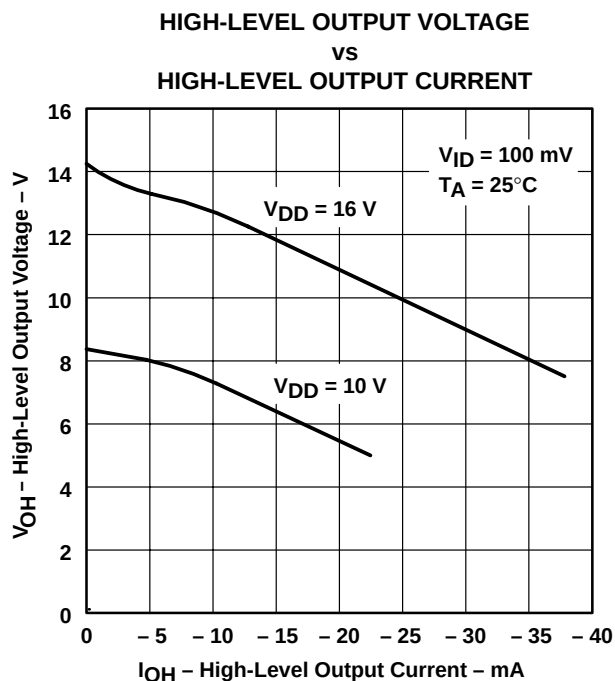


Figure 7

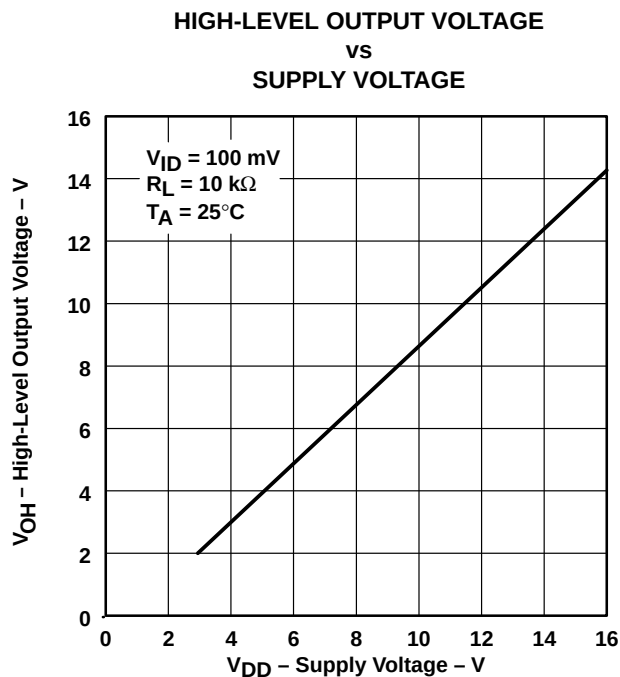


Figure 8

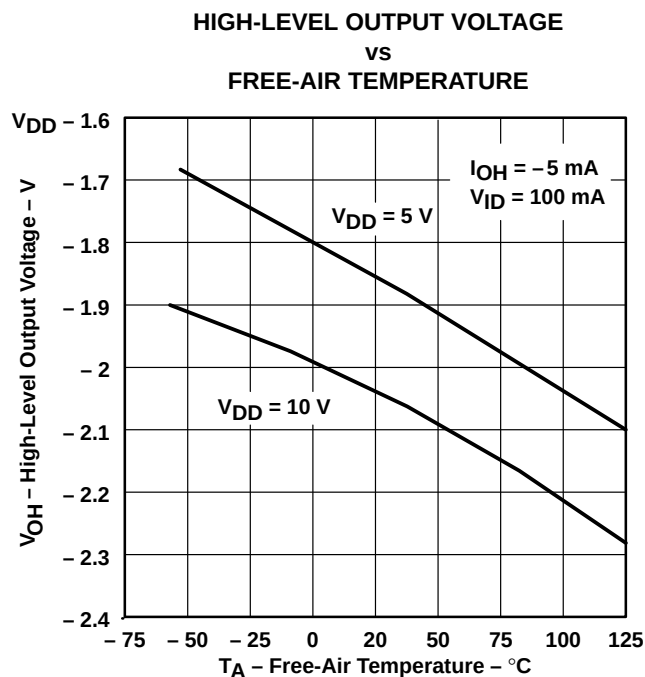


Figure 9

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

### TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>

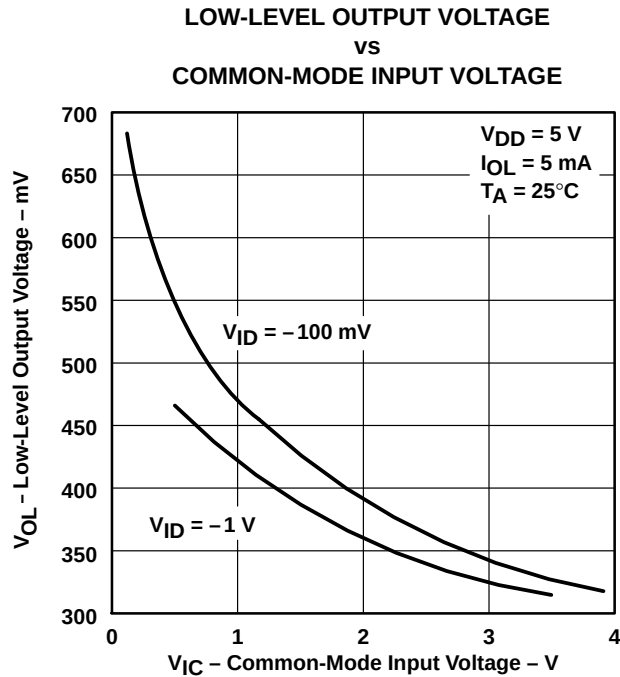


Figure 10

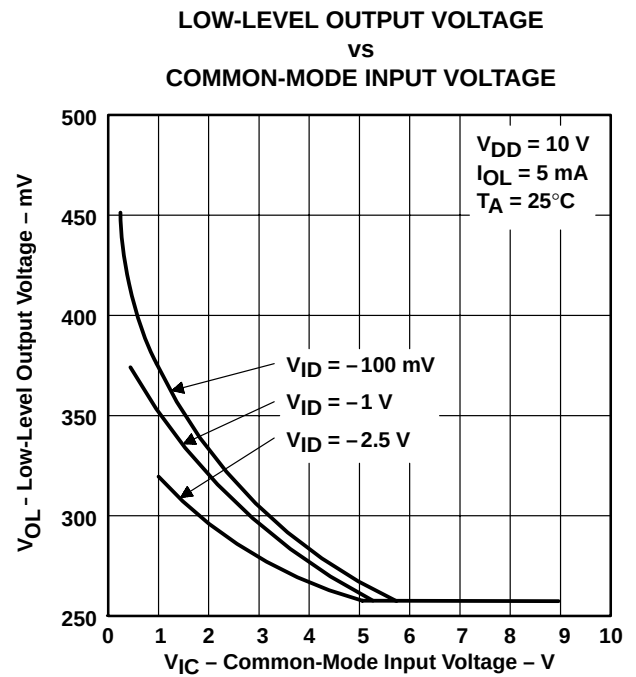


Figure 11

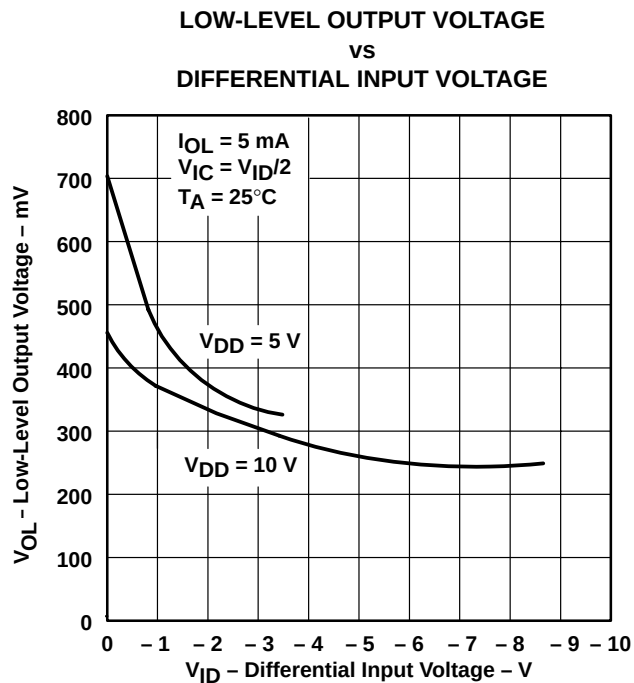


Figure 12

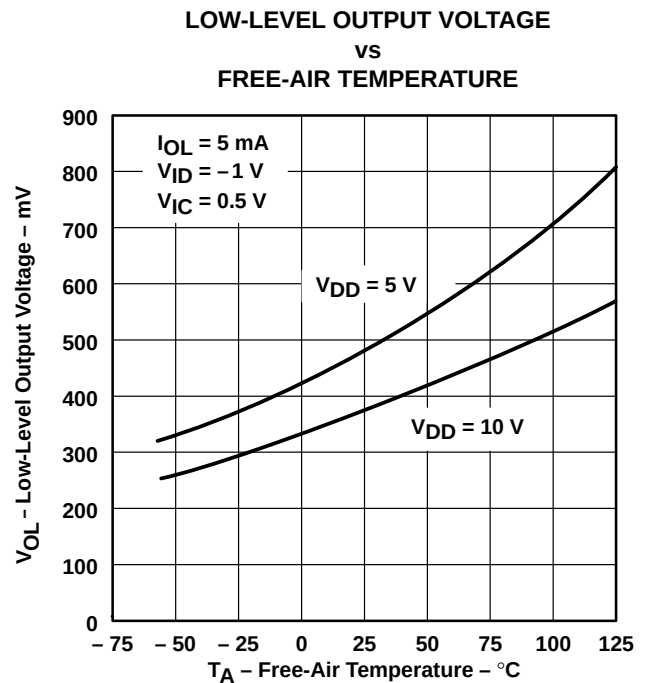


Figure 13

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>

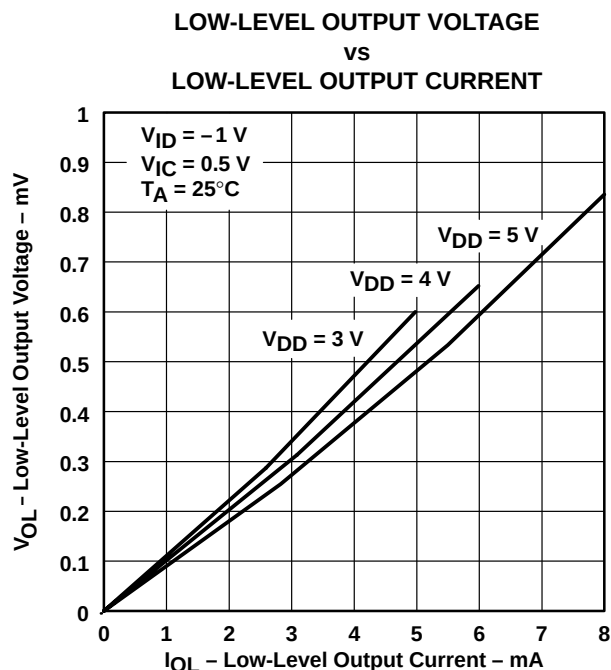


Figure 14

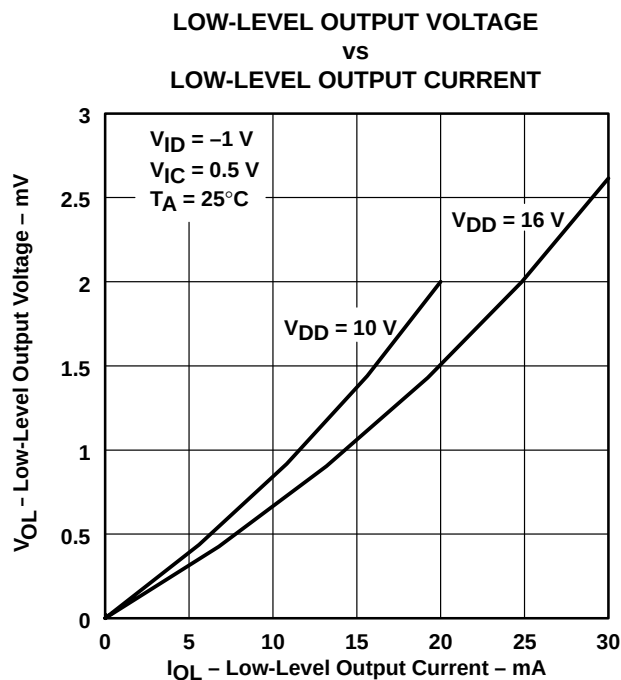


Figure 15

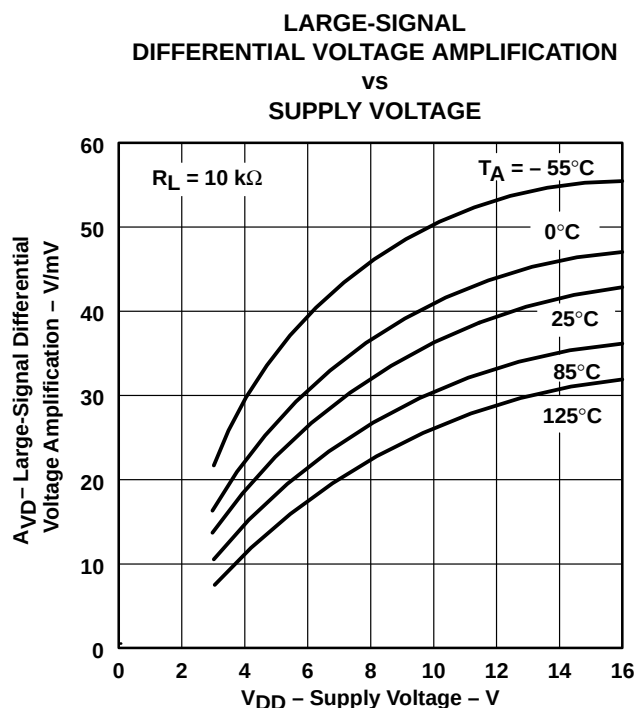


Figure 16


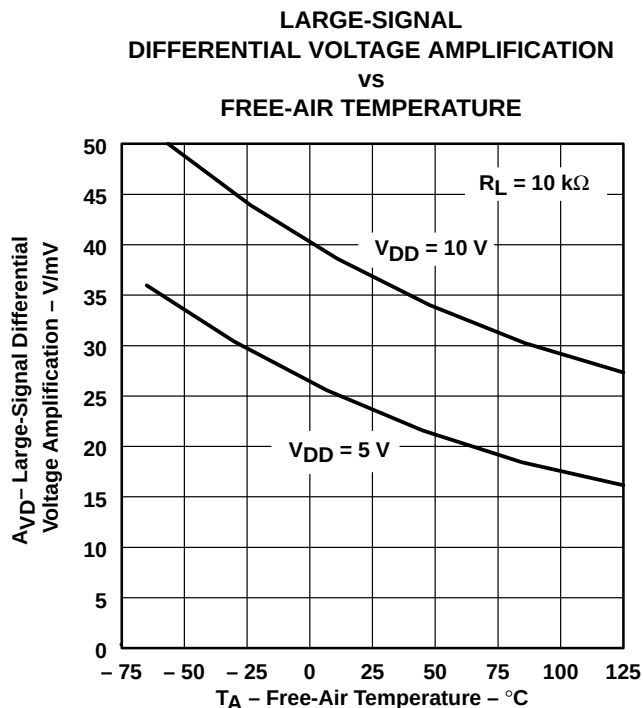


Figure 17

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>**

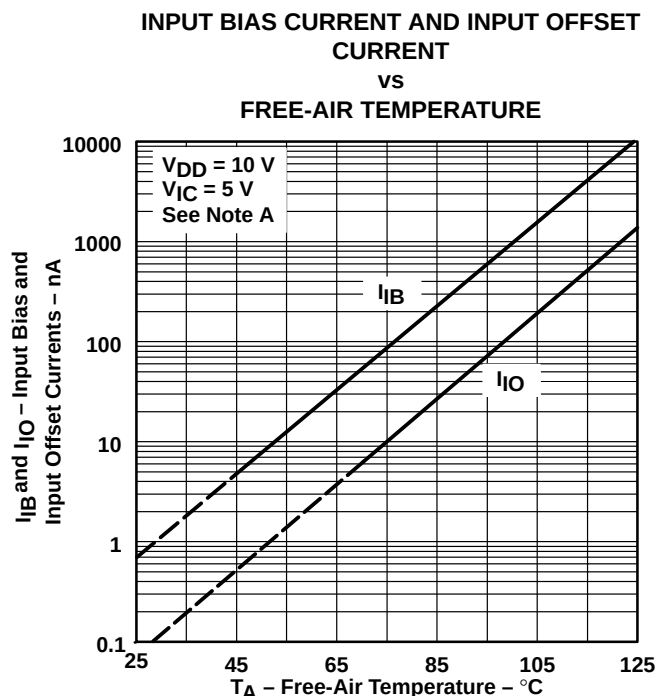

NOTE A: The typical values of input bias current and input offset current below 5 pA were determined mathematically.

**Figure 18**

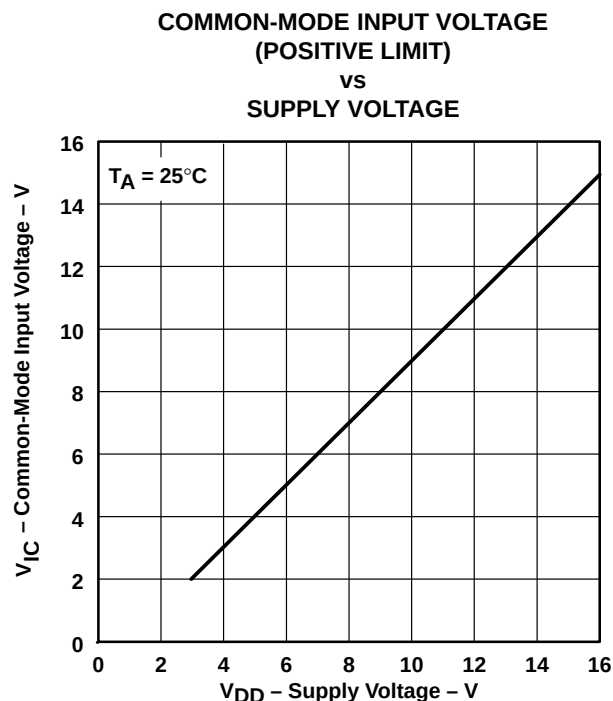


**Figure 19**

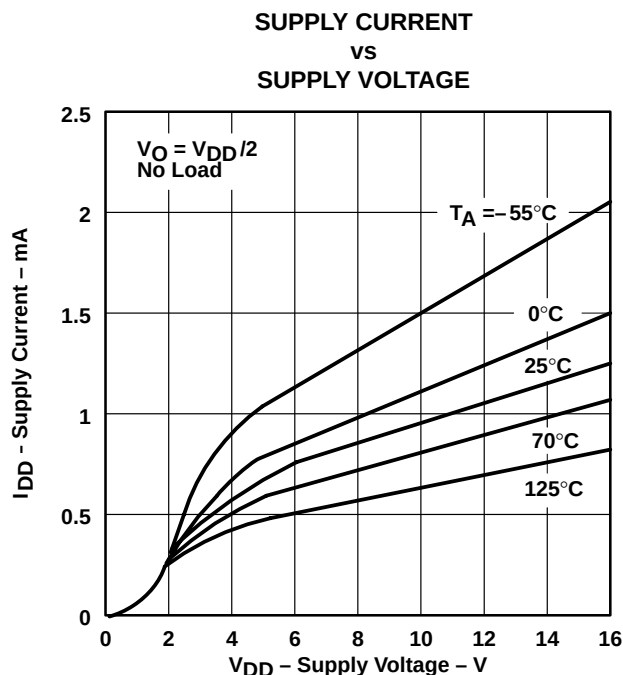


**Figure 20**

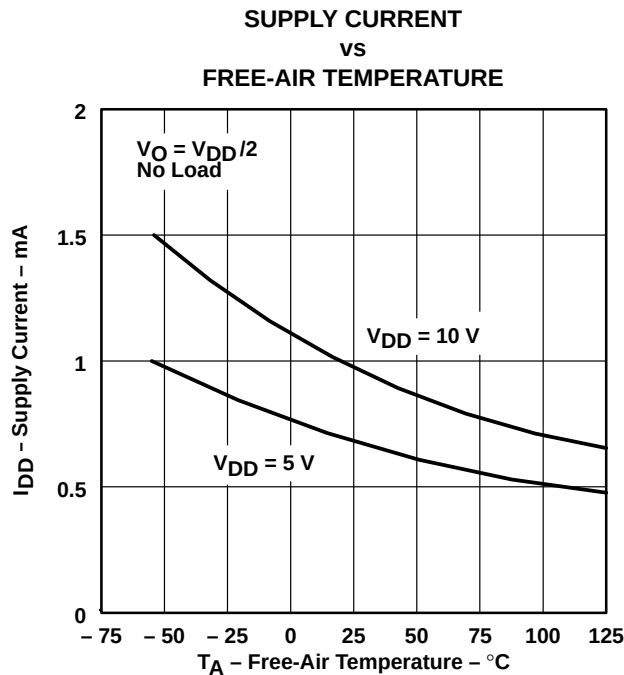


**Figure 21**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>

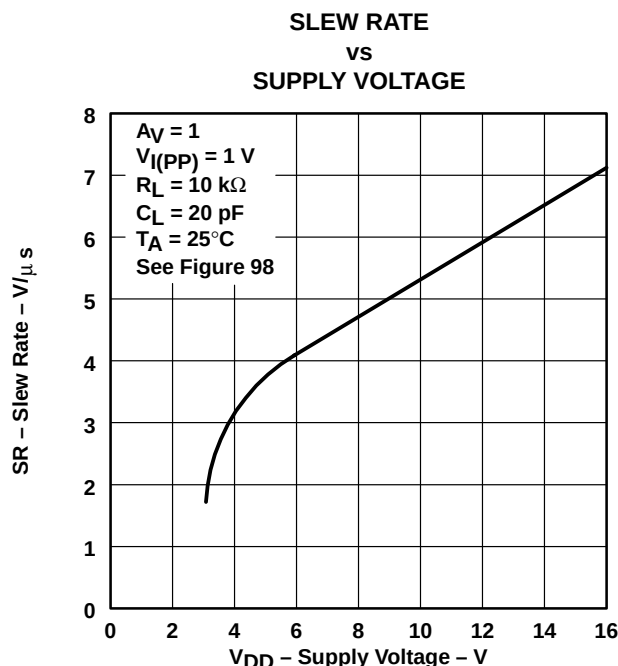


Figure 22

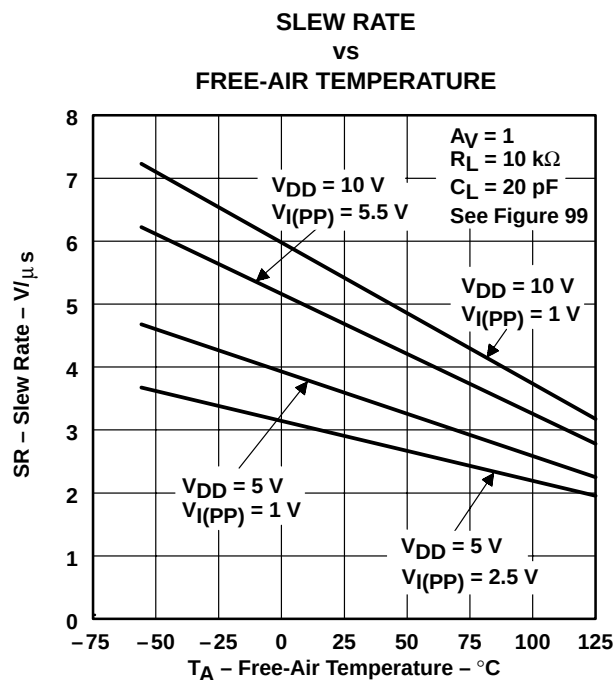


Figure 23

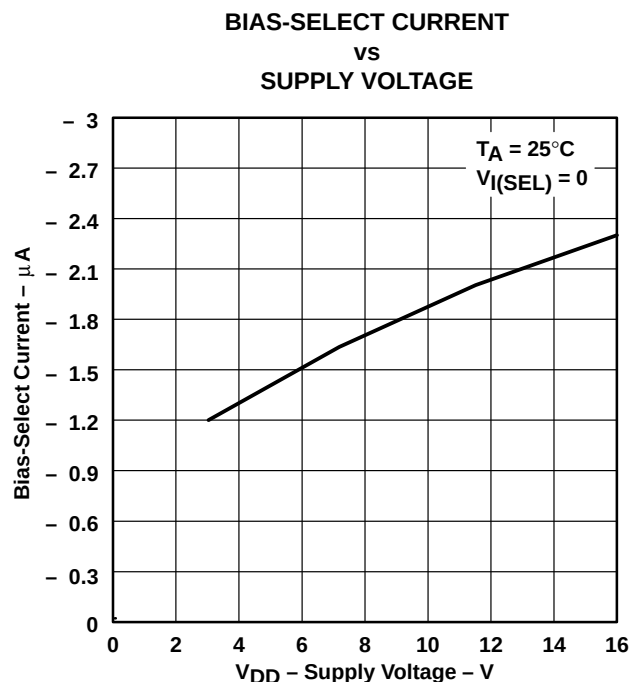


Figure 24

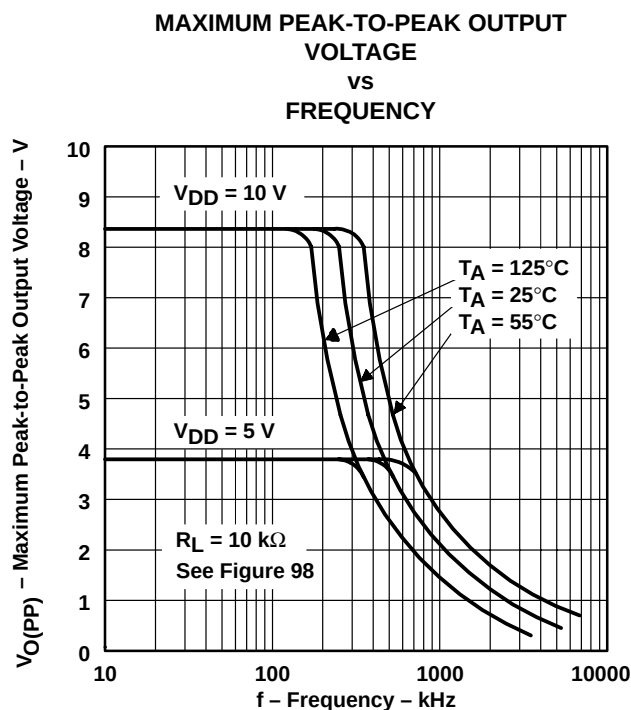


Figure 25

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>**

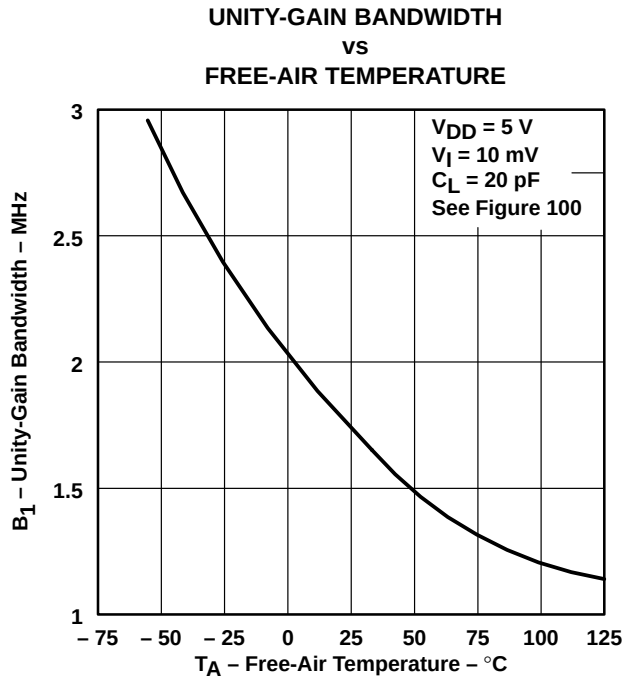


**Figure 26**

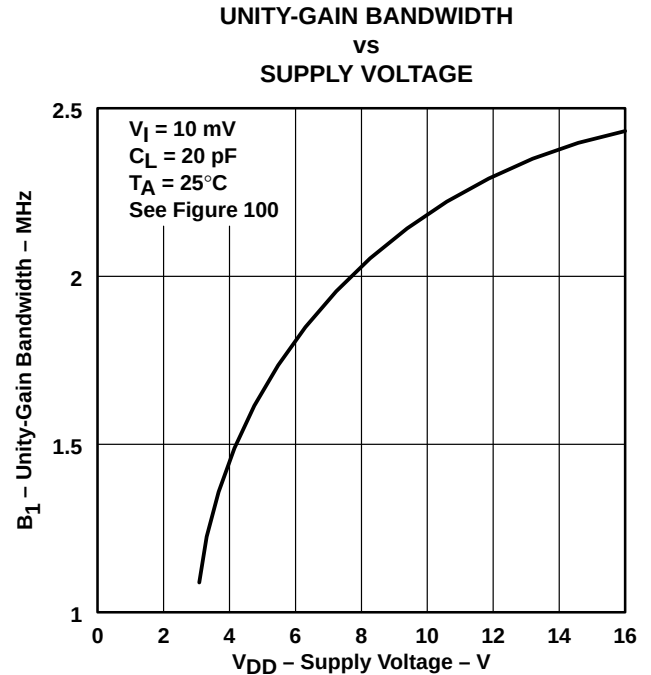


**Figure 27**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
AMPLIFICATION AND PHASE SHIFT  
VS  
FREQUENCY**

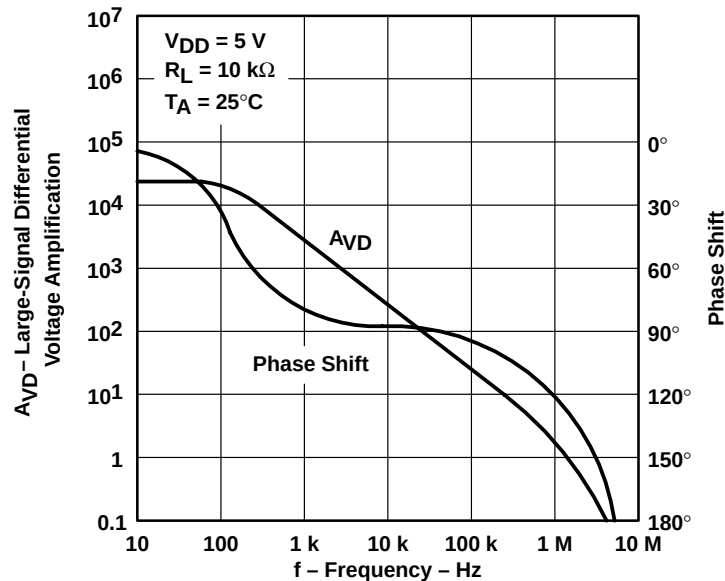


**Figure 28**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>

#### LARGE-SCALE DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

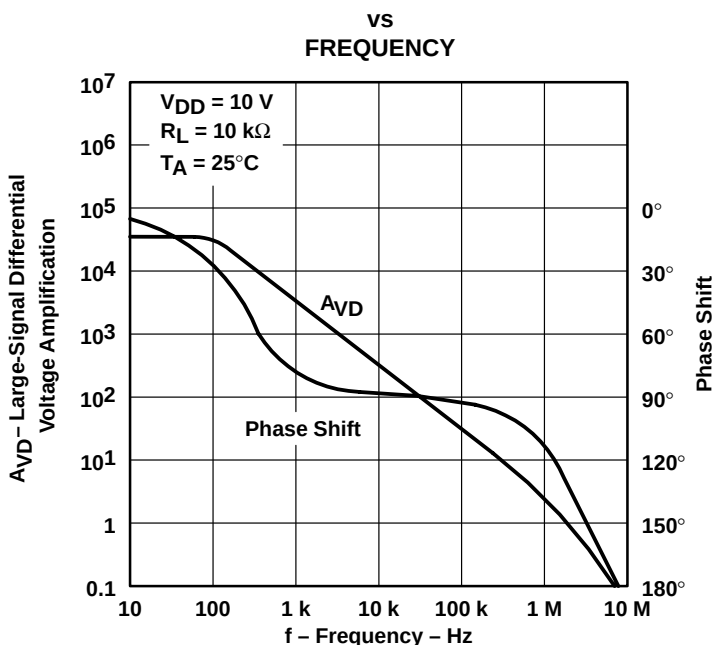


Figure 29

#### PHASE MARGIN vs SUPPLY VOLTAGE

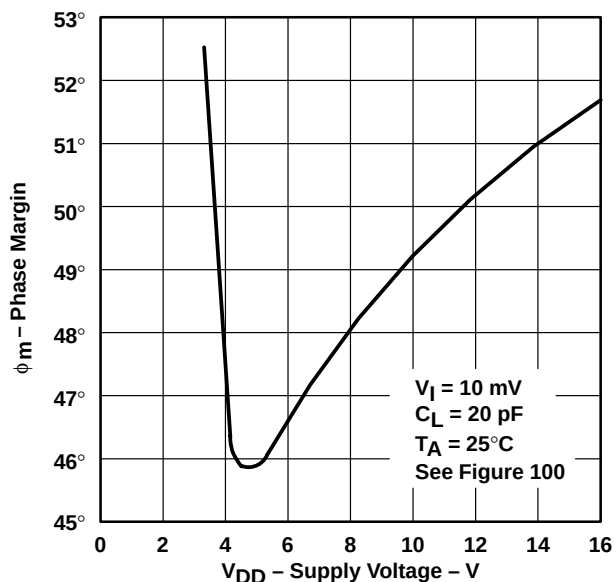


Figure 30

#### PHASE MARGIN vs FREE-AIR TEMPERATURE

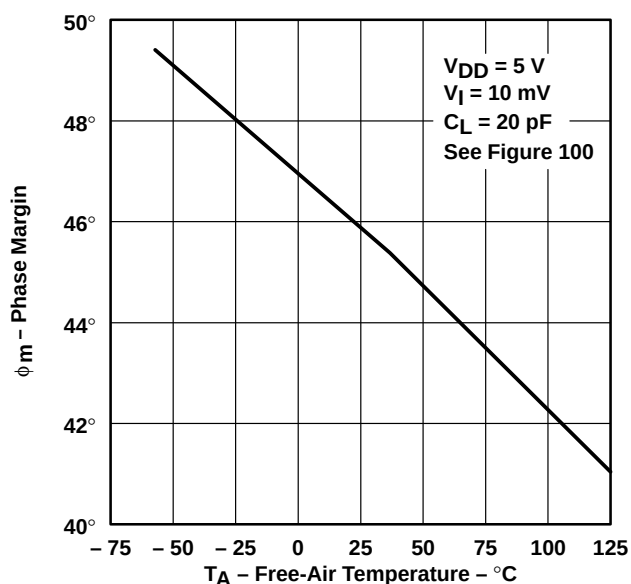


Figure 31

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (HIGH-BIAS MODE)<sup>†</sup>**

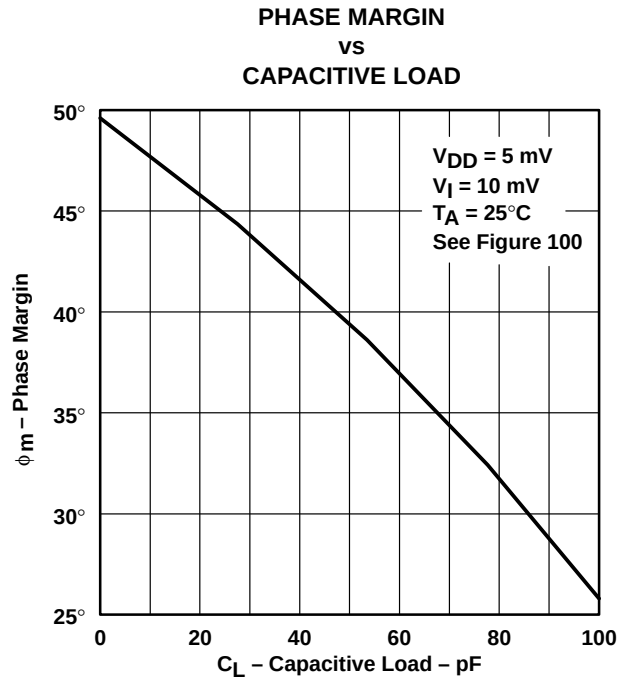


**Figure 32**

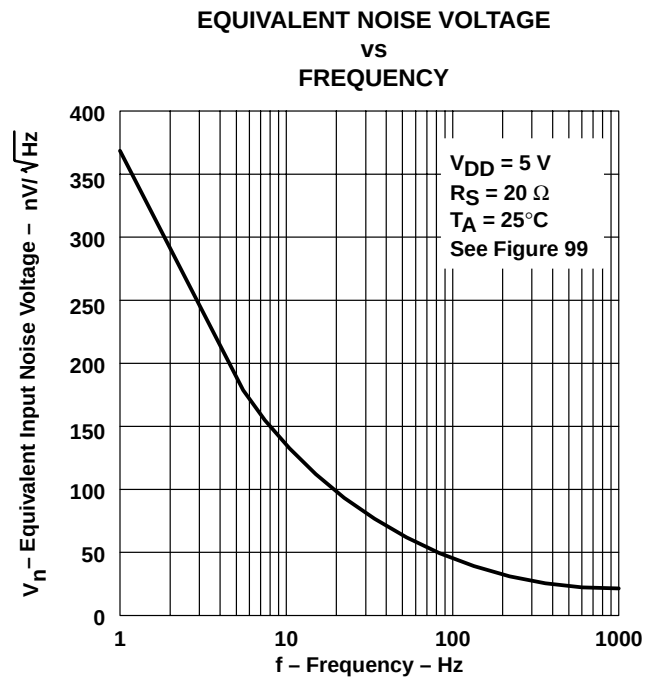


**Figure 33**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### MEDIUM-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                     | T <sub>A</sub> <sup>†</sup> | TLC271C, TLC271AC, TLC271BC |             |     |                        |             |      | UNIT |
|---------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|-----|------------------------|-------------|------|------|
|                     |                                                                      |                                                                                                     |                             | V <sub>DD</sub> = 5 V       |             |     | V <sub>DD</sub> = 10 V |             |      |      |
|                     |                                                                      |                                                                                                     |                             | MIN                         | TYP         | MAX | MIN                    | TYP         | MAX  |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0<br>R <sub>S</sub> = 50 Ω,<br>R <sub>I</sub> = 100 kΩ | 25°C                        | 1.1                         | 10          |     | 1.1                    | 10          | mV   |      |
|                     |                                                                      |                                                                                                     | Full range                  |                             | 12          |     | 12                     |             |      |      |
|                     |                                                                      |                                                                                                     | 25°C                        | 0.9                         | 5           |     | 0.9                    | 5           |      |      |
|                     |                                                                      |                                                                                                     | Full range                  |                             | 6.5         |     | 6.5                    |             |      |      |
|                     |                                                                      |                                                                                                     | 25°C                        | 0.25                        | 2           |     | 0.26                   | 2           |      |      |
|                     |                                                                      |                                                                                                     | Full range                  |                             | 3           |     | 3                      |             |      |      |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                     | 25°C to 70°C                | 1.7                         |             |     | 2.1                    | μV/°C       |      |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                        | 25°C                        | 0.1                         | 60          |     | 0.1                    | 60          | pA   |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 7                           | 300         |     | 7                      | 300         |      |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                        | 25°C                        | 0.6                         | 60          |     | 0.7                    | 60          | pA   |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 40                          | 600         |     | 50                     | 600         |      |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                     | 25°C                        | −0.2 to 4                   | −0.3 to 4.2 |     | −0.2 to 9              | −0.3 to 9.2 | V    |      |
|                     |                                                                      |                                                                                                     | Full range                  | −0.2 to 3.5                 |             |     | −0.2 to 8.5            |             | V    |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 100 kΩ                                                | 25°C                        | 3.2                         | 3.9         |     | 8                      | 8.7         | V    |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 3                           | 3.9         |     | 7.8                    | 8.7         |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 3                           | 4           |     | 7.8                    | 8.7         |      |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                                   | 25°C                        | 0                           | 50          |     | 0                      | 50          | mV   |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 0                           | 50          |     | 0                      | 50          |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 0                           | 50          |     | 0                      | 50          |      |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 100 kΩ,<br>See Note 6                                                              | 25°C                        | 25                          | 170         |     | 25                     | 275         | V/mV |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 15                          | 200         |     | 15                     | 320         |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 15                          | 140         |     | 15                     | 230         |      |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                               | 25°C                        | 65                          | 91          |     | 65                     | 94          | dB   |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 60                          | 91          |     | 60                     | 94          |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 60                          | 92          |     | 60                     | 94          |      |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                             | 25°C                        | 70                          | 93          |     | 70                     | 93          | dB   |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 60                          | 92          |     | 60                     | 92          |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 60                          | 94          |     | 60                     | 94          |      |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = V <sub>DD</sub> /2                                                            | 25°C                        | −130                        |             |     | −160                   |             | nA   |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load            | 25°C                        | 105                         | 280         |     | 143                    | 300         | μA   |      |
|                     |                                                                      |                                                                                                     | 0°C                         | 125                         | 320         |     | 173                    | 400         |      |      |
|                     |                                                                      |                                                                                                     | 70°C                        | 85                          | 220         |     | 110                    | 280         |      |      |

<sup>†</sup> Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



## MEDIUM-BIAS MODE

**electrical characteristics at specified free-air temperature (unless otherwise noted)**

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                        | T <sub>A</sub> <sup>†</sup> | TLC271I, TLC271AI, TLC271BI |             |             |                        |             |       | UNIT |
|---------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|-------------|------------------------|-------------|-------|------|
|                     |                                                                      |                                                                                                        |                             | V <sub>DD</sub> = 5 V       |             |             | V <sub>DD</sub> = 10 V |             |       |      |
|                     |                                                                      |                                                                                                        |                             | MIN                         | TYP         | MAX         | MIN                    | TYP         | MAX   |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 100 kΩ | 25°C                        | 1.1                         |             | 10          | 1.1                    |             | 10    | mV   |
|                     |                                                                      |                                                                                                        | Full range                  | 13                          |             |             | 13                     |             |       |      |
|                     |                                                                      |                                                                                                        | 25°C                        | 0.9                         |             | 5           | 0.9                    |             | 5     |      |
|                     |                                                                      |                                                                                                        | Full range                  | 7                           |             |             | 7                      |             |       |      |
|                     |                                                                      |                                                                                                        | 25°C                        | 0.25                        |             | 2           | 0.26                   |             | 2     |      |
|                     |                                                                      |                                                                                                        | Full range                  | 3.5                         |             |             | 3.5                    |             |       |      |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                        | 25°C to 85°C                | 1.7                         |             |             | 2.1                    |             | μV/°C |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                           | 25°C                        | 0.1                         |             | 60          | 0.1                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                        | 85°C                        | 24                          |             | 1000        | 26                     |             | 1000  |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                           | 25°C                        | 0.6                         |             | 60          | 0.7                    |             | 60    | pA   |
|                     |                                                                      |                                                                                                        | 85°C                        | 200                         |             | 2000        | 220                    |             | 2000  |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                        | 25°C                        | −0.2 to 4                   | −0.3 to 4.2 |             | −0.2 to 9              | −0.3 to 9.2 | V     |      |
|                     |                                                                      |                                                                                                        | Full range                  | −0.2 to 3.5                 |             | −0.2 to 8.5 |                        | V           |       |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 100 kΩ                                                   | 25°C                        | 3.2                         | 3.9         |             | 8                      | 8.7         | V     |      |
|                     |                                                                      |                                                                                                        | −40°C                       | 3                           | 3.9         |             | 7.8                    | 8.7         |       |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 3                           | 4           |             | 7.8                    | 8.7         |       |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                                      | 25°C                        | 0                           |             | 50          | 0                      |             | 50    | mV   |
|                     |                                                                      |                                                                                                        | −40°C                       | 0                           |             | 50          | 0                      |             | 50    |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 0                           |             | 50          | 0                      |             | 50    |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 100 kΩ,<br>See Note 6                                                                 | 25°C                        | 25                          | 170         |             | 25                     | 275         | V/mV  |      |
|                     |                                                                      |                                                                                                        | −40°C                       | 15                          | 270         |             | 15                     | 390         |       |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 15                          | 130         |             | 15                     | 220         |       |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                  | 25°C                        | 65                          | 91          |             | 65                     | 94          | dB    |      |
|                     |                                                                      |                                                                                                        | −40°C                       | 60                          | 90          |             | 60                     | 93          |       |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 60                          | 90          |             | 60                     | 94          |       |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                                | 25°C                        | 70                          | 93          |             | 70                     | 93          | dB    |      |
|                     |                                                                      |                                                                                                        | −40°C                       | 60                          | 91          |             | 60                     | 91          |       |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 60                          | 94          |             | 60                     | 94          |       |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = V <sub>DD</sub> /2                                                               | 25°C                        | −130                        |             |             | −160                   |             | nA    |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load               | 25°C                        | 105                         |             | 280         | 143                    |             | 300   | μA   |
|                     |                                                                      |                                                                                                        | −40°C                       | 158                         |             | 400         | 225                    |             | 450   |      |
|                     |                                                                      |                                                                                                        | 85°C                        | 80                          |             | 200         | 103                    |             | 260   |      |

<sup>†</sup> Full range is –40°C to 85°C.

- NOTES:
- The typical values of input bias current and input offset current below 5 pA were determined mathematically.
  - This range also applies to each input individually.
  - At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER

### OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

#### MEDIUM-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER                                                                             | TEST CONDITIONS                                                                                        | T <sub>A</sub> <sup>†</sup> | TLC271M               |             |     |                        |             |     | UNIT  |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------|-------------|-----|------------------------|-------------|-----|-------|
|                                                                                       |                                                                                                        |                             | V <sub>DD</sub> = 5 V |             |     | V <sub>DD</sub> = 10 V |             |     |       |
|                                                                                       |                                                                                                        |                             | MIN                   | TYP         | MAX | MIN                    | TYP         | MAX |       |
| V <sub>IO</sub> Input offset voltage                                                  | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 100 kΩ | 25°C                        | 1.1                   |             | 10  | 1.1                    |             | 10  | mV    |
|                                                                                       |                                                                                                        | Full range                  |                       |             | 12  |                        |             | 12  |       |
| αV <sub>IO</sub> Average temperature coefficient of input offset voltage              |                                                                                                        | 25°C to 125°C               | 1.7                   |             |     | 2.1                    |             |     | μV/°C |
| I <sub>IO</sub> Input offset current (see Note 4)                                     | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                           | 25°C                        | 0.1                   |             | 60  | 0.1                    |             | 60  | pA    |
|                                                                                       |                                                                                                        | 125°C                       | 1.4                   |             | 15  | 1.8                    |             | 15  | nA    |
| I <sub>IB</sub> Input bias current (see Note 4)                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                           | 25°C                        | 0.6                   |             | 60  | 0.7                    |             | 60  | pA    |
|                                                                                       |                                                                                                        | 125°C                       | 9                     |             | 35  | 10                     |             | 35  | nA    |
| V <sub>ICR</sub> Common-mode input voltage range (see Note 5)                         |                                                                                                        | 25°C                        | 0 to 4                | –0.3 to 4.2 |     | 0 to 9                 | –0.3 to 9.2 |     | V     |
|                                                                                       |                                                                                                        | Full range                  | 0 to 3.5              |             |     | 0 to 8.5               |             |     | V     |
| V <sub>OH</sub> High-level output voltage                                             | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 100 kΩ                                                   | 25°C                        | 3.2                   | 3.9         |     | 8                      | 8.7         |     | V     |
|                                                                                       |                                                                                                        | –55°C                       | 3                     | 3.9         |     | 7.8                    | 8.6         |     |       |
|                                                                                       |                                                                                                        | 125°C                       | 3                     | 4           |     | 7.8                    | 8.6         |     |       |
| V <sub>OL</sub> Low-level output voltage                                              | V <sub>ID</sub> = –100 mV,<br>I <sub>OL</sub> = 0                                                      | 25°C                        | 0                     |             | 50  | 0                      |             | 50  | mV    |
|                                                                                       |                                                                                                        | –55°C                       | 0                     |             | 50  | 0                      |             | 50  |       |
|                                                                                       |                                                                                                        | 125°C                       | 0                     |             | 50  | 0                      |             | 50  |       |
| A <sub>VD</sub> Large-signal differential voltage amplification                       | R <sub>L</sub> = 10 kΩ<br>See Note 6                                                                   | 25°C                        | 25                    | 170         |     | 25                     | 275         |     | V/mV  |
|                                                                                       |                                                                                                        | –55°C                       | 15                    | 290         |     | 15                     | 420         |     |       |
|                                                                                       |                                                                                                        | 125°C                       | 15                    | 120         |     | 15                     | 190         |     |       |
| CMRR      Common-mode rejection ratio                                                 | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                  | 25°C                        | 65                    | 91          |     | 65                     | 94          |     | dB    |
|                                                                                       |                                                                                                        | –55°C                       | 60                    | 89          |     | 60                     | 93          |     |       |
|                                                                                       |                                                                                                        | 125°C                       | 60                    | 91          |     | 60                     | 93          |     |       |
| k <sub>SVR</sub> Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                                | 25°C                        | 70                    | 93          |     | 70                     | 93          |     | dB    |
|                                                                                       |                                                                                                        | –55°C                       | 60                    | 91          |     | 60                     | 91          |     |       |
|                                                                                       |                                                                                                        | 125°C                       | 60                    | 94          |     | 60                     | 94          |     |       |
| I <sub>I(SEL)</sub> Input current (BIAS SELECT)                                       | V <sub>I(SEL)</sub> = V <sub>DD</sub> /2                                                               | 25°C                        | –130                  |             |     | –160                   |             |     | nA    |
| I <sub>DD</sub> Supply current                                                        | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load               | 25°C                        | 105                   |             | 280 | 143                    |             | 300 | μA    |
|                                                                                       |                                                                                                        | –55°C                       | 170                   |             | 440 | 245                    |             | 500 |       |
|                                                                                       |                                                                                                        | 125°C                       | 70                    |             | 180 | 90                     |             | 240 |       |

<sup>†</sup> Full range is –55°C to 125°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



### MEDIUM-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                         |                                         | $T_A$ | TLC271C, TLC271AC,<br>TLC271BC |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------|-----------------------------------------|-------|--------------------------------|------|-----|------------------------|
|                                         |                                                                         |                                         |       | MIN                            | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | $V_{I(PP)} = 1\text{ V}$                | 25°C  |                                | 0.43 |     | V/ $\mu$ s             |
|                                         |                                                                         |                                         | 0°C   |                                | 0.46 |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 0.36 |     |                        |
|                                         |                                                                         | $V_{I(PP)} = 2.5\text{ V}$              | 25°C  |                                | 0.40 |     |                        |
|                                         |                                                                         |                                         | 0°C   |                                | 0.43 |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 0.34 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                   | $R_S = 20\text{ }\Omega$ ,              | 25°C  |                                | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 100\text{ k}\Omega$ ,                        | $C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C  |                                | 55   |     | kHz                    |
|                                         |                                                                         |                                         | 0°C   |                                | 60   |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 50   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                | $C_L = 20\text{ pF}$ ,                  | 25°C  |                                | 525  |     | kHz                    |
|                                         |                                                                         |                                         | 0°C   |                                | 600  |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 400  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,                        | $f = B_1$ ,<br>See Figure 100           | 25°C  |                                | 40°  |     |                        |
|                                         |                                                                         |                                         | 0°C   |                                | 41°  |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 39°  |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                         |                                         | $T_A$ | TLC271C, TLC271AC,<br>TLC271BC |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------|-----------------------------------------|-------|--------------------------------|------|-----|------------------------|
|                                         |                                                                         |                                         |       | MIN                            | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | $V_{I(PP)} = 1\text{ V}$                | 25°C  |                                | 0.62 |     | V/ $\mu$ s             |
|                                         |                                                                         |                                         | 0°C   |                                | 0.67 |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 0.51 |     |                        |
|                                         |                                                                         | $V_{I(PP)} = 5.5\text{ V}$              | 25°C  |                                | 0.56 |     |                        |
|                                         |                                                                         |                                         | 0°C   |                                | 0.61 |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 0.46 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                   | $R_S = 20\text{ }\Omega$ ,              | 25°C  |                                | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 100\text{ k}\Omega$ ,                        | $C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C  |                                | 35   |     | kHz                    |
|                                         |                                                                         |                                         | 0°C   |                                | 40   |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 30   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                | $C_L = 20\text{ pF}$ ,                  | 25°C  |                                | 635  |     | kHz                    |
|                                         |                                                                         |                                         | 0°C   |                                | 710  |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 510  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,                        | $f = B_1$ ,<br>See Figure 100           | 25°C  |                                | 43°  |     |                        |
|                                         |                                                                         |                                         | 0°C   |                                | 44°  |     |                        |
|                                         |                                                                         |                                         | 70°C  |                                | 42°  |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**MEDIUM-BIAS MODE**

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                             | $T_A$                              | TLC271I, TLC271AI,<br>TLC271BI |      |     | UNIT                   |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|------|-----|------------------------|
|                                         |                                                                                             |                                    | MIN                            | TYP  | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 0.43 |     | V/ $\mu$ s             |
|                                         |                                                                                             |                                    | -40°C                          | 0.51 |     |                        |
|                                         |                                                                                             |                                    | 85°C                           | 0.35 |     |                        |
|                                         |                                                                                             | $V_{I(PP)} = 2.5\text{ V}$         | 25°C                           | 0.40 |     |                        |
|                                         |                                                                                             |                                    | -40°C                          | 0.48 |     |                        |
|                                         |                                                                                             |                                    | 85°C                           | 0.32 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                       | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 55   |     | kHz                    |
|                                         |                                                                                             | -40°C                              |                                | 75   |     |                        |
|                                         |                                                                                             | 85°C                               |                                | 45   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                    | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 525  |     | MHz                    |
|                                         |                                                                                             | -40°C                              |                                | 770  |     |                        |
|                                         |                                                                                             | 85°C                               |                                | 370  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100           | 25°C                               |                                | 40°  |     |                        |
|                                         |                                                                                             | -40°C                              |                                | 43°  |     |                        |
|                                         |                                                                                             | 85°C                               |                                | 38°  |     |                        |

**operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                                          | $T_A$                              | TLC271I, TLC271AI,<br>TLC271BI |      |     | UNIT                   |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|------|-----|------------------------|
|                                         |                                                                                                          |                                    | MIN                            | TYP  | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                                  | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 0.62 |     | V/ $\mu$ s             |
|                                         |                                                                                                          |                                    | -40°C                          | 0.77 |     |                        |
|                                         |                                                                                                          |                                    | 85°C                           | 0.47 |     |                        |
|                                         |                                                                                                          | $V_{I(PP)} = 5.5\text{ V}$         | 25°C                           | 0.56 |     |                        |
|                                         |                                                                                                          |                                    | -40°C                          | 0.70 |     |                        |
|                                         |                                                                                                          |                                    | 85°C                           | 0.44 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                                    | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ , <sup>3</sup><br>$R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 35   |     | kHz                    |
|                                         |                                                                                                          | -40°C                              |                                | 45   |     |                        |
|                                         |                                                                                                          | 85°C                               |                                | 25   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                                 | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 635  |     | kHz                    |
|                                         |                                                                                                          | -40°C                              |                                | 880  |     |                        |
|                                         |                                                                                                          | 85°C                               |                                | 480  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100                        | 25°C                               |                                | 43°  |     |                        |
|                                         |                                                                                                          | -40°C                              |                                | 46°  |     |                        |
|                                         |                                                                                                          | 85°C                               |                                | 41°  |     |                        |



### MEDIUM-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                             | $T_A$                              | TLC271M |      |     | UNIT                   |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------|---------|------|-----|------------------------|
|                                         |                                                                                             |                                    | MIN     | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 0.43 |     | V/ $\mu$ s             |
|                                         |                                                                                             |                                    | –55°C   | 0.54 |     |                        |
|                                         |                                                                                             |                                    | 125°C   | 0.29 |     |                        |
|                                         |                                                                                             | $V_{I(PP)} = 2.5\text{ V}$         | 25°C    | 0.40 |     |                        |
|                                         |                                                                                             |                                    | –55°C   | 0.50 |     |                        |
|                                         |                                                                                             |                                    | 125°C   | 0.28 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                       | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 55   |     | kHz                    |
|                                         |                                                                                             | –55°C                              |         | 80   |     |                        |
|                                         |                                                                                             | 125°C                              |         | 40   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                    | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 525  |     | kHz                    |
|                                         |                                                                                             | –55°C                              |         | 850  |     |                        |
|                                         |                                                                                             | 125°C                              |         | 330  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100           | 25°C                               |         | 40°  |     |                        |
|                                         |                                                                                             | –55°C                              |         | 43°  |     |                        |
|                                         |                                                                                             | 125°C                              |         | 36°  |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                             | $T_A$                              | TLC271M |      |     | UNIT                   |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------|---------|------|-----|------------------------|
|                                         |                                                                                             |                                    | MIN     | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 0.62 |     | V/ $\mu$ s             |
|                                         |                                                                                             |                                    | –55°C   | 0.81 |     |                        |
|                                         |                                                                                             |                                    | 125°C   | 0.38 |     |                        |
|                                         |                                                                                             | $V_{I(PP)} = 5.5\text{ V}$         | 25°C    | 0.56 |     |                        |
|                                         |                                                                                             |                                    | –55°C   | 0.73 |     |                        |
|                                         |                                                                                             |                                    | 125°C   | 0.35 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                       | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 32   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 100\text{ k}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 35   |     | kHz                    |
|                                         |                                                                                             | –55°C                              |         | 50   |     |                        |
|                                         |                                                                                             | 125°C                              |         | 20   |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                    | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 635  |     | kHz                    |
|                                         |                                                                                             | –55°C                              |         | 960  |     |                        |
|                                         |                                                                                             | 125°C                              |         | 440  |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100           | 25°C                               |         | 43°  |     |                        |
|                                         |                                                                                             | –55°C                              |         | 47°  |     |                        |
|                                         |                                                                                             | 125°C                              |         | 39°  |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)**

**Table of Graphs**

|                |                                                 |                               | <b>FIGURE</b> |
|----------------|-------------------------------------------------|-------------------------------|---------------|
| $V_{IO}$       | Input offset voltage                            | Distribution                  | 34, 35        |
| $\alpha_{VIO}$ | Temperature coefficient                         | Distribution                  | 36, 37        |
| $V_{OH}$       | High-level output voltage                       | vs High-level output current  | 38, 39        |
|                |                                                 | vs Supply voltage             | 40            |
|                |                                                 | vs Free-air temperature       | 41            |
| $V_{OL}$       | Low-level output voltage                        | vs Common-mode input voltage  | 42, 43        |
|                |                                                 | vs Differential input voltage | 44            |
|                |                                                 | vs Free-air temperature       | 45            |
|                |                                                 | vs Low-level output current   | 46, 47        |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Supply voltage             | 48            |
|                |                                                 | vs Free-air temperature       | 49            |
|                |                                                 | vs Frequency                  | 60, 61        |
| $I_{IB}$       | Input bias current                              | vs Free-air temperature       | 50            |
| $I_{IO}$       | Input offset current                            | vs Free-air temperature       | 50            |
| $V_I$          | Maximum Input voltage                           | vs Supply voltage             | 51            |
| $I_{DD}$       | Supply current                                  | vs Supply voltage             | 52            |
|                |                                                 | vs Free-air temperature       | 53            |
| SR             | Slew rate                                       | vs Supply voltage             | 54            |
|                |                                                 | vs Free-air temperature       | 55            |
|                | Bias-select current                             | vs Supply voltage             | 56            |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                  | 57            |
| $B_1$          | Unity-gain bandwidth                            | vs Free-air temperature       | 58            |
|                |                                                 | vs Supply voltage             | 59            |
| $\phi_m$       | Phase margin                                    | vs Supply voltage             | 62            |
|                |                                                 | vs Free-air temperature       | 63            |
|                |                                                 | vs Capacitive load            | 64            |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                  | 65            |
|                | Phase shift                                     | vs Frequency                  | 60, 61        |

**TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>**

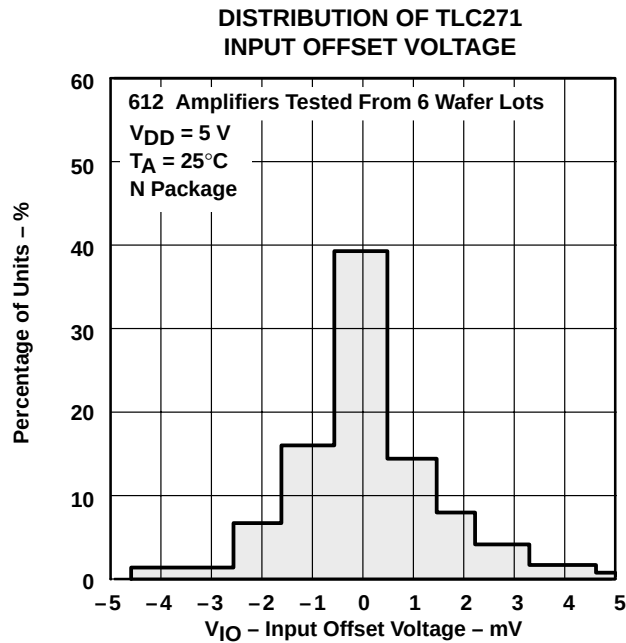


**Figure 34**

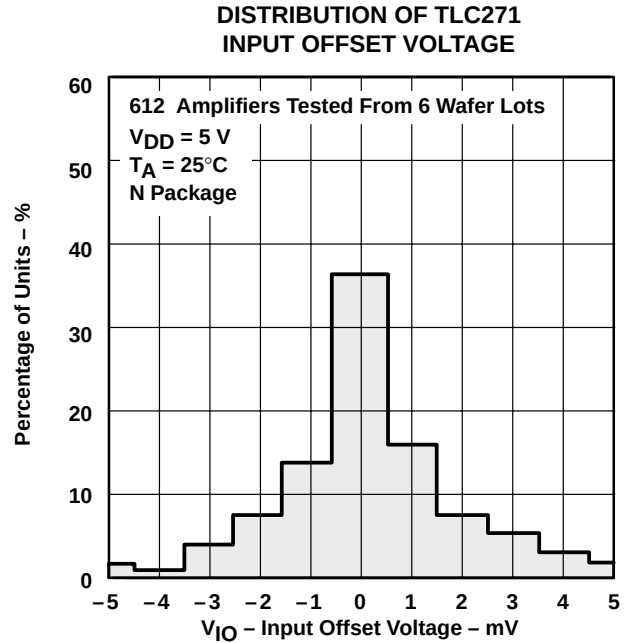


**Figure 35**

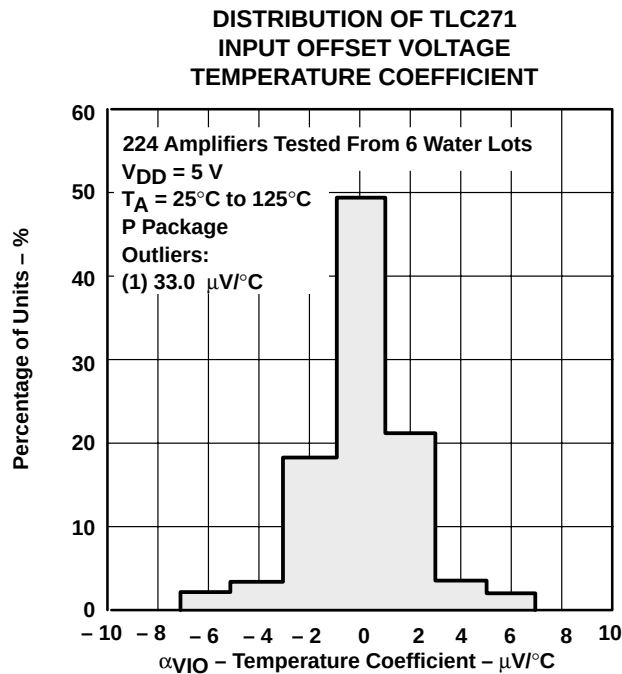


**Figure 36**

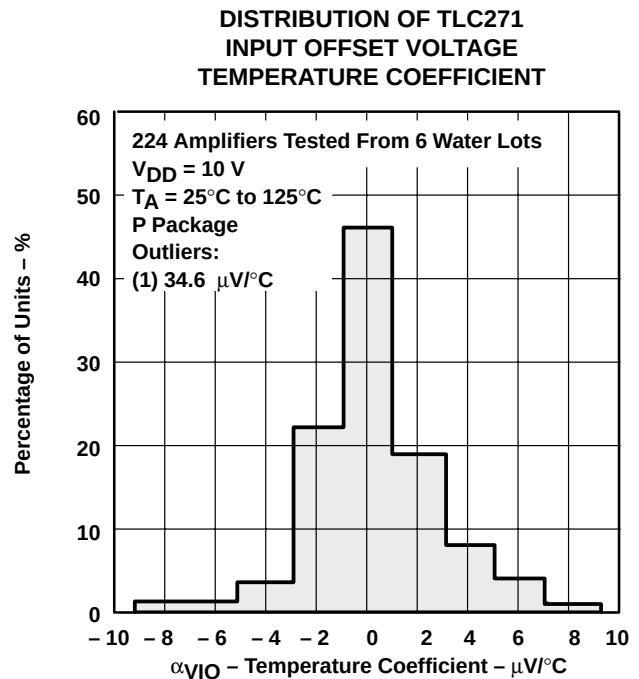


**Figure 37**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>

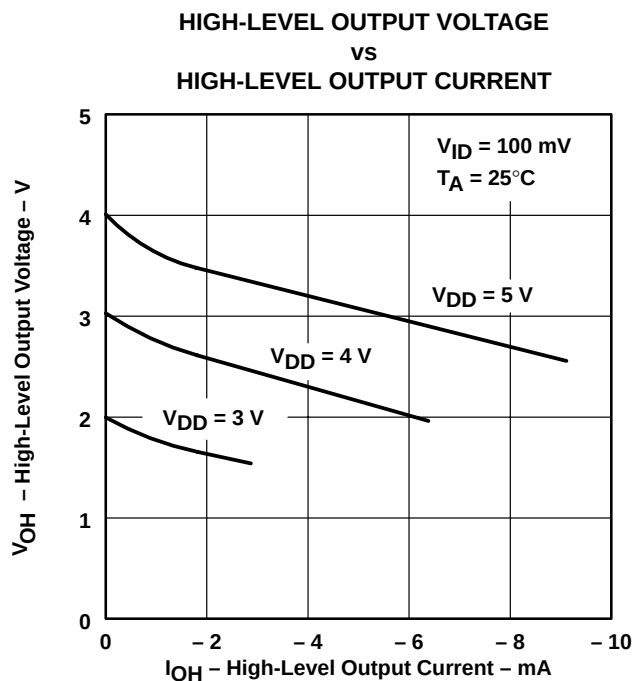


Figure 38

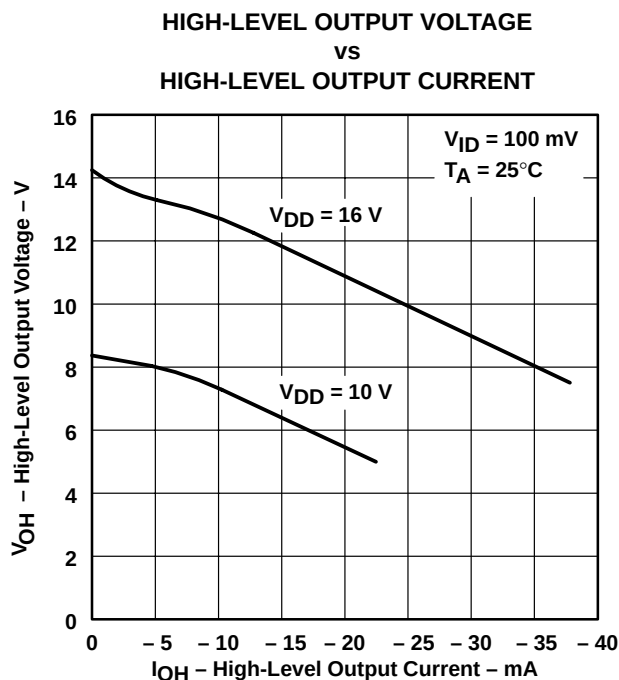


Figure 39

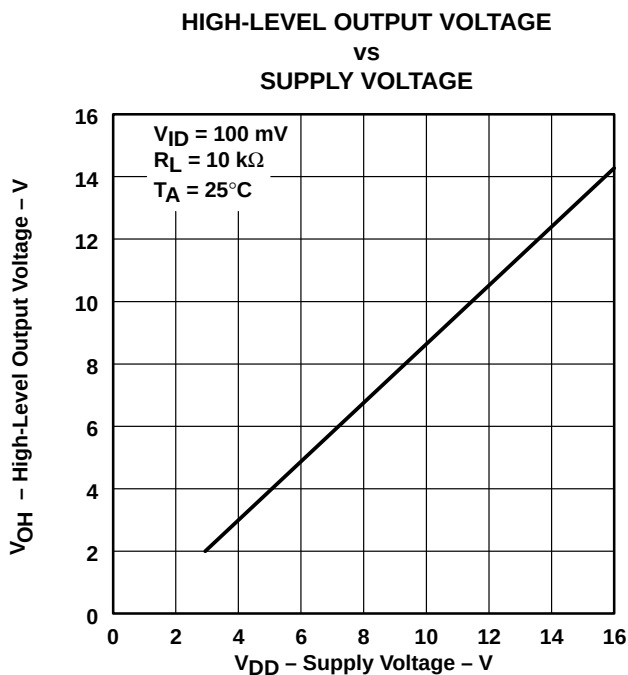


Figure 40

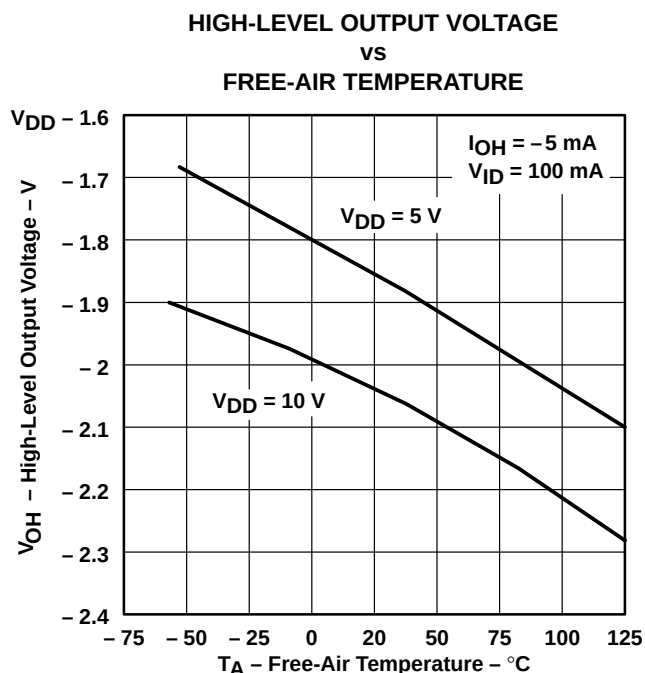


Figure 41

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>**

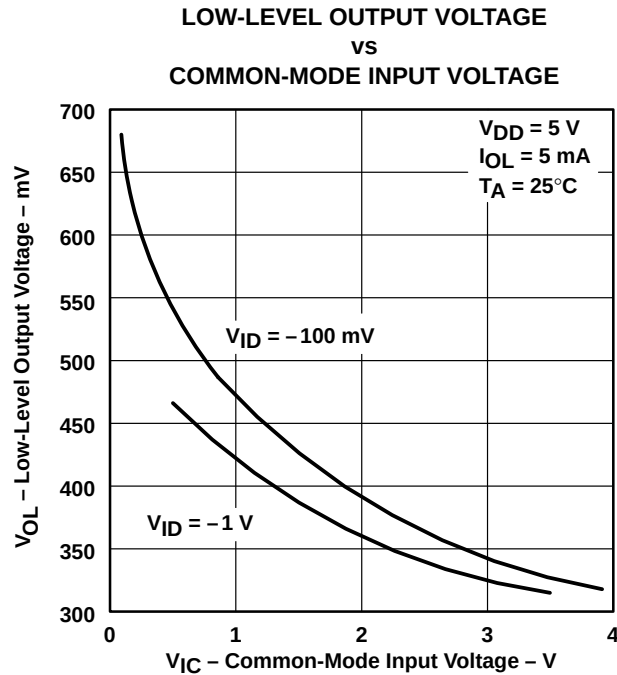


**Figure 42**

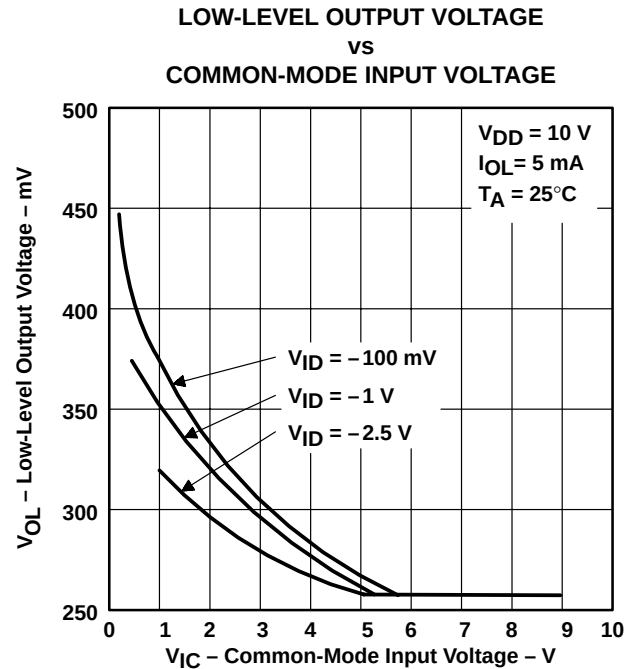


**Figure 43**

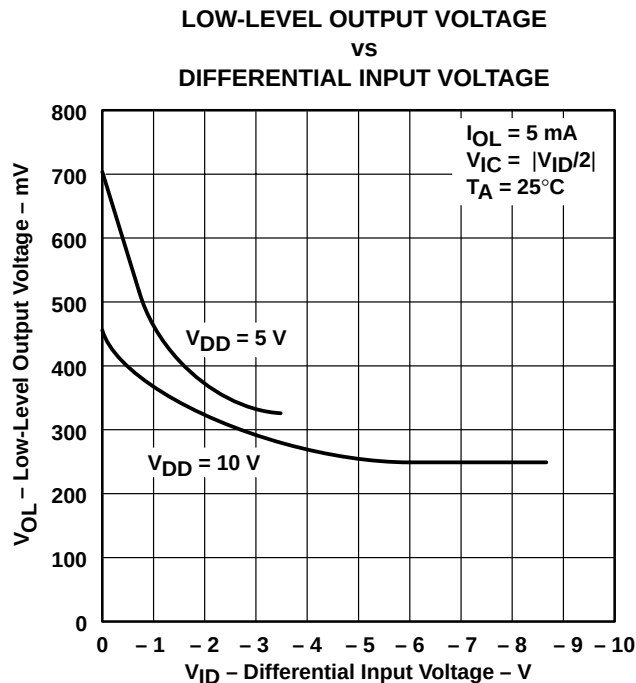


**Figure 44**

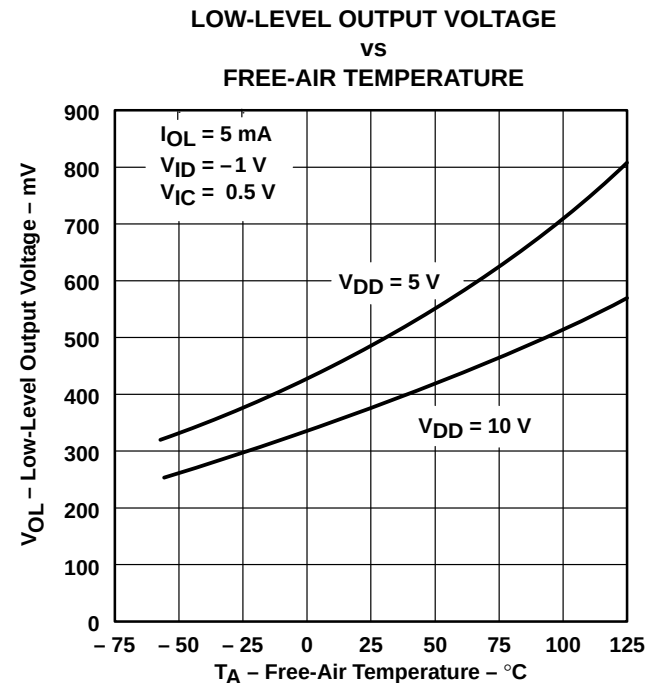


**Figure 45**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>

LOW-LEVEL OUTPUT VOLTAGE  
vs  
LOW-LEVEL OUTPUT CURRENT

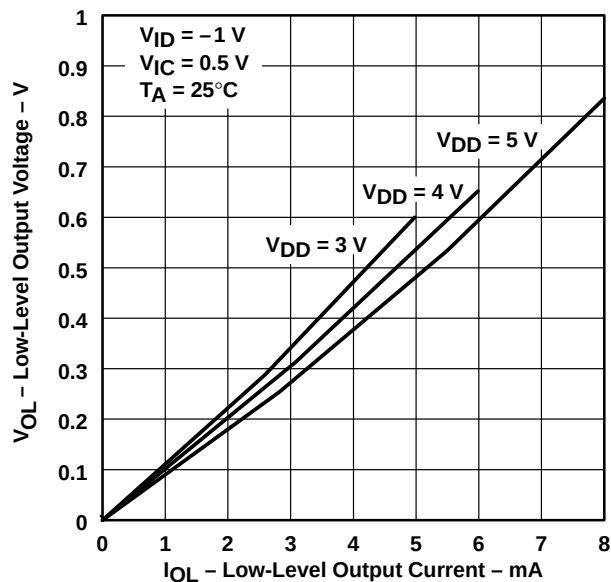


Figure 46

LOW-LEVEL OUTPUT VOLTAGE  
vs  
LOW-LEVEL OUTPUT CURRENT

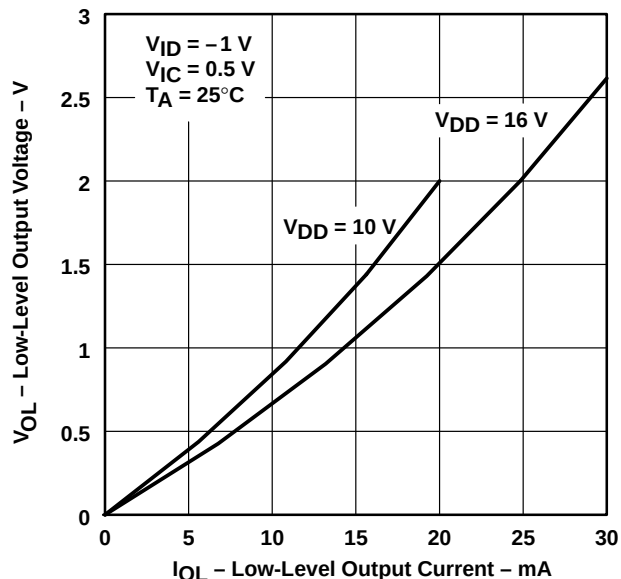


Figure 47

LARGE-SIGNAL  
DIFFERENTIAL VOLTAGE AMPLIFICATION  
vs  
SUPPLY VOLTAGE

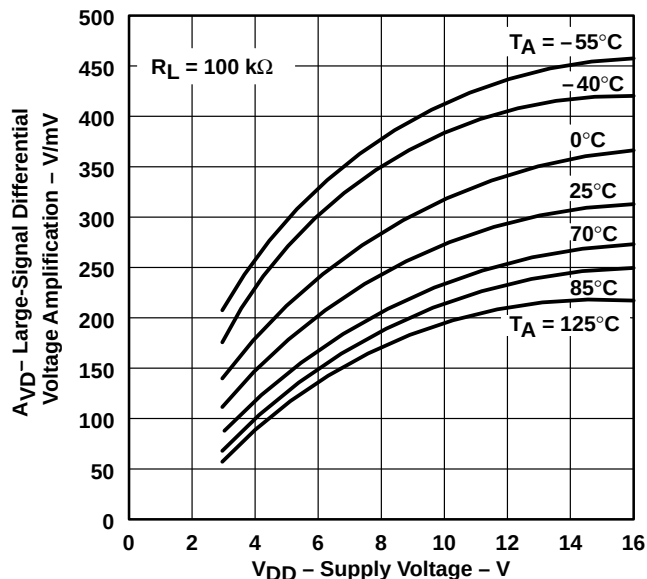


Figure 48

LARGE-SIGNAL  
DIFFERENTIAL VOLTAGE AMPLIFICATION  
vs  
FREE-AIR TEMPERATURE


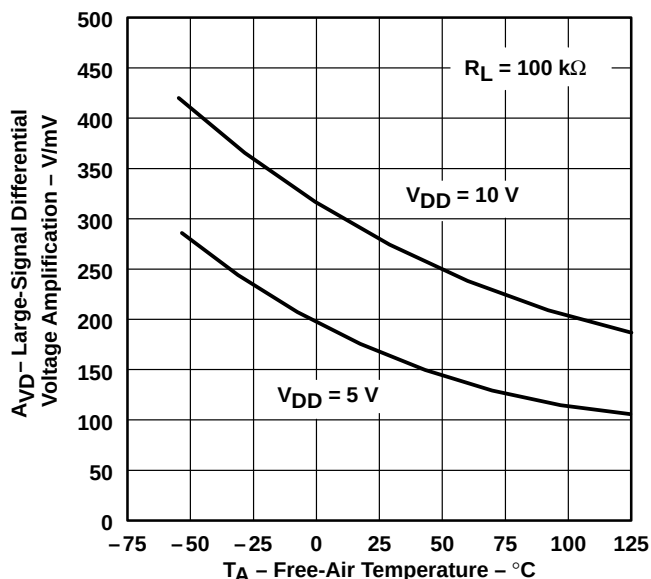


Figure 49

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>**

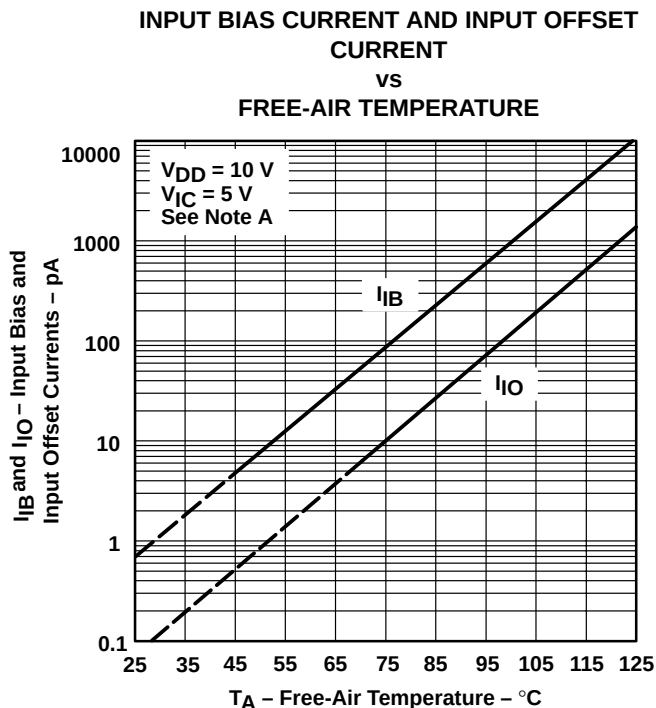

NOTE A: The typical values of input bias current and input offset current below 5 pA were determined mathematically.

**Figure 50**

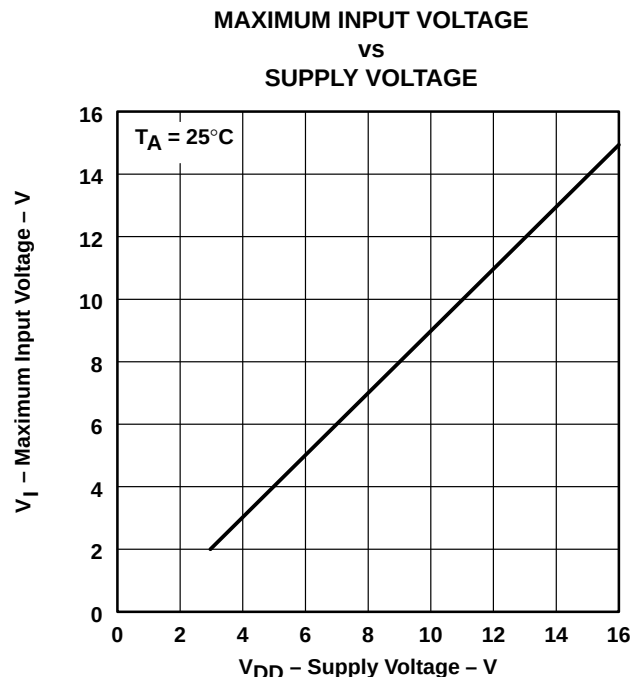


**Figure 51**

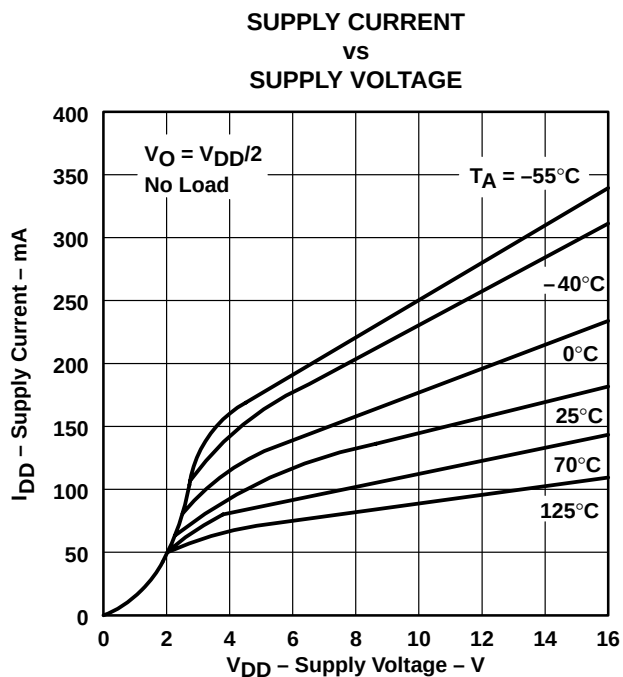


**Figure 52**

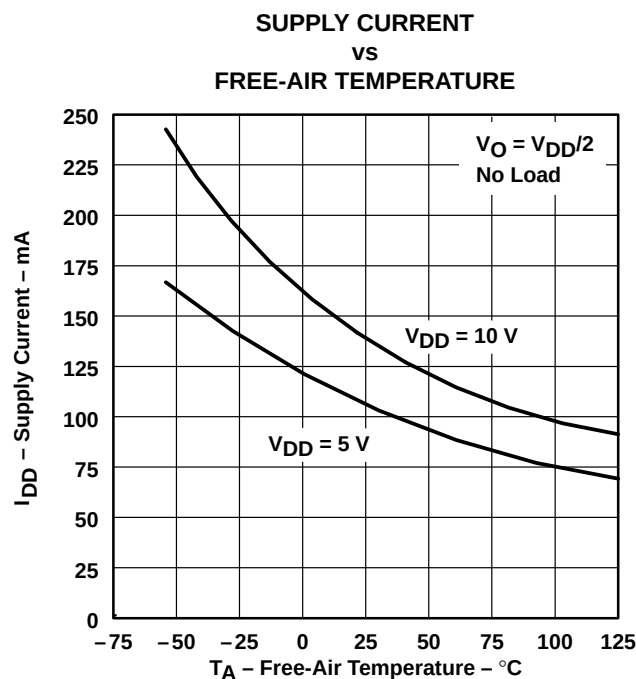


**Figure 53**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>

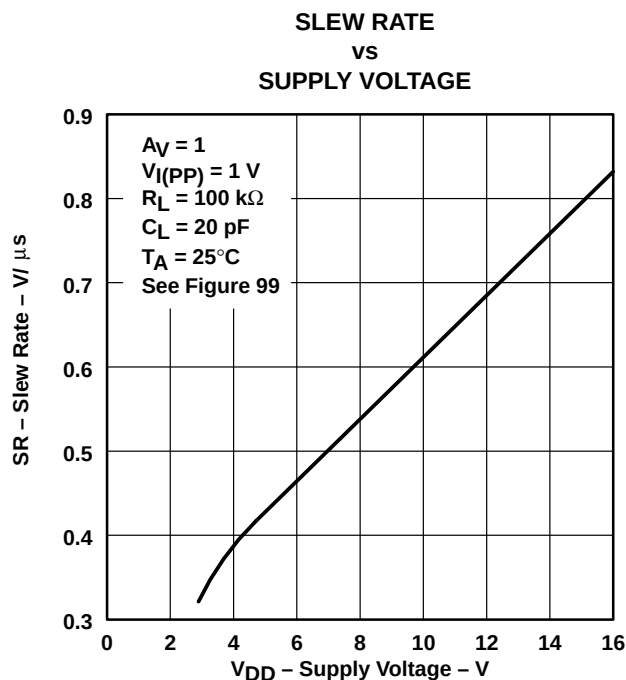


Figure 54

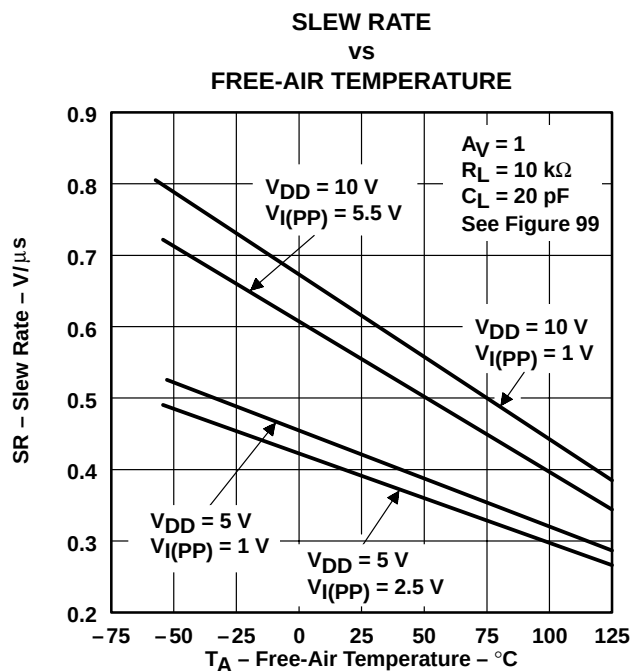


Figure 55

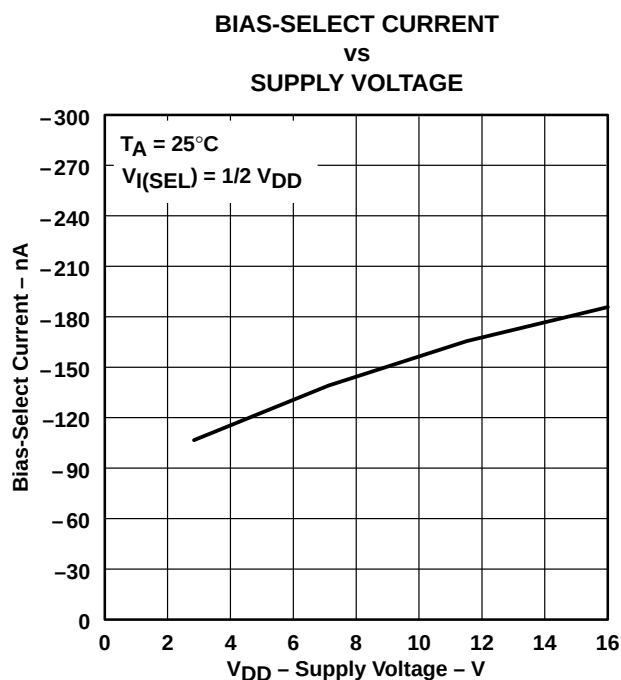


Figure 56

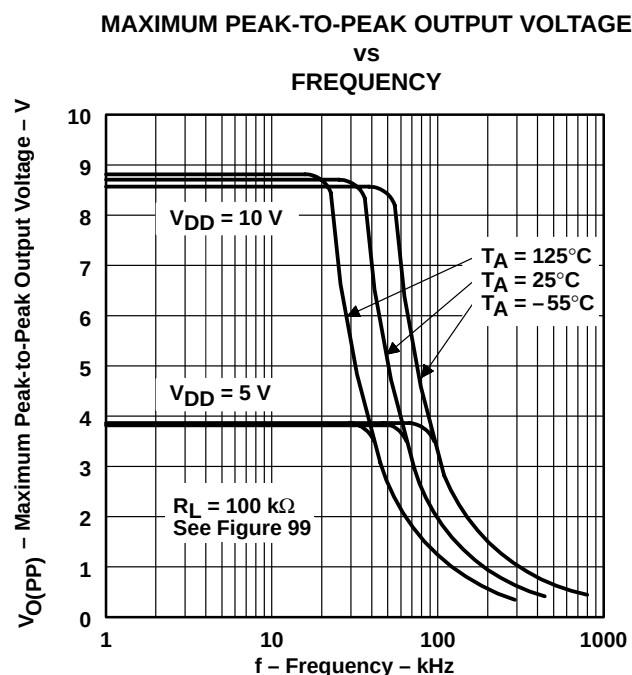


Figure 57

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>**

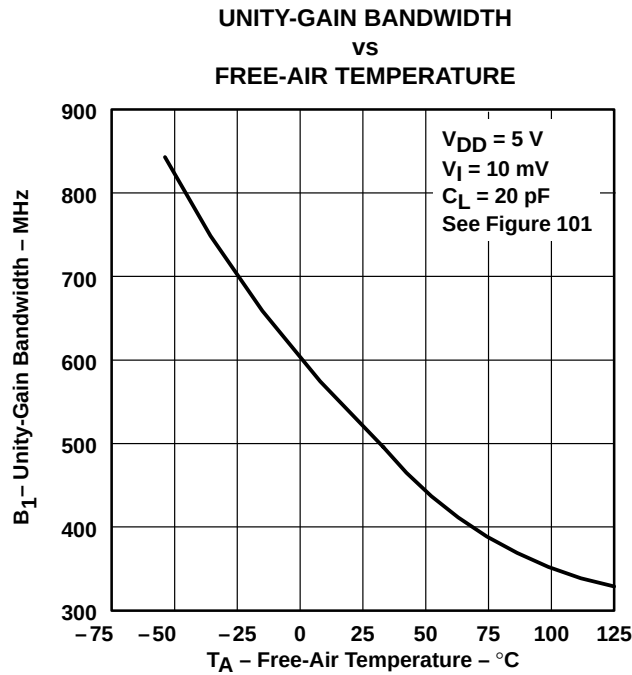


**Figure 58**

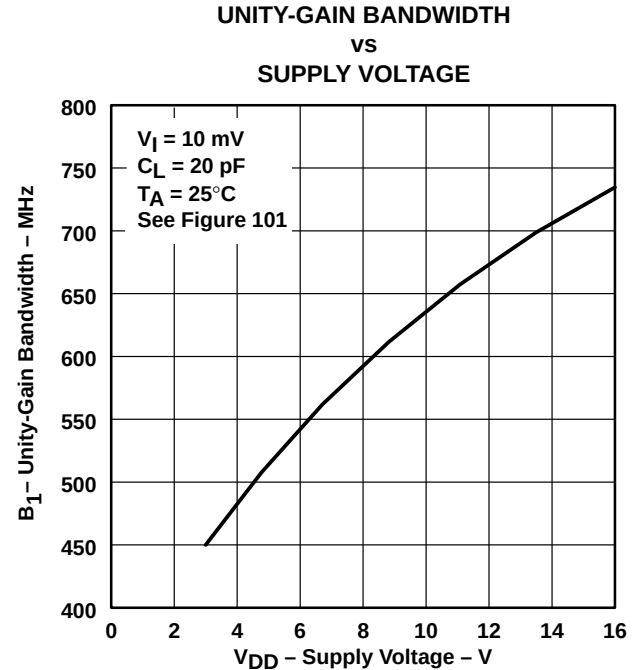


**Figure 59**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
 AMPLIFICATION AND PHASE SHIFT  
 VS  
 FREQUENCY**

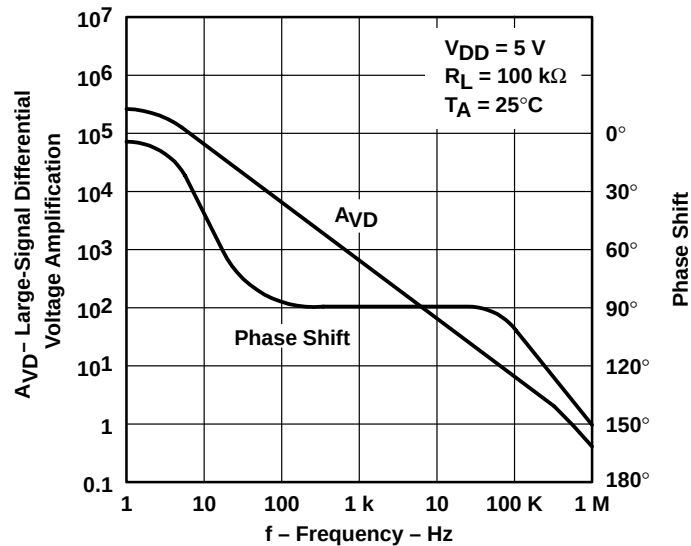


**Figure 60**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>

#### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

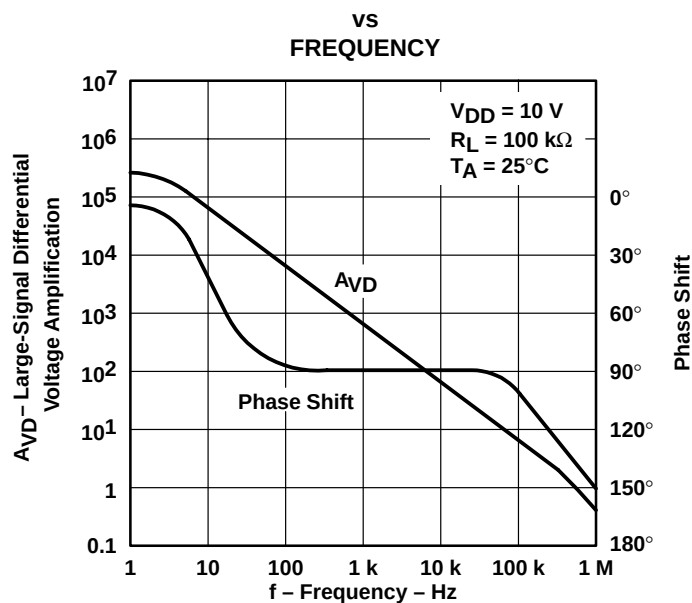


Figure 61

#### PHASE MARGIN VS SUPPLY VOLTAGE

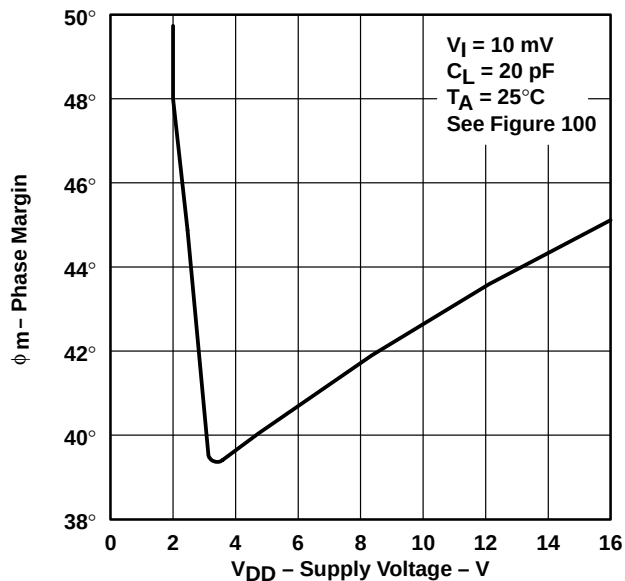


Figure 62

#### PHASE MARGIN VS FREE-AIR TEMPERATURE

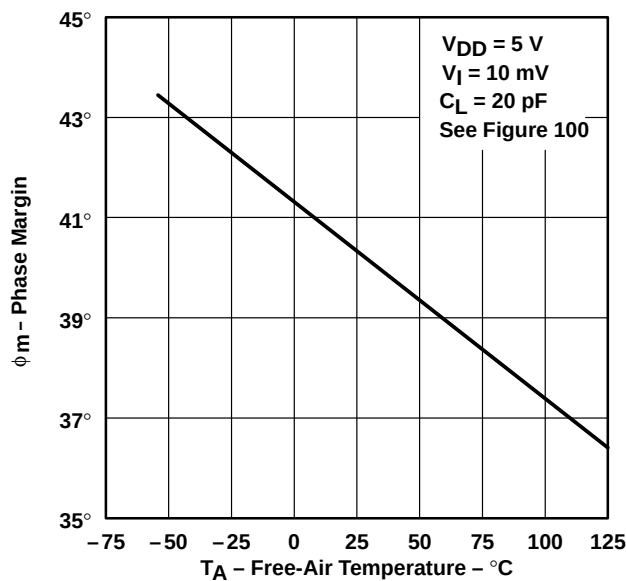


Figure 63

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS (MEDIUM-BIAS MODE)<sup>†</sup>

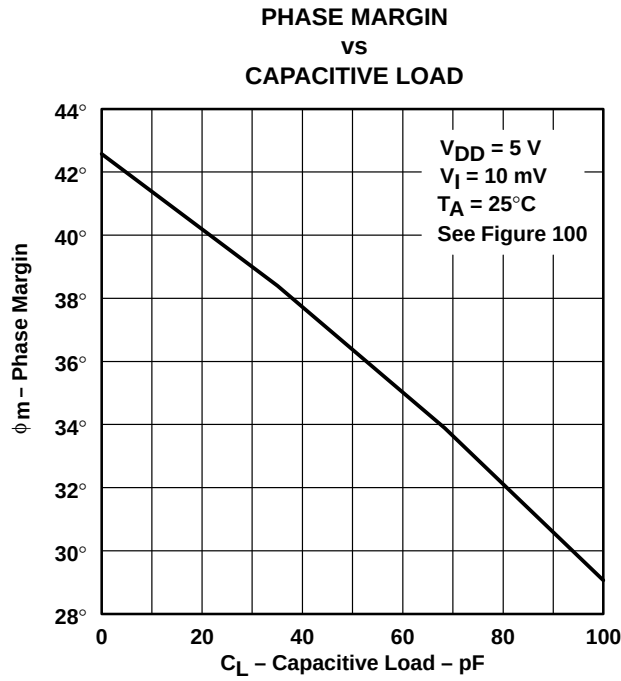


Figure 64

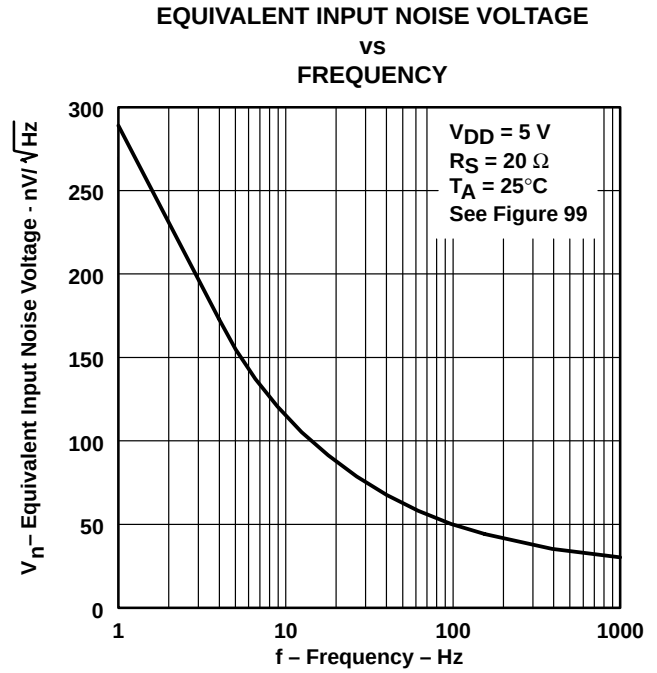


Figure 65

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### LOW-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                      | T <sub>A</sub> <sup>†</sup> | TLC271C, TLC271AC, TLC271BC |             |           |                        |      |     | UNIT |
|---------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-------------|-----------|------------------------|------|-----|------|
|                     |                                                                      |                                                                                                      |                             | V <sub>DD</sub> = 5 V       |             |           | V <sub>DD</sub> = 10 V |      |     |      |
|                     |                                                                      |                                                                                                      |                             | MIN                         | TYP         | MAX       | MIN                    | TYP  | MAX |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>I</sub> = 1 MΩ | 25°C                        | 1.1                         | 10          | 1.1       | 10                     | mV   |     |      |
|                     |                                                                      |                                                                                                      | Full range                  | 12                          | 12          |           |                        |      |     |      |
|                     |                                                                      |                                                                                                      | 25°C                        | 0.9                         | 5           | 0.9       | 5                      |      |     |      |
|                     |                                                                      |                                                                                                      | Full range                  | 6.5                         | 6.5         |           |                        |      |     |      |
|                     |                                                                      |                                                                                                      | 25°C                        | 0.24                        | 2           | 0.26      | 2                      |      |     |      |
|                     |                                                                      |                                                                                                      | Full range                  | 3                           | 3           |           |                        |      |     |      |
| αV <sub>IO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                      | 25°C to 70°C                | 1.1                         | 1           | μV/°C     |                        |      |     |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                         | 25°C                        | 0.1                         | 60          | 0.1       | 60                     | pA   |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 7                           | 300         | 8         | 300                    |      |     |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                         | 25°C                        | 0.6                         | 60          | 0.7       | 60                     | pA   |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 40                          | 600         | 50        | 600                    |      |     |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                      | 25°C                        | −0.2 to 4                   | −0.3 to 4.2 | −0.2 to 9 | −0.3 to 9.2            | V    |     |      |
|                     |                                                                      |                                                                                                      | Full range                  | −0.2 to 3.5                 | −0.2 to 8.5 | V         |                        |      |     |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 1 MΩ                                                   | 25°C                        | 3.2                         | 4.1         | 8         | 8.9                    | V    |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 3                           | 4.1         | 7.8       | 8.9                    |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 3                           | 4.2         | 7.8       | 8.9                    |      |     |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                                    | 25°C                        | 0                           | 50          | 0         | 50                     | mV   |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 0                           | 50          | 0         | 50                     |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 0                           | 50          | 0         | 50                     |      |     |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 1 MΩ,<br>See Note 6                                                                 | 25°C                        | 50                          | 520         | 50        | 870                    | V/mV |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 50                          | 700         | 50        | 1030                   |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 50                          | 380         | 50        | 660                    |      |     |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                | 25°C                        | 65                          | 94          | 65        | 97                     | dB   |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 60                          | 95          | 60        | 97                     |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 60                          | 95          | 60        | 97                     |      |     |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                              | 25°C                        | 70                          | 97          | 70        | 97                     | dB   |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 60                          | 97          | 60        | 97                     |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 60                          | 98          | 60        | 98                     |      |     |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = V <sub>DD</sub>                                                                | 25°C                        | 65                          | 95          | nA        |                        |      |     |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load             | 25°C                        | 10                          | 17          | 14        | 23                     | μA   |     |      |
|                     |                                                                      |                                                                                                      | 0°C                         | 12                          | 21          | 18        | 33                     |      |     |      |
|                     |                                                                      |                                                                                                      | 70°C                        | 8                           | 14          | 11        | 20                     |      |     |      |

<sup>†</sup> Full range is 0°C to 70°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



## LOW-BIAS MODE

**electrical characteristics at specified free-air temperature (unless otherwise noted)**

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                          | T <sub>A</sub> <sup>†</sup>                                                                          | TLC271I, TLC271AI, TLC271BI |             |             |                        |       |     | UNIT |
|---------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------|-------------|-------------|------------------------|-------|-----|------|
|                     |                                                                      |                                                                                          |                                                                                                      | V <sub>DD</sub> = 5 V       |             |             | V <sub>DD</sub> = 10 V |       |     |      |
|                     |                                                                      |                                                                                          |                                                                                                      | MIN                         | TYP         | MAX         | MIN                    | TYP   | MAX |      |
| V <sub>IO</sub>     | Input offset voltage                                                 | TLC271I<br><br>TLC271AI<br><br>TLC271BI                                                  | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 1 MΩ | 25°C                        | 1.1         | 10          | 1.1                    | 10    | mV  |      |
|                     |                                                                      |                                                                                          |                                                                                                      | Full range                  | 13          |             | 13                     |       |     |      |
|                     |                                                                      |                                                                                          |                                                                                                      | 25°C                        | 0.9         | 5           | 0.9                    | 5     |     |      |
|                     |                                                                      |                                                                                          |                                                                                                      | Full range                  | 7           |             | 7                      |       |     |      |
|                     |                                                                      |                                                                                          |                                                                                                      | 25°C                        | 0.24        | 2           | 0.26                   | 2     |     |      |
|                     |                                                                      |                                                                                          |                                                                                                      | Full range                  | 3.5         |             | 3.5                    |       |     |      |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                          | 25°C to 85°C                                                                                         | 1.1                         |             | 1           |                        | μV/°C |     |      |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2             | 25°C                                                                                                 | 0.1                         | 60          | 0.1         | 60                     | pA    |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 24                          | 1000        | 26          | 1000                   |       |     |      |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2             | 25°C                                                                                                 | 0.6                         | 60          | 0.7         | 60                     | pA    |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 200                         | 2000        | 220         | 2000                   |       |     |      |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                          | 25°C                                                                                                 | −0.2 to 4                   | −0.3 to 4.2 | −0.2 to 9   | −0.3 to 9.2            | V     |     |      |
|                     |                                                                      |                                                                                          | Full range                                                                                           | −0.2 to 3.5                 |             | −0.2 to 8.5 |                        | V     |     |      |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 1 MΩ                                       | 25°C                                                                                                 | 3                           | 4.1         | 8           | 8.9                    | V     |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 3                           | 4.1         | 7.8         | 8.9                    |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 3                           | 4.2         | 7.8         | 8.9                    |       |     |      |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = −100 mV,<br>I <sub>OL</sub> = 0                                        | 25°C                                                                                                 | 0                           | 50          | 0           | 50                     | mV    |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 0                           | 50          | 0           | 50                     |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 0                           | 50          | 0           | 50                     |       |     |      |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 1 MΩ<br>See Note 6                                                      | 25°C                                                                                                 | 50                          | 520         | 50          | 870                    | V/mV  |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 50                          | 900         | 50          | 1550                   |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 50                          | 330         | 50          | 585                    |       |     |      |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                    | 25°C                                                                                                 | 65                          | 94          | 65          | 97                     | dB    |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 60                          | 95          | 60          | 97                     |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 60                          | 95          | 60          | 98                     |       |     |      |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                  | 25°C                                                                                                 | 70                          | 97          | 70          | 97                     | dB    |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 60                          | 97          | 60          | 97                     |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 60                          | 98          | 60          | 98                     |       |     |      |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = V <sub>DD</sub>                                                    | 25°C                                                                                                 | 65                          |             | 95          |                        | nA    |     |      |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load | 25°C                                                                                                 | 10                          | 17          | 14          | 23                     | μA    |     |      |
|                     |                                                                      |                                                                                          | −40°C                                                                                                | 16                          | 27          | 25          | 43                     |       |     |      |
|                     |                                                                      |                                                                                          | 85°C                                                                                                 | 17                          | 13          | 10          | 18                     |       |     |      |

<sup>†</sup> Full range is –40 to 85°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### LOW-BIAS MODE

electrical characteristics at specified free-air temperature (unless otherwise noted)

| PARAMETER           |                                                                      | TEST CONDITIONS                                                                                      | T <sub>A</sub> † | TLC271M               |             |          |                        |             |      | UNIT  |
|---------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------|-----------------------|-------------|----------|------------------------|-------------|------|-------|
|                     |                                                                      |                                                                                                      |                  | V <sub>DD</sub> = 5 V |             |          | V <sub>DD</sub> = 10 V |             |      |       |
|                     |                                                                      |                                                                                                      |                  | MIN                   | TYP         | MAX      | MIN                    | TYP         | MAX  |       |
| V <sub>IO</sub>     | Input offset voltage                                                 | V <sub>O</sub> = 1.4 V,<br>V <sub>IC</sub> = 0 V,<br>R <sub>S</sub> = 50 Ω,<br>R <sub>L</sub> = 1 MΩ | 25°C             | 1.1                   |             | 10       | 1.1                    |             | 10   | mV    |
|                     |                                                                      | Full range                                                                                           |                  |                       | 12          |          |                        | 12          |      |       |
| α <sub>VIO</sub>    | Average temperature coefficient of input offset voltage              |                                                                                                      | 25°C to 125°C    | 1.4                   |             |          | 1.4                    |             |      | μV/°C |
| I <sub>IO</sub>     | Input offset current (see Note 4)                                    | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                         | 25°C             | 0.1                   | 60          | 0.1      |                        | 60          | pA   |       |
|                     |                                                                      |                                                                                                      | 125°C            | 1.4                   | 15          | 1.8      |                        | 15          | nA   |       |
| I <sub>IB</sub>     | Input bias current (see Note 4)                                      | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2                         | 25°C             | 0.6                   | 60          | 0.7      |                        | 60          | pA   |       |
|                     |                                                                      |                                                                                                      | 125°C            | 9                     | 35          | 10       |                        | 35          | nA   |       |
| V <sub>ICR</sub>    | Common-mode input voltage range (see Note 5)                         |                                                                                                      | 25°C             | 0 to 4                | –0.3 to 4.2 | 0 to 9   |                        | –0.3 to 9.2 | V    |       |
|                     |                                                                      |                                                                                                      | Full range       | 0 to 3.5              |             | 0 to 8.5 |                        |             | V    |       |
| V <sub>OH</sub>     | High-level output voltage                                            | V <sub>ID</sub> = 100 mV,<br>R <sub>L</sub> = 1 MΩ                                                   | 25°C             | 3.2                   | 4.1         | 8        |                        | 8.9         | V    |       |
|                     |                                                                      |                                                                                                      | –55°C            | 3                     | 4.1         | 7.8      |                        | 8.8         |      |       |
|                     |                                                                      |                                                                                                      | 125°C            | 3                     | 4.2         | 7.8      |                        | 9           |      |       |
| V <sub>OL</sub>     | Low-level output voltage                                             | V <sub>ID</sub> = –100 mV,<br>I <sub>OL</sub> = 0                                                    | 25°C             | 0                     |             | 50       | 0                      |             | 50   | mV    |
|                     |                                                                      |                                                                                                      | –55°C            | 0                     |             | 50       | 0                      |             | 50   |       |
|                     |                                                                      |                                                                                                      | 125°C            | 0                     |             | 50       | 0                      |             | 50   |       |
| A <sub>VD</sub>     | Large-signal differential voltage amplification                      | R <sub>L</sub> = 1 MΩ,<br>See Note 6                                                                 | 25°C             | 50                    | 520         | 50       |                        | 870         | V/mV |       |
|                     |                                                                      |                                                                                                      | –55°C            | 25                    | 1000        | 25       |                        | 1775        |      |       |
|                     |                                                                      |                                                                                                      | 125°C            | 25                    | 200         | 25       |                        | 380         |      |       |
| CMRR                | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICRmin</sub>                                                                | 25°C             | 65                    | 94          | 65       |                        | 97          | dB   |       |
|                     |                                                                      |                                                                                                      | –55°C            | 60                    | 95          | 60       |                        | 97          |      |       |
|                     |                                                                      |                                                                                                      | 125°C            | 60                    | 85          | 60       |                        | 91          |      |       |
| k <sub>SVR</sub>    | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 5 V to 10 V<br>V <sub>O</sub> = 1.4 V                                              | 25°C             | 70                    | 97          | 70       |                        | 97          | dB   |       |
|                     |                                                                      |                                                                                                      | –55°C            | 60                    | 97          | 60       |                        | 97          |      |       |
|                     |                                                                      |                                                                                                      | 125°C            | 60                    | 98          | 60       |                        | 98          |      |       |
| I <sub>I(SEL)</sub> | Input current (BIAS SELECT)                                          | V <sub>I(SEL)</sub> = V <sub>DD</sub>                                                                | 25°C             | 65                    |             | 95       |                        | nA          |      |       |
| I <sub>DD</sub>     | Supply current                                                       | V <sub>O</sub> = V <sub>DD</sub> /2,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load             | 25°C             | 10                    | 17          | 14       |                        | 23          | μA   |       |
|                     |                                                                      |                                                                                                      | –55°C            | 17                    | 30          | 28       |                        | 48          |      |       |
|                     |                                                                      |                                                                                                      | 125°C            | 7                     | 12          | 9        |                        | 15          |      |       |

† Full range is –55°C to 125°C.

NOTES: 4. The typical values of input bias current and input offset current below 5 pA were determined mathematically.

5. This range also applies to each input individually.

6. At V<sub>DD</sub> = 5 V, V<sub>O</sub> = 0.25 V to 2 V; at V<sub>DD</sub> = 10 V, V<sub>O</sub> = 1 V to 6 V.



## LOW-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                       |                                         | $T_A$ | TLC271C, TLC271AC, TLC271BC |      |     | UNIT                   |
|-----------------------------------------|-----------------------------------------------------------------------|-----------------------------------------|-------|-----------------------------|------|-----|------------------------|
|                                         |                                                                       |                                         |       | MIN                         | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | $V_{I(PP)} = 1\text{ V}$                | 25°C  |                             | 0.03 |     | V/ $\mu$ s             |
|                                         |                                                                       |                                         | 0°C   |                             | 0.04 |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 0.03 |     |                        |
|                                         |                                                                       | $V_{I(PP)} = 2.5\text{ V}$              | 25°C  |                             | 0.03 |     |                        |
|                                         |                                                                       |                                         | 0°C   |                             | 0.03 |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 0.02 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                 | $R_S = 20\text{ }\Omega$ ,              | 25°C  |                             | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,                        | $C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C  |                             | 5    |     | kHz                    |
|                                         |                                                                       |                                         | 0°C   |                             | 6    |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 4.5  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                              | $C_L = 20\text{ pF}$ ,                  | 25°C  |                             | 85   |     | kHz                    |
|                                         |                                                                       |                                         | 0°C   |                             | 100  |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 65   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,                      | $f = B_1$ ,<br>See Figure 100           | 25°C  |                             | 34°  |     |                        |
|                                         |                                                                       |                                         | 0°C   |                             | 36°  |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 30°  |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                       |                                         | $T_A$ | TLC271C, TLC271AC, TLC271BC |      |     | UNIT                   |
|-----------------------------------------|-----------------------------------------------------------------------|-----------------------------------------|-------|-----------------------------|------|-----|------------------------|
|                                         |                                                                       |                                         |       | MIN                         | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | $V_{I(PP)} = 1\text{ V}$                | 25°C  |                             | 0.05 |     | V/ $\mu$ s             |
|                                         |                                                                       |                                         | 0°C   |                             | 0.05 |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 0.04 |     |                        |
|                                         |                                                                       | $V_{I(PP)} = 5.5\text{ V}$              | 25°C  |                             | 0.04 |     |                        |
|                                         |                                                                       |                                         | 0°C   |                             | 0.05 |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 0.04 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                 | $R_S = 20\text{ }\Omega$ ,              | 25°C  |                             | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,                        | $C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C  |                             | 1    |     | kHz                    |
|                                         |                                                                       |                                         | 0°C   |                             | 1.3  |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 0.9  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                              | $C_L = 20\text{ pF}$ ,                  | 25°C  |                             | 110  |     | kHz                    |
|                                         |                                                                       |                                         | 0°C   |                             | 125  |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 90   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,                      | $f = B_1$ ,<br>See Figure 100           | 25°C  |                             | 38°  |     |                        |
|                                         |                                                                       |                                         | 0°C   |                             | 40°  |     |                        |
|                                         |                                                                       |                                         | 70°C  |                             | 34°  |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**LOW-BIAS MODE**

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                           | $T_A$                              | TLC271I, TLC271AI,<br>TLC271BI |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|------|-----|------------------------|
|                                         |                                                                                           |                                    | MIN                            | TYP  | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 0.03 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                           |                                    | –40°C                          | 0.04 |     |                        |
|                                         |                                                                                           |                                    | 85°C                           | 0.03 |     |                        |
|                                         |                                                                                           | $V_{I(PP)} = 2.5\text{ V}$         | 25°C                           | 0.03 |     |                        |
|                                         |                                                                                           |                                    | –40°C                          | 0.04 |     |                        |
|                                         |                                                                                           |                                    | 85°C                           | 0.02 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                     | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 5    |     | kHz                    |
|                                         |                                                                                           | –40°C                              |                                | 7    |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 4    |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                  | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 85   |     | MHz                    |
|                                         |                                                                                           | –40°C                              |                                | 130  |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 55   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100         | 25°C                               |                                | 34°  |     |                        |
|                                         |                                                                                           | –40°C                              |                                | 38°  |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 28°  |     |                        |

**operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$**

| PARAMETER                               | TEST CONDITIONS                                                                           | $T_A$                              | TLC271C, TLC271AC,<br>TLC271BC |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------|--------------------------------|------|-----|------------------------|
|                                         |                                                                                           |                                    | MIN                            | TYP  | MAX |                        |
| SR Slew rate at unity gain              | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C                           | 0.05 |     | V/ $\mu\text{s}$       |
|                                         |                                                                                           |                                    | –40°C                          | 0.06 |     |                        |
|                                         |                                                                                           |                                    | 85°C                           | 0.03 |     |                        |
|                                         |                                                                                           | $V_{I(PP)} = 5.5\text{ V}$         | 25°C                           | 0.04 |     |                        |
|                                         |                                                                                           |                                    | –40°C                          | 0.05 |     |                        |
|                                         |                                                                                           |                                    | 85°C                           | 0.03 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                     | $R_S = 20\text{ }\Omega$ ,<br>25°C |                                | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |                                | 1    |     | kHz                    |
|                                         |                                                                                           | –40°C                              |                                | 1.4  |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 0.8  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                  | $C_L = 20\text{ pF}$ ,<br>25°C     |                                | 110  |     | MHz                    |
|                                         |                                                                                           | –40°C                              |                                | 155  |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 80   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100         | 25°C                               |                                | 38°  |     |                        |
|                                         |                                                                                           | –40°C                              |                                | 42°  |     |                        |
|                                         |                                                                                           | 85°C                               |                                | 32°  |     |                        |



## LOW-BIAS MODE

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                           | $T_A$                              | TLC271M |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------|---------|------|-----|------------------------|
|                                         |                                                                                           |                                    | MIN     | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 0.03 |     | V/ $\mu$ s             |
|                                         |                                                                                           |                                    | –55°C   | 0.04 |     |                        |
|                                         |                                                                                           |                                    | 125°C   | 0.02 |     |                        |
|                                         |                                                                                           | $V_{I(PP)} = 2.5\text{ V}$         | 25°C    | 0.03 |     |                        |
|                                         |                                                                                           |                                    | –55°C   | 0.04 |     |                        |
|                                         |                                                                                           |                                    | 125°C   | 0.02 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                     | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 5    |     | kHz                    |
|                                         |                                                                                           | –55°C                              |         | 8    |     |                        |
|                                         |                                                                                           | 125°C                              |         | 3    |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                  | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 85   |     | kHz                    |
|                                         |                                                                                           | –55°C                              |         | 140  |     |                        |
|                                         |                                                                                           | 125°C                              |         | 45   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100         | 25°C                               |         | 34°  |     |                        |
|                                         |                                                                                           | –55°C                              |         | 39°  |     |                        |
|                                         |                                                                                           | 125°C                              |         | 25°  |     |                        |

operating characteristics at specified free-air temperature,  $V_{DD} = 10\text{ V}$

| PARAMETER                               | TEST CONDITIONS                                                                           | $T_A$                              | TLC271M |      |     | UNIT                   |
|-----------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------|---------|------|-----|------------------------|
|                                         |                                                                                           |                                    | MIN     | TYP  | MAX |                        |
| SR      Slew rate at unity gain         | $R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98                     | $V_{I(PP)} = 1\text{ V}$           | 25°C    | 0.05 |     | V/ $\mu$ s             |
|                                         |                                                                                           |                                    | –55°C   | 0.06 |     |                        |
|                                         |                                                                                           |                                    | 125°C   | 0.03 |     |                        |
|                                         |                                                                                           | $V_{I(PP)} = 5.5\text{ V}$         | 25°C    | 0.04 |     |                        |
|                                         |                                                                                           |                                    | –55°C   | 0.06 |     |                        |
|                                         |                                                                                           |                                    | 125°C   | 0.03 |     |                        |
| $V_n$ Equivalent input noise voltage    | $f = 1\text{ kHz}$ ,<br>See Figure 99                                                     | $R_S = 20\text{ }\Omega$ ,<br>25°C |         | 68   |     | nV/ $\sqrt{\text{Hz}}$ |
| $B_{OM}$ Maximum output-swing bandwidth | $V_O = V_{OH}$ ,<br>$R_L = 1\text{ M}\Omega$ ,<br>$C_L = 20\text{ pF}$ ,<br>See Figure 98 | 25°C                               |         | 1    |     | kHz                    |
|                                         |                                                                                           | –55°C                              |         | 1.5  |     |                        |
|                                         |                                                                                           | 125°C                              |         | 0.7  |     |                        |
| $B_1$ Unity-gain bandwidth              | $V_I = 10\text{ mV}$ ,<br>See Figure 100                                                  | $C_L = 20\text{ pF}$ ,<br>25°C     |         | 110  |     | kHz                    |
|                                         |                                                                                           | –55°C                              |         | 165  |     |                        |
|                                         |                                                                                           | 125°C                              |         | 70   |     |                        |
| $\phi_m$ Phase margin                   | $V_I = 10\text{ mV}$ ,<br>$C_L = 20\text{ pF}$ ,<br>$f = B_1$ ,<br>See Figure 100         | 25°C                               |         | 38°  |     |                        |
|                                         |                                                                                           | –55°C                              |         | 43°  |     |                        |
|                                         |                                                                                           | 125°C                              |         | 29°  |     |                        |

**TLC271, TLC271A, TLC271B**  
**LinCMOS™ PROGRAMMABLE LOW-POWER**  
**OPERATIONAL AMPLIFIERS**

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS (LOW-BIAS MODE)**

**Table of Graphs**

|                |                                                 |                                                                                                                         | <b>FIGURE</b>                |
|----------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------|
| $V_{IO}$       | Input offset voltage                            | Distribution                                                                                                            | 66, 67                       |
| $\alpha_{VIO}$ | Temperature coefficient                         | Distribution                                                                                                            | 68, 69                       |
| $V_{OH}$       | High-level output voltage                       | vs High-level output current<br>vs Supply voltage<br>vs Free-air temperature                                            | 70, 71<br>72<br>73           |
| $V_{OL}$       | Low-level output voltage                        | vs Common-mode input voltage<br>vs Differential input voltage<br>vs Free-air temperature<br>vs Low-level output current | 74, 75<br>76<br>77<br>78, 79 |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Supply voltage<br>vs Free-air temperature<br>vs Frequency                                                            | 80<br>81<br>92, 93           |
| $I_{IB}$       | Input bias current                              | vs Free-air temperature                                                                                                 | 82                           |
| $I_{IO}$       | Input offset current                            | vs Free-air temperature                                                                                                 | 82                           |
| $V_I$          | Maximum input voltage                           | vs Supply voltage                                                                                                       | 83                           |
| $I_{DD}$       | Supply current                                  | vs Supply voltage<br>vs Free-air temperature                                                                            | 84<br>85                     |
| $SR$           | Slew rate                                       | vs Supply voltage<br>vs Free-air temperature                                                                            | 86<br>87                     |
|                | Bias-select current                             | vs Supply voltage                                                                                                       | 88                           |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                                                                                                            | 89                           |
| $B_1$          | Unity-gain bandwidth                            | vs Free-air temperature<br>vs Supply voltage                                                                            | 90<br>91                     |
| $\phi_m$       | Phase margin                                    | vs Supply voltage<br>vs Free-air temperature<br>vs Capacitive load                                                      | 94<br>95<br>96               |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                                                                                                            | 97                           |
|                | Phase shift                                     | vs Frequency                                                                                                            | 92, 93                       |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

### TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

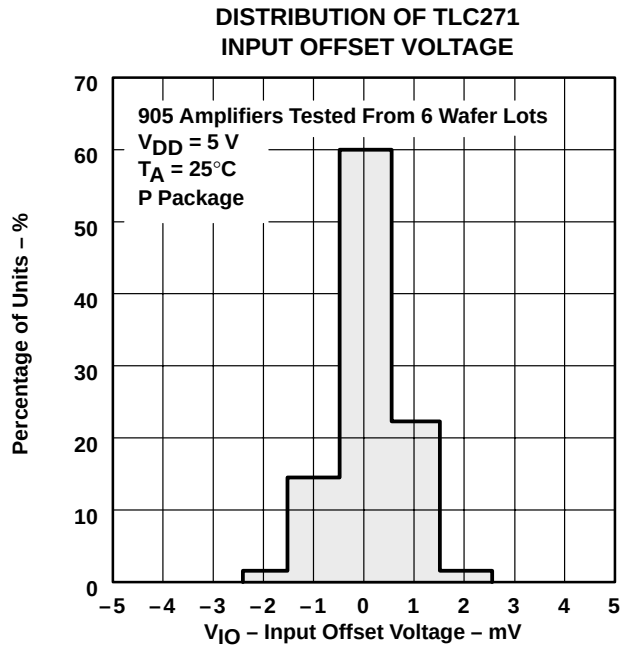


Figure 66

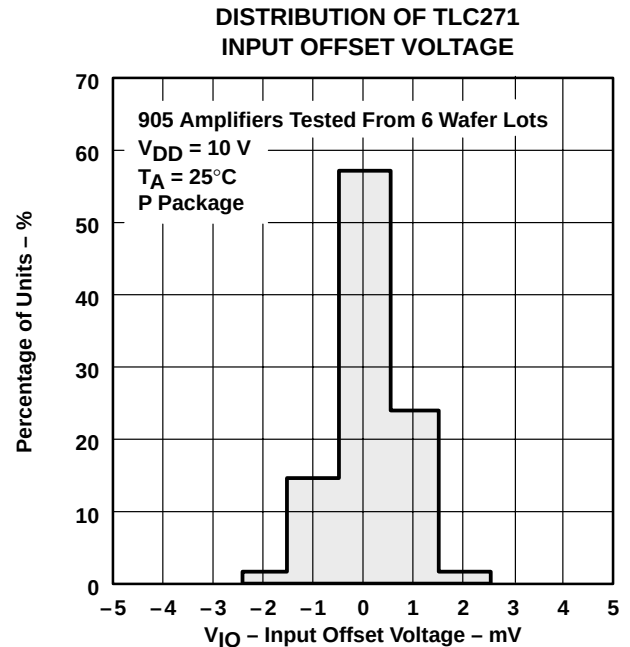


Figure 67

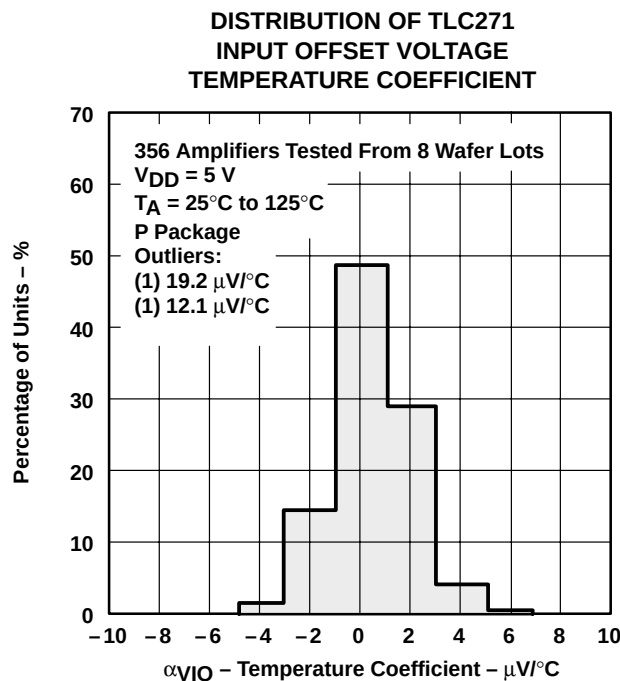


Figure 68

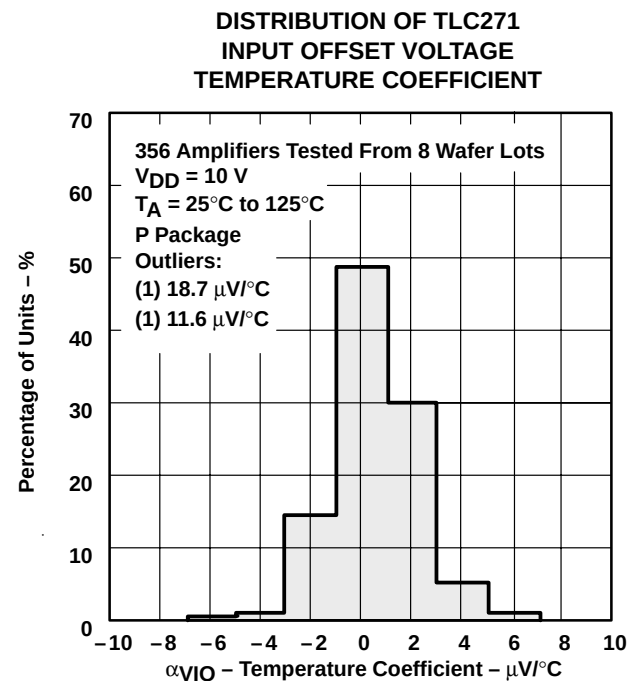


Figure 69

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

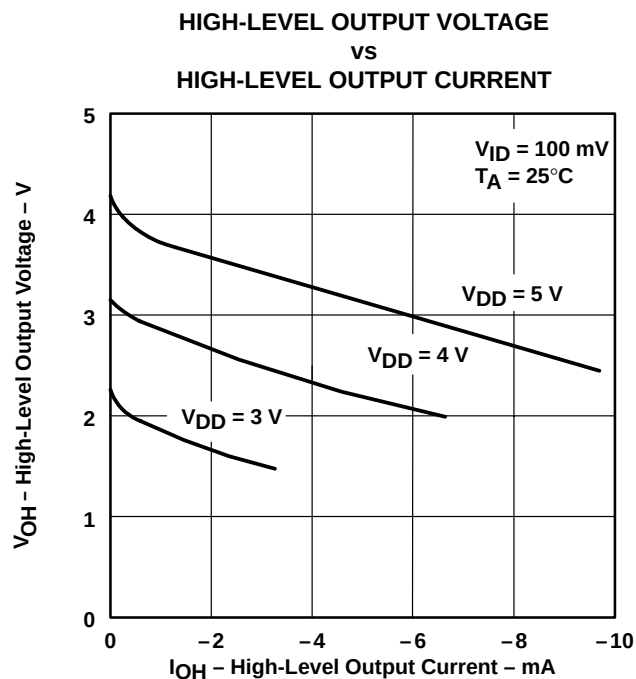


Figure 70

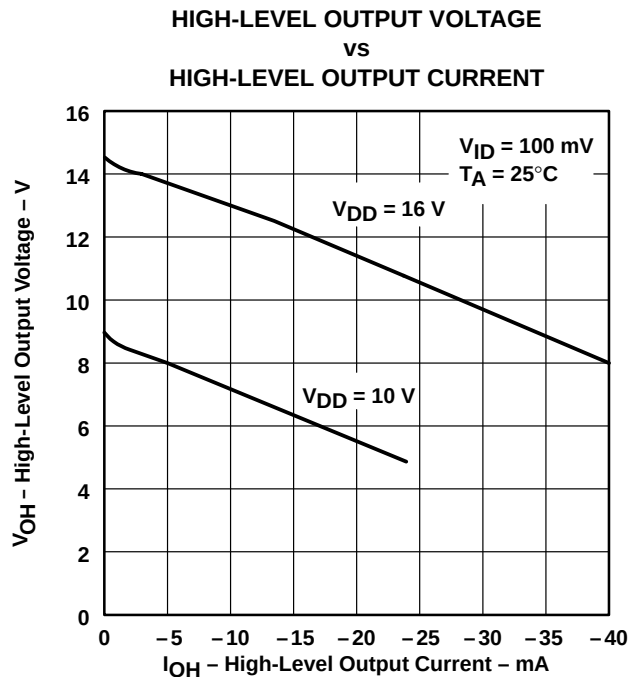


Figure 71

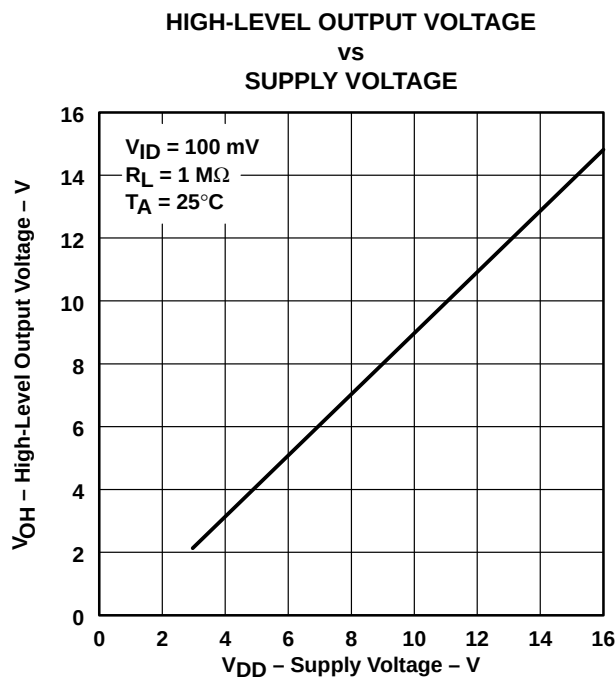


Figure 72

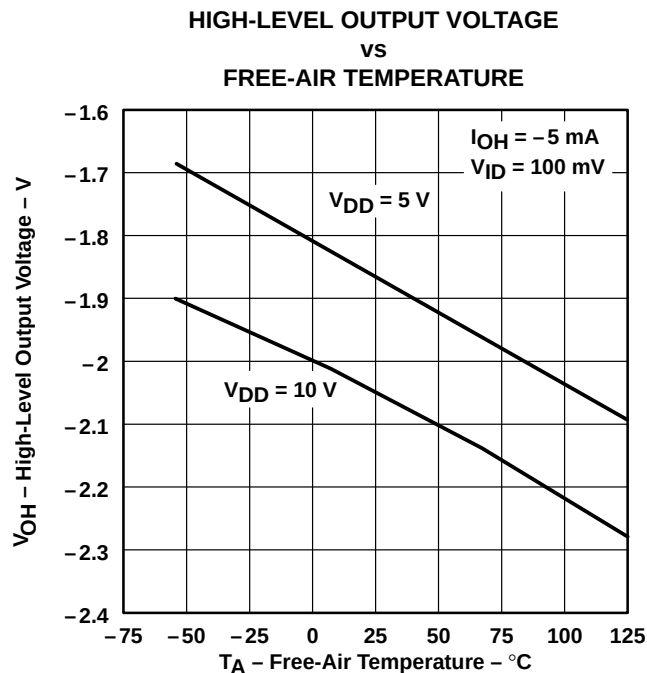


Figure 73

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>**

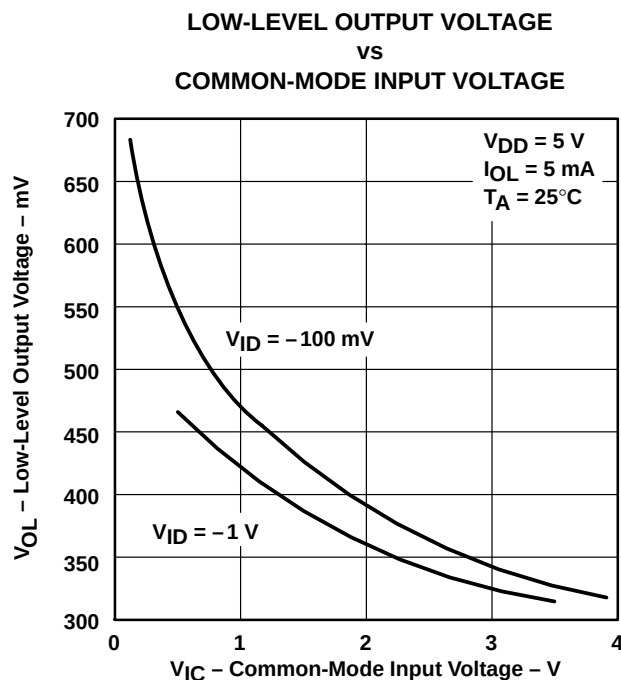


**Figure 74**

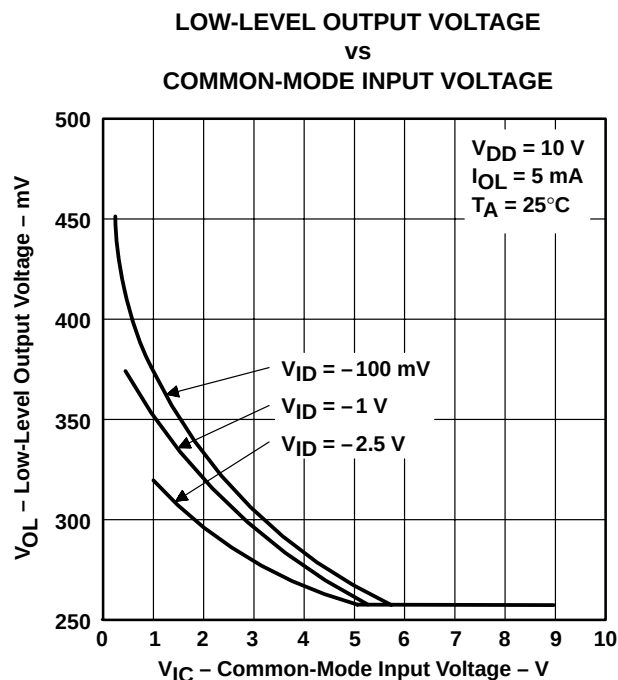


**Figure 75**

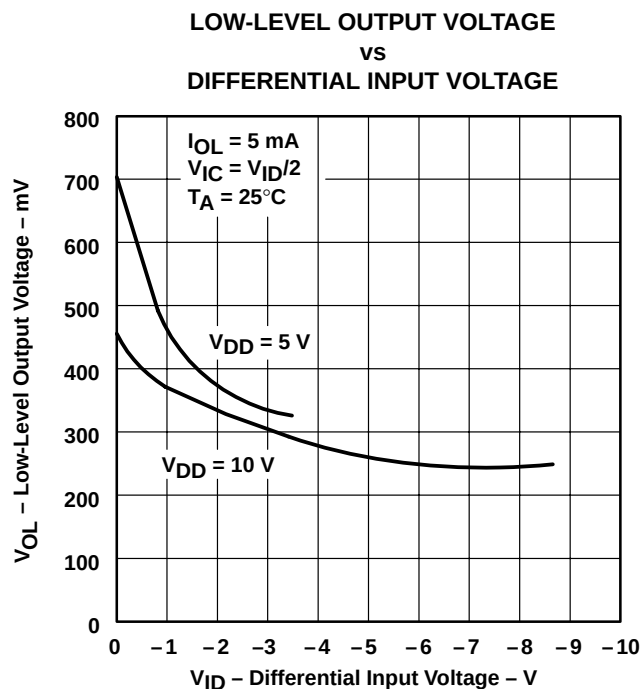


**Figure 76**

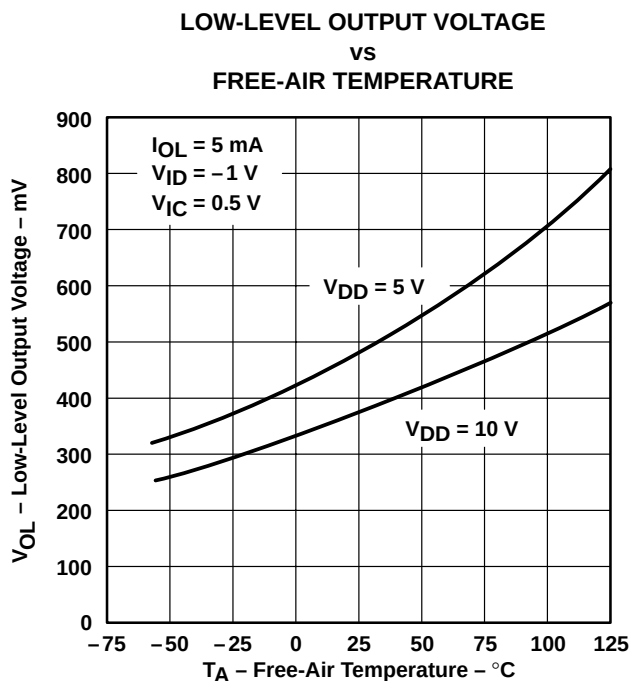


**Figure 77**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

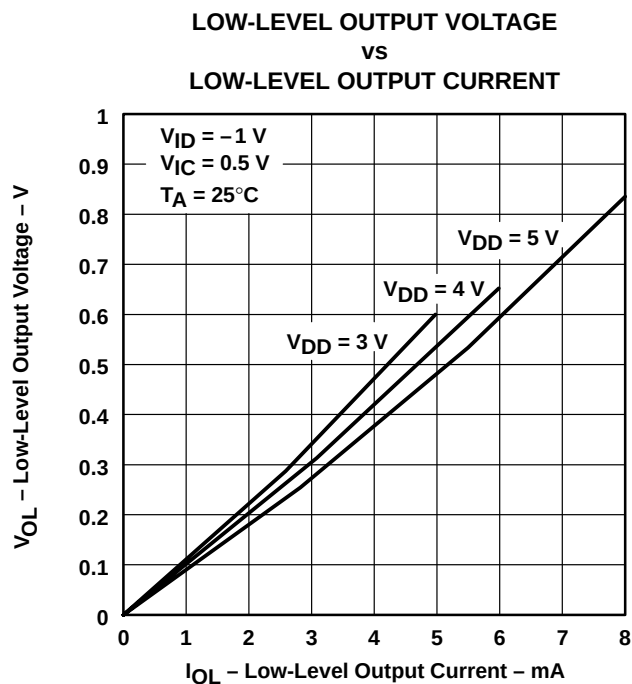


Figure 78

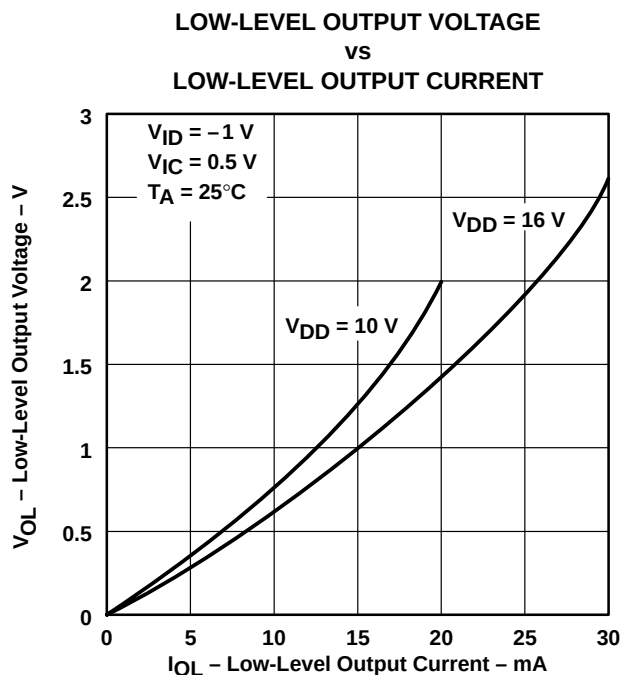


Figure 79

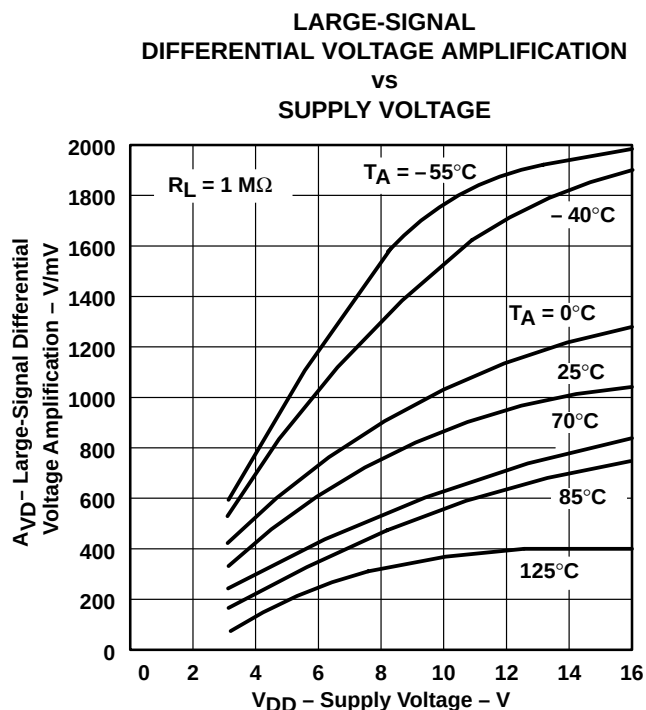


Figure 80


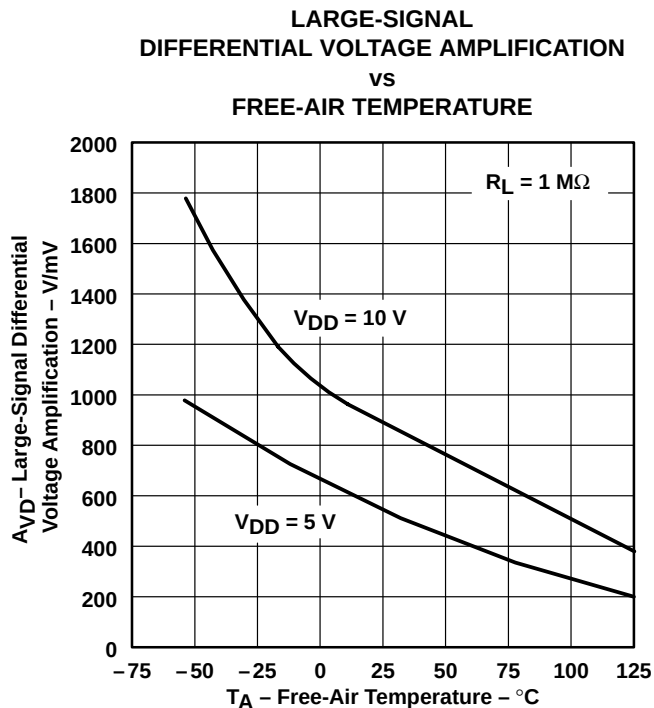


Figure 81

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

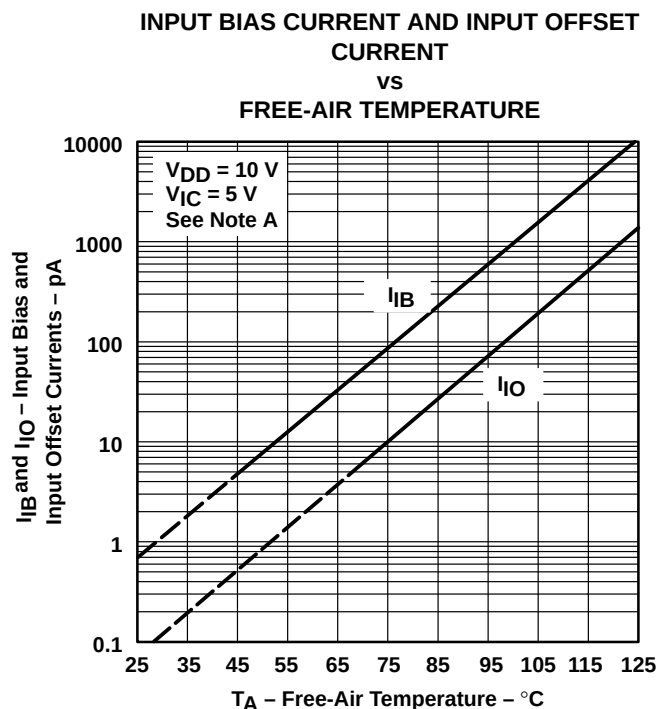

NOTE A: The typical values of input bias current and input offset current below 5 pA were determined mathematically.

Figure 82

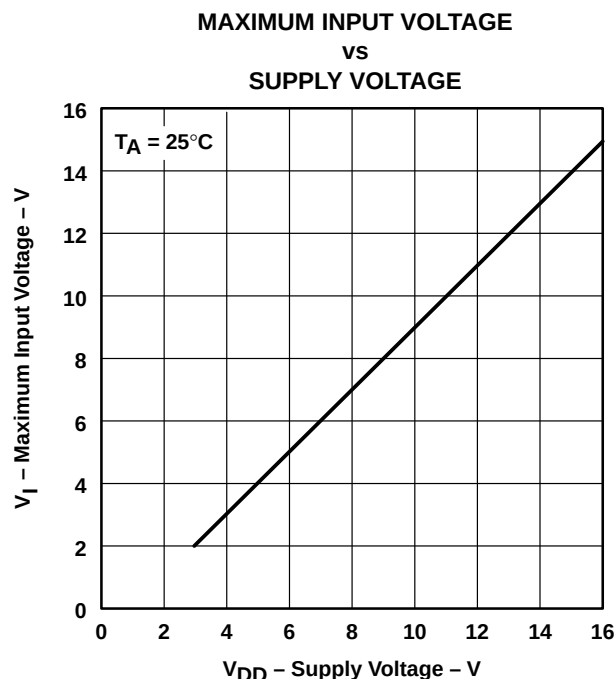


Figure 83

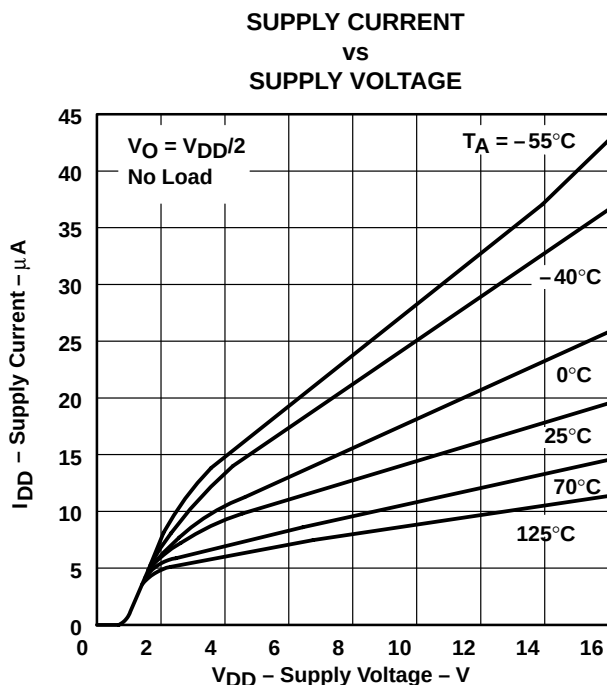


Figure 84

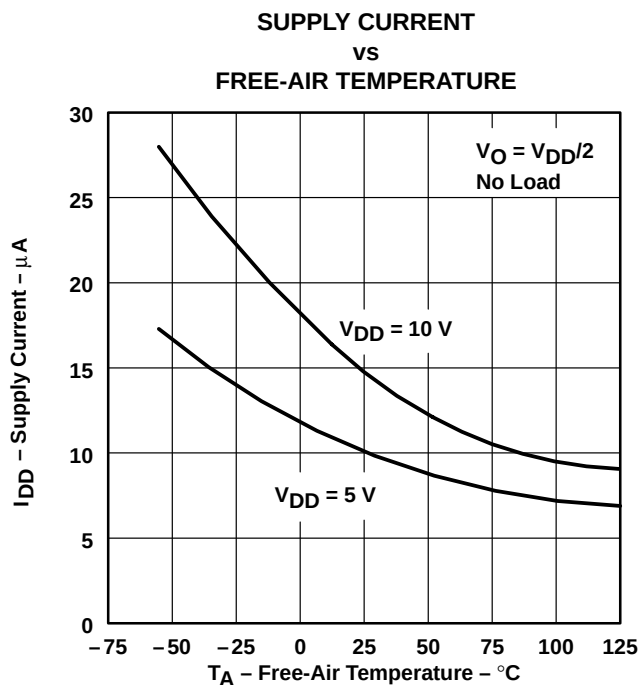


Figure 85

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC271, TLC271A, TLC271B

## LinCMOS™ PROGRAMMABLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS090D – NOVEMBER 1987 – REVISED MARCH 2001

### TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

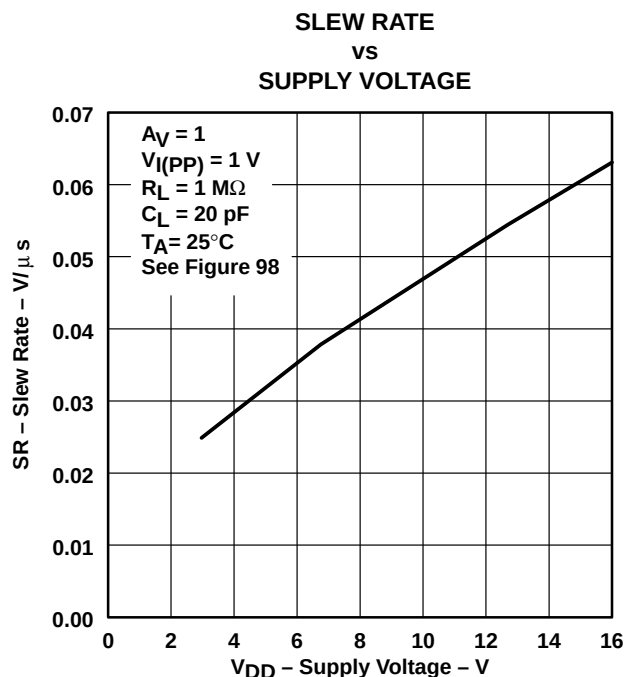


Figure 86

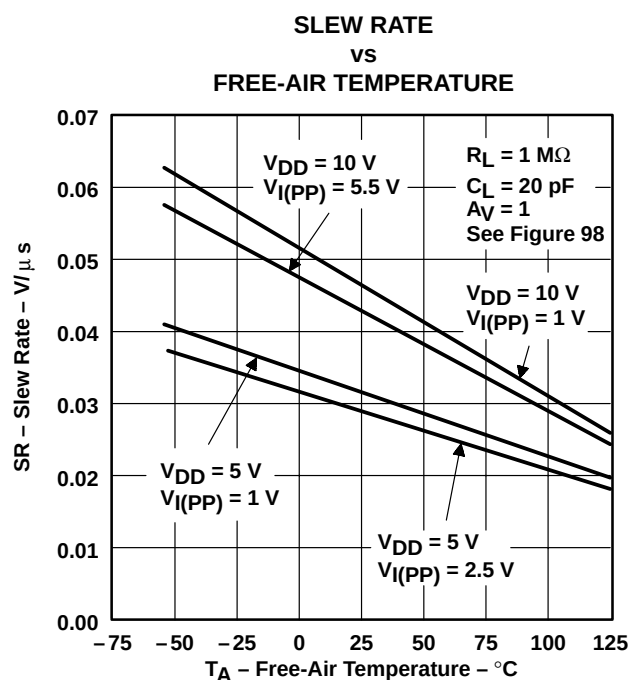


Figure 87

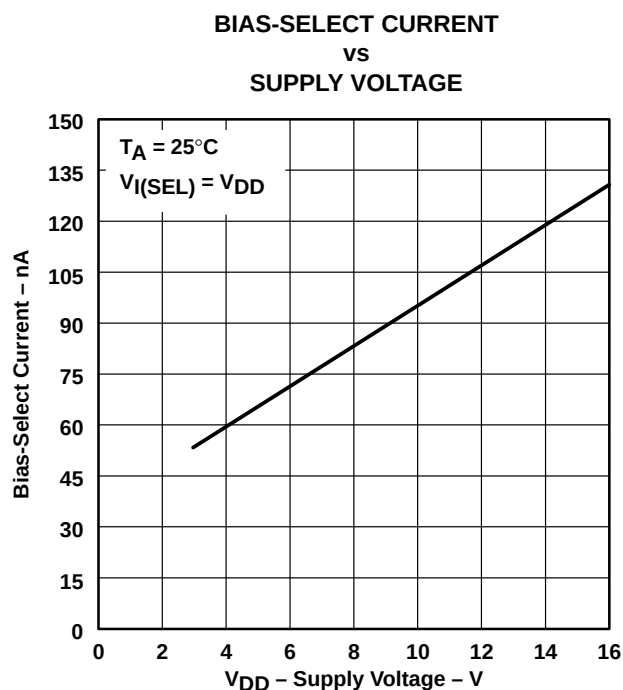


Figure 88

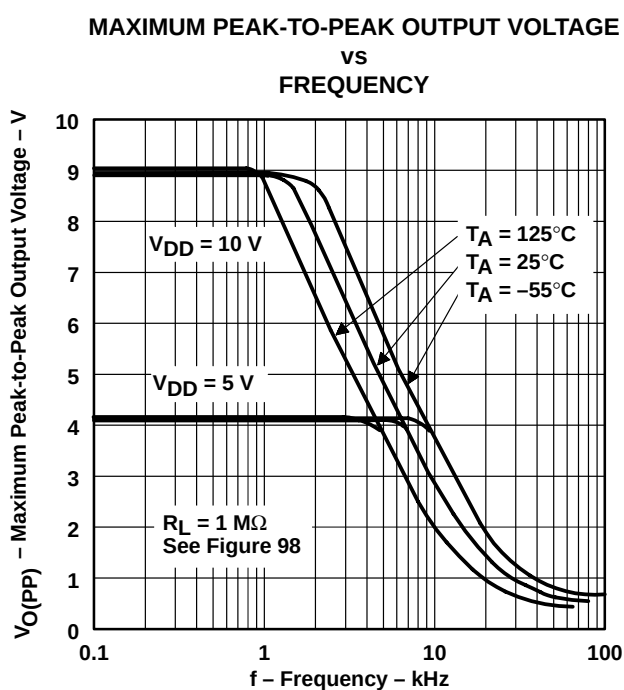


Figure 89

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

**TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>**

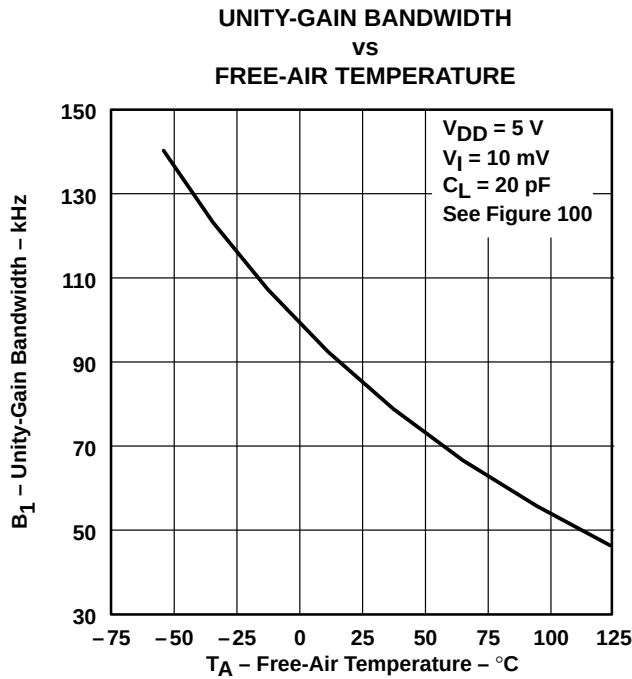


**Figure 90**

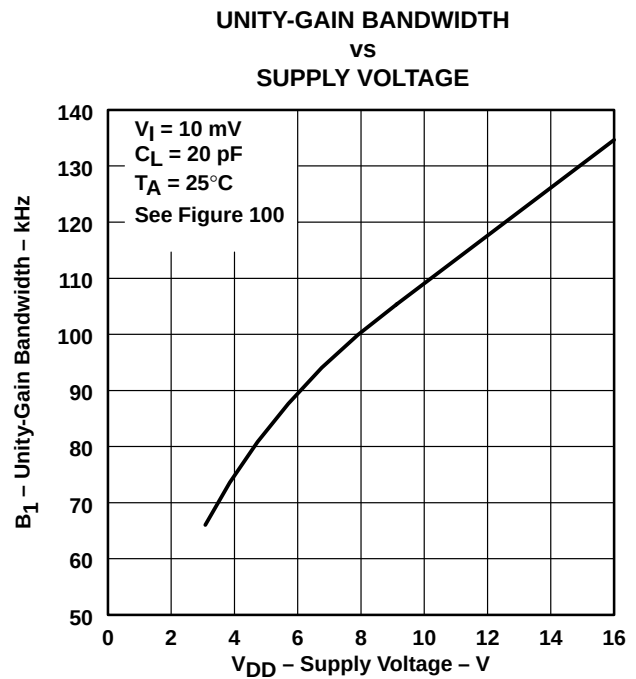


**Figure 91**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE  
 AMPLIFICATION AND PHASE SHIFT  
 VS  
 FREQUENCY**

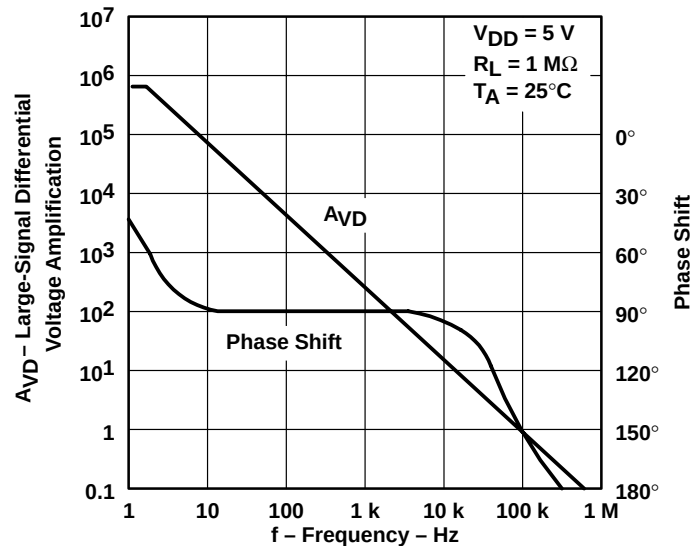


**Figure 92**

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

## LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT

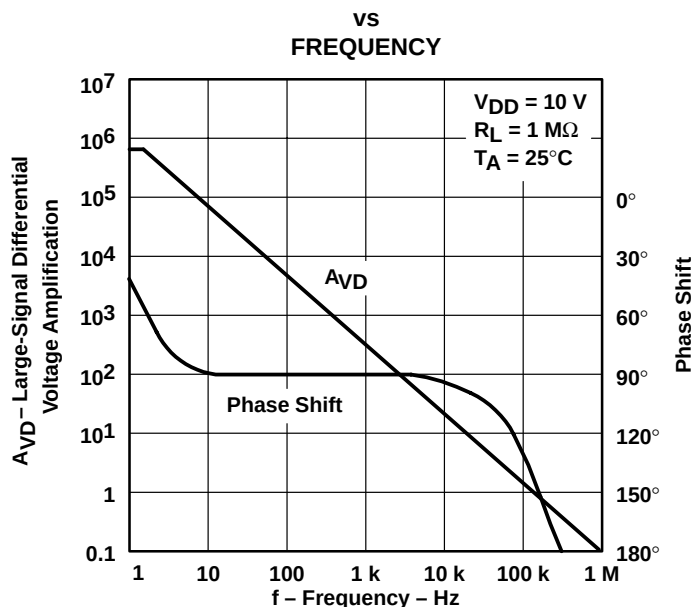


Figure 93

## PHASE MARGIN VS SUPPLY VOLTAGE

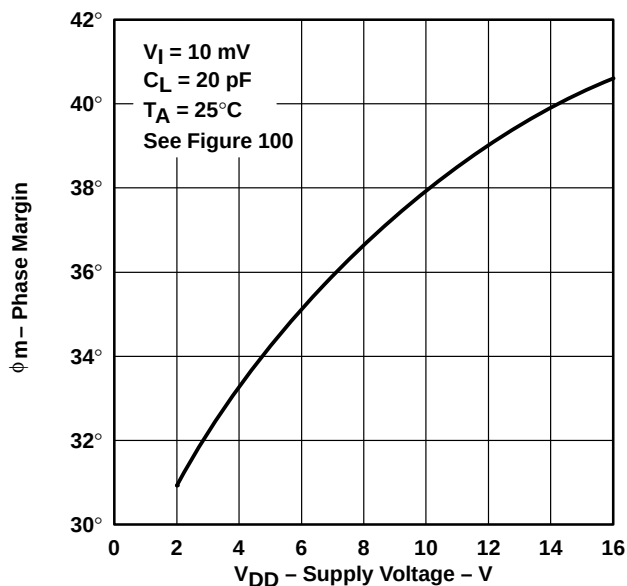


Figure 94

## PHASE MARGIN VS FREE-AIR TEMPERATURE

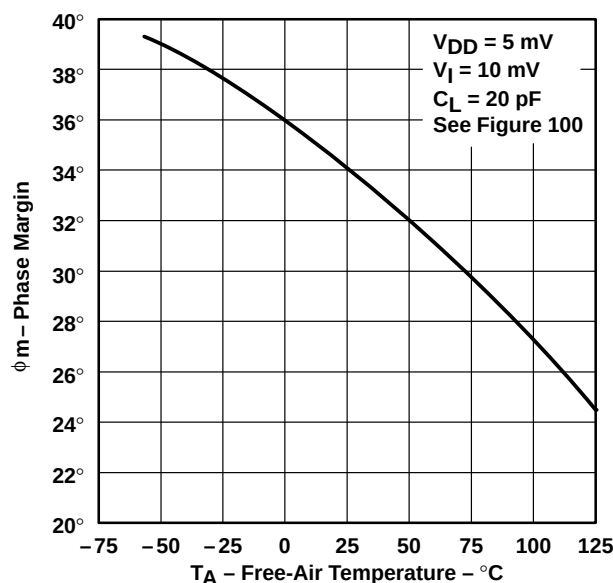


Figure 95

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS (LOW-BIAS MODE)<sup>†</sup>

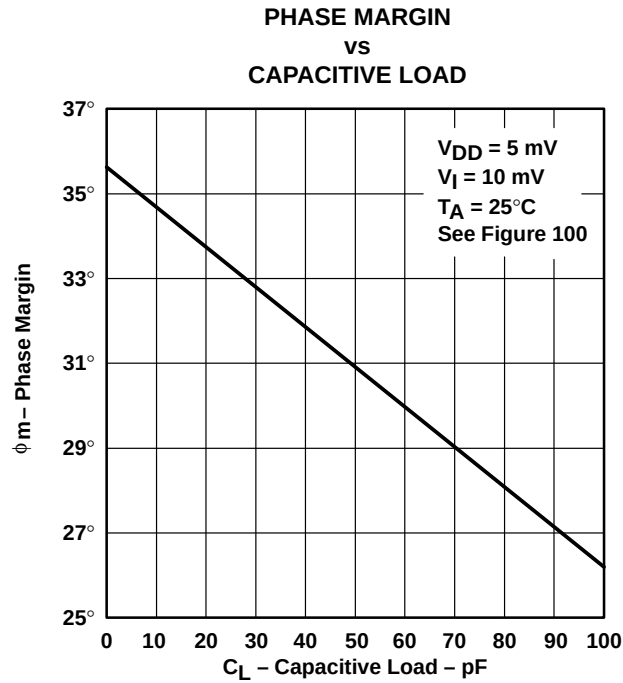


Figure 96

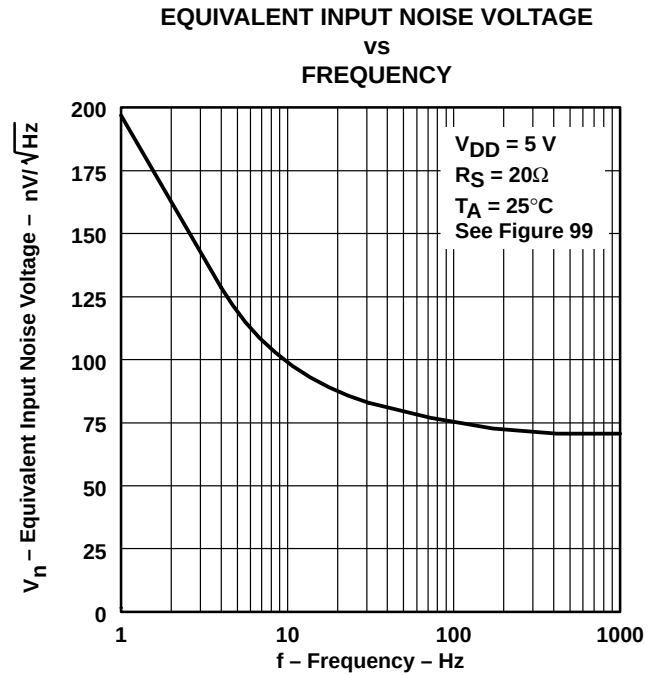


Figure 97

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

## PARAMETER MEASUREMENT INFORMATION

### single-supply versus split-supply test circuits

Because the TLC271 is optimized for single-supply operation, circuit configurations used for the various tests often present some inconvenience since the input signal, in many cases, must be offset from ground. This inconvenience can be avoided by testing the device with split supplies and the output load tied to the negative rail. A comparison of single-supply versus split-supply test circuits is shown below. The use of either circuit gives the same result.

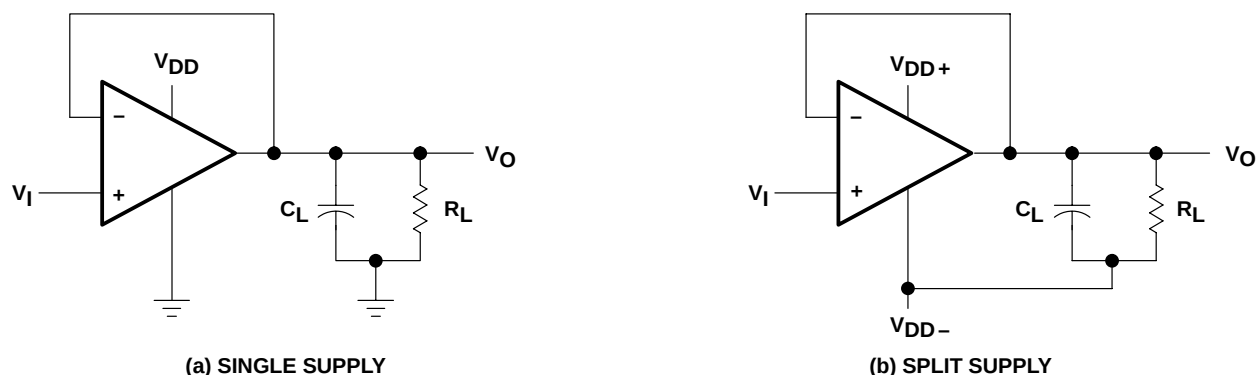


Figure 98. Unity-Gain Amplifier

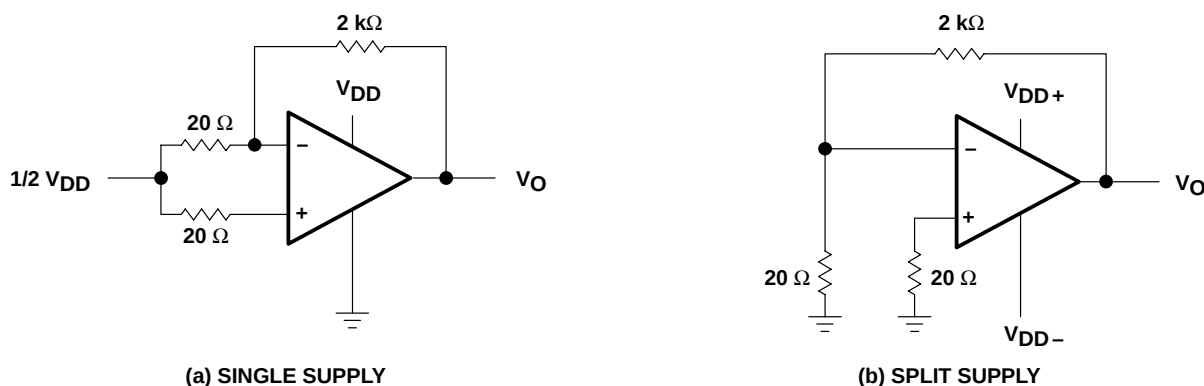


Figure 99. Noise-Test Circuit

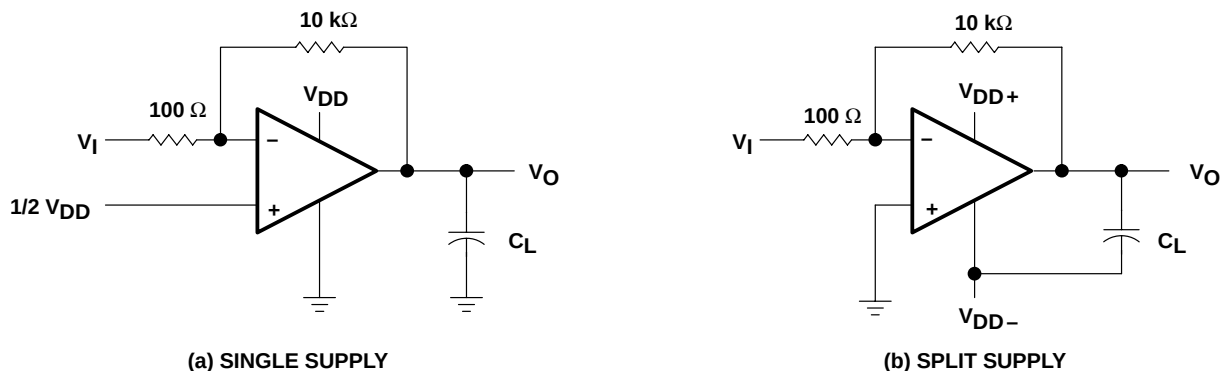


Figure 100. Gain-of-100 Inverting Amplifier

## PARAMETER MEASUREMENT INFORMATION

### input bias current

Because of the high input impedance of the TLC271 operational amplifiers, attempts to measure the input bias current can result in erroneous readings. The bias current at normal room ambient temperature is typically less than 1 pA, a value that is easily exceeded by leakages on the test socket. Two suggestions are offered to avoid erroneous measurements:

1. Isolate the device from other potential leakage sources. Use a grounded shield around and between the device inputs (see Figure 101). Leakages that would otherwise flow to the inputs are shunted away.
2. Compensate for the leakage of the test socket by actually performing an input bias current test (using a picoammeter) with no device in the test socket. The actual input bias current can then be calculated by subtracting the open-socket leakage readings from the readings obtained with a device in the test socket.

One word of caution: many automatic testers as well as some bench-top operational amplifier testers use the servo-loop technique with a resistor in series with the device input to measure the input bias current (the voltage drop across the series resistor is measured and the bias current is calculated). This method requires that a device be inserted into the test socket to obtain a correct reading; therefore, an open-socket reading is not feasible using this method.

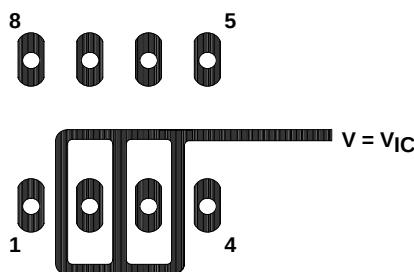


**Figure 101. Isolation Metal Around Device inputs (JG and P packages)**

### low-level output voltage

To obtain low-supply-voltage operation, some compromise is necessary in the input stage. This compromise results in the device low-level output being dependent on both the common-mode input voltage level as well as the differential input voltage level. When attempting to correlate low-level output readings with those quoted in the electrical specifications, these two conditions should be observed. If conditions other than these are to be used, please refer to the Typical Characteristics section of this data sheet.

### input offset voltage temperature coefficient

Erroneous readings often result from attempts to measure temperature coefficient of input offset voltage. This parameter is actually a calculation using input offset voltage measurements obtained at two different temperatures. When one (or both) of the temperatures is below freezing, moisture can collect on both the device and the test socket. This moisture results in leakage and contact resistance which can cause erroneous input offset voltage readings. The isolation techniques previously mentioned have no effect on the leakage since the moisture also covers the isolation metal itself, thereby rendering it useless. It is suggested that these measurements be performed at temperatures above freezing to minimize error.

## PARAMETER MEASUREMENT INFORMATION

### full-power response

Full-power response, the frequency above which the amplifier slew rate limits the output voltage swing, is often specified two ways: full-linear response and full-peak response. The full-linear response is generally measured by monitoring the distortion level of the output while increasing the frequency of a sinusoidal input signal until the maximum frequency is found above which the output contains significant distortion. The full-peak response is defined as the maximum output frequency, without regard to distortion, above which full peak-to-peak output swing cannot be maintained.

Because there is no industry-wide accepted value for significant distortion, the full-peak response is specified in this data sheet and is measured using the circuit of Figure 98. The initial setup involves the use of a sinusoidal input to determine the maximum peak-to-peak output of the device (the amplitude of the sinusoidal wave is increased until clipping occurs). The sinusoidal wave is then replaced with a square wave of the same amplitude. The frequency is then increased until the maximum peak-to-peak output can no longer be maintained (Figure 102). A square wave is used to allow a more accurate determination of the point at which the maximum peak-to-peak output is reached.

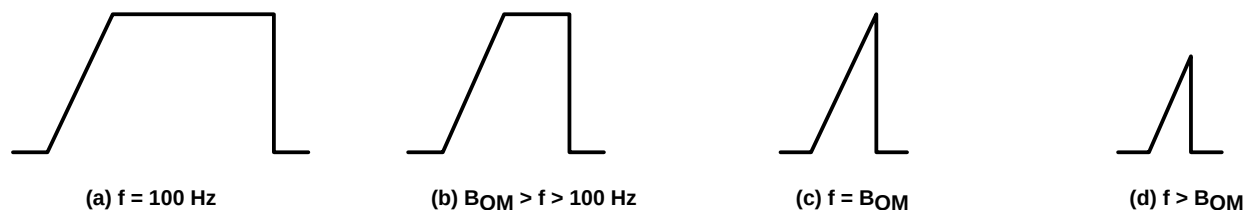


Figure 102. Full-Power-Response Output Signal

### test time

Inadequate test time is a frequent problem, especially when testing CMOS devices in a high-volume, short-test-time environment. Internal capacitances are inherently higher in CMOS than in bipolar and BiFET devices, and require longer test times than their bipolar and BiFET counterparts. The problem becomes more pronounced with reduced supply levels and lower temperatures.

## APPLICATION INFORMATION

### single-supply operation

While the TLC271 performs well using dual power supplies (also called balanced or split supplies), the design is optimized for single-supply operation. This includes an input common mode voltage range that encompasses ground as well as an output voltage range that pulls down to ground. The supply voltage range extends down to 3 V (C-suffix types), thus allowing operation with supply levels commonly available for TTL and HCMOS; however, for maximum dynamic range, 16-V single-supply operation is recommended.

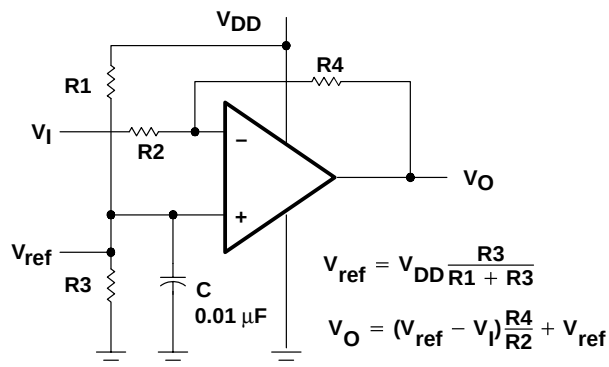


Figure 103. Inverting Amplifier With Voltage Reference

## APPLICATION INFORMATION

### single-supply operation (continued)

Many single-supply applications require that a voltage be applied to one input to establish a reference level that is above ground. A resistive voltage divider is usually sufficient to establish this reference level (see Figure 103). The low input bias current consumption of the TLC271 permits the use of very large resistive values to implement the voltage divider, thus minimizing power consumption.

The TLC271 works well in conjunction with digital logic; however, when powering both linear devices and digital logic from the same power supply, the following precautions are recommended:

1. Power the linear devices from separate bypassed supply lines (see Figure 104); otherwise, the linear device supply rails can fluctuate due to voltage drops caused by high switching currents in the digital logic.
2. Use proper bypass techniques to reduce the probability of noise-induced errors. Single capacitive decoupling is often adequate; however, RC decoupling may be necessary in high-frequency applications.

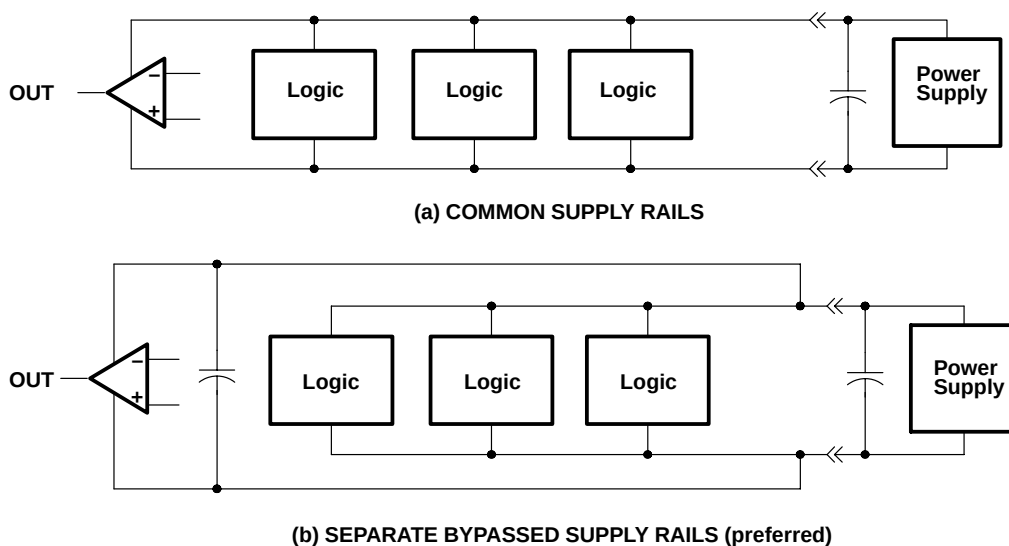


**Figure 104. Common Versus Separate Supply Rails**

## APPLICATION INFORMATION

### input offset voltage nulling

The TLC271 offers external input offset null control. Nulling of the input offset voltage may be achieved by adjusting a 25-k $\Omega$  potentiometer connected between the offset null terminals with the wiper connected as shown in Figure 105. The amount of nulling range varies with the bias selection. In the high-bias mode, the nulling range allows the maximum offset voltage specified to be trimmed to zero. In low-bias and medium-bias modes, total nulling may not be possible.


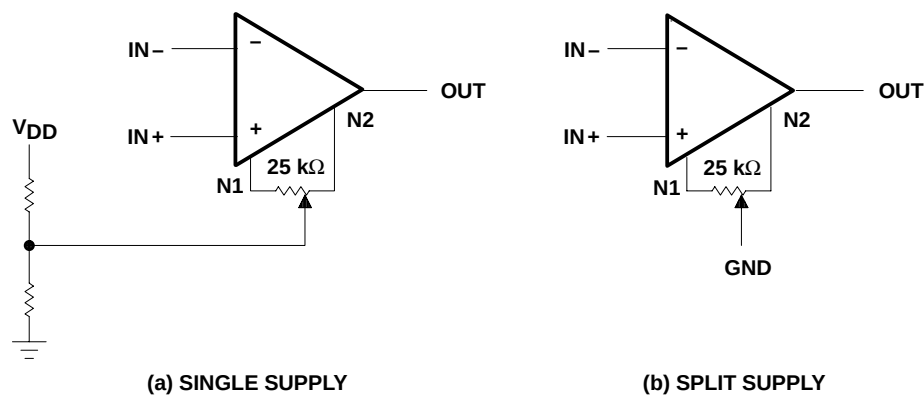


**Figure 105. Input Offset Voltage Null Circuit**

### bias selection

Bias selection is achieved by connecting the bias select pin to one of the three voltage levels (see Figure 106). For medium-bias applications, R is recommended that the bias select pin be connected to the mid-point between the supply rails. This is a simple procedure in split-supply applications, since this point is ground. In single-supply applications, the medium-bias mode necessitates using a voltage divider as indicated. The use of large-value resistors in the voltage divider reduces the current drain of the divider from the supply line. However, large-value resistors used in conjunction with a large-value capacitor requires significant time to charge up to the supply midpoint after the supply is switched on. A voltage other than the midpoint may be used if it is within the voltages specified in the table of Figure 106.

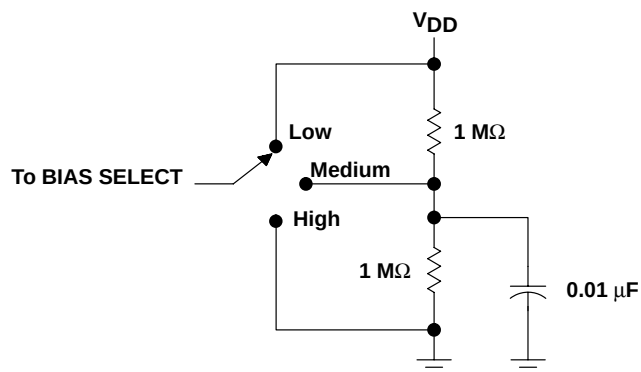

| BIAS MODE | BIAS-SELECT VOLTAGE<br>(single supply) |
|-----------|----------------------------------------|
| Low       | $V_{DD}$                               |
| Medium    | 1 V to $V_{DD} - 1$ V                  |
| High      | GND                                    |

**Figure 106. Bias Selection for Single-Supply Applications**

## APPLICATION INFORMATION

### input characteristics

The TLC271 is specified with a minimum and a maximum input voltage that, if exceeded at either input, could cause the device to malfunction. Exceeding this specified range is a common problem, especially in single-supply operation. Note that the lower range limit includes the negative rail, while the upper range limit is specified at  $V_{DD} - 1$  V at  $T_A = 25^\circ\text{C}$  and at  $V_{DD} - 1.5$  V at all other temperatures.

The use of the polysilicon-gate process and the careful input circuit design gives the TLC271 very good input offset voltage drift characteristics relative to conventional metal-gate processes. Offset voltage drift in CMOS devices is highly influenced by threshold voltage shifts caused by polarization of the phosphorus dopant implanted in the oxide. Placing the phosphorus dopant in a conductor (such as a polysilicon gate) alleviates the polarization problem, thus reducing threshold voltage shifts by more than an order of magnitude. The offset voltage drift with time has been calculated to be typically  $0.1 \mu\text{V/month}$ , including the first month of operation.

Because of the extremely high input impedance and resulting low bias current requirements, the TLC271 is well suited for low-level signal processing; however, leakage currents on printed circuit boards and sockets can easily exceed bias current requirements and cause a degradation in device performance. It is good practice to include guard rings around inputs (similar to those of Figure 101 in the Parameter Measurement Information section). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input (see Figure 107).

The inputs of any unused amplifiers should be tied to ground to avoid possible oscillation.

### noise performance

The noise specifications in operational amplifier circuits are greatly dependent on the current in the first-stage differential amplifier. The low input bias current requirements of the TLC271 results in a very low noise current, which is insignificant in most applications. This feature makes the devices especially favorable over bipolar devices when using values of circuit impedance greater than  $50 \text{ k}\Omega$ , since bipolar devices exhibit greater noise currents.

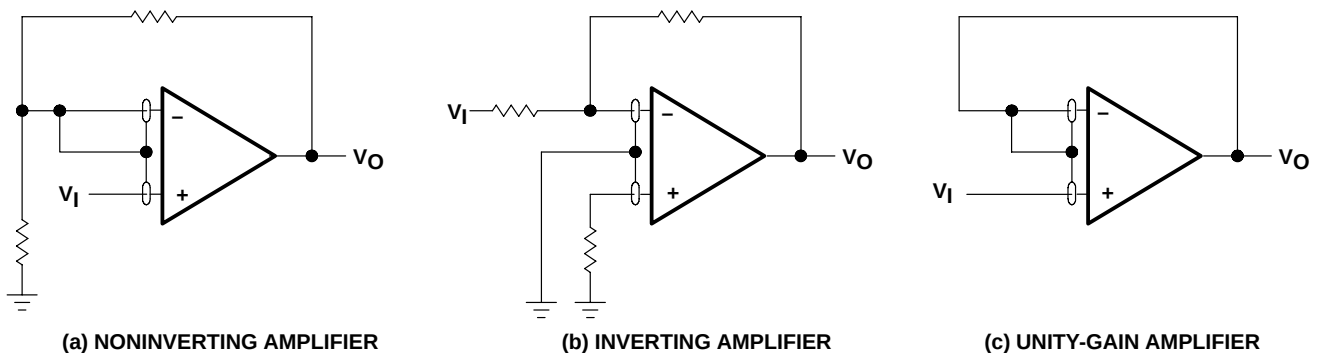


**Figure 107. Guard-Ring Schemes**

## APPLICATION INFORMATION

### feedback

Operational amplifier circuits almost always employ feedback, and since feedback is the first prerequisite for oscillation, a little caution is appropriate. Most oscillation problems result from driving capacitive loads and ignoring stray input capacitance. A small-value capacitor connected in parallel with the feedback resistor is an effective remedy (see Figure 108). The value of this capacitor is optimized empirically.

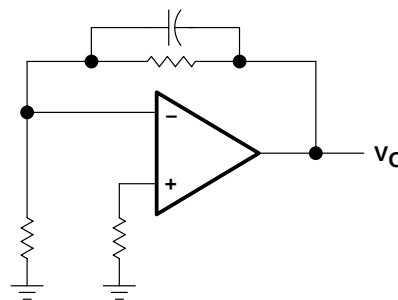


**Figure 108. Compensation for Input Capacitance**

### electrostatic discharge protection

The TLC271 incorporates an internal electrostatic-discharge (ESD) protection circuit that prevents functional failures at voltages up to 2000 V as tested under MIL-STD-883C, Method 3015.2. Care should be exercised, however, when handling these devices as exposure to ESD may result in the degradation of the device parametric performance. The protection circuit also causes the input bias currents to be temperature dependent and have the characteristics of a reverse-biased diode.

### latch-up

Because CMOS devices are susceptible to latch-up due to their inherent parasitic thyristors, the TLC271 inputs and output were designed to withstand  $-100\text{-mA}$  surge currents without sustaining latchup; however, techniques should be used to reduce the chance of latch-up whenever possible. Internal protection diodes should not by design be forward biased. Applied input and output voltage should not exceed the supply voltage by more than 300 mV. Care should be exercised when using capacitive coupling on pulse generators. Supply transients should be shunted by the use of decoupling capacitors ( $0.1\text{ }\mu\text{F}$  typical) located across the supply rails as close to the device as possible.

The current path established if latch-up occurs is usually between the positive supply rail and ground and can be triggered by surges on the supply lines and/or voltages on either the output or inputs that exceed the supply voltage. Once latch-up occurs, the current flow is limited only by the impedance of the power supply and the forward resistance of the parasitic thyristor and usually results in the destruction of the device. The chance of latch-up occurring increases with increasing temperature and supply voltages.

### output characteristics

The output stage of the TLC271 is designed to sink and source relatively high amounts of current (see Typical Characteristics). If the output is subjected to a short-circuit condition, this high current capability can cause device damage under certain conditions. Output current capability increases with supply voltage.

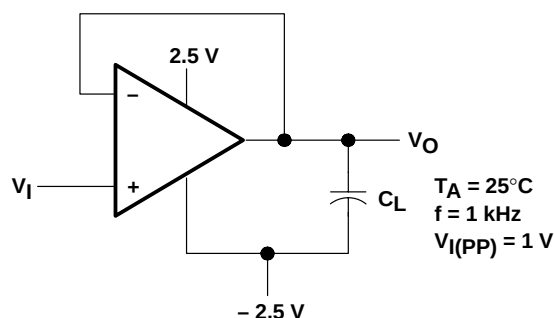


**Figure 109. Test Circuit for Output Characteristics**

## APPLICATION INFORMATION

### output characteristics (continued)

All operating characteristics of the TLC271 were measured using a 20-pF load. The devices drive higher capacitive loads; however, as output load capacitance increases, the resulting response pole occurs at lower frequencies, thereby causing ringing, peaking, or even oscillation (see Figures 110, 111, and 112). In many cases, adding some compensation in the form of a series resistor in the feedback loop alleviates the problem.

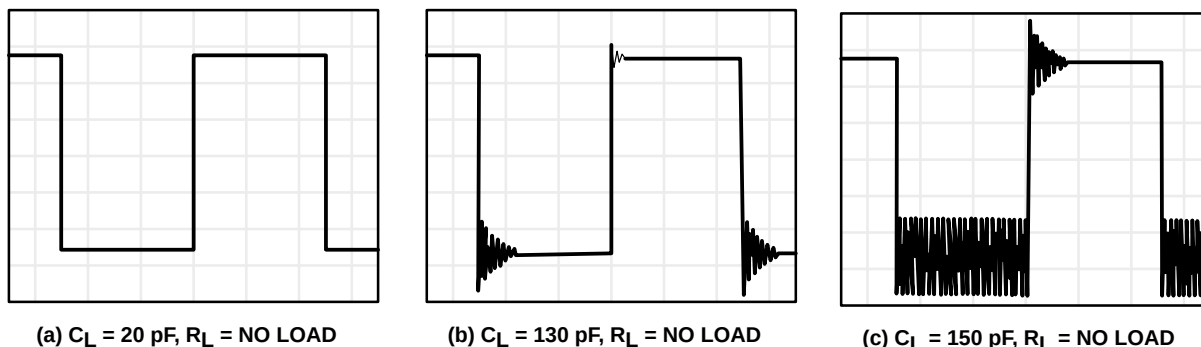


**Figure 110. Effect of Capacitive Loads in High-Bias Mode**

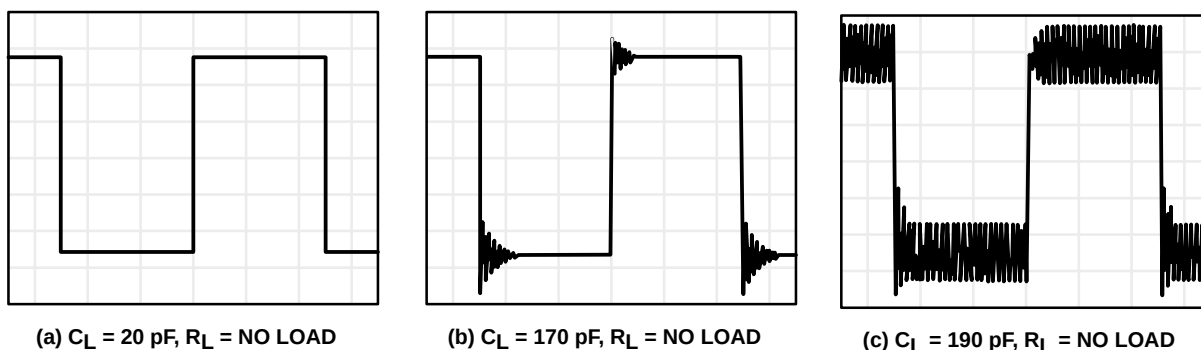


**Figure 111. Effect of Capacitive Loads in Medium-Bias Mode**



**Figure 112. Effect of Capacitive Loads in Low-Bias Mode**

## APPLICATION INFORMATION

### output characteristics (continued)

Although the TLC271 possesses excellent high-level output voltage and current capability, methods are available for boosting this capability, if needed. The simplest method involves the use of a pullup resistor ( $R_P$ ) connected from the output to the positive supply rail (see Figure 113). There are two disadvantages to the use of this circuit. First, the NMOS pulldown transistor, N4 (see equivalent schematic) must sink a comparatively large amount of current. In this circuit, N4 behaves like a linear resistor with an on-resistance between approximately 60  $\Omega$  and 180  $\Omega$ , depending on how hard the operational amplifier input is driven. With very low values of  $R_P$ , a voltage offset from 0 V at the output occurs. Secondly, pullup resistor  $R_P$  acts as a drain load to N4 and the gain of the operational amplifier is reduced at output voltage levels where N5 is not supplying the output current.


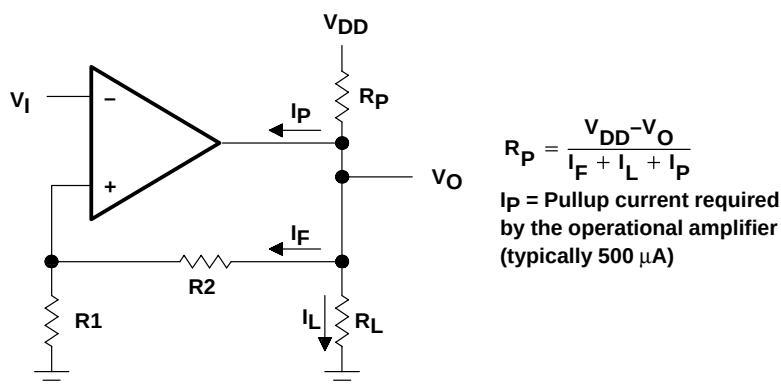


Figure 113. Resistive Pullup to Increase  $V_{OH}$

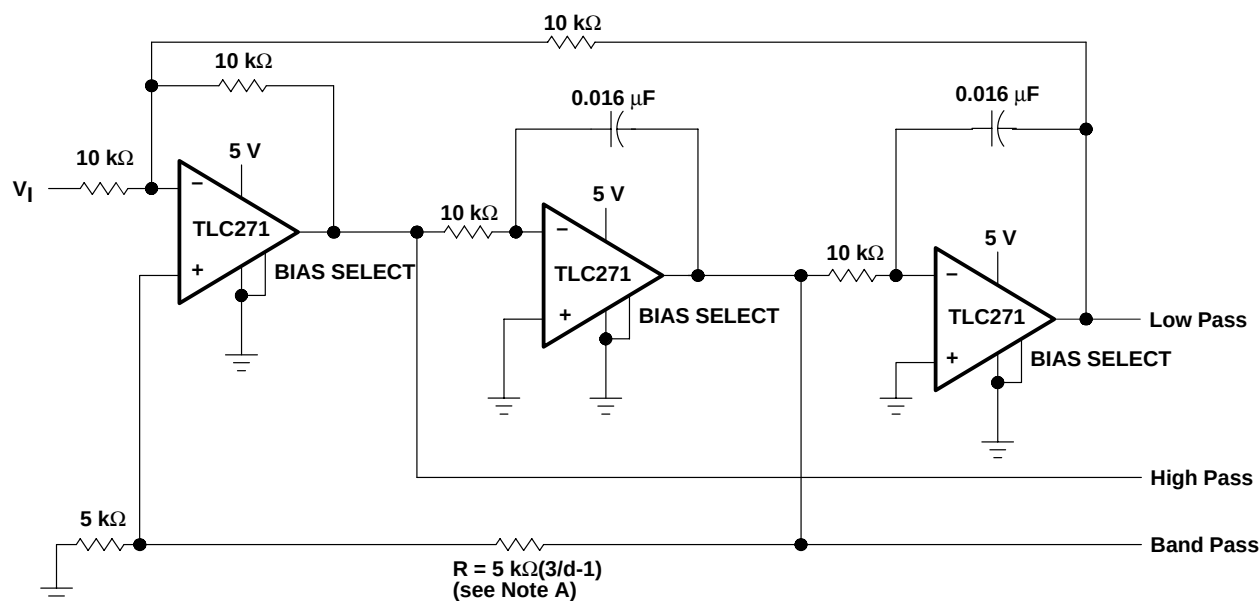


NOTE B: d = damping factor, I/O

Figure 114. State-Variable Filter

## APPLICATION INFORMATION

### output characteristics (continued)

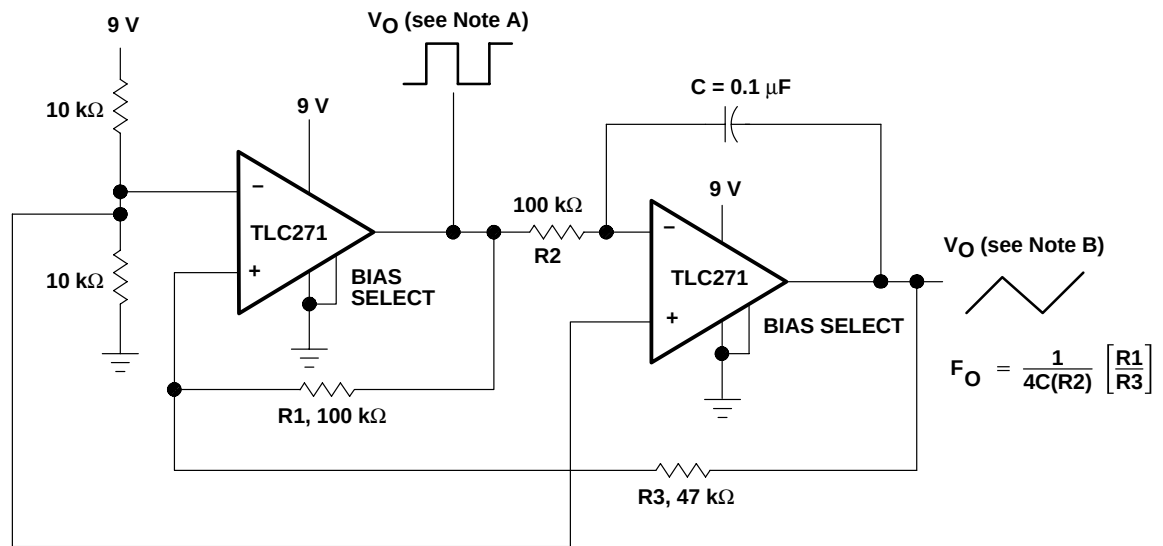

NOTES: A.  $V_{O(PP)} = 8 \text{ V}$   
 B.  $V_{O(PP)} = 4 \text{ V}$


Figure 115. Single-Supply Function Generator

The diagram shows a fully differential amplifier circuit using three TLC271 op-amp chips. The circuit is powered by 5V and -5V rails. The input signals  $V_{I+}$  and  $V_{I-}$  are applied to the non-inverting inputs of the first two op-amps. The output of the first op-amp is connected to the inverting input of the second op-amp via a 10 k $\Omega$  resistor. The output of the second op-amp is connected to the inverting input of the third op-amp via a 100 k $\Omega$  resistor. The output of the third op-amp is connected to the inverting input of the first op-amp via a 95 k $\Omega$  resistor. A 10 k $\Omega$  resistor is connected between the output of the third op-amp and ground. A potentiometer  $R1$  (10 k $\Omega$ ) is connected between the output of the third op-amp and ground, with its wiper connected to the inverting input of the third op-amp. The biasing is connected to the BIAS SELECT pin of each op-amp.

**Figure 116. Low-Power Instrumentation Amplifier**



# APPLICATION INFORMATION (HIGH-BIAS MODE)

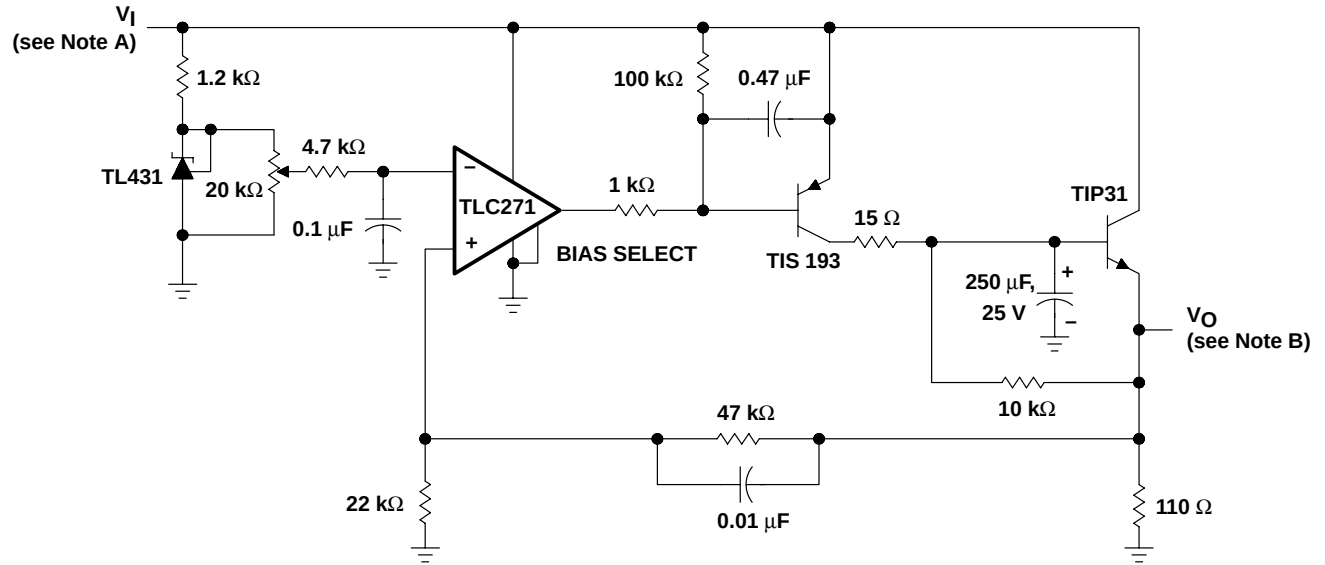

NOTES: A.  $V_I = 3.5$  to  $15$  V  
 B.  $V_O = 2.0$  V,  $0$  to  $1$  A

Figure 118. Logic-Array Power Supply


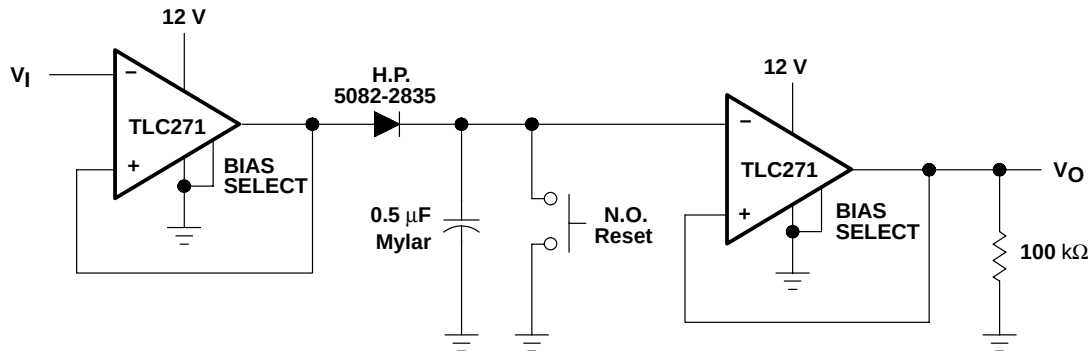


Figure 119. Positive-Peak Detector

**APPLICATION INFORMATION (MEDIUM-BIAS MODE)**

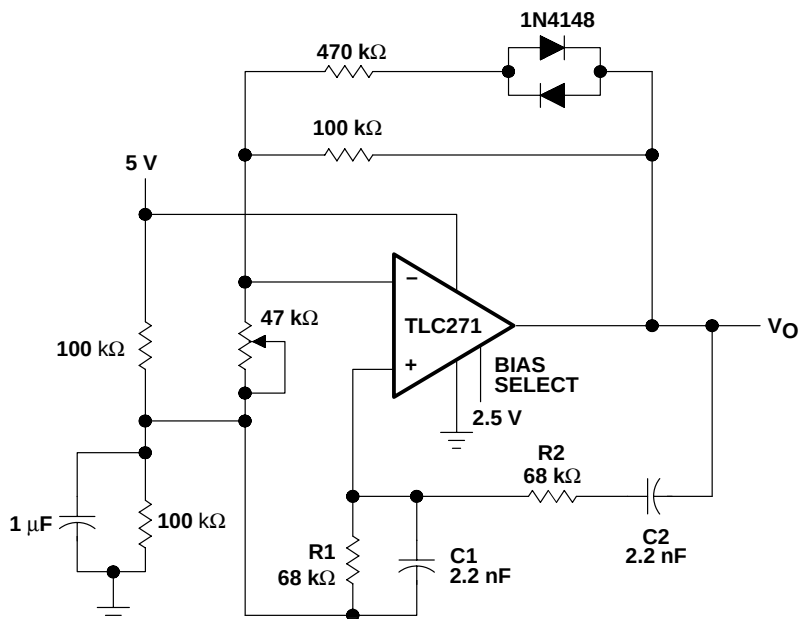

NOTES: A.  $V_{O(PP)} = 2\text{ V}$

B.  $f_0 = \frac{1}{2\pi\sqrt{R1R2C1C2}}$

**Figure 120. Wein Oscillator**

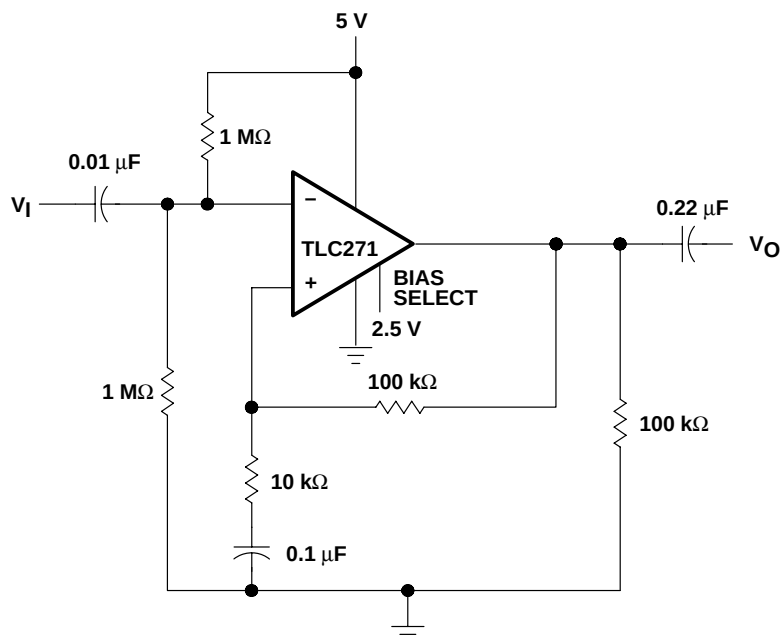


**Figure 121. Single-Supply AC Amplifier**

(see Note A)

5 V

Gain Control

1 MΩ

100 kΩ

10 kΩ

1 μF

0.1 μF

1 kΩ

100 kΩ

TLC271

BIAS SELECT

2.5 V

1 μF


100 kΩ

The diagram shows a current source circuit. A TLC271 op-amp is configured with its non-inverting input (+) to an input voltage  $V_I$  and its inverting input (-) to ground. The op-amp's output is connected to the gate of a 2N3821 JFET. The JFET's source is connected to ground through a resistor  $R$ . The drain of the JFET is connected to a 5V supply. A 2.5V supply is connected to the BIAS SELECT pin of the op-amp. The current  $I_S$  is the drain current of the JFET.

NOTES: A.  $V_I = 0\text{ V TO } 3\text{ V}$   
 B.  $I_S = \frac{V_I}{R}$



APPLICATION INFORMATION (LOW-BIAS MODE)

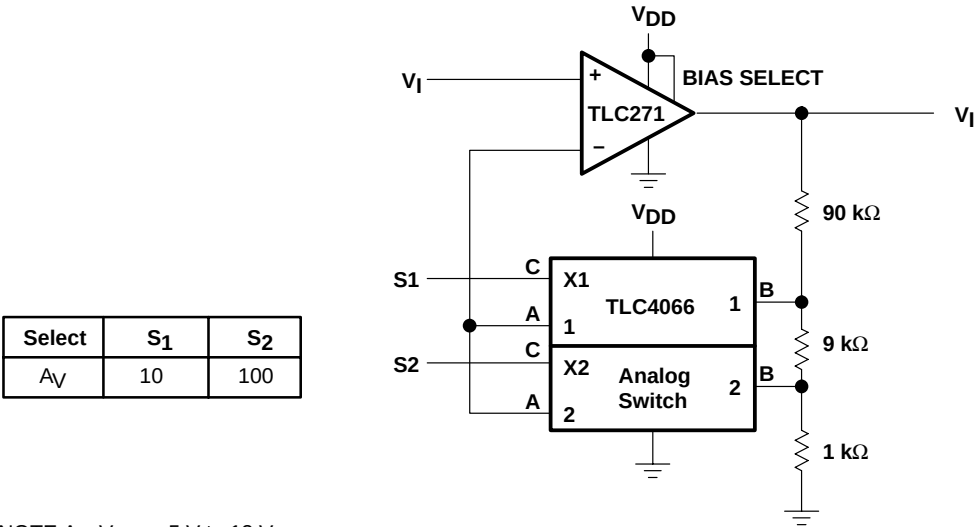

NOTE A: V<sub>DD</sub> = 5 V to 12 V

Figure 125. Amplifier With Digital Gain Selection


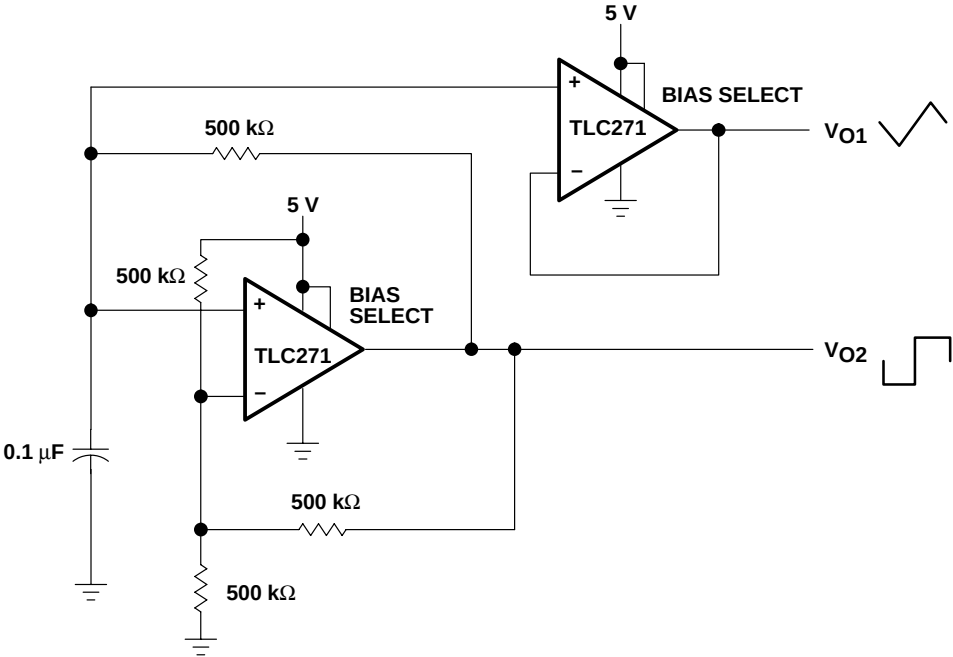



Figure 126. Multivibrator

## APPLICATION INFORMATION (LOW-BIAS MODE)

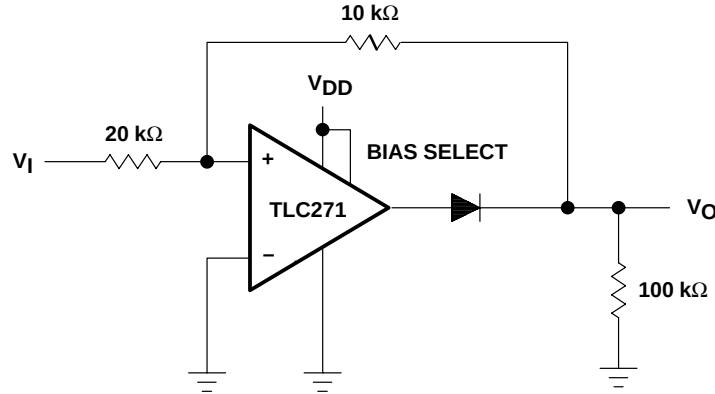


NOTE A:  $V_{DD} = 5\text{ V to }16\text{ V}$

**Figure 127. Full-Wave Rectifier**

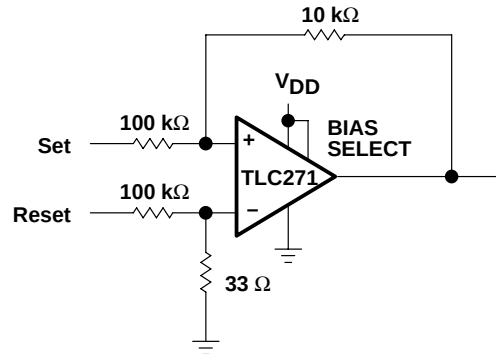

NOTE A:  $V_{DD} = 5\text{ V to }16\text{ V}$

**Figure 128. Set/Reset Flip-Flop**

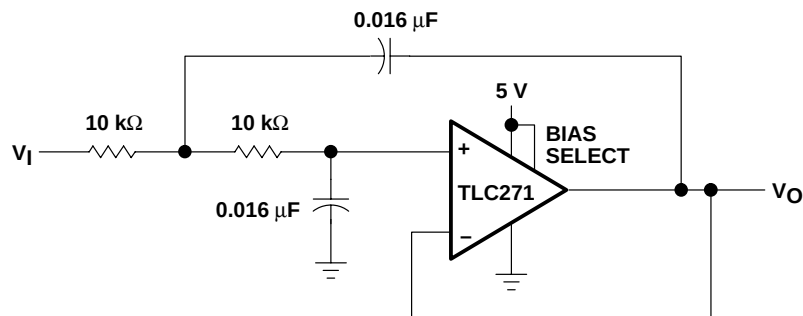

NOTE A: Normalized to  $F_C = 1\text{ kHz}$  and  $R_L = 10\text{ k}\Omega$

**Figure 129. Two-Pole Low-Pass Butterworth Filter**

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TLC271ACD        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271AC                   | <a href="#">Samples</a> |
| TLC271ACDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271AC                   | <a href="#">Samples</a> |
| TLC271ACP        | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | TLC271ACP               | <a href="#">Samples</a> |
| TLC271ACPS       | ACTIVE        | SO           | PS                 | 8    | 80             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271A                   | <a href="#">Samples</a> |
| TLC271ACPSR      | ACTIVE        | SO           | PS                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271A                   | <a href="#">Samples</a> |
| TLC271AID        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271AI                   | <a href="#">Samples</a> |
| TLC271AIDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271AI                   | <a href="#">Samples</a> |
| TLC271AIDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271AI                   | <a href="#">Samples</a> |
| TLC271AIP        | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | -40 to 85    | TLC271AIP               | <a href="#">Samples</a> |
| TLC271BCD        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271BC                   | <a href="#">Samples</a> |
| TLC271BCDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271BC                   | <a href="#">Samples</a> |
| TLC271BCDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271BC                   | <a href="#">Samples</a> |
| TLC271BCP        | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | TLC271BCP               | <a href="#">Samples</a> |
| TLC271BCPS       | ACTIVE        | SO           | PS                 | 8    | 80             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271B                   | <a href="#">Samples</a> |
| TLC271BID        | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271BI                   | <a href="#">Samples</a> |
| TLC271BIDG4      | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271BI                   | <a href="#">Samples</a> |
| TLC271BIDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271BI                   | <a href="#">Samples</a> |
| TLC271BIP        | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | -40 to 85    | TLC271BIP               | <a href="#">Samples</a> |
| TLC271CD         | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271C                    | <a href="#">Samples</a> |
| TLC271CDR        | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271C                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| TLC271CDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | 271C                    | <a href="#">Samples</a> |
| TLC271CP         | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | 0 to 70      | TLC271CP                | <a href="#">Samples</a> |
| TLC271CPS        | ACTIVE        | SO           | PS                 | 8    | 80             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271                    | <a href="#">Samples</a> |
| TLC271CPSR       | ACTIVE        | SO           | PS                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271                    | <a href="#">Samples</a> |
| TLC271CPW        | ACTIVE        | TSSOP        | PW                 | 8    | 150            | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271                    | <a href="#">Samples</a> |
| TLC271CPWR       | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271                    | <a href="#">Samples</a> |
| TLC271CPWRG4     | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | 0 to 70      | P271                    | <a href="#">Samples</a> |
| TLC271ID         | ACTIVE        | SOIC         | D                  | 8    | 75             | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271I                    | <a href="#">Samples</a> |
| TLC271IDR        | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271I                    | <a href="#">Samples</a> |
| TLC271IDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -40 to 85    | 271I                    | <a href="#">Samples</a> |
| TLC271IP         | ACTIVE        | PDIP         | P                  | 8    | 50             | RoHS & Green    | NIPDAU                               | N / A for Pkg Type   | -40 to 85    | TLC271IP                | <a href="#">Samples</a> |
| TLC271MDR        | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -55 to 125   | 271M                    | <a href="#">Samples</a> |
| TLC271MDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500           | RoHS & Green    | NIPDAU                               | Level-1-260C-UNLIM   | -55 to 125   | 271M                    | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.


**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- <sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- <sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- <sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- <sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

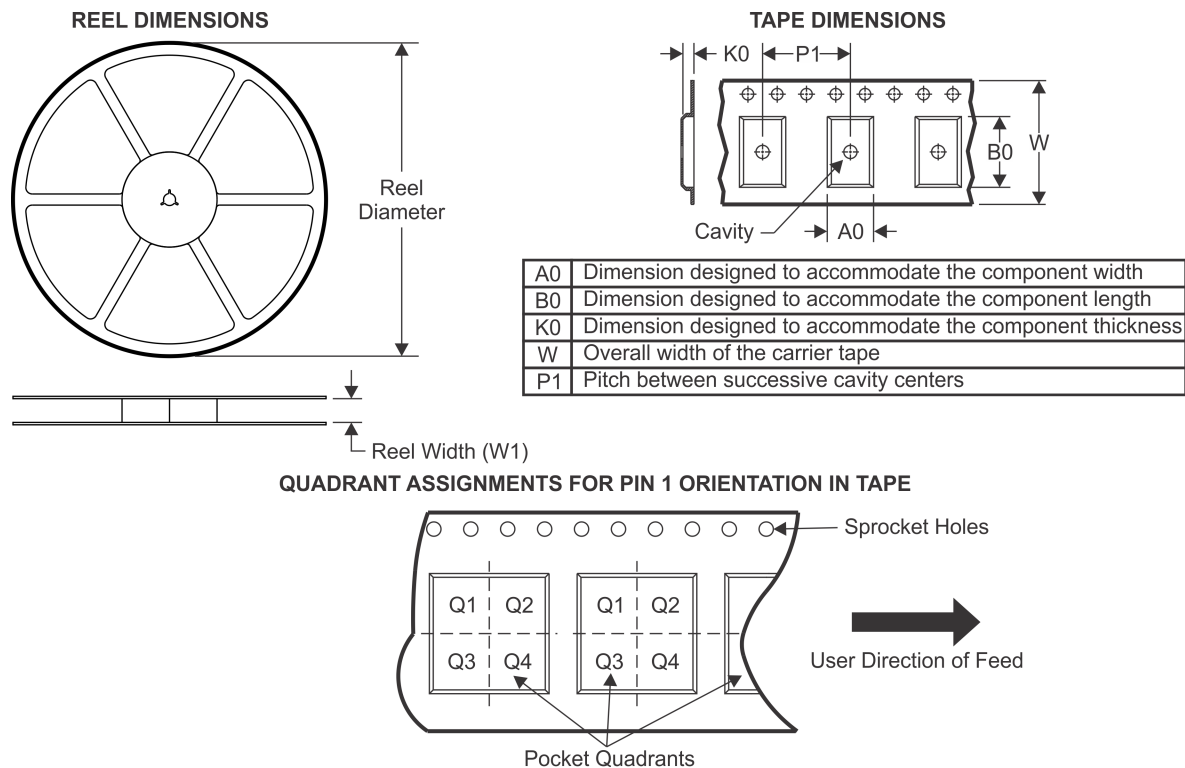

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLC271ACDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271ACPSR | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.35    | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| TLC271AIDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271BCDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271BIDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271CPSR  | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.35    | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| TLC271CPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLC271IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC271MDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS

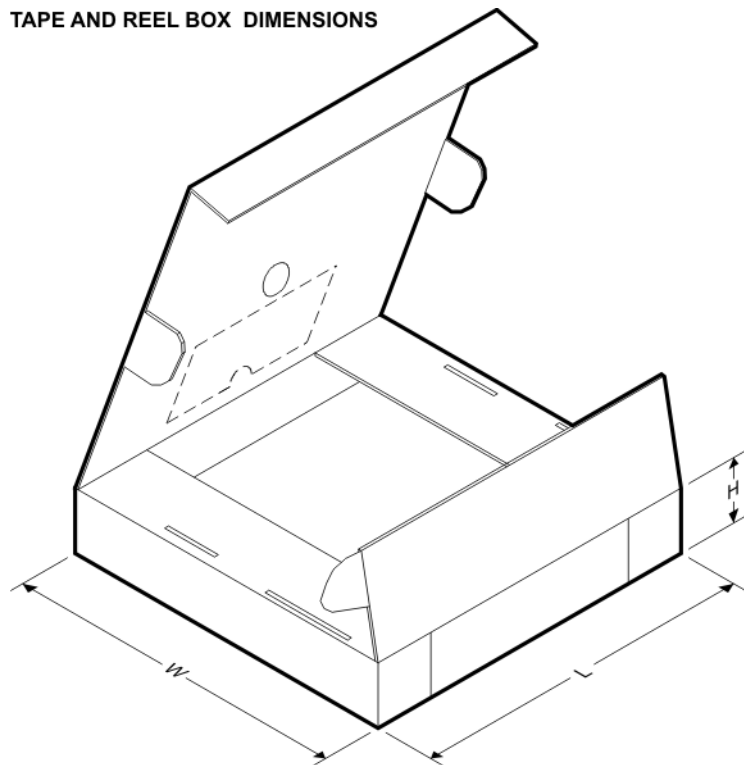

\*All dimensions are nominal


| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLC271ACDR  | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLC271ACPSR | SO           | PS              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLC271AIDR  | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLC271BCDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLC271BIDR  | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLC271CDR   | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLC271CPSR  | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |
| TLC271CPWR  | TSSOP        | PW              | 8    | 2000 | 853.0       | 449.0      | 35.0        |
| TLC271IDR   | SOIC         | D               | 8    | 2500 | 340.5       | 336.1      | 25.0        |
| TLC271MDR   | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |

## TUBE

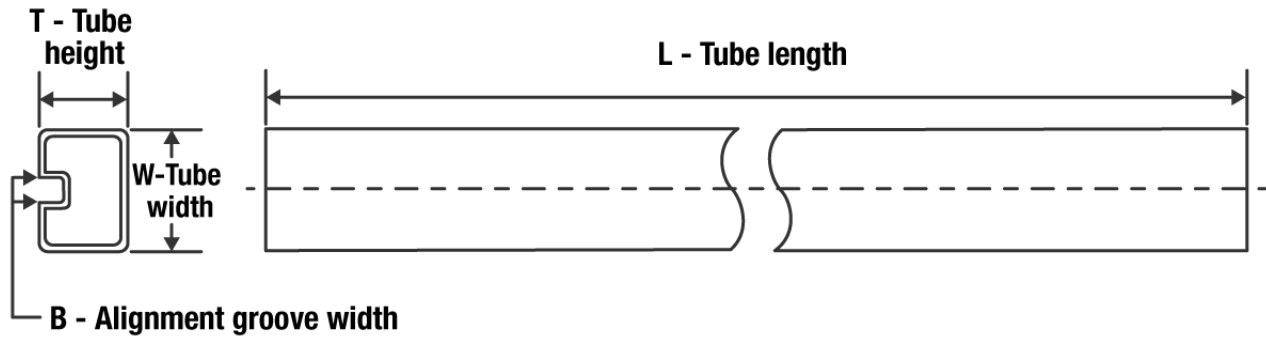

\*All dimensions are nominal

| Device      | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TLC271ACD   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271ACP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLC271ACPS  | PS           | SOP          | 8    | 80  | 530    | 10.5   | 4000   | 4.1    |
| TLC271AID   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271AIDG4 | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271AIP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLC271BCD   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271BCDG4 | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271BCP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLC271BCPS  | PS           | SOP          | 8    | 80  | 530    | 10.5   | 4000   | 4.1    |
| TLC271BID   | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271BIDG4 | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271BIP   | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLC271CD    | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271CP    | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |
| TLC271CPS   | PS           | SOP          | 8    | 80  | 530    | 10.5   | 4000   | 4.1    |
| TLC271CPW   | PW           | TSSOP        | 8    | 150 | 530    | 10.2   | 3600   | 3.5    |
| TLC271ID    | D            | SOIC         | 8    | 75  | 507    | 8      | 3940   | 4.32   |
| TLC271IP    | P            | PDIP         | 8    | 50  | 506    | 13.97  | 11230  | 4.32   |




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

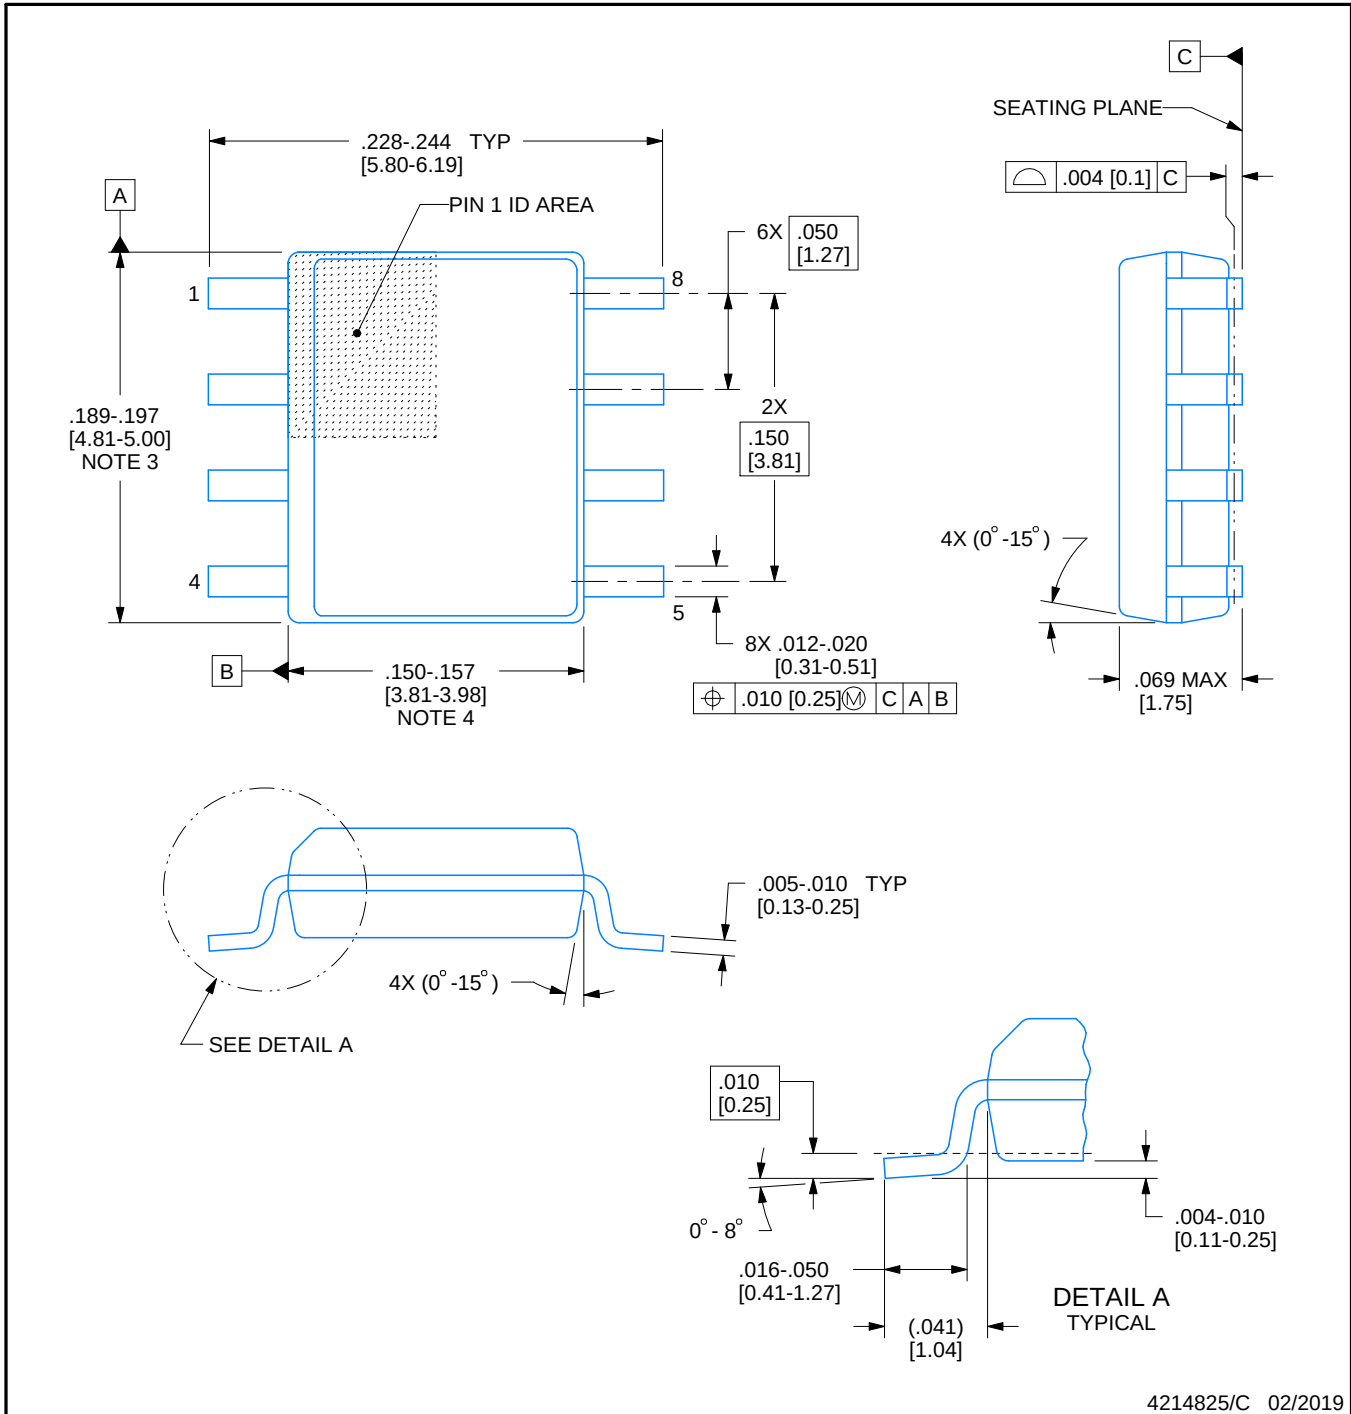

4214825/C 02/2019


## NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.


**D0008A**

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

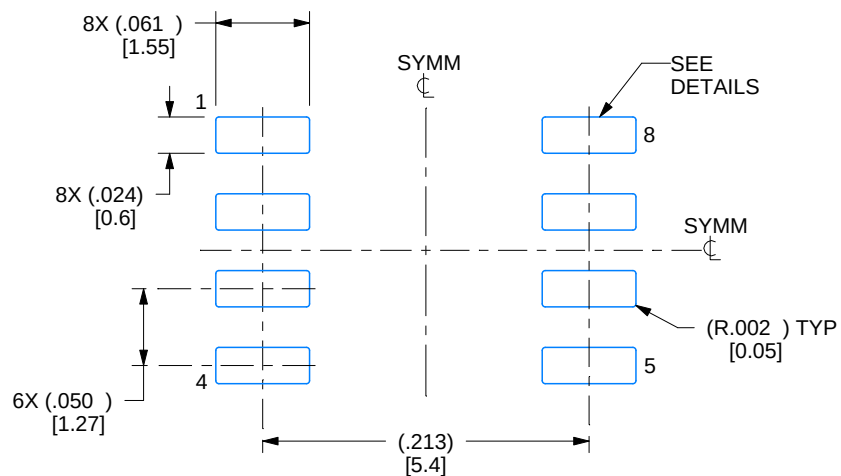

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

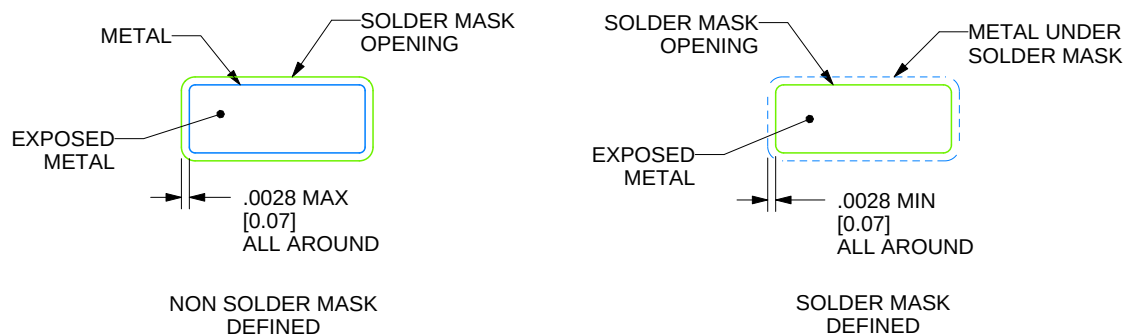

## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

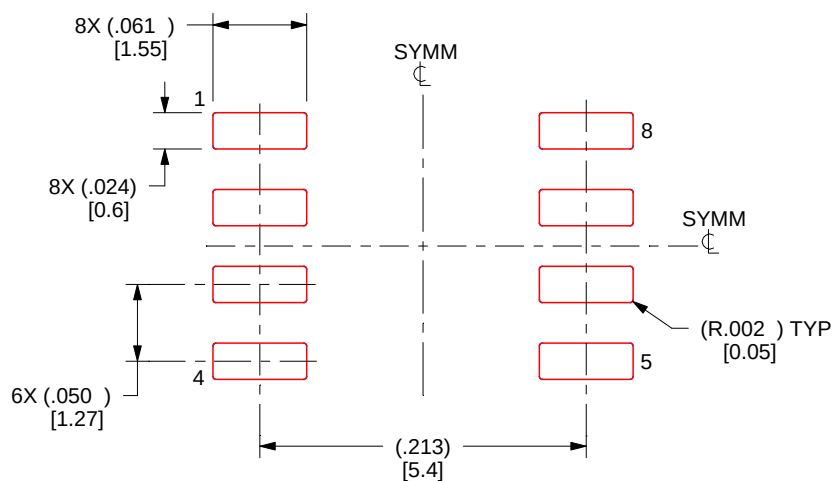

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# MECHANICAL DATA

PS (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

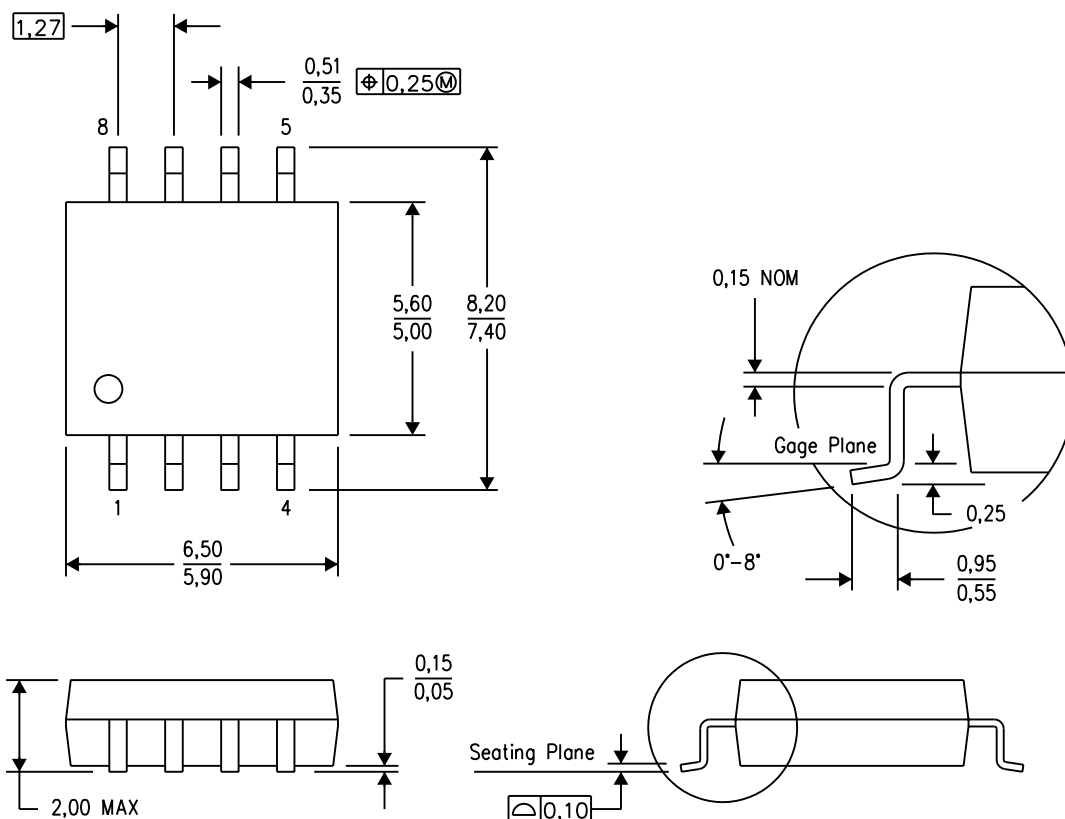


4040063/C 03/03

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## PS (R-PDSO-G8)


## PLASTIC SMALL OUTLINE

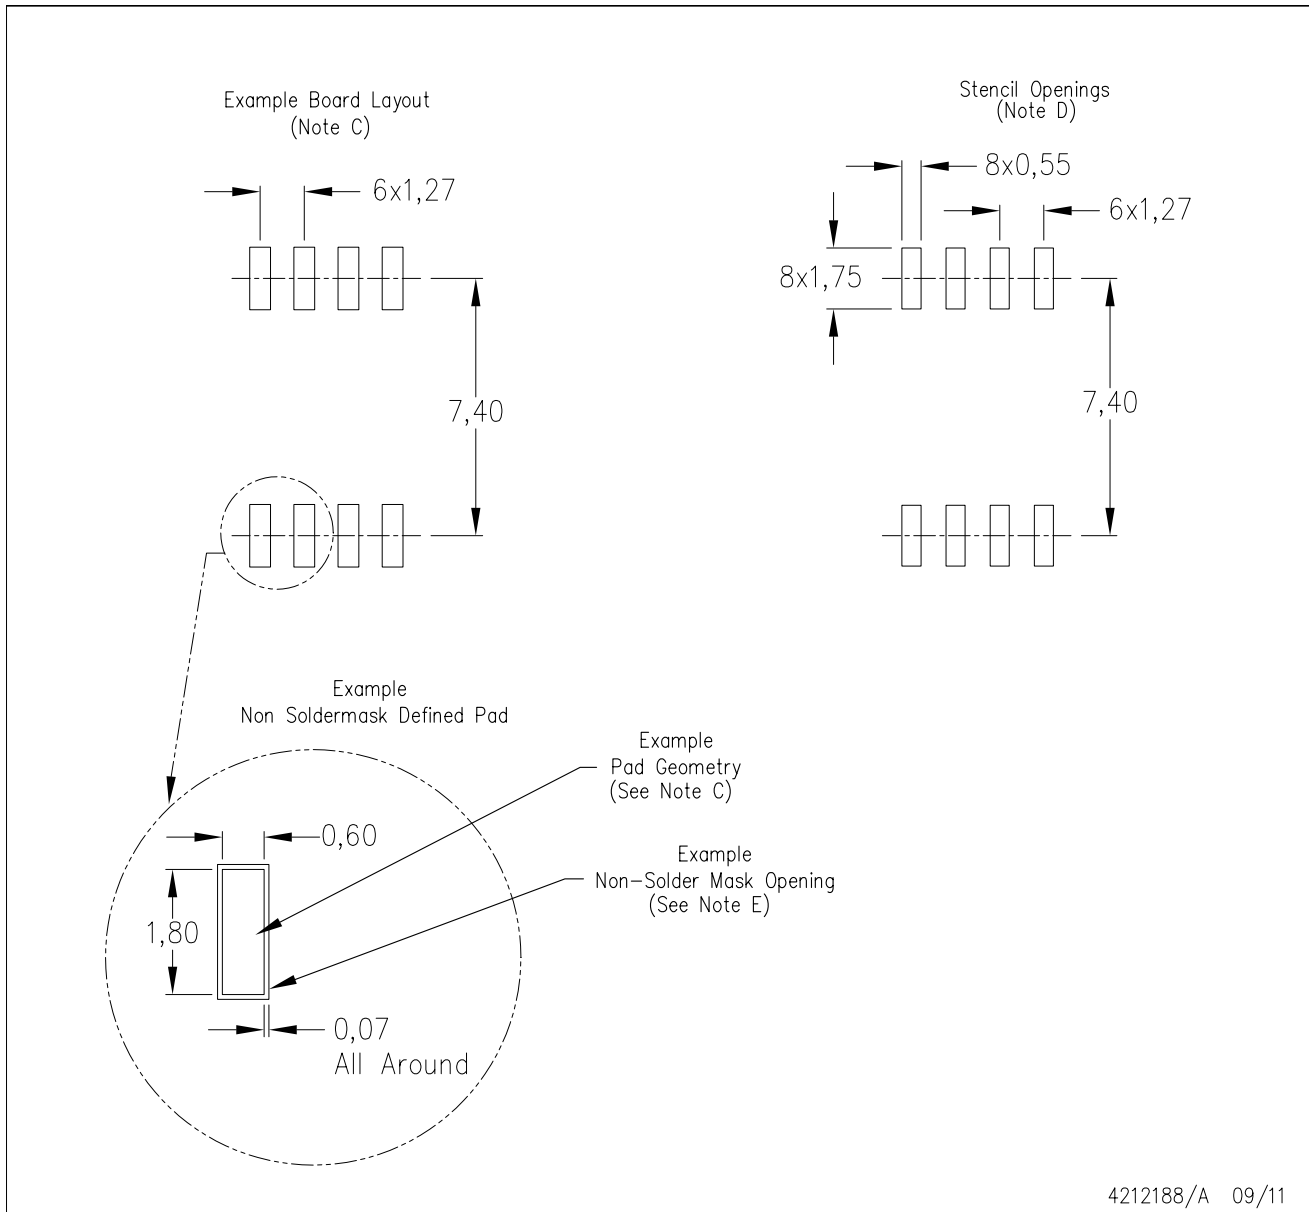

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

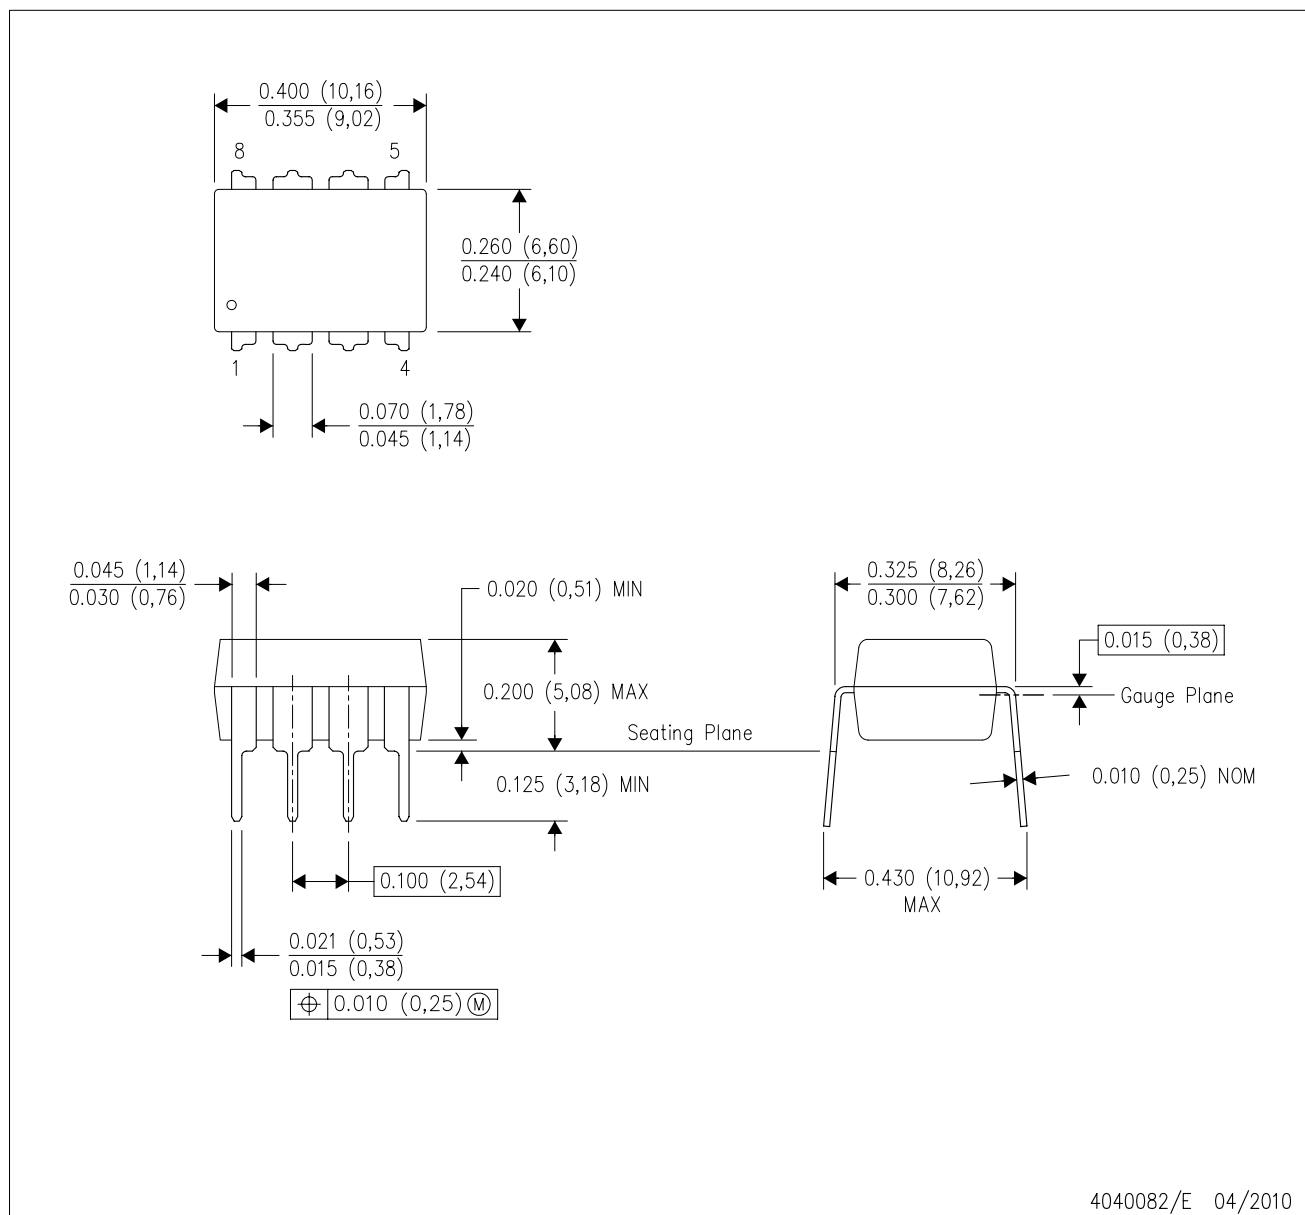

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.




# EXAMPLE BOARD LAYOUT



PW0008A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

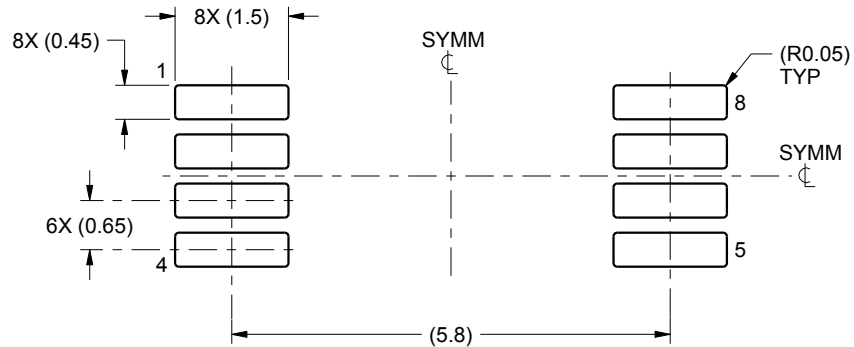

LAND PATTERN EXAMPLE  
SCALE:10X

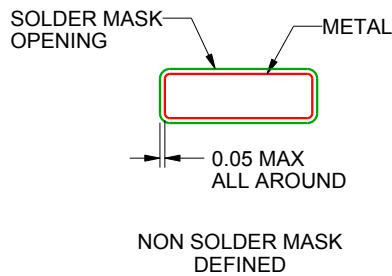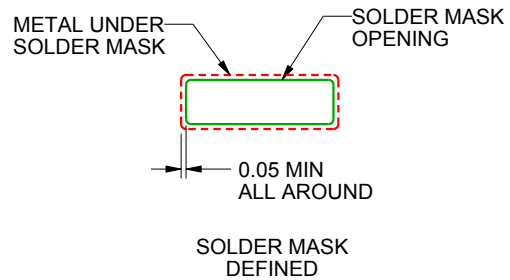

SOLDER MASK DETAILS  
NOT TO SCALE

4221848/A 02/2015

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

**PW0008A**

## TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

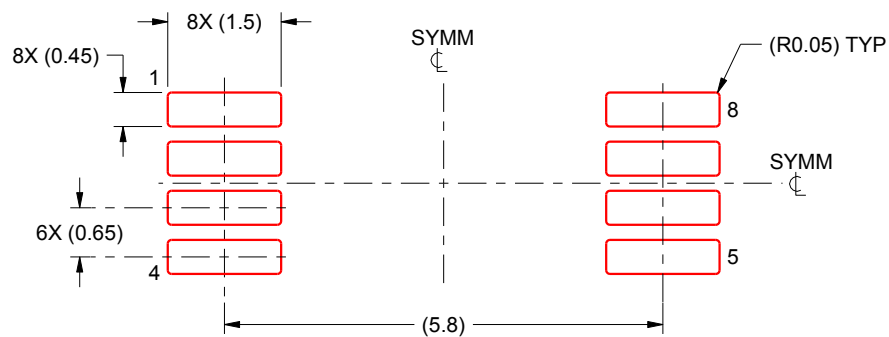

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:10X

4221848/A 02/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated